PDUMH30HVATNET

Single-Phase Switched Rack-Mount ATS PDU




















2 L6-30P Plugs






19 Switched Outlets

5/5.8kW Load Capacity

Network Interface

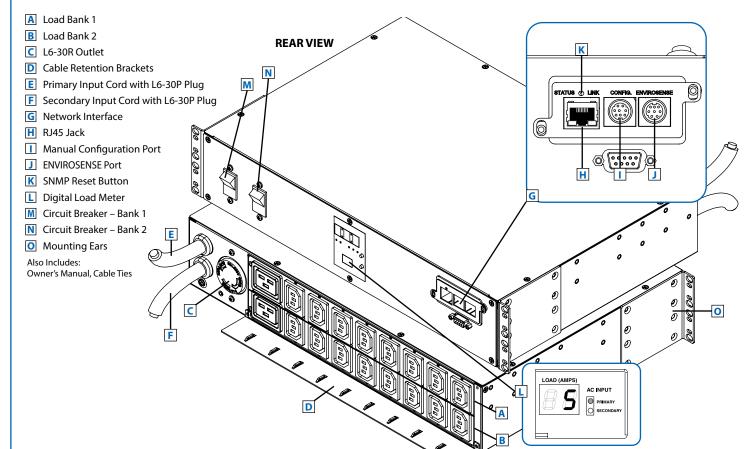

FRONT VIEW


Specifications Model PDUMH30HVATNET Voltage 208/240V (Single-Phase Input/Output) Frequency 50/60 Hz Load Capacity 5.8kW (240V), 5kW (208V) Input Connector (x2) NEMA L6-30P Cord Length (x2) 10 ft. / 3 m 19 (16 C13, 2 C19, 1 L6-30R) Outlets **Primary Mounting Option** 2U Horizontal **Unit Dimensions** 3.41 x 17.26 x 12.23 in. / 87 x 438 x 311 mm **Unit Weight** 13.7 lb. / 6.2 kg Standards Tested to UL 60950-1 (US & Canada), NOM (Mexico), FCC Class A; RoHS; TAA

- Distributes 5-5.8kW single-phase redundant power for devices with non-redundant power supply configurations
- Automatic transfer switching within 2-6ms
- Switched outlets and network interface supports individual outlet control on a real-time or programmable basis
- · Digital load meter offers real-time output current monitoring


SEE NEXT PAGE FOR DETAILED UNIT MEASUREMENTS




Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

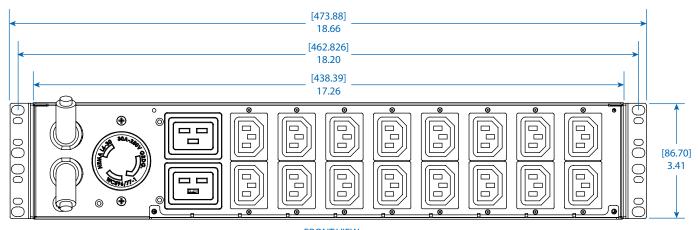

FRONT VIEW

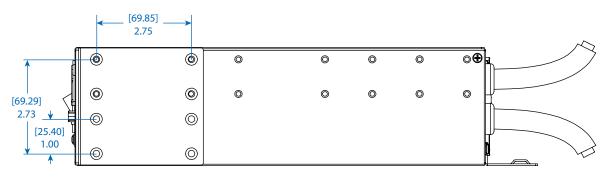

SIDE VIEW

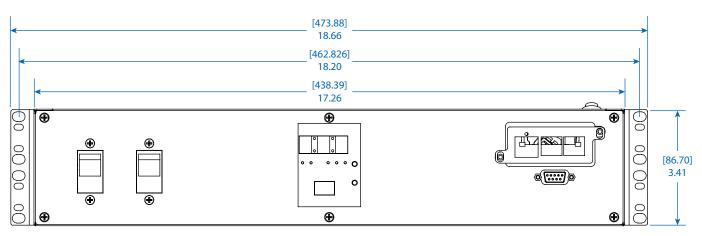


REAR VIEW



1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.

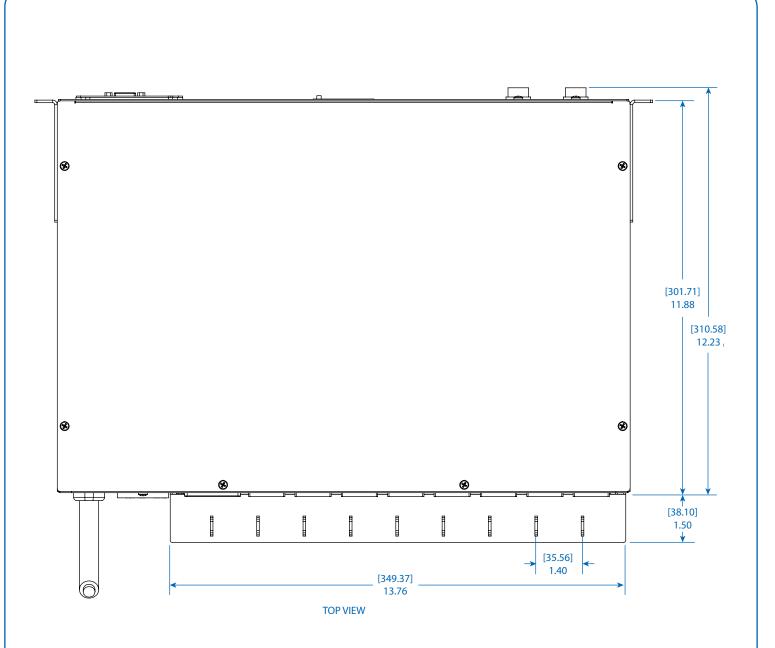





1111 W. 35th Street Chicago, IL 60609 USA 773.869.1234 www.tripplite.com

Dimensions: [mm] INCHES

Tripp Lite has a policy of continuous improvement. Specifications are subject to change without notice.