


FLEXIDOME IP micro 5000 - Quick Installation Guide

1


Disassemble

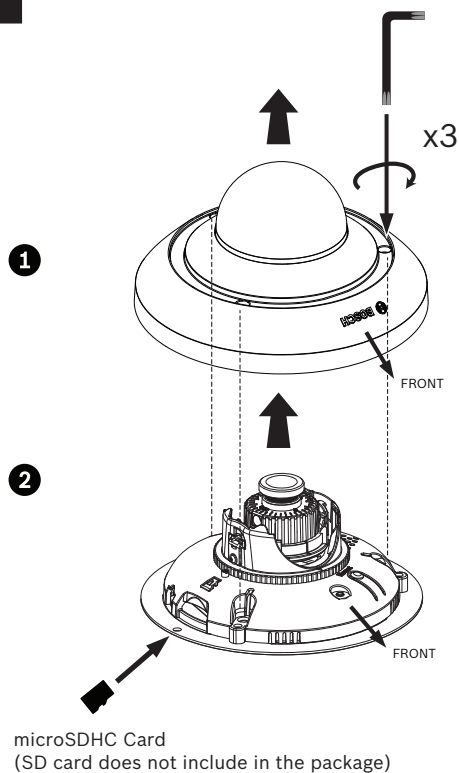

microSDHC Card
(SD card does not include in the package)

2


Stick Desiccant

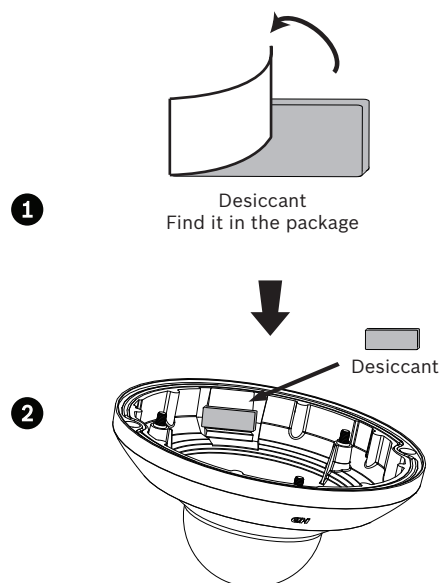

The desiccant must be seated to the indicated position. Improper positioning could lead to interference with the camera module.


3

Mount

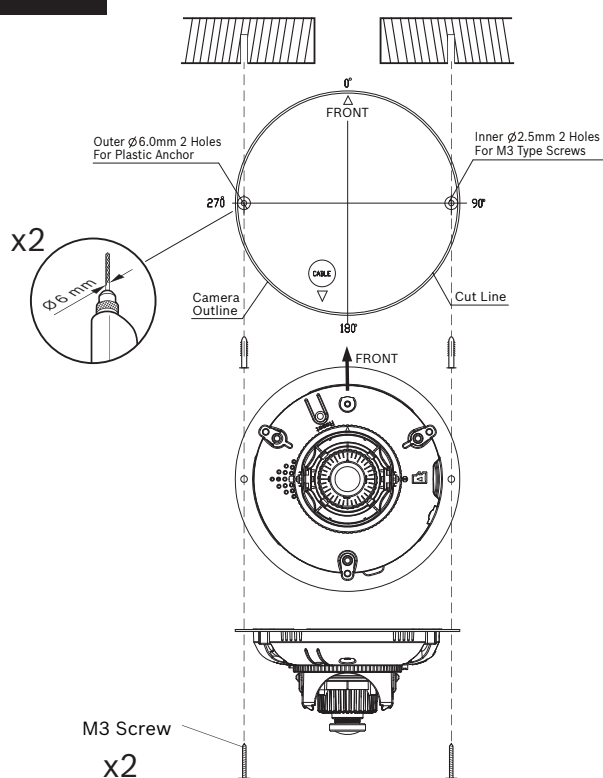

4


Network (Power)

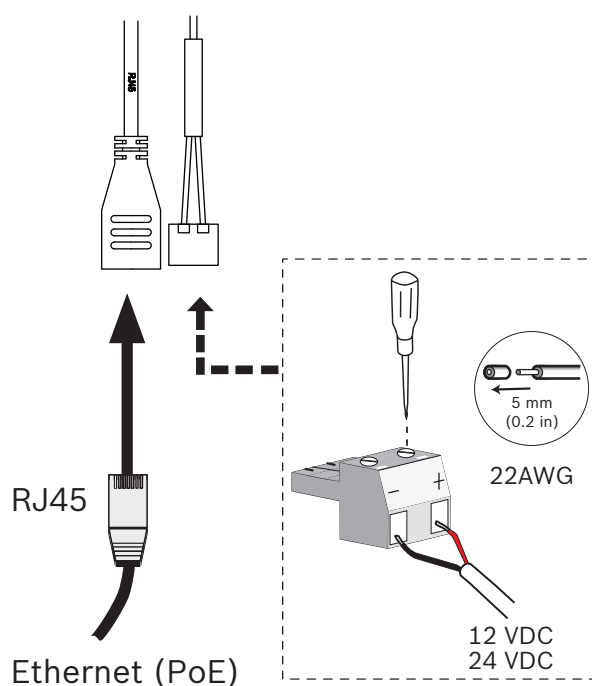

"This product is intended to be supplied by a Listed Power Unit marked "Class 2", "LPS", or "Limited Power Source" and output rated 12Vdc, 0.32A minimum; or 24Vdc, 0.16A minimum."

5


Adjust

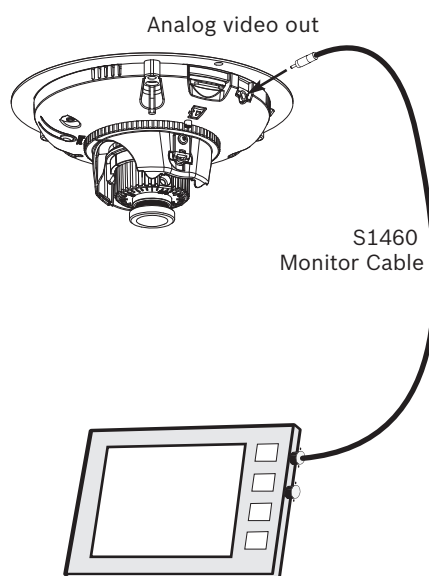


6

Adjust


Pan
 $\pm 175^\circ$



Tilt
 $\pm 70^\circ$




Rotation
 $\pm 180^\circ$



NOTE: The angle of rotation should NOT be rotated over 180° in clockwise and 180° in counter clockwise.

7

Adjust

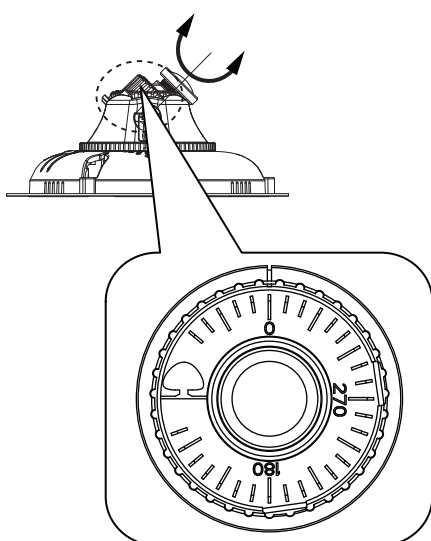

NOTE: To use tree mark for easy adjustment in image direction.

8

Bosch Video Client



Default IP: 192.168.0.1



http://www.boschsecurity.com/catalog_overview.htm

Bosch Security Systems BV, Torenallee 49, 5617BA,
Eindhoven, The Netherlands

F.01U.288.440



BOSCH