



Option 1: Flush mounting for a 50 mm (1.96") cutout

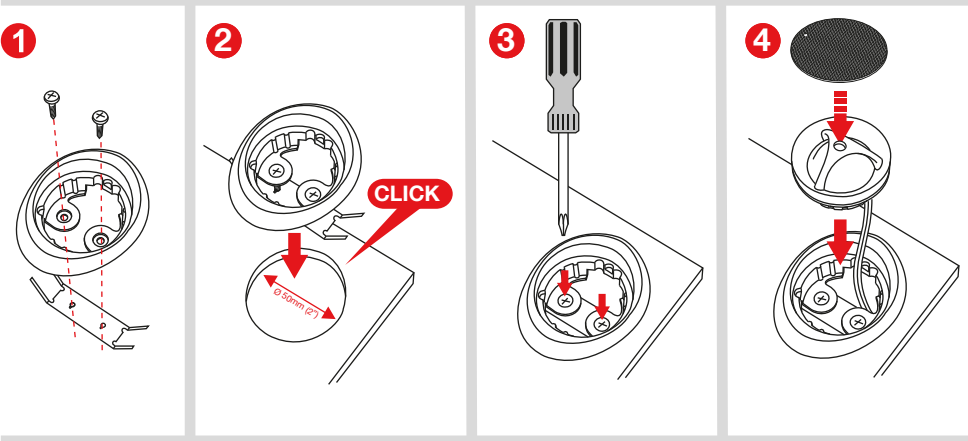

Option 2: Surface mounting

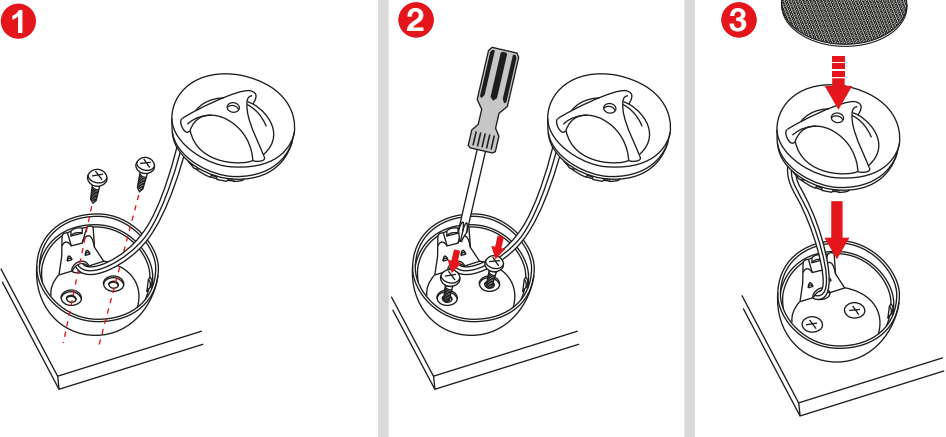


Specifications

2-Way System			
Nominal Impedance	4 ohm		
Power Handling	90W		
Max. Transient Power Handling	180W		
Sensitivity (2.83V/1M)	94dB		
Frequency Response	60-22,000 Hz		
Voice Coil Diameter	Woofer: 30mm (1.181")	Tweeter: 25mm (1")	
Voice Coil Wire	Woofer: CCAW	Tweeter: CCAW	
Magnet System	Woofer: Hybrid magnet system	Tweeter: Neodymium	
Mounting Depth	Woofer: 63mm (2.5")	Tweeter: 20mm (0.8")	

Morel operates a policy of continuous design improvement, consequently specifications are subject to alteration without prior notice.


www.morelhifi.com

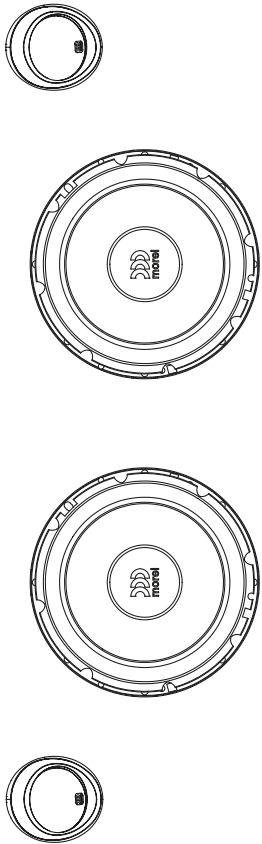


maximo ultra 602HE MkII
Car Audio Component Speaker System




Content - Tweeter

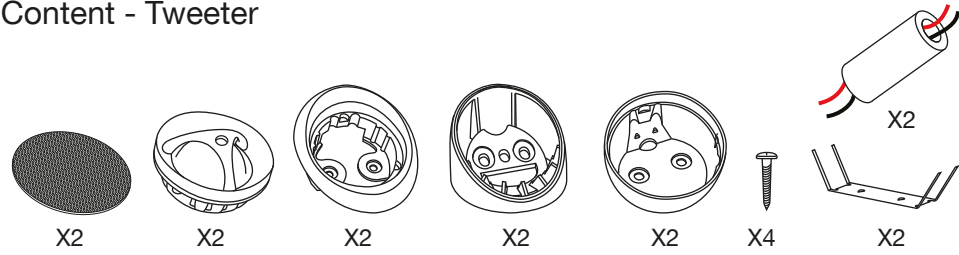


Content - Woofer

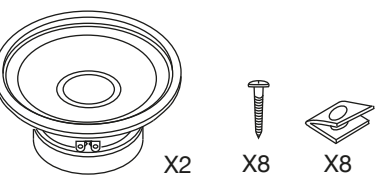

Woofer mounting

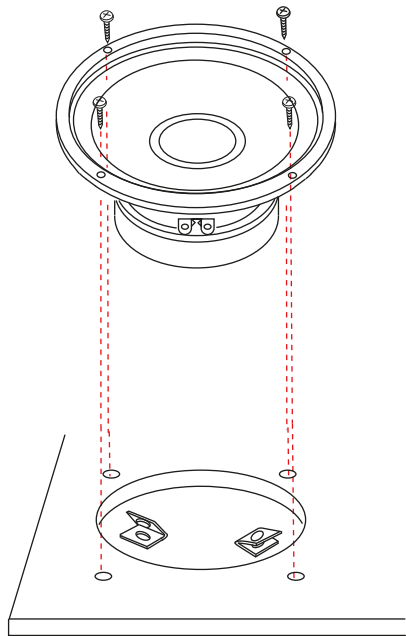

Crossover Connection

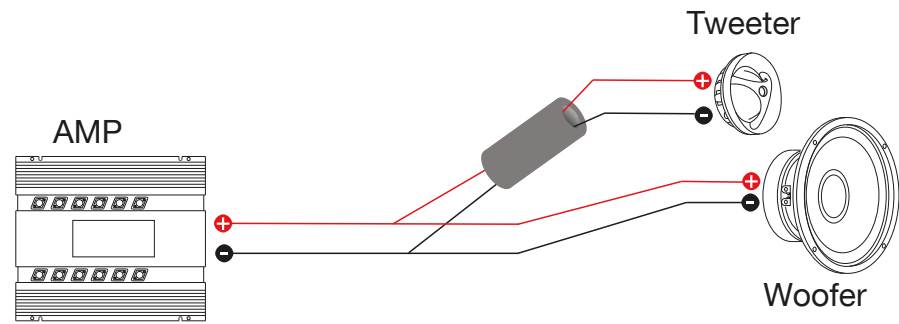

Tweeter surface mounting

