


SmallRig

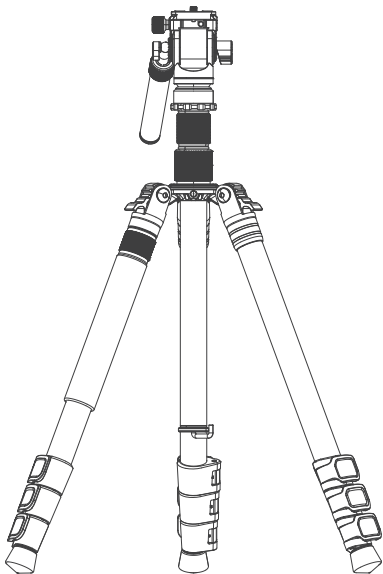

Travel Video Tripod Kit

User Manual

Thank you for purchasing SmallRig's products.


Warnings

- Do not exceed the specified load capacity.
- Make sure to lock and keep safe when operating the tripod.
- Do not use a tripod when the temperature is lower than minus 20 degrees or higher than 65 degrees. Please clean the tripod when it is getting dirty or wet, do not use it in the sea.
- Do not expose product under direct sunshine or high temperature for a long time. Make sure all devices (e.g. cameras) were taken down from the tripod before transportation.
- Keep the tripod and all accessories clean before packing for storage.
- Unless necessary, the equipment does not need to be lubricated regularly.
- Please use the standard lube only if needed.
- To ensure safety, do not connect the tripod with any power supply.





Please do not disassemble the product ,if you have any question, please contact the seller to apply after-sales service.

Tripod Details

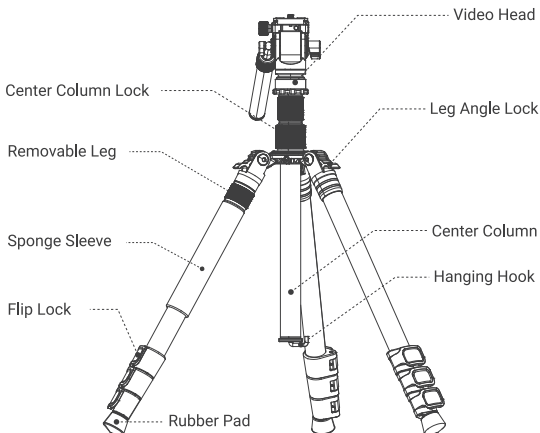


Video Head Details

- 1** Quick release plate
- 2** 1/4"-20 threaded hole
- 3** Up & down locking knob
- 4** Spirit level
- 5** Balance base
- 6** Base
- 7** 1/4"-20 screw
- 8** Handle telescopic locking knob
- 9** Panoramic locking knob
- 10** Balance base locking knob
- 11** Platform locking knob
- 12** Grip handle angle adjusting locking knob




A. Platform locking knob

After loosen the platform locking knob, align the quick release plate in correct position, then lock the locking knob.



B. Up & down locking knob


After loosen the locking knob, to ensure the platform can be fixed in the any up & down angle, then can lock the locking knob.



360° horizontal rotation


C. Panoramic locking knob

After loosen the panoramic locking knob, ball head can be in a 360° rotation.



D. Wrench


Gently push the arrows part, can take out the hidden wrench.



360° horizontal rotation


E. Balance base locking knob

Loosen the balance base locking knob, can freely adjust the balance base angle.




F. Grip handle

After loosen the angle adjust locking knob, can freely adjust the grip angle, then lock the locking knob.



G. Handle telescopic locking knob


Loose handle telescopic locking knob, the handle can be telescopic.



H. Quick release plate




Can freely adjust the camera screw with the free wrench.

Adjust Leg Angles

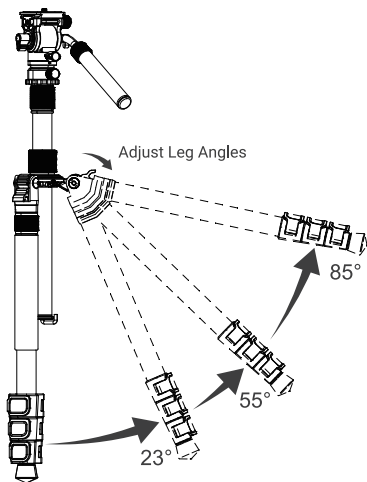

For stable support when shooting on an uneven surface, or for low-angle shots, each leg can be adjusted to 3 preset angles. To set the leg angles:

1. Press outward the leg angle lock
2. Set the leg angle to one of the three preset positions.
3. Press inward the leg angle lock to secure the angle setting.

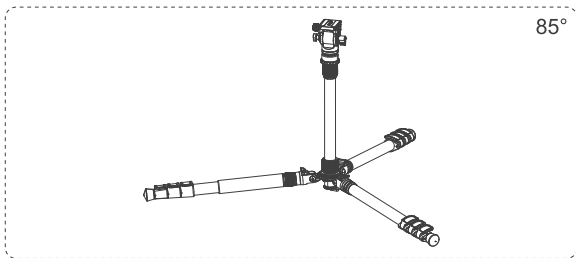


Tips

- Please remove camera from the tripod before moving the tripod to other locations for shooting to avoid any damage to the camera, as violent shaking may break the camera screw thus break the camera, especially the camera with telephoto lens.
- Extend the tripod legs in the order of from max tube to min tube, while fold the legs in the order of from min tube to max tube.




Spread Tripod Legs


①



②




Pull open
the flip lock



Pull out legs




③

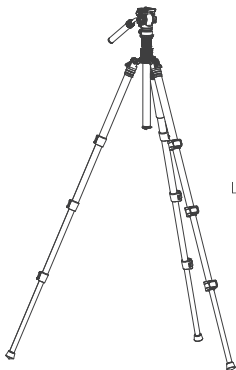


Lock the flip lock to secure legs

Convert to Monopod

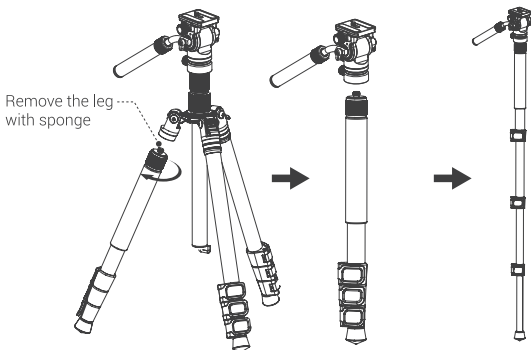

Monopod 3/8"-16 screw supports other devices

Install Tripod Head

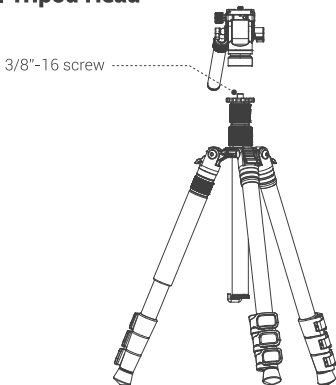

Specifications

Model	 Base Max D	 Width	 Height	 Depth	 up and down angle	 Weight	 Max Load
CH20	ø37mm	78mm	88mm	200mm	90 degrees down	0.36kg	4kg
CH20	ø1.45in	3.07in	3.46in	7.87in	55 degrees up	0.79lbs	8.8lbs

* To improve the products, if any changes in design / specification / parameter, please refer to the real product.

In the Box

- | | |
|-----------------|-----|
| 1. Tripod Kit | × 1 |
| 2. Carrying Bag | × 1 |
| 3. User Manual | × 1 |

Service Warranty

Please keep your original receipt and guarantee card. Be sure the dealer has written on it the date of purchase and SN of the product. These are required for warranty service.

After-sale Warranty Terms

SmallRig products are entitled to warranty services as of the date of payment.

- Electronic products (except V mount battery): 1-year warranty.
- V mount battery: 2-year warranty.
- Non-electronic products: 2-year warranty.

Note: In case of any conflict between our warranty period policy and applicable laws and regulations of the country / region where the products are sold, the latter shall prevail.

This Warranty Does Not Cover

1. If users fail to adhere to the "Operating Instruction" or any "Warnings" stated in the user manual, resulting in a quality failure, it falls outside the scope of warranty coverage.
2. The product identification or SN label is removed or defaced in any way.
3. Product damage caused by problems not attributable to the quality of the products such as improper use of the products.
4. Product damage caused by unauthorized modification, disassembly, repair and other acts.
5. Product damage caused by fires, floods, lightning and other force majeure factors.

Warranty Mode

- For the products within the scope of warranty, SmallRig will repair or replace them on the basis of specific failures; the repaired / replaced products / parts are entitled to the remaining part of the original warranty period.

Contact Information

- You're advised to contact the online customer service personnel of corresponding shopping platform and submit a repair service application.
 - You may also apply for repair service through SmallRig's service email.
- Service Email: support@smallrig.com

Guarantee Card

ID No.	
Item Name	
Purchase Date	
User Name	
Mobile	
Address	
Receipt	



GAVIMOSA CONSULTORIA, SOCIEDAD LIMITADA,
CASTELLANA 9144, 28046 Madrid,
compliance.gavimosa@outlook.com



Sea&Mew Accounting Ltd,
Electric Avenue Vision 25, London, Enfield EN3 7GD,
info@seamew.net



WE ARE HERE FOR YOU
服务与支持



ETICHETTATURA AMBIENTALE
ENVIRONMENTAL LABELING

Manufacturer Email: support@smallrig.com

Manufacturer: Shenzhen Leqi Innovation Co., Ltd.

Add: Rooms 101, 701, 901, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road,
Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.

Consignor: Shenzhen LC Co., Ltd.

Add: Room 201, Building 4, Gonglianfuji Innovation Park, No. 58, Ping'an Road,
Dafu Community, Guanlan Street, Longhua District, Shenzhen, Guangdong, China.



RoHS



FR
**LE TRI
+ FACILE**



Boîte 6



Papier 5



BAC
DE TRI


Séparez les éléments avant de trier

合格证
已检验

Made in China



SmallRig

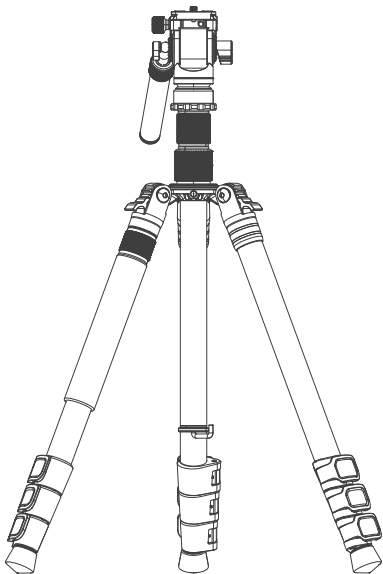

轻量视频三脚架套件

用户手册

感谢您购买 SmallRig 产品。


重要提示

- 不要超过最大的制定负重。当使用产品时，时常紧锁其安全装置。
- 切勿在温度低于零下20摄氏度及高于65摄氏度使用，当在潮湿 / 沙地 / 布满尘埃的环境下使用后，谨记将产品弄干及清洁，不建议在海水中使用。
- 切勿将产品长时间放在太阳下暴晒及避免高温环境。
- 建议在运输过程中，将设备（例如相机）从脚架上取下。
- 使用温和清洁剂及柔软毛巾清洁，将尘埃及沙粒从所有锁制及活动部件清除。
- 除非有需要，此设备无需定期添加润滑油。如确实需要时，请使用标准润滑油。
- 为自身安全着想，切勿将产品接触任何电源。





请勿拆卸产品，如果您怀疑产品有任何问题，请联络购买平台，申请售后处理。

三脚架解析

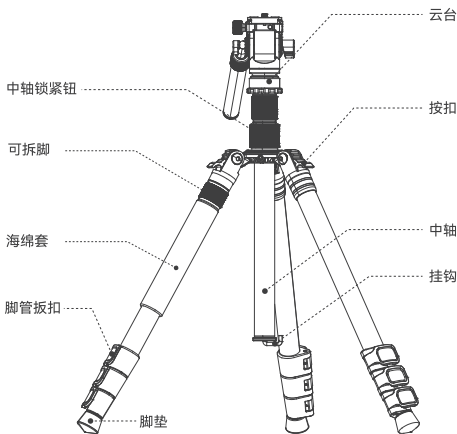


云台解析

- 1 快装板
- 2 1/4"-20 螺纹孔
- 3 俯仰锁紧旋钮
- 4 水平器
- 5 平衡座
- 6 底座
- 7 1/4"-20 螺丝
- 8 握把伸缩锁紧旋钮
- 9 全景锁紧旋钮
- 10 平衡座锁紧旋钮
- 11 平台锁紧旋钮
- 12 握把角度调节锁紧旋钮




A、平台锁紧旋钮

拧松平台锁紧旋钮，把快装板按图中的方向对好便可装进快装板后，再锁紧旋钮。



B、俯仰锁紧旋钮


拧松俯仰锁紧旋钮，使平台可以固定在俯仰角度任意位置后，再锁紧旋钮。



360度水平旋转


C、全景锁紧旋钮

拧松全景锁紧旋钮，云台可以360度水平旋转。




D、扳手

轻推箭头处，可取出隐藏式扳手。



360度水平旋转




E、平衡座锁紧旋钮

拧松平衡座锁紧旋钮，可自由调节平衡座角度。


F、握把

拧松握把角度调节锁紧旋钮，可自由调节握把角度，再锁紧旋钮。



G、握把伸缩锁紧旋钮


旋松握把伸缩锁紧旋钮，
握把可伸缩调节。



H、快装板




可用自带扳手自由调节
相机螺丝松紧度。

角度调节

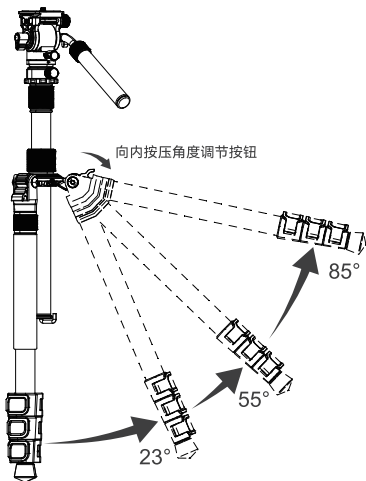

三脚架角度调节:

该三脚架的每只支撑脚均可调节三种支撑角度，以适应不同的拍摄要求。如上图所示：向内按压角度调节按钮，同时扳动脚管至相应角度，然后松开角度调节按钮即可锁住角度。

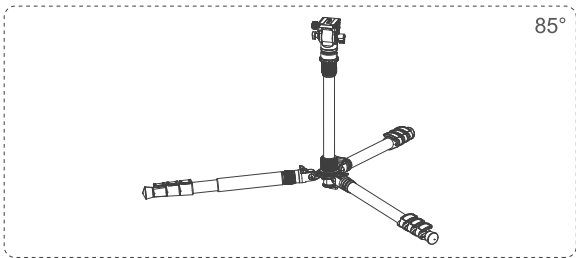


温馨提示

- 在使用脚架拍摄且需要移动位置时，请将相机从三脚架上取下，切勿将相机装在脚架上一同移动，剧烈的晃动（特别是安装了长焦镜头的相机）可能会使转接螺丝断裂。进而损坏相机。
- 伸展脚管时，请从最大管径的脚管到最小管径的脚管的顺序伸展。收纳脚管时，请从最小管径的脚管到最大管径的脚管的顺序收纳。




伸展脚架


①




②




扳开锁紧扣



拉出脚管




③

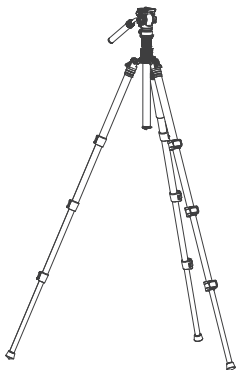


按下锁紧扣,固定脚管。

独脚架使用

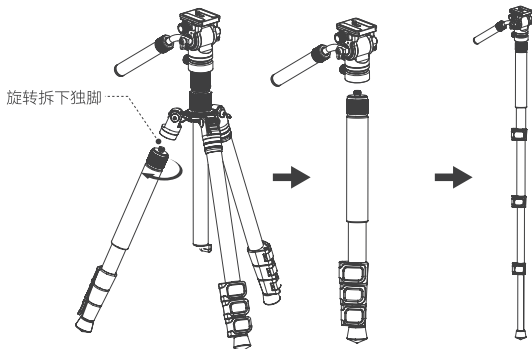

独脚顶端为 3/8"-16 螺丝，可连接其他设备

安装云台

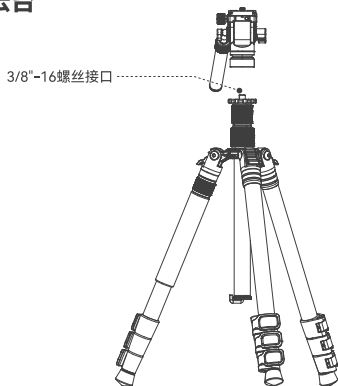

规格参数

Model	 底座直径	 宽度	 高度	 长度	 俯仰角度	 净重	 最大承重
CH20	ø37mm	78mm	88mm	200mm	俯90° / 仰55°	0.36kg	4kg

* 为了改善产品，有设计 / 规格 / 参数的变动时以实物为准。

包装清单

- | | |
|----------|-----|
| 1. 三脚架套件 | × 1 |
| 2. 收纳包 | × 1 |
| 3. 用户手册 | × 1 |

保修条款

请保留您的原始购买单据及保修卡，同时包含您的购买日期、产品序列号等，这些资料质保服务时均需要提供。

售后质保条款

SmallRig产品自下单付款之日起享有质保服务。

- 电子产品(除V口电池): 1年质保。
- V口电池: 2年质保。
- 非电子产品: 2年质保。

注：若销售地国家或地区的适用法律法规有冲突的，以销售地国家或地区有关质保期的法律法规为准。

质保无效说明

1. 当用户违反操作指引或用户手册中“重要提示”任何一条导致的质量失效，不在质保范围内。
2. 产品序列号标识已经被撕毁或无法辨识，不在质保范围。
3. 产品使用不当等非产品本身质量问题，而造成的产品损坏，不在质保范围。
4. 非官方指导的私自改装、拆解、维修等行为而造成的损坏，不在质保范围。
5. 因火灾、水灾、雷击等不可抗力造成的产品损坏，不在质保范围。

维修方式

- 属于质保范围的，SmallRig 根据产品具体的故障对产品进行维修或更换；维修后的产品 / 部件享受原有保修期的剩余时长。

联系方式

- 建议您优先前往相应购买平台联系在线客服,提出产品维修申请。
- 您也可以通过 SmallRig 服务邮箱申请维修服务。

服务邮箱:support@smallrig.com

保修卡

ID编号	
产品名称	
购买日期	
用户姓名	
用户电话	
用户地址	
购买单据	

执行标准: GB 4943.1-2022, GB/T 26572-2011

LQ-B020-18

制造商: 深圳市乐其创新股份有限公司

地址: 中国广东省深圳市龙华区观澜街道大富社区平安路58号共联富基创新园4栋
101、701、901

委托商: 深圳市乐长科技有限公司

地址: 中国广东省深圳市龙华区观澜街道大富社区平安路58号共联富基创新园4栋
201

CE RoHS



Séparez les éléments avant de trier



中国制造

