

TERRA WL5 (Monochromatic)



art. 14012

Short description

The stainless steel TERRA range, with its IP67 protection rating, includes LED in-ground lights suitable for outdoors installations with an high light output to create vivid colors or monochromatic sets.

- TERRA WL5 is available with 5 monochromatic LEDs (warm white, neutral white, cool white, red, green, blue). Can be used to decorate columns, pillars, along walkways, on patios, in steps, to highlight and to landscape details and key elements.

Description

- SOURCE: n.5 LEDs

Total out lumen: 2500lm

Total light power: 15W

- OPTIC: medium beam (38mm lenses)

On request: wide and narrow beam lens

- ELECTRIC FEATURES:

(this fixture has to work with dedicated power supply)

3x1 cable 1,5mt.

- IP RATING PROTECTION: IP67 recessed driveway

On request IP68

- MATERIALS:

- housing and trim ring in stainless steel

- thermal-shock resistant tempered safety glass

TERRA WL5 (Monochromatic)

- DIMENSIONS: ø 190 x 47,5mm - ø 190 x 82mm (model with power supply on board)



art. 14091
WL60 UN (Ultra Narrow) Monochromatic

Studio Due
emotion and creativity in light

WL 60 UN

monochromatic

The new **WL 60 UN (ULTRA NARROW)** with its smart design is the new IP67 LED Lighting fixture suitable for monochromatic applications. Utilizes high brightness LEDs combined with an high efficient optic system for a rectangular projection.

The **ULTRA NARROW** lenses of 4°, allow to light up objects from far away distance (more than 200 meters). It can be supplied with different color temperature white LEDs (warm, neutral and cool) or red, green, blue LEDs.

Standard fixture colour finishing is grey. Optional black and white (art. FX-COLOUR).

TECHNICAL FEATURES

- **SOURCE**
n. 60 (5W) White LEDs
180W total light power
24000 lm
- **OPTIC**
4° ULTRA NARROW 35 mm lenses
- **CONNECTIONS**
Main Power: 3x0,75mm cable
- **RATING PROTECTION**
IP 67
- **POWER SUPPLY**
Voltage range: 88-264VAC, 124-370VDC
Frequency range: 47-63Hz
Active Power factor: PF>0.95/230VAC, PF>0.98/115VAC
Current: 0.7A@230VAC;
Fuse inside Power Supply
Power: 200W
- **PHYSICAL**
WxDxH: 611,5x130x340 mm
Weight: 15 Kg.




Click on the QR Code
with your smartphone
to go directly to the
fixture website page

art. 14091
WL60 UN (Ultra Narrow) Monochromatic

Studio Due

emotion and creativity in light

PHYSICAL

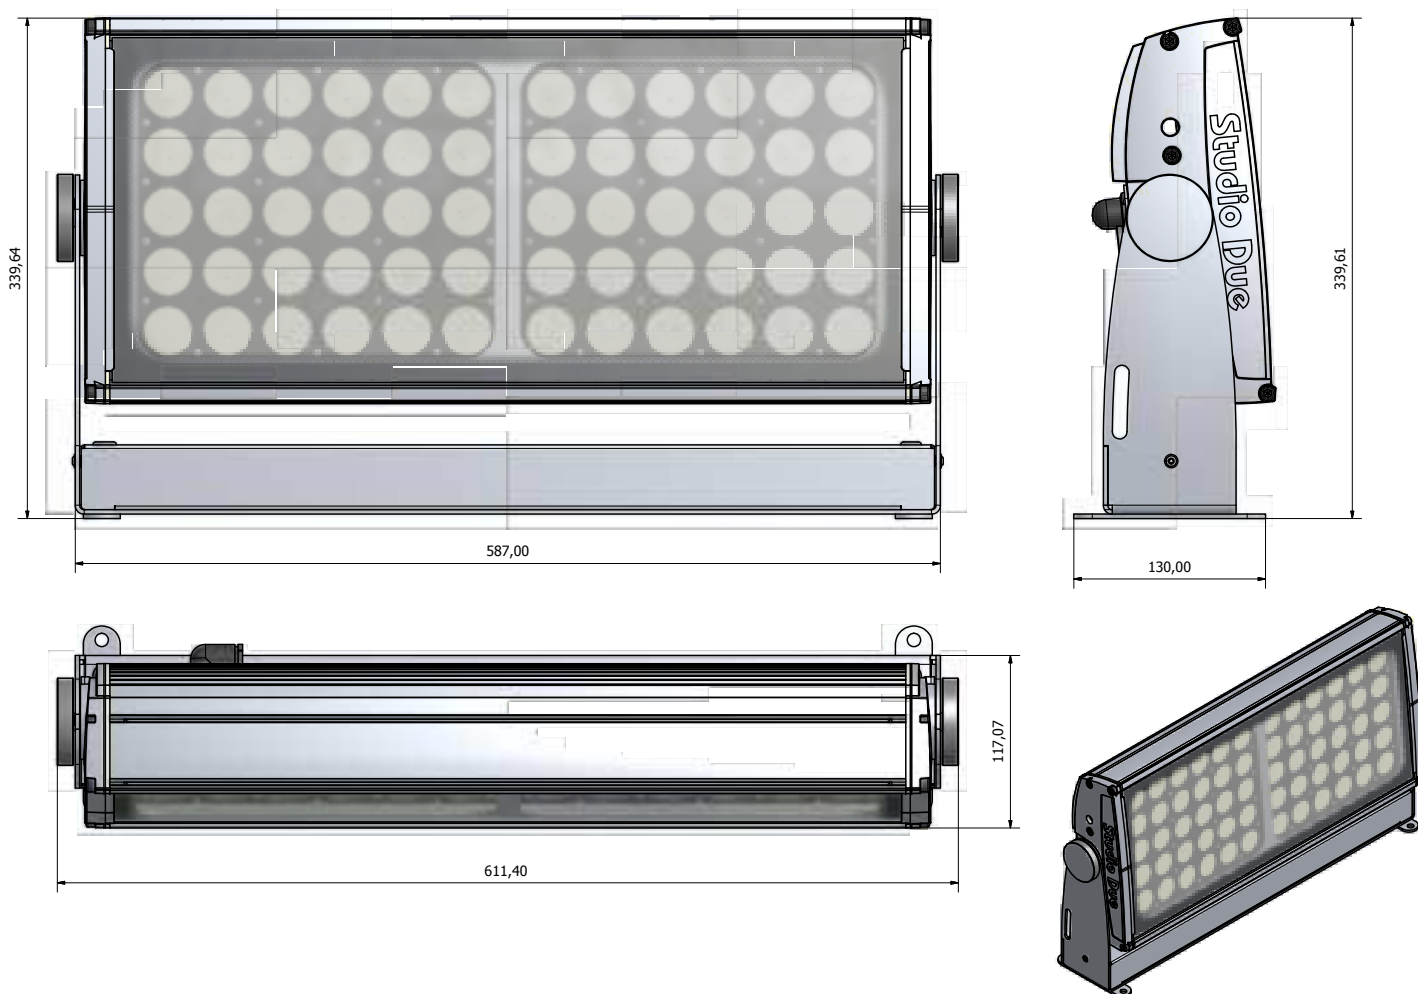

© Copyright 2014 Studio Due light srl
Strada Poggino, 100
01100 Viterbo (Italy)
tel. +39.0761.352520 (4 lines)
fax +39.0761.352653
C.F. e P. IVA 05793121004

Specifications are subject to change without notice. Trademarks are the property of Studio Due Light Srl
www.studiodue.com