



Radio Test Report

Report No.: STS2506034W03

Issued for

Shenzhen GMK Technology Co., Ltd.

4-5/F, #9 Bldg, HuaLian Industrial Park, XinShi Community,
Dalang St, Longhua Dist, 518109, Shenzhen, China

Product Name: Mini PC

Brand Name: GMKtec

Model Name: G10

Series Model(s): G10 PLUS, G10 Pro, G11, G11 PLUS,
G11 Pro, G12, G13, G14, G15, G16

FCC ID: 2AXUD-G10

Test Standard: FCC Part15.407

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

**TEST REPORT**

Applicant's Name: Shenzhen GMK Technology Co., Ltd.
Address: 4-5/F, #9 Bldg, HuaLian Industrial Park, XinShi Community, Dalang St, Longhua Dist, 518109, Shenzhen, China

Manufacturer's Name: Shenzhen GMK Technology Co., Ltd.
Address: 4-5/F, #9 Bldg, HuaLian Industrial Park, XinShi Community, Dalang St, Longhua Dist, 518109, Shenzhen, China

Product Description

Product Name: Mini PC

Brand Name: GMKtec

Model Name: G10

Series Model(s): G10 PLUS, G10 Pro, G11, G11 PLUS, G11 Pro, G12, G13, G14, G15, G16

Test Standards: FCC Part15.407

Test Procedure ANSI C63.10-2020

This device described above has been tested by STS, the test results show that the equipment under test (EUT) is in compliance with the FCC requirements. And it is applicable only to the tested sample identified in the report.

The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Shenzhen STS Test Services Co., Ltd.

Date of Test

Date of receipt of test item: 06 June 2025

Date (s) of performance of tests: 06 June 2025~12 June 2025

Date of Issue: 12 June 2025

Test Result: **Pass**

Testing Engineer :

Aaron Bu

(Aaron Bu)

Technical Manager :

Skylar Li

(Skylar Li)

Authorized Signatory :

Bovey Yang

(Bovey Yang)



**Table of Contents****Page**

1 . SUMMARY OF TEST RESULTS	6
1.1 TEST FACTORY	7
1.2 MEASUREMENT UNCERTAINTY	7
2. GENERAL INFORMATION	8
2.1 GENERAL DESCRIPTION OF THE EUT	8
2.2 DESCRIPTION OF TEST MODES	10
2.3 TEST SOFTWARE AND POWER LEVEL	11
2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED	11
2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS	12
2.6 EQUIPMENTS LIST	13
3. EMC EMISSION TEST	14
3.1 CONDUCTED EMISSION MEASUREMENT	14
3.2 RADIATED EMISSION AND (BANDEGE) MEASUREMENT	18
4. POWER SPECTRAL DENSITY TEST	29
4.1 LIMIT	29
4.2 TEST PROCEDURE	29
4.3 DEVIATION FROM STANDARD	30
4.4 TEST SETUP	30
4.5 EUT OPERATION CONDITIONS	30
4.6 TEST RESULTS	30
5. BANDWIDTH MEASUREMENT	31
5.1 EMISSION BANDWIDTH (EBW) 26 BANDWID PROCEDURES / LIMIT	31
5.2 OCCUPIED BANDWIDTH (99%) TEST APPLIED PROCEDURES / LIMIT	32
5.3 MINIMUM EMISSION BANDWIDTH(6 DB) PROCEDURES / LIMIT	33
6. MAXIMUM CONDUCTED OUTPUT POWER	34
6.1 LIMIT	34
6.2 TEST PROCEDURE	34
6.3 DEVIATION FROM STANDARD	34
6.4 TEST SETUP	34
6.5 EUT OPERATION CONDITIONS	34
6.6 TEST RESULTS	34
7. CONDUCTED BANDEGE	35
7.1 LIMIT	35
7.2 TEST PROCEDURE	35
7.3 TEST SETUP	35



Table of Contents	Page
7.4 EUT OPERATION CONDITIONS	35
7.5 TEST RESULTS	35
8. AUTOMATICALLY DISCONTINUE TRANSMISSION	36
8.1 LIMIT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	36
8.2 TEST RESULT OF AUTOMATICALLY DISCONTINUE TRANSMISSION	36
9. ANTENNA REQUIREMENT	37
9.1 STANDARD REQUIREMENT	37
9.2 EUT ANTENNA	37
APPENDIX - PHOTOS OF TEST SETUP	38

**Revision History**

Rev.	Issue Date	Report No.	Effect Page	Contents
00	12 June 2025	STS2506034W03	ALL	Initial Issue



1. SUMMARY OF TEST RESULTS

Test procedures according to the technical standards:

§ 15.407, KDB 789033 D02 General U-NII Test Procedures New Rules v02r01

FCC Part 15.407		
FCC standard	Test Item	Results
15.207	AC Conducted Emission	PASS
15.407 (a) /15.407 (e)	26dB/6dB &99% Bandwidth	PASS
15.407(a)	Maximum Conducted Output Power	PASS
15.407(b) /15.209	Radiated Emission And (bandedge Emissions) Measurement	PASS
15.407(a)	Power Spectral Density	PASS
15.407°C	Automatically Discontinue Transmission	PASS
15.203/15.204	Antenna Requirement	PASS

Note:

- (1) 'N/A' denotes test is not applicable in this Test Report.
- (2) All tests are according to ANSI C63.10-2020.



1.1 TEST FACTORY

SHENZHEN STS TEST SERVICES CO., LTD

Add.: 101, Building B, Zhuoke Science Park, No.190 Chongqing Road, ZhanChengShequ, Fuhai Sub-District, Bao'an District, Shenzhen, Guang Dong, China

FCC test Firm Registration Number: 625569

IC test Firm Registration Number: 12108A

A2LA Certificate No.: 4338.01

1.2 MEASUREMENT UNCERTAINTY

The reported uncertainty of measurement $y \pm U$, where expended uncertainty U is based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately **95 %**.

No.	Item	Uncertainty
1	RF output power, conducted	$\pm 0.755\text{dB}$
2	Unwanted Emissions, conducted	$\pm 2.874\text{dB}$
3	All emissions, radiated 9K-30MHz	$\pm 3.80\text{dB}$
4	All emissions, radiated 30M-1GHz	$\pm 4.18\text{dB}$
5	All emissions, radiated 1G-6GHz	$\pm 4.90\text{dB}$
6	All emissions, radiated >6G	$\pm 5.24\text{dB}$
7	Conducted Emission (9KHz-150KHz)	$\pm 2.19\text{dB}$
8	Conducted Emission (150KHz-30MHz)	$\pm 2.53\text{dB}$
9	Occupied Channel Bandwidth	$\pm 3.5\%$
10	Power Spectral Density, conducted	$\pm 1.245\text{dB}$
11	Duty Cycle	$\pm 3.2\%$



2. GENERAL INFORMATION

2.1 GENERAL DESCRIPTION OF THE EUT

Product Name	Mini PC	
Brand Name	GMKtec	
Model Name	G10	
Series Model(s)	G10 PLUS, G10 Pro, G11, G11 PLUS, G11 Pro, G12, G13, G14, G15, G16	
Model Difference	Only the model is different, the motherboard and the circuit are the same	
Product Description	The EUT is Mini PC	
	Operation Frequency:	IEEE 802.11a/ n(HT20)/ac(VHT20)/ax(HE20): 5.180GHz-5.240GHz IEEE 802.11n(HT40)/ac(VHT40)/ax(HE40): 5.190GHz-5.230GHz IEEE 802.11ac(VHT80)/ax(HE80): 5.210GHz
	Modulation Type:	802.11a(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11n(OFDM): BPSK,QPSK,16-QAM,64-QAM 802.11ac(OFDM): BPSK,QPSK,16-QAM,64-QAM,256-QAM 802.11ax(OFDM, OFDMA): BPSK,QPSK,16-QAM,64-QAM,256-QAM, 1024QAM
	Antenna Type:	PIFA
	Antenna Gain:	ANT 1: 1.41 dBi ANT 2: 1.41 dBi MIMO: 4.42 dBi
	Max.Output Power(Conducted):	13.08dBm
	More details of EUT technical specification, please refer to the User Manual.	
Test Channel	Please refer to the Note 3.	
Power Rating	Input: DC 19.0V 3.42A 64.98W	
Adapter	Input: 100-240V~ 50/60Hz 1.5A Output: DC 19V 3.42A 64.98W	
Battery	N/A	
Hardware version number	ADB55	
Software version number	Windows11 24H2	
Connecting I/O Port(s)	Please refer to the Note 1.	

Note

1. For a more detailed features description, please refer to the manufacturer's specifications or the User Manual.
2. The antenna details in this report are based on the manufacturer provided antenna specification documents and apply only to the tested sample identified herein.
Any discrepancies in the antenna information may affect the accuracy of the test results, and the customer assumes responsibility for any related issues.



3.

Operation Frequency of channel	
5.180GHz-5.240GHz	
Channel	Frequency
36	5180
38	5190
40	5200
42	5210
44	5220
46	5230
48	5240

Note:

In section 15.31(m), regards to the operating frequency range over 10 MHz, the Lowest frequency, the middle frequency, and the highest frequency of channel were selected to perform the test, and the selected channel see below:

Carrier Frequency Channel

5GHz:

For 802.11a/n(HT20) /ac (VHT20) /ax (HE20)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
36	5180	40	5200
48	5240	--	--

For 802.11n(HT40) /ac (VHT40) /ax (HE40)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
38	5190	46	5230

For 802.11ac (VHT80) /ax (HE80)			
Channel	Freq.(MHz)	Channel	Freq.(MHz)
42	5210	--	--

5.KDB 662911 D01 Multiple Transmitter Output v02r01

2) Directional Gain Calculations for In-Band Measurements

a) Basic methodology with NANT transmit antennas, each with the same directional gain GANT dBi, being driven by NANT transmitter outputs of equal power. Directional gain is to be computed as follows:

(i) If any transmit signals are correlated with each other,

Directional gain = GANT + 10 log(NANT) dBi

(ii) If all transmit signals are completely uncorrelated with each other,

Directional gain = GANT

ANT 1: 1.41 dBi

ANT 2: 1.41 dBi

MIMO: 4.42 dBi

GANT + 10 log(NANT) dBi

4.42dBi



2.2 DESCRIPTION OF TEST MODES

To investigate the maximum EMI emission characteristics generated from EUT, the test system was pre-scanning tested based on the consideration of following EUT operation mode or test configuration mode which possibly have effect on EMI emission level. Each of these EUT operation mode(s) or test configuration mode(s) mentioned above was evaluated respectively.

Worst Mode	Description	Data Rate
Mode 1	TX IEEE 802.11a HT20 CH36&CH40&CH48	6 Mbps
Mode 2	TX IEEE 802.11n HT20 CH36&CH40&CH48	MCS 0
Mode 3	TX IEEE 802.11ac VHT20 CH36&CH40&CH48	NSS1 MCS0
Mode 4	TX IEEE 802.11n HT40 CH38&CH46	MCS 0
Mode 5	TX IEEE 802.11ac VHT40 CH38&CH46	NSS1 MCS0
Mode 6	TX IEEE 802.11ac VHT80 CH42	NSS1 MCS0
Mode 7	TX IEEE 802.11ax HE20 CH36&CH40&CH48	NSS1 MCS0
Mode 8	TX IEEE 802.11ax HE40 CH38&CH46	NSS1 MCS0
Mode 9	TX IEEE 802.11ax HE80 CH42	NSS1 MCS0

Note: (1) The measurements are performed at the highest, middle, lowest available channels.
(2) The measurements are performed at all Bit Rate of Transmitter, the worst data was reported.
(3) We have been tested for all available U.S. voltage and frequencies (For 120V, 50/60Hz and 240V, 50/60Hz) for which the device is capable of operation.
(4) The 802.11ax mode is investigated among different tones (26/52/106/242-tone RU channel), full resource units (RU), partial resource units. The partial RU has no higher power than full RU's, thus the full RU is chosen as main test configuration.

AC Conducted Emission

Test Case	
AC Conducted Emission	Mode 10: Keeping TX + WLAN Link


2.3 TEST SOFTWARE AND POWER LEVEL

During testing channel & power controlling software provided by the customer was used to control the operating channel as well as the output power level.


RF Function	Type	Mode Or Modulation type	ANT Gain(dBi)	ANT_1 Power Class	ANT_2 Power Class	Software For Testing
WIFI(5G)	U-NII-1 (5150MHz-5250MHz)	802.11a	ANT 1: 1.41 ANT 2: 1.41 MIMO: 4.42	14.5	14.5	QA TOOL
		802.11n(HT20)		14	14	
		802.11n(HT40)		11	11	
		802.11ac(VHT20)		11	11	
		802.11ac(VHT40)		11	11	
		802.11ac(VHT80)		11	11	
		802.11ax(HE20)		11	11	
		802.11ax(HE40)		11	11	
		802.11ax(HE80)		11	11	

2.4 BLOCK DIAGRAM SHOWING THE CONFIGURATION OF SYSTEM TESTED


Radiated Spurious Emission Test

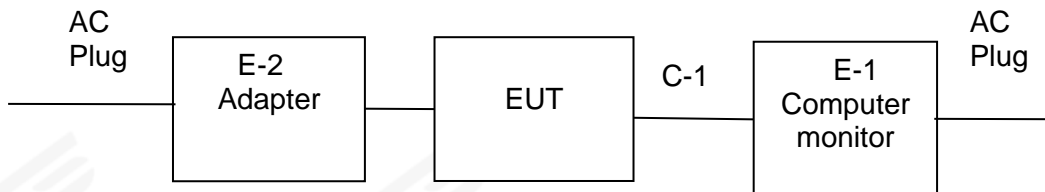

Conducted Emission Test

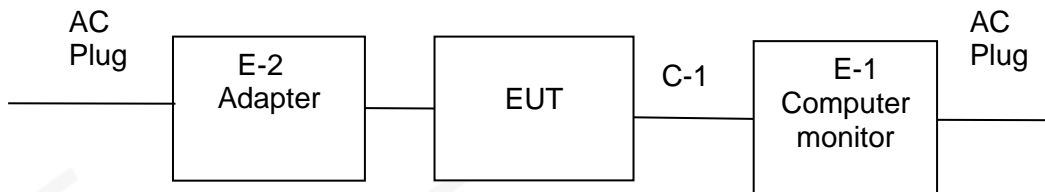

RF Conducted Test

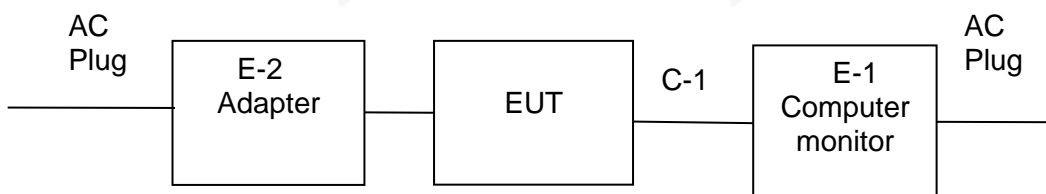



2.5 DESCRIPTION OF NECESSARY ACCESSORIES AND SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units. The following support units or accessories were used to form a representative test configuration during the tests.

Item	Equipment	Mfr/Brand	Model/Type No.	Note
C-1	HDMI Cable	GMKtec	EVO-X2	N/A
E-1	Computer monitor	PHILIPS	FASTIPS	N/A
E-2	Adapter	JHD-AD066C6-190342BA-A	N/A	N/A

Item	Equipment	Mfr/Brand	Length	Note
C-1	Shielded	NO	100cm	N/A

Note:

- (1) For detachable type I/O cable should be specified the length in cm in 『Length』 column.



2.6 EQUIPMENTS LIST

RF Radiation Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last Calibration	Calibrated Until
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Pre-Amplifier(0.1M-3GHz)	EM	EM330	060665	2025.02.22	2026.02.21
Pre-Amplifier(1G-18GHz)	SKET	LNPA-01018G-45	SK2018080901	2024.09.23	2025.09.22
Pre-Amplifier(18G-40GHz)	SKET	LNPA_1840-50	SK2018101801	2025.02.22	2026.02.21
Active loop Antenna	ZHINAN	ZN30900C	16035	2025.02.25	2026.02.24
Bilog Antenna	TESEQ	CBL6111D	34678	2024.09.30	2025.09.29
Horn Antenna	SCHWARZB ECK	BBHA 9120D	02014	2023.09.24	2025.09.23
Horn Antenna	A-INFOMW	LB-180400-KF	J211020657	2023.10.10	2025.10.09
Positioning Controller	MF	MF-7802	MF-780208587	N/A	N/A
Signal Analyzer	R&S	FSV 40-N	101823	2024.09.23	2025.09.22
Switch Control Box	N/A	N/A	N/A	N/A	N/A
Filter Box	BALUN Technology	SU319E	BL-SZ1530051	N/A	N/A
Antenna Mast	MF	MFA-440H	N/A	N/A	N/A
Turn Table	MF	SC100_1	60531	N/A	N/A
AC Power Source	APC	KDF-11010G	F214050035	N/A	N/A
DC power supply	HONGSHEN GFENG	DPS-305AF	17064939	2024.09.23	2025.09.22
Test SW	EZ-EMC	Ver.STSLAB-03A1 RE			
Conduction Test Equipment					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Test Receiver	R&S	ESCI	101427	2024.09.24	2025.09.23
Limtter	CYBERTEK	EM5010	N/A	2024.09.24	2025.09.23
LISN	R&S	ENV216	101242	2024.09.24	2025.09.23
LISN	EMCO	3810/2NM	23625	2024.09.24	2025.09.23
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	EZ-EMC	Ver.STSLAB-03A1 CE			
RF Connected Test					
Kind of Equipment	Manufacturer	Type No.	Serial No.	Last calibration	Calibrated until
Signal Analyzer	Agilent	N9020A	MY51510623	2025.02.22	2026.02.21
Temperature& Humidity test chamber	Safety test	AG80L	171200018	2025.02.22	2026.02.21
Switch control box	MW	MW100-RFCB	N/A	N/A	N/A
Temperature & Humidity	SW-108	SuWei	N/A	2025.02.24	2026.02.23
Test SW	MW	MTS 8310_2.0.0.0			



3. EMC EMISSION TEST

3.1 CONDUCTED EMISSION MEASUREMENT

3.1.1 POWER LINE CONDUCTED EMISSION Limits (Frequency Range 150KHz-30MHz)

FREQUENCY (MHz)	Class B (dBuV)		Standard
	Quasi-peak	Average	
0.15 -0.5	66 - 56 *	56 - 46 *	CISPR
0.50 -5.0	56.00	46.00	CISPR
5.0 -30.0	60.00	50.00	CISPR

0.15 -0.5	66 - 56 *	56 - 46 *	FCC
0.50 -5.0	56.00	46.00	FCC
5.0 -30.0	60.00	50.00	FCC

Note:

- (1) The tighter limit applies at the band edges.
- (2) The limit of “ * ” marked band means the limitation decreases linearly with the logarithm of the frequency in the range.

The following table is the setting of the receiver

Receiver Parameters	Setting
Attenuation	10 dB
Start Frequency	0.15 MHz
Stop Frequency	30 MHz
IF Bandwidth	9 kHz


3.1.2 TEST PROCEDURE

- The EUT is 0.8 m from the horizontal ground plane and 0.4 m from the vertical ground plane with EUT being connected to the power mains through a line impedance stabilization network (LISN). All other support equipments are powered from additional LISN(s). The LISN provides 50 Ohm/ 50uH of coupling impedance for the measuring instrument.
- Interconnecting cables that hang closer than 40 cm to the ground plane shall be folded back and forth in the center forming a bundle 30 to 40 cm long.
- I/O cables that are not connected to a peripheral shall be bundled in the center. The end of the cable may be terminated, if required, using the correct terminating impedance. The overall length shall not exceed 1 m.
- LISN is at least 80 cm from the nearest part of EUT chassis.
- For the actual test configuration, please refer to the related Item –EUT Test Photos.

3.1.3 DEVIATION FROM TEST STANDARD

No deviation

3.1.4 TEST SETUP

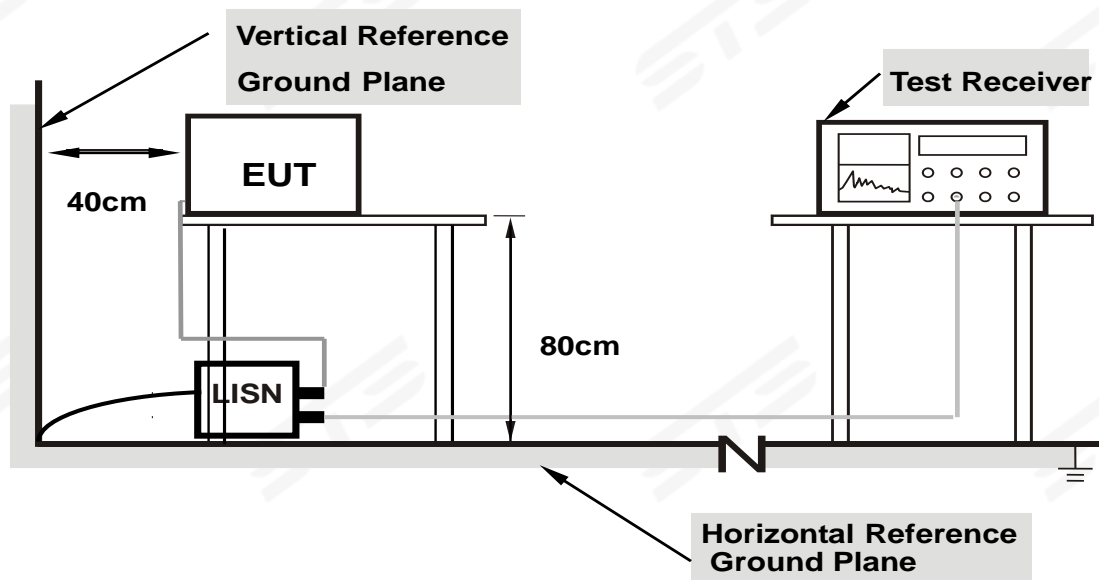

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) are 80 cm from EUT and at least 80 cm from other units and other metal planes support units.

3.1.5 EUT OPERATING CONDITIONS

The EUT was configured for testing in a typical fashion (as a customer would normally use it). The EUT has been programmed to continuously transmit during test. This operating condition was tested and used to collect the included data.




3.1.6 TEST RESULTS

Temperature:	25.1°C	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	L
Test Mode :	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1620	35.85	19.78	55.63	65.36	-9.73	QP
2	0.1620	16.50	19.78	36.28	55.36	-19.08	AVG
3	0.2220	30.98	19.87	50.85	62.74	-11.89	QP
4	0.2220	13.37	19.87	33.24	52.74	-19.50	AVG
5	0.3860	21.02	20.04	41.06	58.15	-17.09	QP
6	0.3860	5.41	20.04	25.45	48.15	-22.70	AVG
7	0.6460	26.02	19.87	45.89	56.00	-10.11	QP
8	0.6460	13.26	19.87	33.13	46.00	-12.87	AVG
9	4.4380	18.55	19.83	38.38	56.00	-17.62	QP
10	4.4380	5.60	19.83	25.43	46.00	-20.57	AVG
11	29.5620	23.26	20.20	43.46	60.00	-16.54	QP
12	29.5620	11.31	20.20	31.51	50.00	-18.49	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) – Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

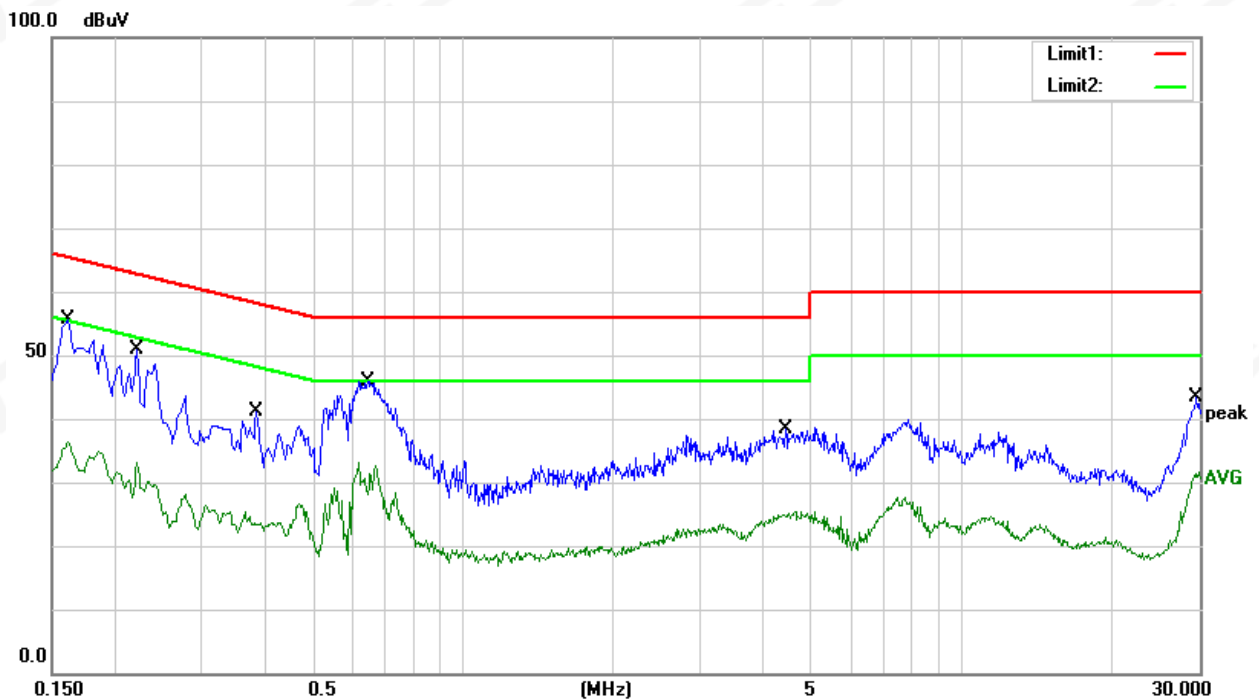




Temperature:	25.1℃	Relative Humidity:	59%
Test Voltage:	AC 120V/60Hz	Phase:	N
Test Mode :	Mode 10		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)	Remark
1	0.1940	33.53	19.85	53.38	63.86	-10.48	QP
2	0.1940	19.17	19.85	39.02	53.86	-14.84	AVG
3	0.5460	26.41	19.93	46.34	56.00	-9.66	QP
4	0.5460	11.72	19.93	31.65	46.00	-14.35	AVG
5	0.6580	27.02	19.87	46.89	56.00	-9.11	QP
6	0.6580	23.07	19.87	42.94	46.00	-3.06	AVG
7	1.4260	16.01	19.82	35.83	56.00	-20.17	QP
8	1.4260	5.06	19.82	24.88	46.00	-21.12	AVG
9	3.5060	16.84	19.94	36.78	56.00	-19.22	QP
10	3.5060	1.89	19.94	21.83	46.00	-24.17	AVG
11	29.6260	22.33	20.43	42.76	60.00	-17.24	QP
12	29.6260	10.17	20.43	30.60	50.00	-19.40	AVG

Remark:

1. All readings are Quasi-Peak and Average values
2. Margin = Result (Result = Reading + Factor) - Limit
3. Factor = LISN factor + Cable loss + Limiter (10dB)

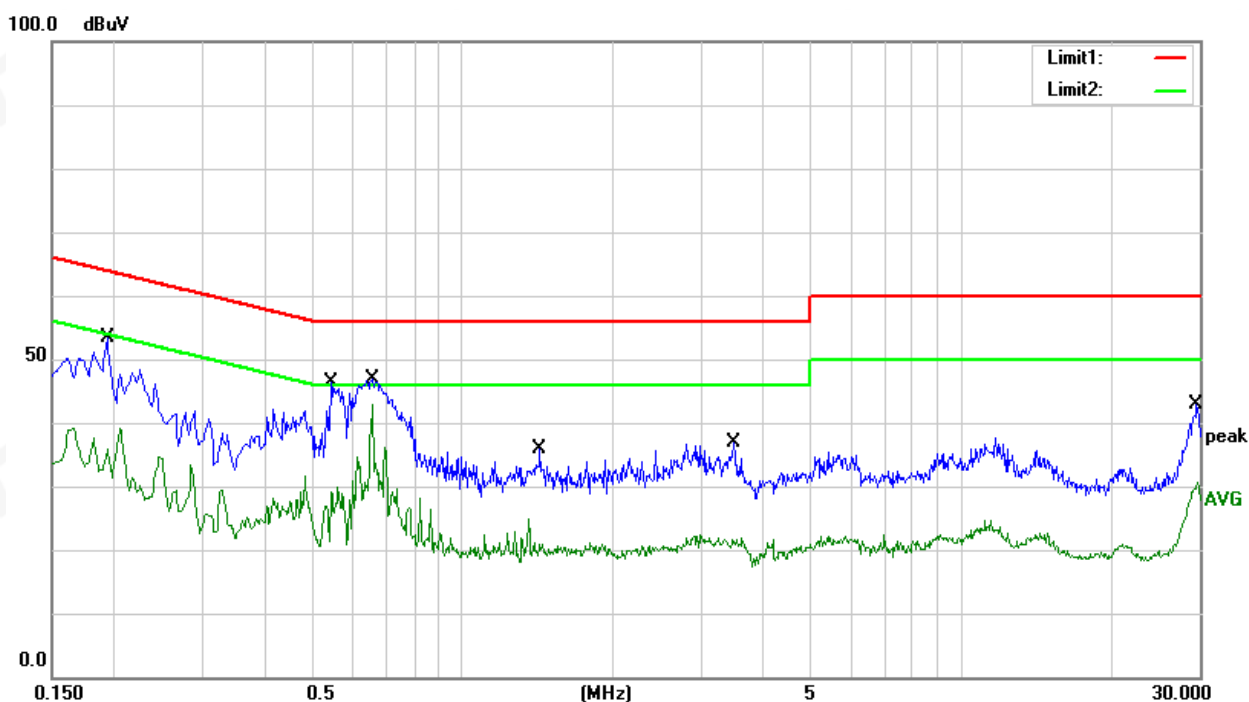



3.2 RADIATED EMISSION AND (BANDEDGE) MEASUREMENT

3.2.1 RADIATED EMISSION LIMITS (Frequency Range 9kHz-1000MHz)

In case the emission fall within the restricted band specified on 15.407(b)7&209(a), then the limit in the table below has to be followed.

Frequencies (MHz)	Field Strength (micorvolts/meter)	Measurement Distance (meters)
0.009~0.490	2400/F(KHz)	300
0.490~1.705	24000/F(KHz)	30
1.705~30.0	30	30
30~88	100	3
88~216	150	3
216~960	200	3
Above 960	500	3

LIMITS OF RADIATED EMISSION MEASUREMENT (Above 1000MHz)

FREQUENCY (MHz)	Class B (dBuV/m) (at 3M)	
	PEAK	AVERAGE
Above 1000	74	54

Notes:

- (1) The limit for radiated test was performed according to FCC PART 15E.
- (2) The tighter limit applies at the band edges.
- (3) Emission level (dBuV/m)=20log Emission level (uV/m).

LIMITS OF RESTRICTED FREQUENCY BANDS

FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (MHz)	FREQUENCY (GHz)
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	Above 38.6
13.36-13.41			

Note: In case the emission radiated emission above 1000MHz fall within the restricted band the restricted frequency bands, the peak limit is 74 dBuV/m.

**LIMITS OF EMISSIONS OUTSIDE OF THE FREQUENCY BANDS**

Undesirable emission limits. Except as shown in paragraph (b)(7) of this section, the maximum emissions outside of the frequency bands of operation shall be attenuated in accordance with the following limits:

- (1) For transmitters operating in the 5.15-5.25 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (2) For transmitters operating in the 5.25-5.35 GHz band: All emissions outside of the 5.15-5.35 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (3) For transmitters operating in the 5.47-5.725 GHz band: All emissions outside of the 5.47-5.725 GHz band shall not exceed an e.i.r.p. of -27 dBm/MHz.
- (4) For transmitters operating in the 5.725-5.85 GHz band:
 - (i) All emissions shall be limited to a level of -27 dBm/MHz at 75 MHz or more above or below the band edge increasing linearly to 10 dBm/MHz at 25 MHz above or below the band edge, and from 25 MHz above or below the band edge increasing linearly to a level of 15.6 dBm/MHz at 5 MHz above or below the band edge, and from 5 MHz above or below the band edge increasing linearly to a level of 27 dBm/MHz at the band edge.

Note: dBuV/m(at 3M) = EIRP(dBm) + 95.2.

Peak Limit = -27dBm/MHz + 95.2 = 68.2 dBuV/m.

Spectrum Parameter	Setting
Attenuation	Auto
Detector	Peak
Start Frequency	1000 MHz(Peak/AV)
Stop Frequency	10th carrier harmonic (Peak/AV)
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

For Band edge

Spectrum Parameter	Setting
Detector	Peak
RB / VB (emission in restricted band)	1 MHz / 1 MHz, AV=1 MHz /3 MHz

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~90kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	90kHz~110kHz / RB 200Hz for QP
Start ~ Stop Frequency	110kHz~490kHz / RB 200Hz for PK & AV
Start ~ Stop Frequency	490kHz~30MHz / RB 9kHz for QP
Start ~ Stop Frequency	30MHz~1000MHz / RB 120kHz for QP



3.2.2 TEST PROCEDURE

- a. The measuring distance at 3 m shall be used for measurements at frequency 0.009MHz up to 1GHz, and above 1GHz.
- b. The EUT was placed on the top of a rotating table 0.8 m (above 1GHz is 1.5 m) above the ground at a 3 m anechoic chamber test site. The table was rotated 360 degree to determine the position of the highest radiation.
- c. The height of the equipment shall be 0.8 m (above 1GHz is 1.5 m); the height of the test antenna shall vary between 1 m to 4 m. Horizontal and vertical polarization of the antenna are set to make the measurement.
- d. The initial step in collecting conducted emission data is a spectrum analyzer peak detector mode pre-scanning the measurement frequency range. Significant peaks are then marked and QuasiPeak detector mode will be re-measured.
- e. If the Peak Mode measured value is compliance with and lower than Quasi Peak Mode Limit, the EUT shall be deemed to meet QP Limits and no additional QP Mode measurement was performed.
- f. For the actual test configuration, please refer to the related Item –EUT Test Photos.

Note:


Both horizontal and vertical antenna polarities were tested and performed pretest to three orthogonal axis. The worst case emissions were reported.

3.2.2 DEVIATION FROM TEST STANDARD


No deviation

3.2.3 TEST SETUP


(A) Radiated Emission Test-Up Frequency Below 30MHz

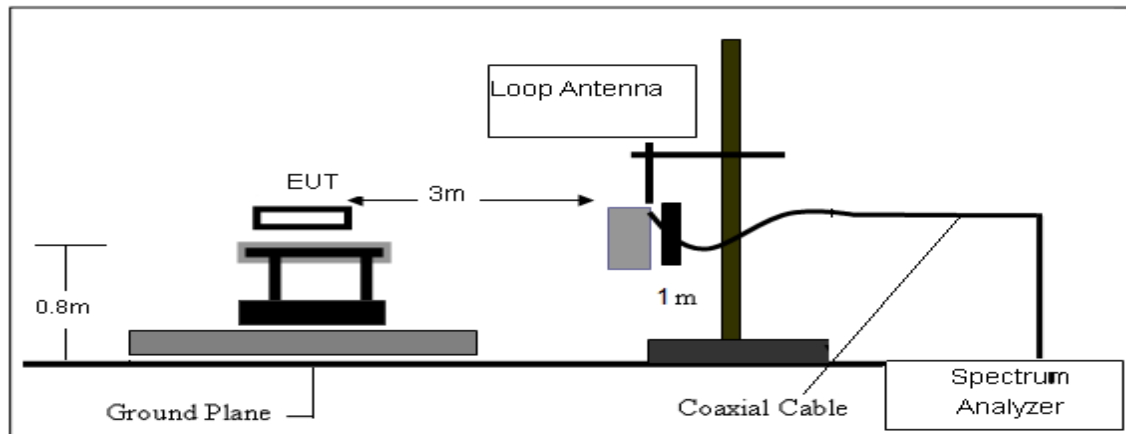

(B) Radiated Emission Test-Up Frequency 30MHz~1GHz

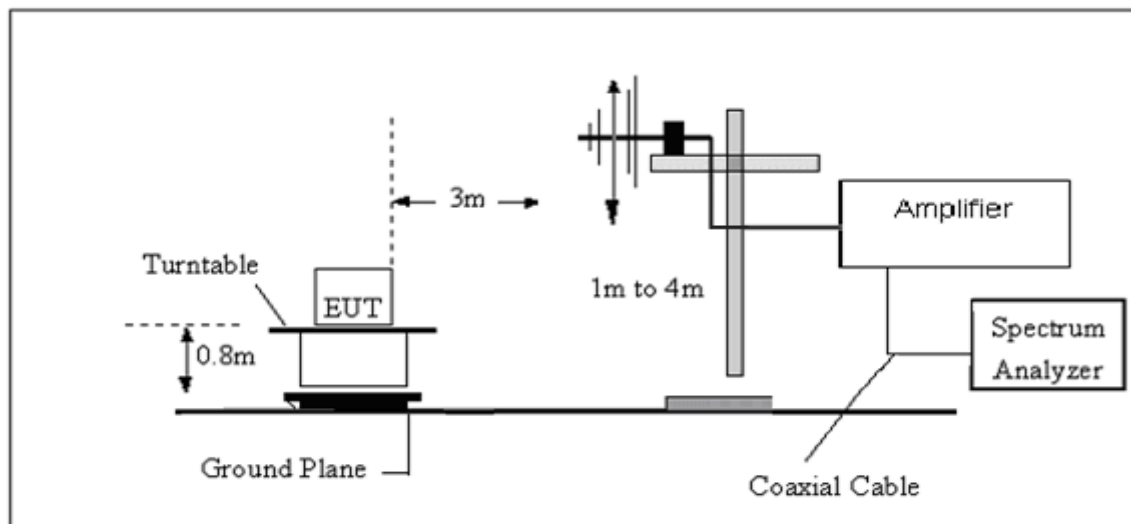

(C) Radiated Emission Test-Up Frequency Above 1GHz

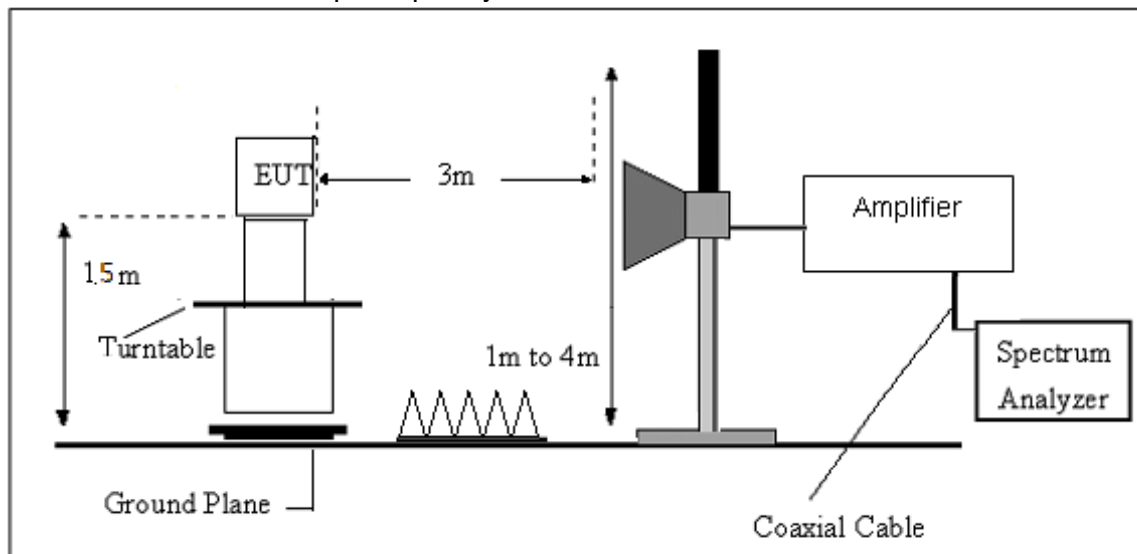



3.2.4 EUT OPERATING CONDITIONS

The EUT tested system was configured as the statements of 2.4 Unless otherwise a special operating condition is specified in the follows during the testing.

3.2.5 FIELD STRENGTH CALCULATION

The field strength is calculated by adding the Antenna Factor and Cable Factor and subtracting the Amplifier Gain and Duty Cycle Correction Factor (if any) from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CL - AG$$

Where

FS = Field Strength

CL = Cable Attenuation Factor (Cable Loss)

RA = Reading Amplitude

AG = Amplifier Gain

AF = Antenna Factor

For example

Frequency	FS	RA	AF	CL	AG	Factor
(MHz)	(dBμV/m)	(dBμV/m)	(dB)	(dB)	(dB)	(dB)
300	40	58.1	12.2	1.6	31.9	-18.1

$$\text{Factor} = \text{AF} + \text{CL} - \text{AG}$$



3.2.6 TEST RESULTS (Between 9KHz – 30 MHz)

Temperature:	23.4℃	Relative Humidity:	60%
Test Voltage:	AC 120V/60Hz	Polarization :	--
Test Mode:	TX Mode		

Freq.	Reading	Limit	Margin	State
(MHz)	(dBuV/m)	(dBuV/m)	(dB)	P/F
--	--	--	--	PASS
--	--	--	--	PASS

Note:

The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance/test distance})$ (dB);

Limit line = specific limits(dBuV) + distance extrapolation factor.




3.2.7 TEST RESULTS (Between 30MHz – 1GHz)

Temperature	23.4℃	Relative Humidity:	60%
Test Voltage	AC 120V/60Hz	Polarization :	Horizontal
Test Mode	Mode 1~9(Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	42.68	-23.42	19.26	40.00	-20.74	peak
2	253.1000	42.74	-15.65	27.09	46.00	-18.91	peak
3	323.9100	45.26	-13.88	31.38	46.00	-14.62	peak
4	498.5100	35.16	-8.04	27.12	46.00	-18.88	peak
5	665.3500	34.56	-4.69	29.87	46.00	-16.13	peak
6	979.6300	31.36	2.65	34.01	54.00	-19.99	peak

Remark:

1. Margin = Result (Result =Reading + Factor)–Limit
2. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

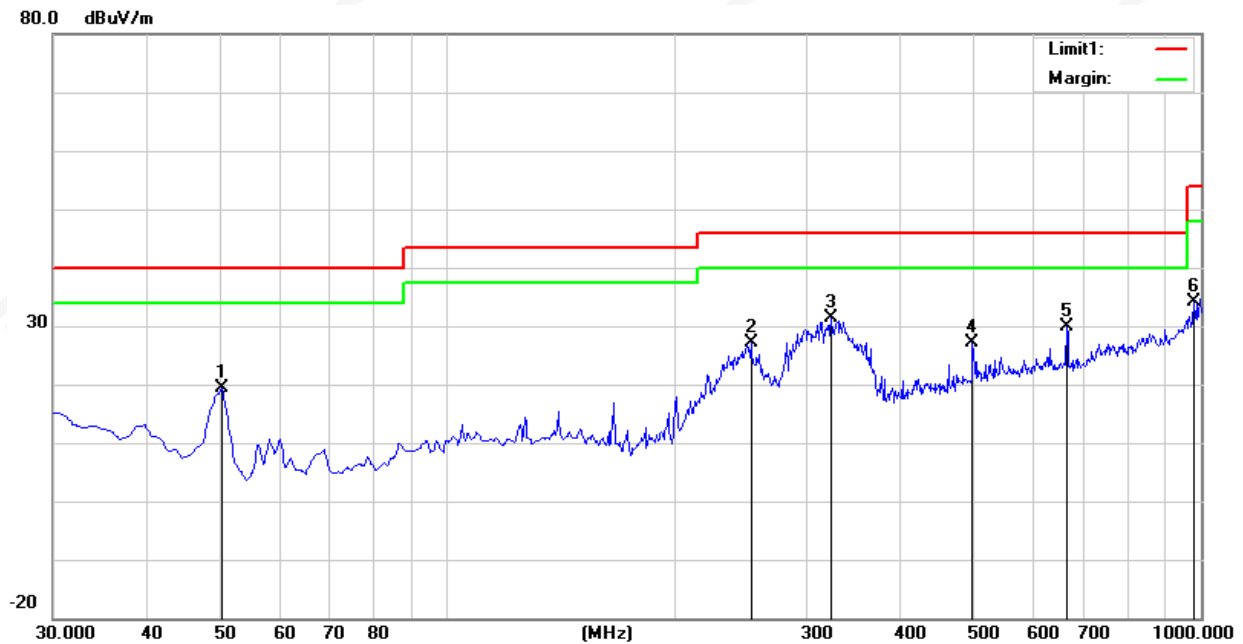



Temperature	23.4℃	Relative Humidity:	60%
Test Voltage	AC 120V/60Hz	Polarization:	Vertical
Test Mode	Mode 1~9(Mode 2 worst mode)		

No.	Frequency (MHz)	Reading (dBuV)	Correct Factor(dB/m)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Remark
1	50.3700	46.51	-23.42	23.09	40.00	-16.91	peak
2	260.8600	42.45	-14.78	27.67	46.00	-18.33	peak
3	332.6400	43.07	-13.62	29.45	46.00	-16.55	peak
4	498.5100	42.28	-8.04	34.24	46.00	-11.76	peak
5	665.3500	34.57	-4.69	29.88	46.00	-16.12	peak
6	966.0500	30.41	1.90	32.31	54.00	-21.69	peak

Remark:

3. Margin = Result (Result =Reading + Factor)-Limit

4. Factor= Antenna factor+Cable attenuation factor(cable loss)-Amplifier gain

