

M SERIES

Advanced thermal imaging camera with full function analysis




SuperIR



VISIT OUR WEBSITE

Multiple Product Options

M series products provide wide-angle and manual focus options. The manual focus with a larger focal length option (without "W") is ideal for electrical, HVAC, and mechanical inspection where focusing on specific components is critical. The "W" series features a fixed focus wide FOV making them ideal for scanning walls, floors, and large-scale items.

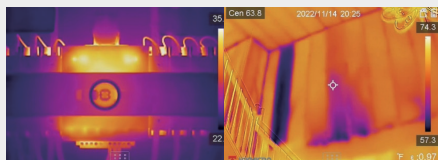


Without "W"

With "W"

1-Tap Level & Span

Quickly highlights the area of the image you are interested in by narrowing the span with one tap on the **3.5" LCD touchscreen**, instantly improving image contrast and highlighting potential problems.

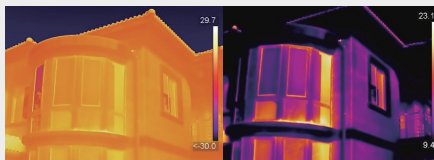

Auto Level & Span

Manual / 1-Tap Level & Span

Interchangeable Battery System

Includes **2 interchangeable Li-ion batteries** and a dual bay charger to provide you with **up to 12 hours** of operation. You can stay powered up for even the longest inspections.



2 interchangeable Li-ion batteries



On-camera Analysis

Offers 17 measurement rules, 7 color alarm palettes and 4 image modes for powerful on-camera analysis.



Camera Interface


Intuitive 3.5" LCD Touch Screen or interactive buttons to easily navigate to any function. Use either or both!




Multiple Image Annotations

Support voice, text, and QR Code Scan annotations, helping to improve inspection efficiency and productivity.


APPLICATIONS



Check Electrical



Check Underfloor Heating



Check Building Insulation



Check Mechanical Status

WHAT'S IN THE BOX



OPTIONAL ACCESSORIES



— Additional batteries —
E097-13-1S1P26650



— Pouch —
HM-SP01-POUCH



— Replacement Charger —
HM-5202ZC

Model No	M11	M11W	M20W	M20	M30	M60
IR Resolution	192 x 144 (27,648 pixels)	192 x 144 (27,648 pixels)	256 x 192 (49,152 pixels)	256 x 192 (49,152 pixels)	384 x 288 (110,592 pixels)	640 x 480 (307,200 pixels)
SuperIR	192 x 144 (27,648 pixels)	192 x 144 (27,648 pixels)	512 x 384 (196,608 pixels)	512 x 384 (196,608 pixels)	768 x 576 (442,368 pixels)	1280 x 960 (1,228,800 pixels)
NETD	< 40 mK (@ 25 °C, F#=1.0)				< 35 mK (@ 25 °C, F#=1.0)	
Focal Length	6.9mm	3.6mm	3.5mm	6.9mm	10mm	15mm
FOV	18.8° x 14.1°	37.2° x 27.8°	50° x 37.2°	25° x 18.8°	37.5° x 28.5°	41.9° x 33.3°
Focus	Manual Focus	Focus Free	Focus Free	Manual Focus	Manual Focus	Manual Focus
Visual Camera	3264 x 2448 (8 MP)					
Min. Focusing Distance	0.1 m (0.33 ft)	0.5 m (1.64 ft)	0.5 m (1.64 ft)	0.1 m (0.33 ft)	0.2 m (0.33 ft)	0.3 m (0.98 ft)
Object Temp. Range	-20 °C to 550 °C (-4 °F to 1022 °F)					-20 °C to 650 °C (-4 °F to 1202 °F)
Accuracy	Max. (± 2°C/3.6°F, ± 2%), for ambient temperature 15°C to 35°C (59°F to 95°F) and object temperature above 0°C (32°F)					
Wi-Fi	802.11 b/g/n (2.4 GHz and 5 GHz)					
Storage	Default Storage: Removable SD Card (16 GB) ; Max. Storage Capacity: 128 GB				Default Storage: Removable SD Card (64 GB) ; Max. Storage Capacity: 128 GB	
Battery Operating Time	Approx. 6 hours x 2	Approx. 6 hours x 2	Approx. 6 hours x 2	Approx. 6 hours x 2	Approx. 4 hours x 2	Approx. 4 hours x 2

Distributed by:

testoon .com
The measurement website

99 rue Beranger 92320 Chatillon - France
Tel. : +33 (0) 1 71 16 17 00
E-mail: contact@testoon.com
www.testoon.com

