


6091/221-35 Art. No. 118910



- Available with one, two or three illuminated sections
- Illuminated sections come in red, signal yellow, green, blue or clear
- Max. incandescent lamp output 60 W, 230 V
- 4 m connection line

MY R. STAHL 6091A

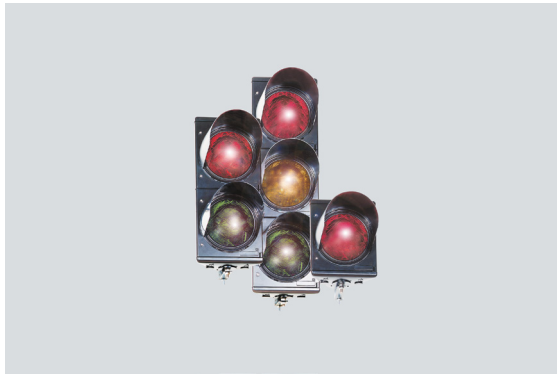

The Series 6091/2 traffic lights are suitable for controlling and signalling traffic or other movements in gas and dust hazardous areas.

Technical Data

Explosion Protection

Application range (zones)	1, 2, 22
ATEX gas certificate	ISSeP02ATEX040X
ATEX gas explosion protection	Ex II 2 G EEx ed IIC T3 ... T1
ATEX dust certificate	ISSeP02ATEX040X
ATEX dust explosion protection	Ex II 3 D T95 °C / T115 °C

Lighting Data

Number of light fields	2
Lamp holder	E27
Lamp	Incandescent lamp

Ambient Conditions

Ambient temperature	-20 °C ... +40 °C (IIC T3) (T95 °C) (T2) (T1)
---------------------	---

Mechanical Data

Degree of protection (IP)	IP54
Enclosure material	Polycarbonate
Lens material	Polycarbonate
Sun shield material	Polyamide
Width	459 mm
Height	645 mm
Length	270 mm
Colour of light fields	Red/green
Weight	7.2 kg
Weight	15.87 lb

We reserve the right to make alterations to the technical data, dimensions, weights, designs and products available without notice. The illustrations cannot be considered binding.