



HPS-SAH-WP Explosion Proof Manual Pull Station



STANDARD FEATURES

- Weatherproof Manual Pull Station
- 10 A, 120 VAC contacts
- Rugged die-cast aluminum housing
- Neoprene sealing gasket
- Corrosion-resistant construction
- Hex reset
- Latching pull-down lever
- Screw terminal connections

SPECIFICATIONS

Model	HPS-SAH-WP
Contact	(1) Form A
Contact Rating	10A @ 120 VAC
Operating Temperature	-30°F (-35°C) ~ 150°F (66°C)
HPS-BB Dimension	1-3/4" Backbox

PRODUCT LISTINGS



California State
Fire Marshal
7150-0410:162

DESCRIPTION


The Hochiki HPS-SAH-WP Weatherproof Manual Pull Station is a UL Listed fire alarm initiating device suitable for applications requiring outdoor mounting of the manual fire alarm pull station. The HPS-SAH-WP is appropriate for applications where the manual pull station may be subject to wet conditions.

The HPS-SAH-WP consists of a die-cast aluminum back box, Neoprene sealing gasket and a special manual fire alarm box. The unit is a high quality pull station constructed entirely of nontoxic materials with a low profile and rounded edges to fit most design requirements. All components are pre-painted, or have plated surfaces to inhibit corrosion.

The latching pull-down lever on the HPS-SAH-WP requires a hex key to reset it. This allows only authorized personnel to reset the manual pull station so that the origin of the alarm can be determined easily.

The HPS-SAH-WP has one set of Normally Open contacts rated for 10A @ 120 VAC, making the device suitable for installations involving large current loads.

The HPS-SAH-WP conforms with the Americans with Disabilities Act (ADA).

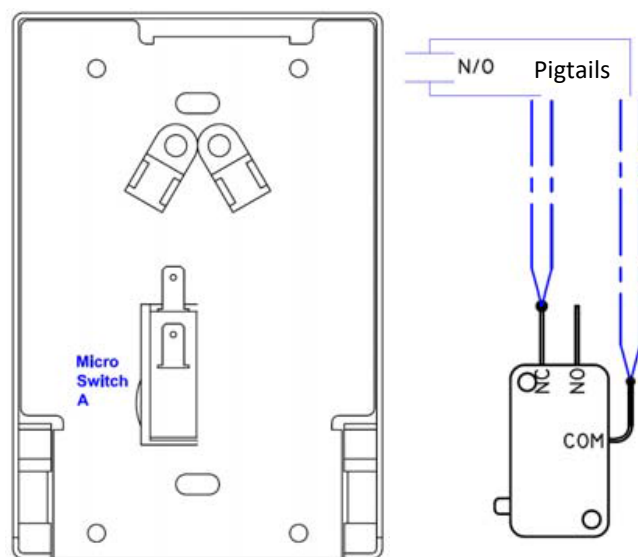

Specifications subject to change without notice.

Hochiki America Corporation
7051 Village Drive, Suite 100, Buena Park, CA 90621-2268
Phone: 714-522-2246 Fax: 714-522-2268
Technical Support: 800-845-6692 or technicalsupport@hochiki.com



Find latest revision at www.hochiki.com

F0035 12/2018