


Tender

APPLICABLE PRODUCTS: B921, B922, B923, B924

This is a general guide to show you how simple it is to install an em-trak AIS transceiver.


If you have any questions at any time you can contact our team support@em-trak.com

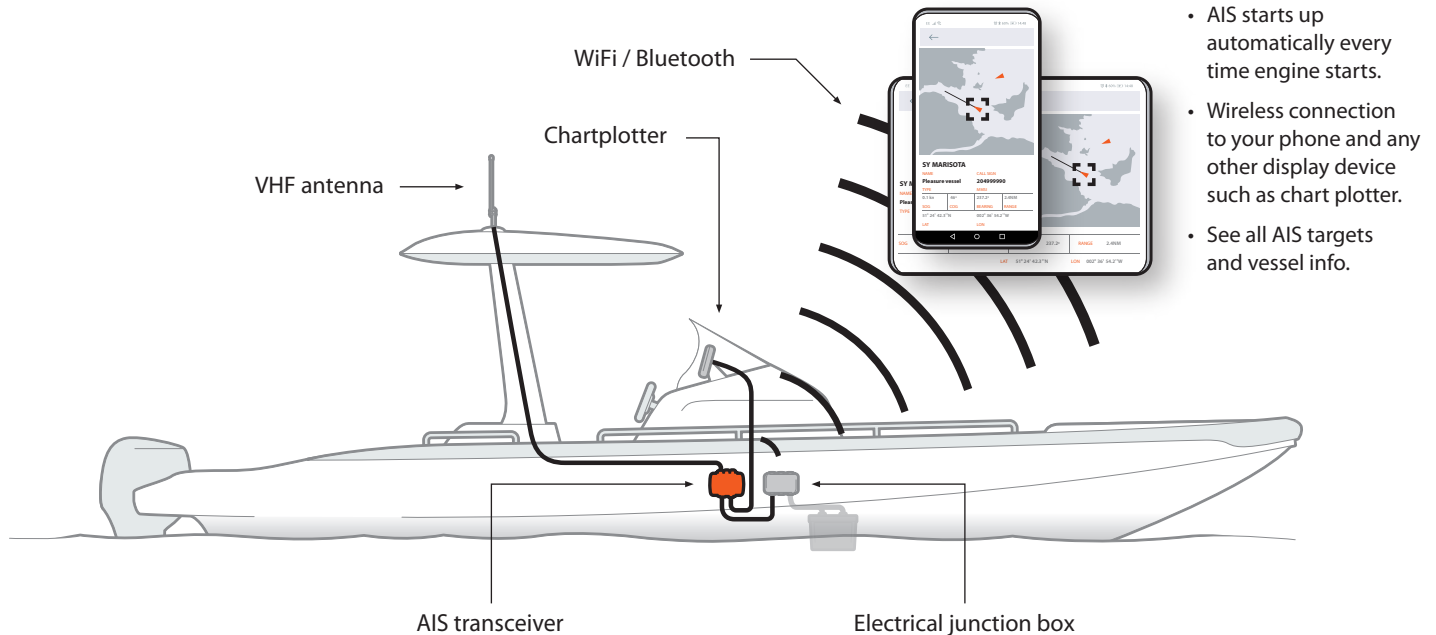

1

No screws required!


Use bracket to fit AIS into convenient storage / utility area.



2


Connect to your VHF radio, VHF antenna and power.

AIS has internal GPS so if you install near a window, under a fibreglass deck or inside a centre console you will not need an external GPS antenna.

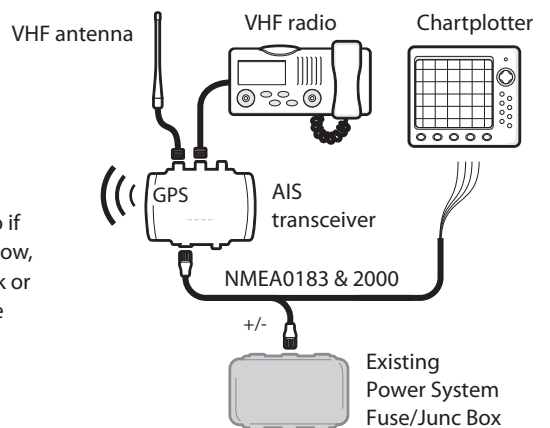

3

Switch power on and use **CONNECT-AIS** app or **PROAIS2** PC Software to program AIS with your vessel information.

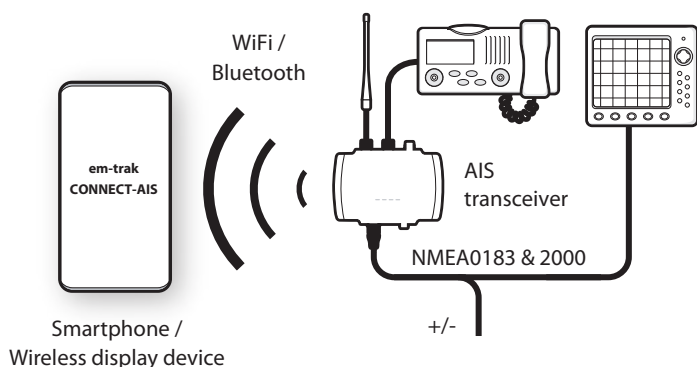

CONNECT-AIS

Download on the Google play

Download on the App Store

4

See AIS targets and information on your chartplotter, smart phone and other wireless devices.

