


H 2...3 meter masts for sensors and data logger installation

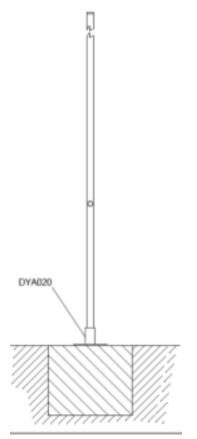

- AISI304 stainless steel structure
- Complete range of accessories for fixation on concrete, soil and lateral side of walls
- H 2 and H 3 m models

These masts are suitable for ground, concrete plinth or wall installation. It can be useful for the installation of meteorological equipment (sensors, ELF box for data logger) and solar panels. All masts are equipped with grounding electric protection. When the mast is fixed on the ground, by a DYA021 tripod, it is always better to use tie-rods. When the DYA020 tripod is used on a concrete plinth, it is possible to use tie rods, expecially when the mast is three meters high.

Technical Specifications

PN	DYA005	DYA006.1	DYA010.1	
Height	1 m	2 m	3 m	
Weight	1.9 Kg	3.8 Kg	5.5 Kg	

Common Techinical Specifications

Use	Support for wind sensors, other sensors mounted on arms and data logger	
Diameter	Ext. 50 mm int. 47 mm	
Material	Stainless steel AISI304	
Fixing surface	On ground, concrete plinth, wall (see ACCESSORIES)	

Accessories

Installation on plinth	
DYA020	Tripod for masts Ø 50 mm concrete plinth installation. Weight: 3.25 kg
DYA020.1	Set of N.3 anchoring bolts, Ø 12mm for fixing tripods DYA020 on cement plinth. Weight: 1.3 kg
Installation on ground	
DYA021	Tripod for masts Ø 50 mm ground installation
DYA023	Set of N.3 pickets for DYA021







H 2...3 meter masts for sensors and data logger installation

	Foldable system for masts Ø 50 mm			
	DYA019	Joint (it should be used with tie-rods set)		
	Collar for jointing	Collar for jointing two masts		
	DYA002	Collar for jointing two masts Ø 50 mm (it should be used with tie-rods set)		
	Arm for masts installation on wall			
	DYA004	Arm for mast Ø 50 mm wall installation (at least one pair required)		
	Tie-rods set for masts Ø 50 mm			
	DYA028	Set of 3 tie-rods and collar for fixing H 2-3 m pole. Weight: 0.7 kg		
	DYA029	Set of 3 tie-rods and collar for fixing H 2-3 m pole. Stainless steel		
	DYA026	Sets of N.3 pickets for tie-rod fixing on the ground. Weight: 11 kg		
	Upper sleeve to reinforce pole head			
	DYA131	Sleeve to reinforce pole head		

DYA020Tripod for Ø 50 mm pole on concrete plinth

DYA021Tripod for Ø 50 mm pole on ground

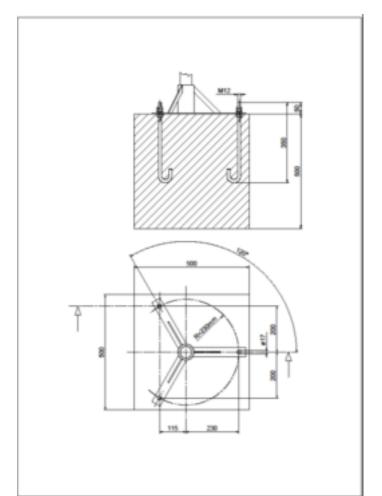


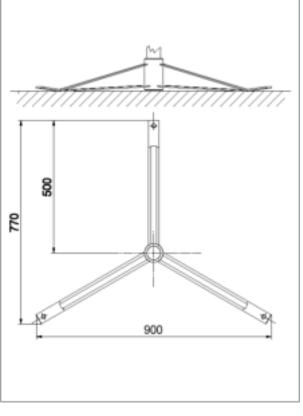




H 2...3 meter masts for sensors and data logger installation


DYA023
Ground pickets for
DYA021 tripod



DYA019Foldable system for mast Ø 50 mm

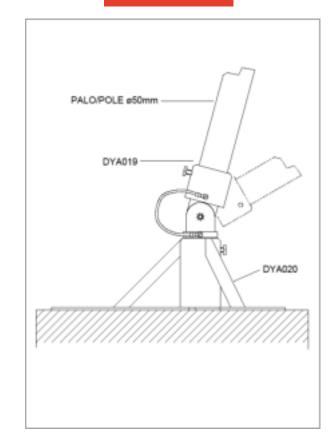


DYA002Collar for jointing two masts

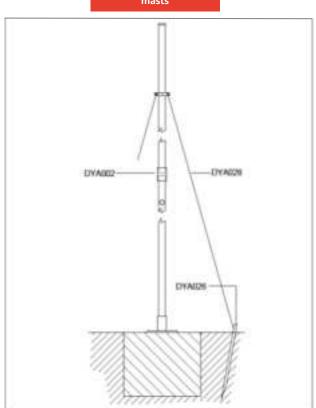

DYA004


Arm for masts installation on wall

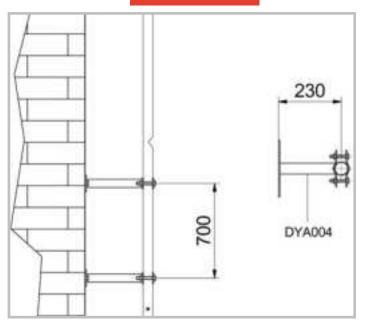






DYA028Tie-rods set for masts
Ø 50 mm



DYA026Pickets set for tie-rods

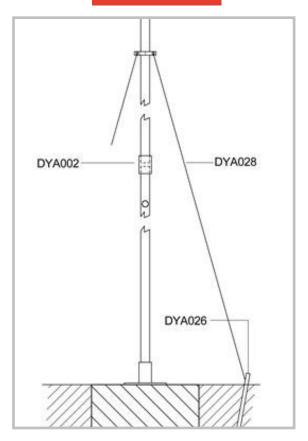

LSI LASTEM Srl Via Ex SP. 161 Dosso, 9 20049 Settala (MI) Italy **Tel.** +39 02 954141 **Fax** +39 02 95770594 **Email** info@lsi-lastem.com **www.lsi-lastem.com**

