

Trove2KA2 (Enclosure & Backplane) / TKA2 (Backplane)

Access & Power Integration Solution for Keyscan

TROVE™

Altronix Trove™ enclosures and backplanes let you easily integrate Altronix power with Keyscan access controllers and accessories. Trove simplifies board layout and wire management, reduces installation time and labor costs.

KEYSCAN
ACCESS CONTROL SYSTEMS



Trove2KA2

Boards are not included

Trove2KA2 (Trove2 Enclosure + TKA2 Backplane) TKA2 (Backplane) Features

- Accommodates the following Keyscan controllers with or without Altronix power/accessories:
 - Keyscan - either CA250B, CA4500B or CA8500B, up to two (2) OCB8, and one (1) of each DPS15 and CIM
 - Altronix Power Supplies and Sub-Assemblies
 - Altronix T16100 Transformer
- Includes Altronix Trove2 enclosure and one (1) removable TKA2 backplane

Features

- Simplifies board layout and wire management
- Convenient knockout configuration:
 - One (1) single knockout 2.415" (2" Conduit)
 - Sixteen (16) double knockouts 1.362" (1" Conduit) / 1.115" (3/4" Conduit)
- Accommodates up to four (4) 12VDC/12AH batteries
- 16 Gauge powder coated steel
- Includes cam lock, tamper switch and mounting hardware

Agency Listings

- UL: UL294 - Access Control System
- cUL: CAN/ULC - s319-05 - Electronic Access Control Systems
- CE European Conformity

Physical and Environmental

Trove2KA2 - Dimensions (H x W x D):

- Enclosure: 27.25" x 21.5" x 6.5" (692mm x 546mm x 165mm)
- Shipping: 32.5" x 26.5" x 11.125" (826mm x 673mm x 283mm)

Trove2KA2 - Weights (approx.):

- Product: 37.1 lb. (16.83 kg)
- Shipping: 40.85 lb. (18.53 kg)

TKA2 - Dimensions (H x W x D):

- Backplane: 25.375" x 19.375" x 0.3125" (645mm x 492mm x 8mm)
- Shipping: 26.5" x 20.5" x 1.25" (673mm x 521mm x 32mm)


TKA2 - Weights (approx.):

- Product: 8.0 lb. (3.63 kg)
- Shipping: 10.0 lb. (4.53 kg)

All registered trademarks are property of their respective owners.

Access Controller Position Chart for the Following Models:

Altronix / Keyscan	Pem Mounting
AL400ULXB2, AL400ULXB2V, AL600ULXB, AL600XB220, AL1012ULXB, AL1012XB220, AL1024ULXB2, AL1024XB2V, eFlow4NB, eFlow4NBV, eFlow6NB, eFlow6NBV, eFlow102NB, eFlow102NBV, eFlow104NB, eFlow104NBV, Tango1B, ACM8, ACM8CB, ACMS8, ACMS8CB, ACMS12, ACMS12CB, LINQ8ACM, LINQ8ACMCB	(A)
ACM4, ACM4CB, LINQ8PD, LINQ8PDCB, MOM5, PD4UL, PD4ULCB, PD8UL, PD8ULCB, PDS8, PDS8CB, PDS16, PDS16CB, VR6	(B)
T16100	(C)
Keyscan DPS15	(D)
Keyscan CA250B, CA4500B, CA8500B	(E)
Keyscan OCB8	(F)
Keyscan CIM with/without NetCom2P	(G)

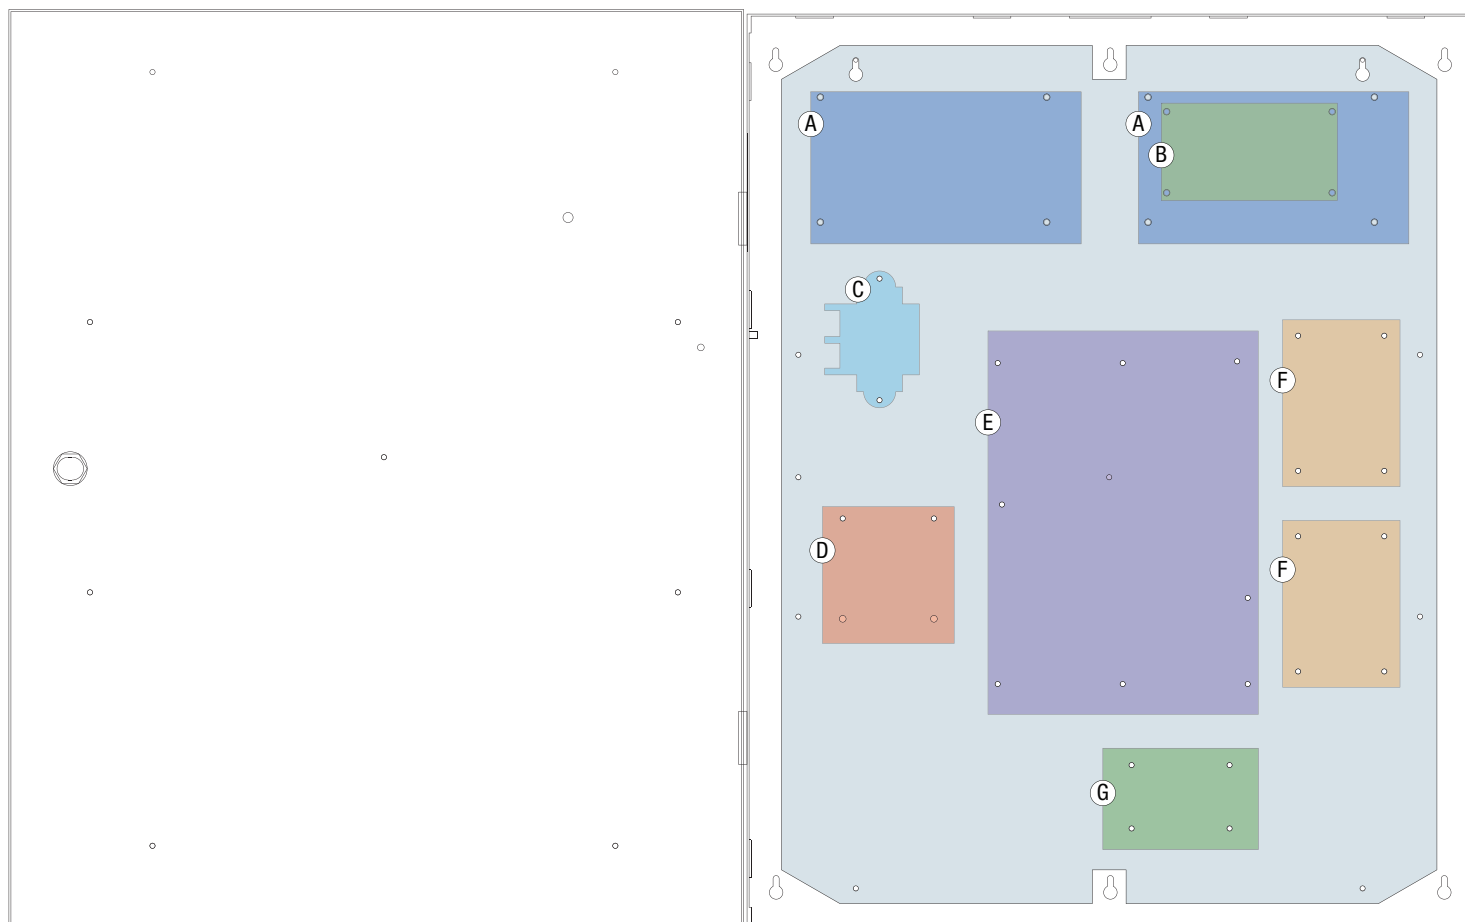

Accessories (order separately)



WM5

WM5, WM25, WM100 - Magnetic Cable Tie Mounts

Altronix WM5, WM25, and WM100 are packs of 5, 25 or 100 magnetic cable tie mounts respectively. They accommodate standard zip ties or velcro straps. These are ideal for wire management in our Trove series.



Mounting Magnet

MM4, MM8, MM12, MM24 - Magnetic Mounting Solution

Altronix mounting magnets accommodate screws and nylon standoffs to allow for mounting various boards/ accessories in any metal enclosure or backplane.



BR1

BR1 - Sub-Assembly Mounting Bracket

Altronix BR1 mounting bracket is compatible with Altronix Maximal and Trove enclosures. It allows to mount one (1) PD4UL(CB), PD8UL(CB), ACM4(CB), MOM5, VR6, PDS8, NetWay5B or LINQ8PD(CB) sub-assembly on the enclosure's inside wall, saving valuable space.

Trove2BWC
with
batteries



Trove2BWC
with
wires



TROVE2BWC - Battery/Wire Trough Enclosure

Altronix Trove2BWC is a dual-purpose enclosure that can be used as wiring trough or battery cabinet when mounted above or below of the Trove2 integrated power and access solution. The knockouts on the Trove2BWC have been strategically placed to line up with the Trove2 allowing for easy conduit connections between cabinets. Trove2BWC includes cam locks and 2 tamper switches to ensure access to wiring and batteries is secure.

Dimensions and Drawing

Dimensions (H x W x D approximate)

27.25" x 21.5" x 6.5" (692.2mm x 546.1mm x 165.1mm)

