



ENERG
енергия · ενέργεια




NIBE

AMS 10-8 + BA-SVM20-200-12 E



55 °C

35 °C



A++

A++



31 dB



55 dB

■ 10
■ 7
■ 8
kW

■ 9
■ 7
■ 8
kW



2019

811/2013




ENERG
енергия · ενέργεια




NIBE


AMS10-8 + BA-SVM20-200-12 E

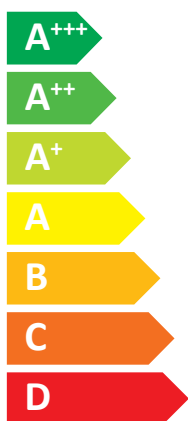

A++

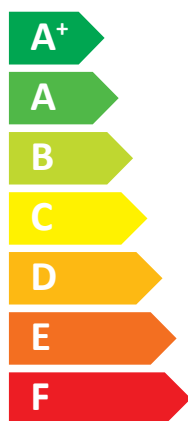


A

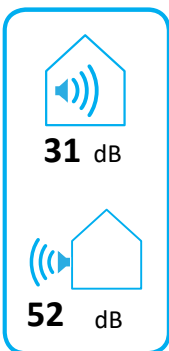



ENERG

енергия · ενεργεια



NIBE

AMS10-8 + BA-SVM20-200-12 E



A++



A



A+++

A++

A+

A

B

C

D


E

F

G

A++

+



+



+



+



A+++

A++

A+

A

B

C

D

E

F

G

A

Supplier's name:	NIBE		
Model:	AMS10-8+BA-SVM20-200-12 E		
Temperature application	35	55	°C
Declared load profile for water heating	XL		
Seasonal space heating energy efficiency class, average climate:	A++	A++	
Water heating energy efficiency class, average climate:	A		
Rated heat output, average climate:	7	7	kW
Annual energy consumption for space heating, average climate	3622	4486	kWh
Annual electricity consumption for water heating, average climate	1557		kWh
Seasonal space heating energy efficiency, average climate:	152	126	%
Water heating energy efficiency, average climate:	108		%
Sound power level LWA indoors	31		dB
Rated heat output, cold climate:	9	10	kW
Rated heat output, warm climate:	8	8	kW
Annual energy consumption for space heating, cold climate	6292	9016	kWh
Annual electricity consumption for water heating, cold climate	1941		kWh
Annual energy consumption for space heating, warm climate	1879	2371	kWh
Annual electricity consumption for water heating, warm climate	1278		kWh
Seasonal space heating energy efficiency, cold climate:	138	106	%
Water heating energy efficiency, cold climate:	86		%
Seasonal space heating energy efficiency, warm climate:	224	177	%
Water heating energy efficiency, warm climate:	131		%
Sound power level LWA outdoors	52		dB

Data for package fiche

Controller class	VI		
Controller contribution to efficiency	4,0		%
Seasonal space heating energy efficiency of package, average climate:	156	130	%
Seasonal space heating energy efficiency class for package, average climate:	A++	A++	%
Seasonal space heating energy efficiency of package, cold climate:	142	110	%
Seasonal space heating energy efficiency of package, warm climate:	228	181	%

Model(s):		AMS10-8+BA-SVM20-200-12 E				NIBE			
Type of heat source/sink:		Air-to-water							
Low-temperature heat pump:		No							
Equipped with supplementary heater:		Yes							
Heat pump combination heater:		Yes							
Climate condition:		Average							
Temperature application:		Medium temperature (55 °C)							
Applied standards: EN14825 and EN16147									
Rated heat output		Prated	7,0	kW	Seasonal space heating energy efficiency		ηs	126	%
Declared capacity for part load at outdoor temperature Tj					Declared coefficient of performance for part load at outdoor temperature Tj				
Tj = -7 °C	Pdh	5,7	kW	Tj = -7 °C	COPd	2,01	-		
Tj = +2 °C	Pdh	3,9	kW	Tj = +2 °C	COPd	3,20	-		
Tj = +7 °C	Pdh	2,6	kW	Tj = +7 °C	COPd	4,21	-		
Tj = +12 °C	Pdh	2,0	kW	Tj = +12 °C	COPd	5,18	-		
Tj = biv	Pdh	5,7	kW	Tj = biv	COPd	2,01	-		
Tj = TOL	Pdh	5,5	kW	Tj = TOL	COPd	1,78	-		
Tj = -15 °C (if TOL < -20 °C)	Pdh		kW	Tj = -15 °C (if TOL < -20 °C)	COPd		-		
Bivalent temperature	Tbiv	-7	°C	Operation limit temperature	TOL	-10	°C		
Cycling interval capacity for heating	Pcyh		kW	Cycling interval efficiency	COPcyc		-		
Degradation co-efficient	Cdh	0,88	-	Heating water operating limit	WTOL	58	°C		
Power consumption in modes other than active mode					Supplementary heater				
Off mode	POFF	0,045	kW	Rated heat output	Psup	1,5	kW		
Thermostat-off mode	PTO	0,048	kW						
Standby mode	PSB	0,045	kW	Type of energy input	Electric				
Crankcase heater mode	PCK	0,000	kW						
Other items									
Capacity control	variable			Rated air flow rate, outdoors		3000	m³/h		
Sound power level, indoors/outdoors	LWA	31/52	dB	Rated water flow rate, indoor heat exchanger		0	m³/h		
Annual energy consumption	QHE	4486	kWh	Rated brine or water flow rate, outdoor heat exchanger			m³/h		
For heat pump combination heater:									
Declared load profile		XL		Water heating energy efficiency		ηlwh	108	%	
Daily electricity consumption	Qelec	7,409	kWh	Daily fuel consumption	Qfuel		kWh		
Annual electricity consumption	AEC	1557	kWh	Annual fuel consumption	AFC		GJ		
Approved by:									
Contact details		© NIBE Energy Systems - Box 14 - Hannabadsvägen 5 - 28521 Markaryd - Sweden							