

24" OVERLAY READY GLASS DOOR UNDERCOUNTER REFRIGERATOR

TUR-24-R/L-OG-C

TUR-24-R-OG-C (Right hinged)

TUR-24-L-OG-C (Left hinged)

FEATURES

- Environmentally friendly R600a refrigerant.
- Industry exclusive, 300-series stainless steel interior.*
- Zero-clearance hinging allows for integrated installation.
- Patented TruLumina® LED lighting gently illuminates your product and allows you to choose from 14 different color options with the push of a button.
- Low-E, double pane, UV tinted glass.
- True Precision Control® with steel touch technology and readout provides digital accuracy.
- Balanced, forced-air refrigeration system enables rapid product pull down and even temperature throughout.
- TrueFlex® shelving system allows for adjustable organization options.
- Sabbath mode compliant.
- All undercounter models UL rated for outdoor use.

ORGANIZATION

- 2 adjustable/removable stainless steel encapsulated glass shelves.

BUILD YOUR TRUE

Customize your True with a variety of finish and hardware options at true-residential.com/custom.



TUR-24-R-OG-C

SPECIFICATIONS

Dimensions (w x h x d) 23⁷/₈" x 34¹/₄" x 23⁷/₈"

Cutout Dimensions (w x h x d) 24" x 34¹/₂" x 24"

Standard Overlay Panel (w x h x d) 23⁵/₈" x 30¹/₈" x ³/₄"

Panel provided by others. Other installation options available.
Consult install guide for details.

Capacity (cu. ft.) 5.6  x 207

Temperature Range 33°F - 47°F

Weight (lbs.) 185

Voltage 115/60/1  115/60/1 NEMA-5-15R

Amps 1.9

Annual Energy Consumption (kwh) 311


Power Cord Length (ft.) 8

Energy Star Rated —


*NOTE: Overlay models have black powder coated steel exteriors.

24" OVERLAY READY GLASS DOOR UNDERCOUNTER REFRIGERATOR

TUR-24-R/L-OG-C — (shown with a $\frac{3}{4}$ " cabinetry panel)

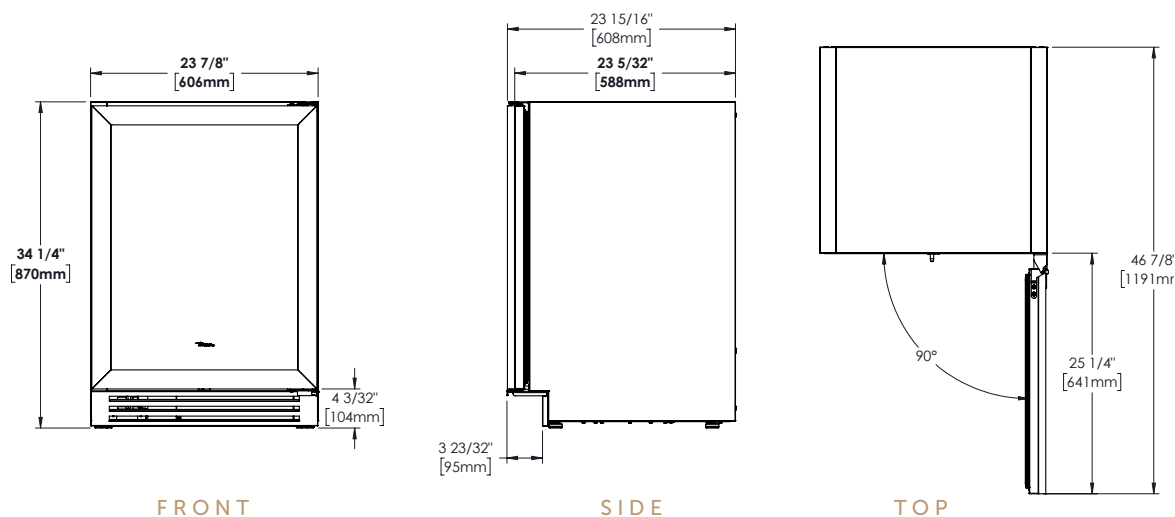

OPENING DIMENSIONS

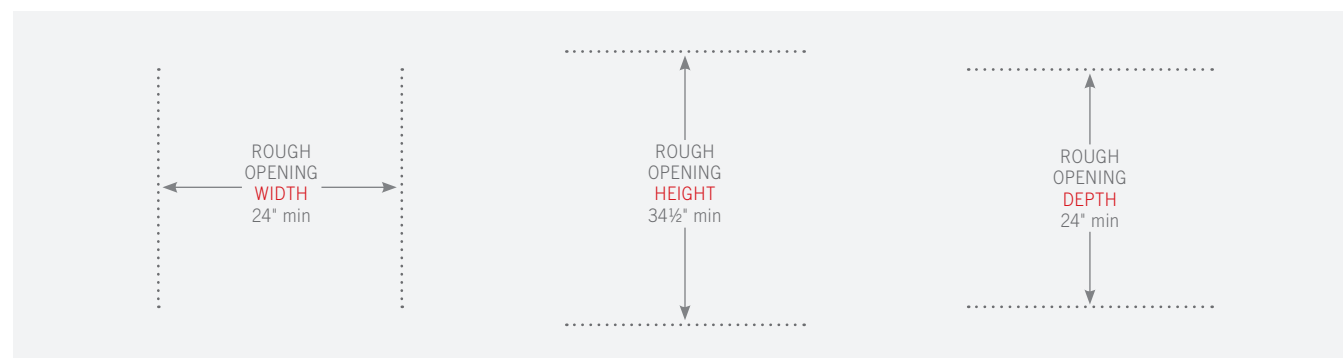

MODEL OPTIONS

MODEL	FINISH
TUR-24-R-OG-C	Overlay glass door right-hinged
TUR-24-L-OG-C	Overlay glass door left-hinged

ACCESSORIES (OPTIONAL)

- Anti-condensation pads
- Tempered glass, spill proof shelf

WARRANTY

- 3 year full (parts & labor)
- 6 year sealed system (parts & labor)
- 7–12 year (parts only — sealed system on registered products)