



KTEX 50-25-4(230V/3~) (ATEX)

Item no. 19403

Document type: Product card
Document date: 2019-07-10
Generated by: Systemair Online Catalogue

Description


- Certified according to ATEX
- Speed controllable
- Integral thermistors (PTC *)
- Maintenance-free and reliable

KTEX fans can be installed in any position and are easy to connect using the DS flexible connections. These fans have impellers with forward-curved blades and external rotor motors. The casing is manufactured from galvanised sheet steel, with a copper inlet cone.

To protect the motor from overheating, these fans have integral thermistors (PTC) with external leads which must be connected to the U-EK230E motor protection relay.

Explosion proof versions comply with EN 50014, EN 50019, EN 1127-1 and EN 13463-1. Improved safety in accordance with EEx e II T3. ex II 2G

* Positive Temperature Coefficient

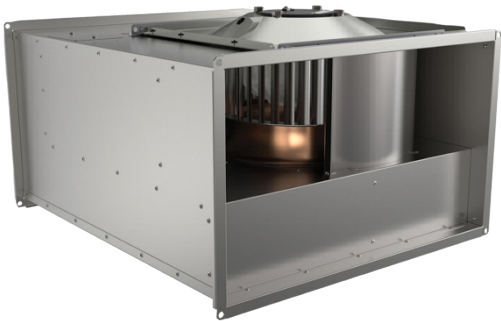

Technical parameters

Nominal data		
Frequency	50	Hz
Voltage	230	V
Phase	3	~
Input power (P1)	506	W
Current	1,54	A
Max. airflow	0,504	m³/s
R.p.m.	1300	r.p.m.
Min. static back pressure	110	Pa
Weight	18,2	kg
Temperature data		
Temperature range, ambient and duct	-20-40	°C
Sound data		
Sound pressure level at 3 m	50,2	dB(A)
Protection / Classification		
Insulation class	F	
Enclosure class, motor	IP44	
Certificate	Presafe 17ATEX9970X	
Explosion proof	Ex eb IIB+H2 T3 Gb	

Get In Touch

Call: 0845 6880112
Email: info@adremit.co.uk

Our Address


Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH





Diagrams

Diagrams

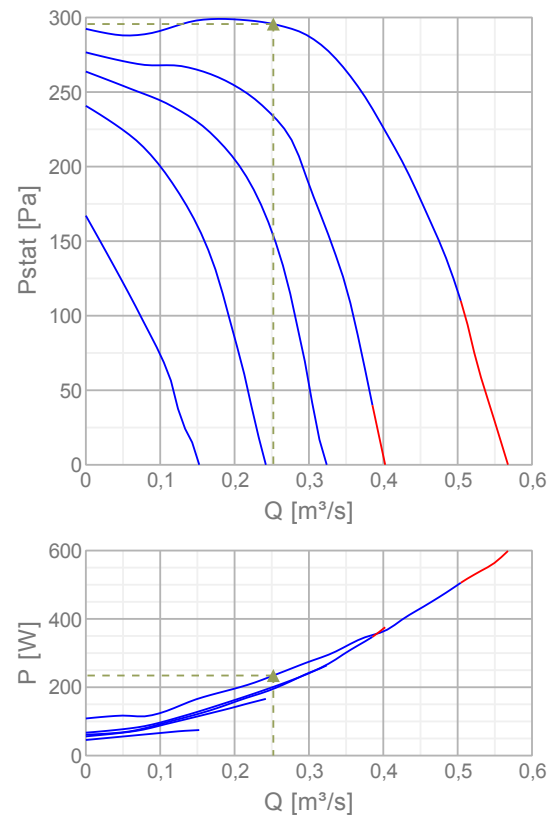

Max efficiency

Hydraulic data										
▲ Working air flow		0,252 m³/s								
▲ Working static pressure		296 Pa								
▲ Power		234 W								
Speed		1424 r.p.m.								
Current		1,02 A								
SFP		0,929 W/(l/s)								
Voltage		230 V								
Sound power level		63	125	250	500	1k	2k	4k	8k	Tot
Inlet	dB(A)	55	64	62	58	60	61	59	54	69
Outlet	dB(A)	52	65	65	66	68	66	65	60	74
Surrounding	dB(A)	41	51	53	45	50	45	43	38	57

Get In Touch

 **Call:** [0845 6880112](tel:08456880112)

 **Email:** info@adremit.co.uk


Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH





230V3~ (D)

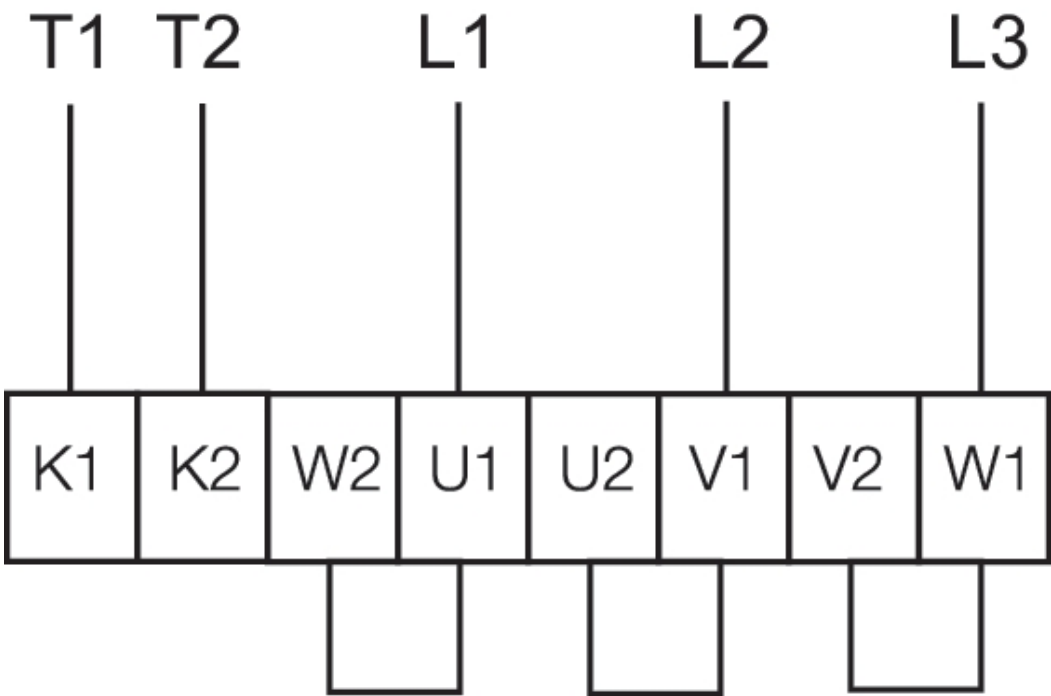

Get In Touch


 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Dimensions

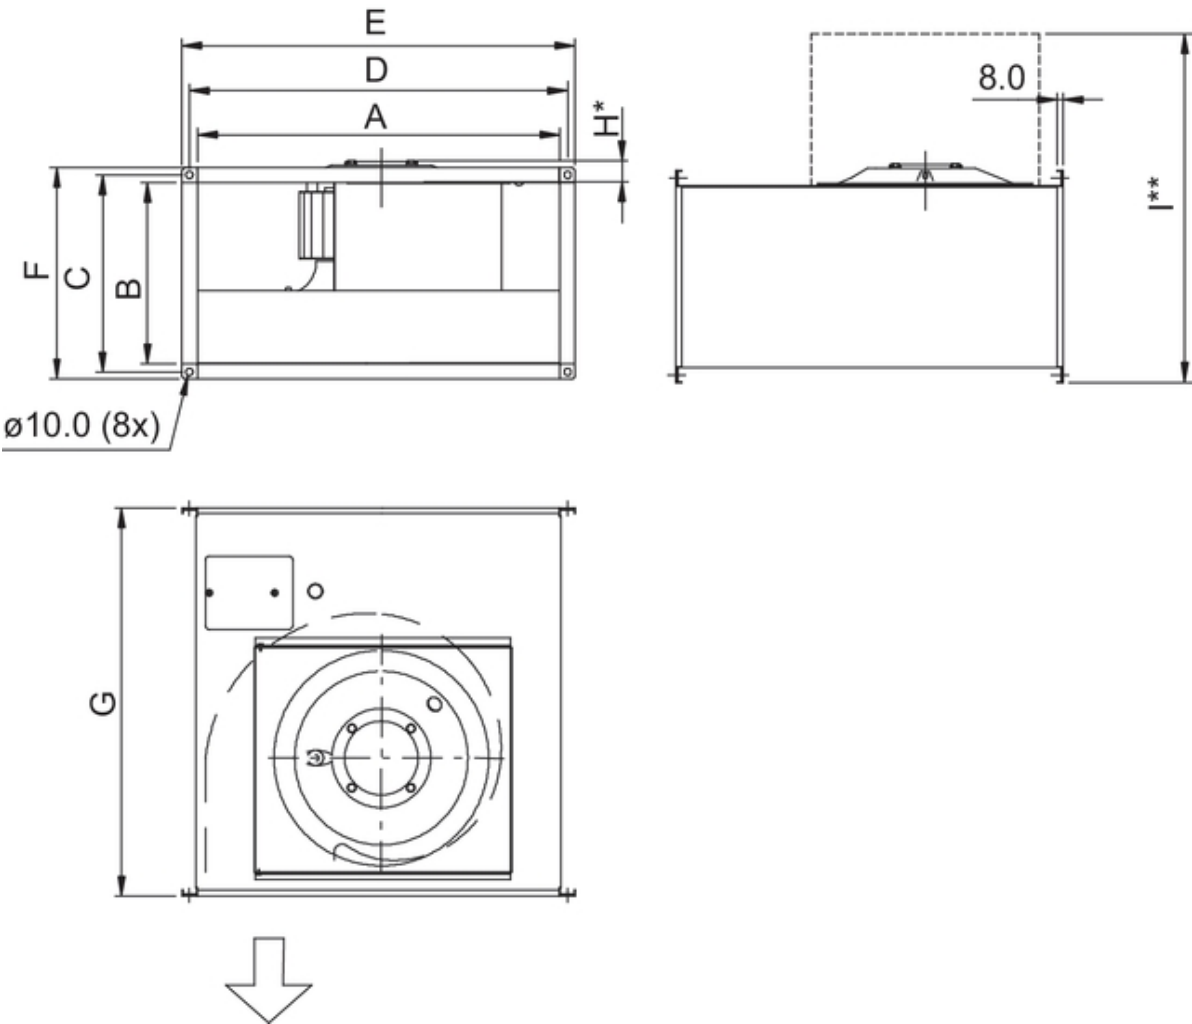

H* = Dimensions from the engine bolts

I** = Dimension with fully open hatch.

Accessories

Electric accessories

Trigger unit U-EK230E (30199)

Accessories

LDR 50-25 Silencer (5070)

FFK 50-25 Filter cassette rect (1752)

DS-EX 50-25 Flex. connection (4116)

Get In Touch

Call: [0845 6880112](tel:08456880112)
Email: info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH



Documentation

 DKEX_KTEX_IMO_141815_CE_EN_A004.pdf (6,24MB)

 Presafe 16 ATEX 8871Q.PDF (261,03kB)

 Presafe17ATEX9970X_KTEX_DKEX.PDF (306,91kB)

Specification text

Circular duct fan for easy and direct installation in ducts. Galvanized steel sheet housing. Copper inlet cone. Service cover. The fan unit is mounted on the service cover for easy cleaning and maintenance. Free-running, forward curved circular impeller made of galvanized steel sheet. Impeller acc. to VDI 2060, balancing quality G 6.3, dynamically balanced in two planes. Explosion proof, voltage controllable external rotor motor. (IP44), maintenance-free, the motor is placed inside the air flow for cooling. PTC with leads to a motor protection device (e.g. Systemair U-EK 230E-IP54). Speed-controlled via a 5-step transformer. Supply cable, led out. For indoor installation. Installation in any mounting position. Suitable to transport explosive atmospheres. Tested acc. to ATEX Directive 2014/34/EU. Explosion proof versions comply with EN 60079-7:2015, EN 14986:2007, EN 60079-0:2012. Improved safety in accordance with **Ex eb IIB+H2 T3 Gb**

Get In Touch

 **Call:** [0845 6880112](tel:08456880112)
 **Email:** info@adremit.co.uk

Our Address

Puravent, Adremit Limited, Unit 5a, Commercial Yard,
Settle, North Yorkshire, BD24 9RH