


on/off: hold 2 sec
*Click to check status



Run Times and Modes


SADDLE Ai ALERT 250 REAR

	ECONOMY	BLAST	PULSE	FLASH 1	DAY FLASH 1	DAY FLASH 2	FEMTO	ACTIVE ALERT
	10 LUMENS	80 LUMENS	50 LUMENS	50 LUMENS	250 LUMENS	125 LUMENS	10 LUMENS	
	20:00 h : min	4:00 h : min	8:00 h : min	34:00 h : min	15:00 h : min	25:00 h : min	60:00 h : min	250 LUMENS

Operation



Ai Alert enabled



Ai Alert disabled

1. On/Off: hold power button two (2) seconds.
2. Mode cycle: click button

Ai ALERT MODE: With the light OFF, hold button for five (5) seconds, until the indicator light blinks.

- Green LED: Ai Alert enabled

- Blue LED: Ai Alert disabled

Click button once to display Ai Alert mode status.

To toggle Ai Alert mode on/off, turn light off (hold button for two (2) seconds) and repeat step above.

Battery



100-75%




75-25%



25-0%

Charging



USB-C charging
*USB-C cable not included



charging





charged


Lock and Unlock LED



Lock




Unlock



Mounting

Saddle Ai Alert is designed to be mounted on standard dual rail seats, including 7mm diameter rails and 7x9mm carbon rails within the standardized section of rail.

1. Loosen rail hooks before installation.
2. The mounting of the Saddle Ai Alert hooks can be mounted either in an upward or downward orientation.
3. Light must be mounted parallel to the ground.
4. Using a T25 wrench, secure the rail hooks on both sides. Equally tighten to 3-4 N·m (30-40 kgf·cm).



1
Loosen hooks


2



OR




25 mm

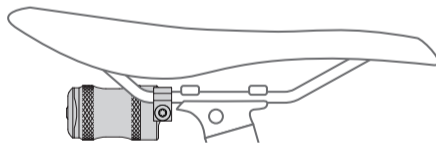


12 mm


3

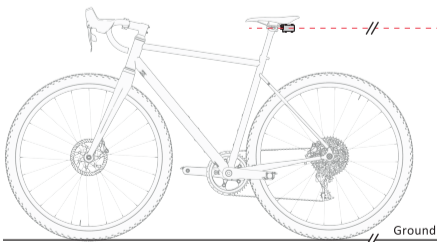

Ground



Mount light parallel to the ground



4
Torque 3-4 Nm