

Cassia S1000/S1100/X1000 Quick Start Guide

Step One – Associate your Bluetooth router with the Cassia IoT Access Controller (AC)

- Connect your router and your PC to the same local network
- Install a port scanner like “Advanced IP Scanner” on your PC to find the IP address of your router, see Figure 1.

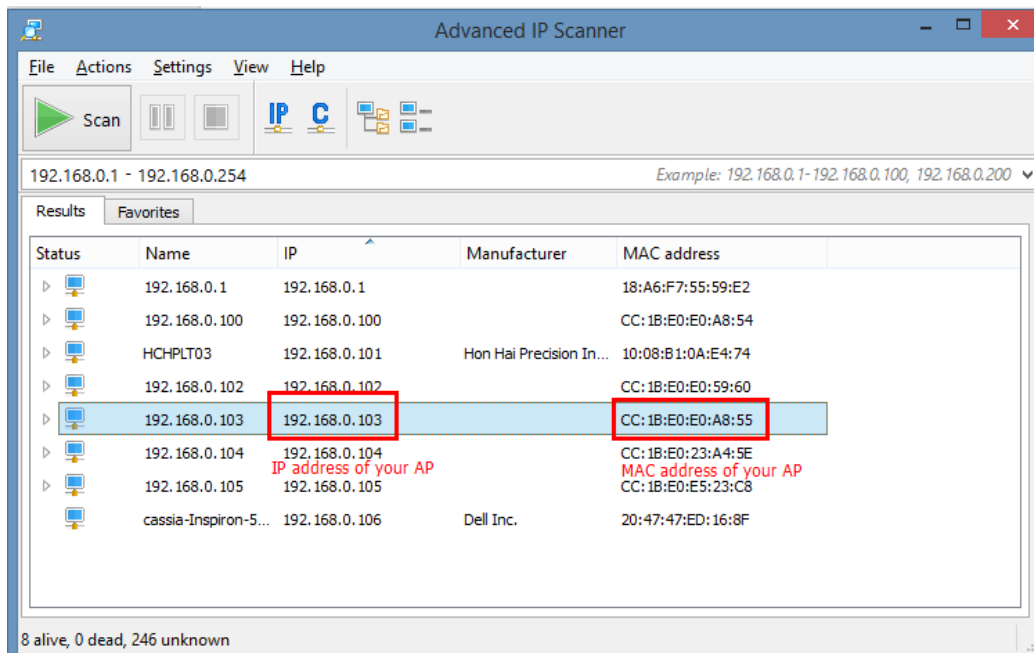


Figure 1 - Find the IP address of your router

- Access your Bluetooth router (AP) by entering its IP address in a web browser, see Figure 2.

192.168.0.106

Common Networks Bypass

IP: eth0:192.168.0.105,wlan0:192.168.0.106 MAC: CC:1B:E0:E0:D4:BC Model: S1100 Version: 1.12.10.15 Uptime: 211 hours

Developer account and AC address

Developer Key [Clear](#)

AC Address [Clear](#)

Other

Timezone ▼

Scenario ▼

[Save](#) Copyright © [Cassia Networks](#)

Figure 2 Access the router's configuration page

- In Common section, please enter your Developer Key and AC Address.

Step Two – Access the Cassia IoT Access Controller (AC)

- Enter the IP address or domain name of your AC into the address bar. For example, <http://demo.cassia.pro>
- Input user name and password, then click Login. See Figure 3 below.

← → ↻ Not secure | demo.cassia.pro/session?view

Cassia IoT Access Controller Beta

• **Welcome!**

Username:

Password:

[Login](#)

Figure 3 - Cassia AC login page

Step Three – Change the settings of Cassia IoT Access Controller (AC)

- Input your Developer Key, Developer Secret, and License as indicated in Figure 4 below.

Figure 4: Input your developer key, secret, and license

Step Four – Add Bluetooth router (AP) to AC routers list

- Navigate to the Routers page, as shown in Figure 5 below.

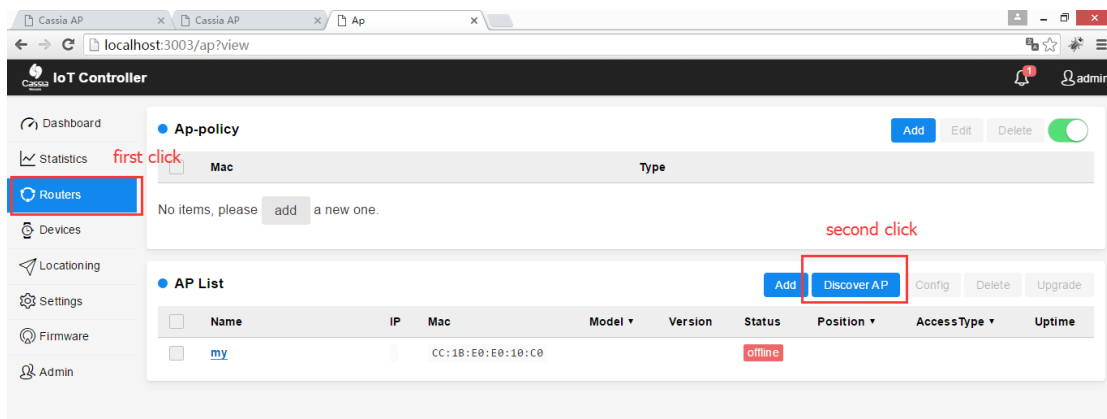


Figure 5: Add Bluetooth router to AC routers list

- Click “Routers -> Discover AP”, AC will identify all Bluetooth routers in its network and display them in the table.
- Check the routers you want to add, then click “Add” button.

Note: You can select multiple routers and add all of them to be managed under the AC, see Figure 6.

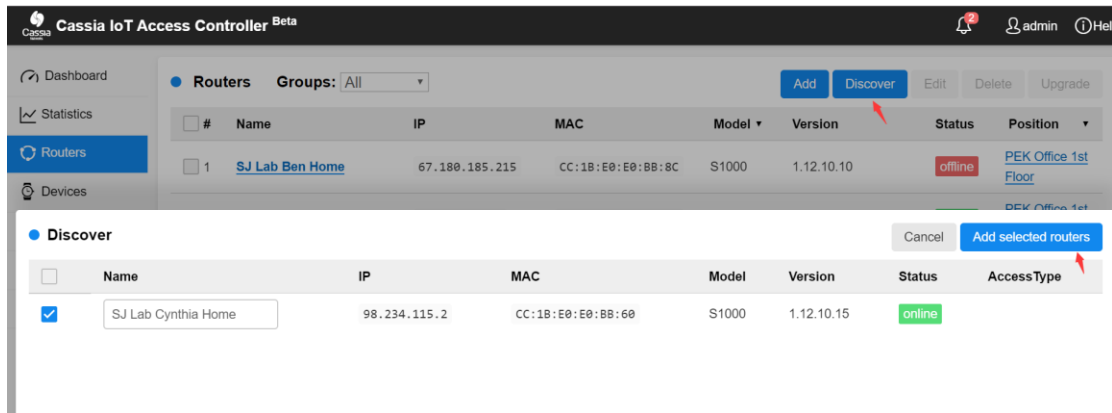


Figure 6: Discover your router and add it into the AC

- User your router's MAC address to identify it on the list of discovered devices.

Note: Your router's MAC address is located on the bottom of the router, as noted in Figure 7 below.



Figure 7: Cassia S1000 router's MAC address

Step Five – Configure the Bluetooth Router (AP)

- To configure a router, check the checkbox next to the desired router and click the Edit button as seen on Figure 8.

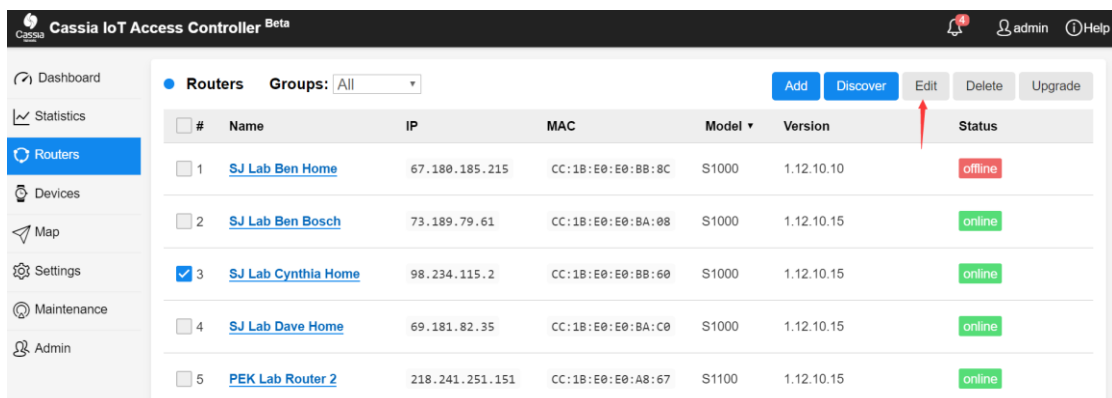


Figure 8: Cassia AC routers list

- Locate the Common Settings tab as shown in Figure 9 below to set Developer key.

The screenshot shows the 'Common' tab of the Cassia AC router configuration interface. At the top, there are three tabs: 'Common' (selected), 'Networks', and 'APIs'. Below the tabs, a status bar displays: 'IP: eth0:192.168.0.100 MAC: CC:1B:E0:E0:BA:08 Model: S1000 Version: 1.11.10.97 Uptime: 123 hours'. The main section is titled 'Developer account and AC address'. It contains two input fields: 'Developer Key' with the value 'tester' and a 'Clear' button, and 'AC Address' with the value 'demo.cassia.pro' and a 'Clear' button. Below this is the 'Other' section, which includes a 'Timezone' dropdown menu set to '(GMT +08:00) Beijing, Hong Kong, Singa...' and a 'Use Mode' dropdown menu set to 'Connection and scanning'.

Figure 9: Set Developer Key on your Router

- Make sure to enter the same Developer Key as your AC. If the AC Address field is empty, please enter your AC domain name or IP address, for example, demo.cassia.pro.
- Configure network settings from Networks tab

CONNECTION OPTIONS – The Cassia Bluetooth Router supports the following networking uplinks:

- Wired (Ethernet) – you can set router to use a static IP address or DHCP
- Wireless (Wi-Fi) – enter your Wi-Fi SSID and password, then click Save. The router will go offline briefly and then come back online.
- 3G/4G dongle – Cassia currently supports two cellular dongles: ZTE MF823 in China and AT&T AirCard 313U in the US

Important: When two or more network connections are activated, you can set priority levels for the networks. By default, the priority is Wired > Wireless > Cellular (3G/4G).

Step Six – Upgrade the router

- Upload firmware image to AC
 - Navigate to Firmware on side navigation menu and click “Add from Local” button. See Figure 10 below.

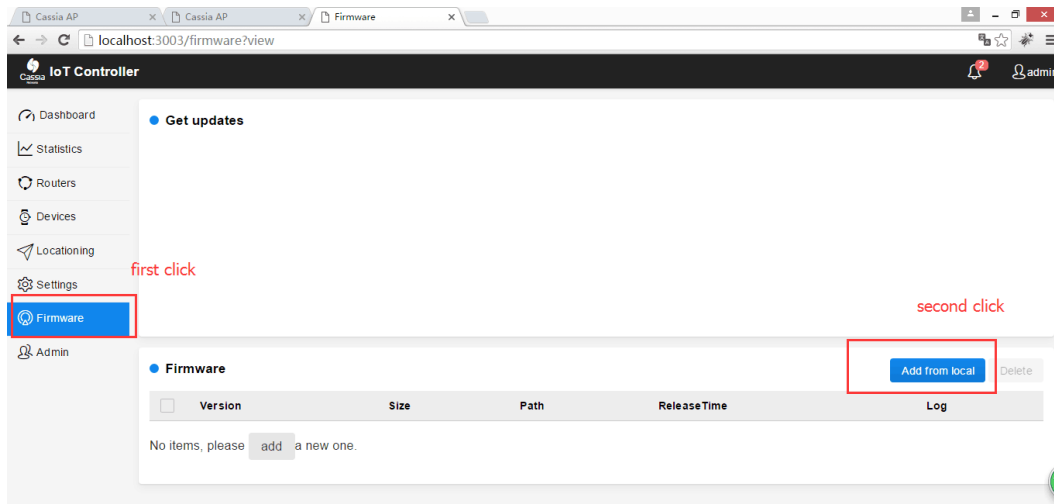


Figure 10: Upload firmware to AC

- From there, select a firmware image from your PC and upload it to the AC.
- Use AC to upgrade router(s)
 - Navigate to Routers on side navigation menu, select the router(s) that need to be upgraded, and click the Upgrade button. See Figure 11.

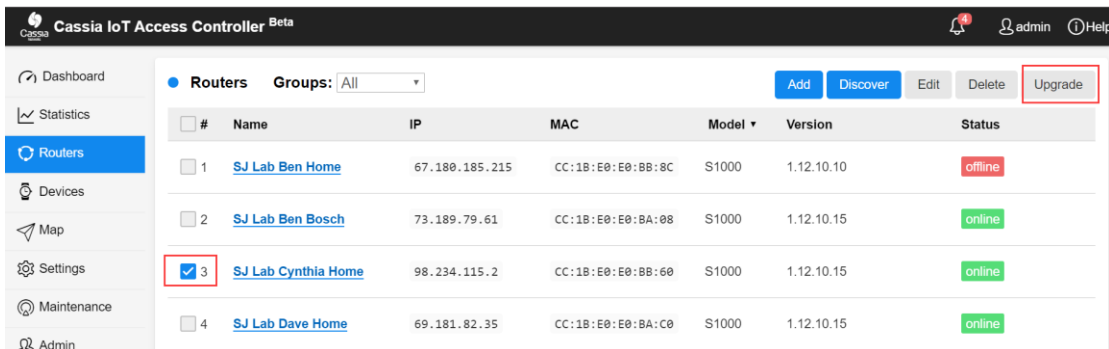


Figure 11: Upgrade a router

- From the text box, choose a Firmware version you want to upgrade to, then click OK. See figure 12 below.

Please select a firmware to upgrade

Firmware

S1000 1.11.10.49
S1000 1.11.10.70
S1000 1.11.10.97
S1000 1.12.10.10
S1000 1.12.10.15
X1000 1.0.3.201707221641

[Add a new firmware](#)

Cancel

OK

Figure 12: Select a firmware version and upgrade the router

- The AC will finish the upgrade for all of the routers you have selected.

For more questions, please contact support@cassianetworks.com.