



HIGH PRECISION

COMMANDS AND LOGS

WWW.UNICORE.COM

NebulasIV

High Precision Products

Copyright© 2009-2024, Unicore Communications, Inc.
Data subject to change without notice.

Revision History

Version	Revision History	Date
R1.0	First release	Oct. 2022
	- Added new commands, including CONFIG MMP, CONFIG SIGNALGROUP, CONFIG IONMODE, CONFIG RTCMPHASERATE, GPHPR2, GPTRA2, GPROT2 - IRNSS L5 was supported in the following messages: MASK, UNMASK, and NMEA messages - CONFIG JAMMING was replaced by CONFIG ANTIJAM - Chapter 5.2: Added MASK RTCMCN0/CN0 configuration	
R1.1	- Chapter 3.6: Added more details in the rover station mode - Chapter 4.10: Added SBAS timeout configuration - Modified the description of CONFIG PPS ENABLE & ENABLE2 - Chapter 3.4: Updated the default value of the horizontal and vertical error tolerance - Modified the description of CONFIG HEADING TRACTOR - Added Chapter 7.3 Unicare Data Output Commands	May 2023
	- Expanded SIGNALGROUP and SBAS configurations - Added some configurations, including CONFIG EVENT2, CONFIG RTCMCLOCKOFFSET, CONFIG PVTALG and CONFIG PSRPOSBIAS - Added QZSSEPH and GPHPD	
R1.2	- RTKSTATUS: updated the description of field 17 - BD3EPH: updated the description of IODC and IODE - Table 7-55: updated the ID number of IRNSS - Updated the optional parameters of the MASK command - Table 3-8: changed the name of UAV "FORMATION" mode to UAV "HIGHDYN" mode	Nov. 2023
R1.3	- Added the following configurations: 4.31 Network IP Address Configuration; 4.32 Network Serial Port Configuration; 4.33 LOGSEQ – LOG Output Sequence Configuration;	Apr. 2024

Version	Revision History	Date
	4.34 Ntripserver Configuration; 4.35 Ntripclient Configuration; 4.36 RTCMDECAUTO – RTCM Decoding Configuration; 4.37 ALLEPHRTCM – Ephemeris Output Configuration; ● Added the CONFIG PPP ENABLE AUTO configuration; ● Updated 4.23 Signal Group Configuration; ● Updated Table 7-78 GLONASS Ephemeris Flags Coding; ● Added the following log outputs: 7.3.22 IRNSSEPH – IRNSS Ephemeris; 7.3.72 E6MASKBLOCK – Mask Block; 7.3.73 E6ORBITBLOCK – Orbit Corrections Block; 7.3.74 E6CLOCKFULLBLOCK – Clock Full-Set Corrections Block; 7.3.75 E6CLOCKSUBBLOCK – Clock Subset Corrections Block; 7.3.76 E6CBIASBLOCK – Code Biases Block; 7.3.77 E6PBIASBLOCK – Phase Biases Block; 7.3.78 BSLNENUHD2 – Heading2 Baseline in ENU Coordinate System; 7.3.79 BSLNXYZHD2 – Heading2 Baseline in XYZ Coordinate System; 7.3.80 DOPHD2 – DOP of Heading2; 7.3.50 HEADINGSTATUS – Heading Status	
R1.4	● Added notes in Heading2 related logs (GPHPR2, GPTRA2, GPROT2): only ONCHANGED trigger is supported; ● Deleted Galileo E6 in SIGNALGROUP 9 configuration; ● Added QZSS L6D and L6E in Table 7-56 Channel Tracking Status; ● Added CONFIG VELSTDTHD and CONFIG RTKASITPPP; ● Added command format with checksum (see the description in Chapter 1 and CONFIG CMDFORMAT in Chapter 4); ● Added notes in the EPH logs in Section 7.3: recommended to use the ONCHANGED trigger when output with 50 Hz observation data;	Jun. 2024

Version	Revision History	Date
	- Revised the "Version" and "Reserved" fields in the binary header (Table 7-50) and ASCII header (Table 7-51); - Added 4.17 RTCM L2C L2P Configuration; - Added requirement for the range of the port number in Section 4.32 Network Serial Port Configuration; - Added the description of valid decimal places in Section 7.1 & 7.2 NMEA messages; - UM982 was supported in TROPINFO, BD3ION, BD3UTC and BD3EPH.	
R1.5	Chapter 3.2: If the 3D position error between the coordinates computed by the receiver and that set by the user is more than 300 meters, no RTCM data will be output.	Sept. 2024
R1.6	- Updated the output example in GPHPR2 - Parity check and stop bits were supported in section 4.2 Serial Port Configuration - Added information about base station ID in PPPNAV - Added support of QZSS L6, including CONFIG SIGNALGROUP 10, L6MDCTYPE 1/2/3/4/5/7 logs, CONFIG PPP ENABLE L6MDCPPP. - Added the QZQSM message - Added SLAS in CONFIG SBAS ENABLE - Deleted the CONFIG RTCMSWITCHL2CL2P configuration - Added QZSS L1C/B and L1S in Table 7-56 Channel Tracking Status - Specified the range of parameters in CONFIG VELSTDTHD - Added the RTKSTATUS2 message - The default configuration of CONFIG VELSTDTHD was changed to DISABLE - Revised the description of the parameters in CONFIG IONMODE - Added TIMEOUT configuration in CONFIG STANDALONE - Added the ENVINFO message - Added KASS in Table 7-36 Satellite ID Numbers in NMEA Messages	Oct. 2024

Version	Revision History	Date
	● 50 Hz PVT output was supported for UM980 SIGNALGROUP 8 configuration.	

Legal Right Notice

This manual provides information and details on the products of Unicore Communication, Inc. ("Unicore") referred to herein.

All rights, title and interest to this document and the information such as data, designs, layouts contained in this manual are fully reserved, including but not limited to the copyrights, patents, trademarks and other proprietary rights as relevant governing laws may grant, and such rights may evolve and be approved, registered or granted from the whole information aforesaid or any part(s) of it or any combination of those parts.

Unicore holds the trademarks of "和芯星通", "UNICORECOMM", "Unicore" and other trade name, trademark, icon, logo, brand name and/or service mark of Unicore products or their product serial referred to in this manual (collectively "Unicore Trademarks").

This manual or any part of it, shall not be deemed as, either expressly, implied, by estoppel or any other form, the granting or transferring of Unicore rights and/or interests (including but not limited to the aforementioned trademark rights), in whole or in part.

Disclaimer

The information contained in this manual is provided "as is" and is believed to be true and correct at the time of its publication or revision. This manual does not represent, and in any case, shall not be construed as a commitments or warranty on the part of Unicore with respect to the fitness for a particular purpose/use, the accuracy, reliability and correctness of the information contained herein.

Information, such as product specifications, descriptions, features and user guide in this manual, are subject to change by Unicore at any time without prior notice, which may not be completely consistent with such information of the specific product you purchase.

Should you purchase our product and encounter any inconsistency, please contact us or our local authorized distributor for the most up-to-date version of this manual along with any addenda or corrigenda.

Foreword

This manual provides information on the commands and logs of Unicore's high precision GNSS boards and receivers, the default configuration of the receivers and operating instructions.

 This manual is a generic version. Please refer to the appropriate part according to the configuration of the product you purchased and different needs concerning RTK, heading, DGPS, etc.

Target Readers

This manual is written for technicians who have knowledge of GNSS receivers, but not to general readers.

List of Abbreviations

RTK

GPS

BDS

GLO

GAL

Contents

Contents.....	I
Tables.....	VI
1 Frequently Used Commands.....	1
1.1 Base Station Configuration	3
1.2 Rover Station Configuration	4
1.3 Heading Configuration	5
1.4 Heading2 Configuration	5
2 Unicore Command Types.....	6
3 MODE Command	7
3.1 Query the Receiver's Operating Mode	8
3.2 Fixed Base Station with Precise Coordinates	9
3.3 Self-optimizing Base Station Mode.....	10
3.4 Base Station Mode without Parameters	12
3.5 Base Station ID	12
3.6 Rover Station Mode.....	13
3.7 Heading2 Mode.....	14
4 CONFIG Command	17
4.1 Query the Receiver's Configuration	18
4.2 Serial Port Configuration	19
4.3 PPS Configuration.....	20
4.4 UNDULATION Configuration.....	22
4.5 DGPS Configuration	23
4.6 RTK Configuration.....	24
4.7 STANDALONE Configuration	25
4.8 HEADING Configuration	27
4.9 Heading Offset and Pitch Offset Configuration.....	29
4.10 SBAS Configuration	30
4.11 EVENT Configuration.....	31
4.12 EVENT2 Configuration.....	32
4.13 SMOOTH Configuration.....	32
4.14 MMP – Multi-path Mitigation Configuration	33
4.15 NMEA Version Configuration.....	34
4.16 RTCM B1C B2a Configuration	34
4.17 RTCMPHASERATE – RTCM Phaserange Rate Configuration	35
4.18 RTCMCLOCKOFFSET – RTCM Clock Offset Compensation	36

4.19	PSRVELDRPOS – Doppler Position Prediction	36
4.20	AGNSS Configuration	37
4.21	PPP Configuration	37
4.22	ANTIJAM – Anti-jamming Configuration	39
4.23	SIGNALGROUP – Signal Group Configuration	40
4.24	ANTENNADELTAHEN – Antenna Height Configuration	43
4.25	AUTHCODE – Authorization Code Configuration	44
4.26	ALGRESET – Algorithm Reset Configuration	45
4.27	IONMODE – Ionospheric Model Configuration	46
4.28	BASEANTENNAMODEL – Base Station Antenna Configuration	47
4.29	PVTAGL – PVT Algorithm Configuration	48
4.30	PSRPOSBIAS – Position Bias Compensation	48
4.31	Network IP Address Configuration	49
4.32	Network Serial Port Configuration	49
4.33	LOGSEQ – LOG Output Sequence Configuration	50
4.34	Ntripserver Configuration	51
4.35	Ntripclient Configuration	51
4.36	RTCMDECAUTO – RTCM Decoding Configuration	52
4.37	ALLEPHRTCM – Ephemeris Output Configuration	53
4.38	VELSTDTHD – Velocity STD Threshold Configuration	53
4.39	RTKASITPPP – RTK Assisting PPP Configuration	54
4.40	CMDFORMAT – Command Format Configuration	55
5	MASK Command	56
5.1	Query the MASK Configuration	56
5.2	MASK Configuration	56
5.3	UNMASK Configuration	59
6	Assisted Position and Time	61
6.1	Assisted Position	61
6.2	Assisted Time	62
7	Data Output Commands	63
7.1	NMEA Data Output Commands	63
7.1.1	NMEA Version 4.10 (Default)	64
7.1.2	NMEA Version 4.11	84
7.2	NMEA Data Output Commands Extended by Unicores	104
7.2.1	GPGGAH – Global Positioning System Fix Data (Slave Antenna)	104
7.2.2	GPGLLH – Geographic Position (Slave Antenna)	106

N4 Products Commands and Logs Reference Book

7.2.3	GPGNSH – GNSS Fix Data (Slave Antenna)	107
7.2.4	GPGRSH – GNSS Range Residuals (Slave Antenna)	110
7.2.5	GPGBAH – GNSS DOP and Active Satellites (Slave Antenna)	114
7.2.6	GPGSTH – GNSS Pseudorange Error Statistics (Slave Antenna)	116
7.2.7	GPGSVH – GNSS Satellites in View (Slave Antenna)	117
7.2.8	GPRMCH – Recommended Minimum Specific GNSS Data (Slave Antenna)	120
7.2.9	GPVTGH – Course over Ground and Ground Speed (Slave Antenna)	121
7.2.10	GPTHS2 – True Heading and Status	123
7.2.11	GPHPR – Attitude Parameters	123
7.2.12	GPHPR2 – Attitude Parameters	124
7.2.13	GPTRA2 – Heading, Pitch & Roll Information	126
7.2.14	GPROT2 – Rate of Turn	127
7.2.15	GPHPD – Positioning and Heading Information	128
7.2.16	QZQSM – Disaster and Crisis Report	129
7.3	Unicore Data Output Commands	130
7.3.1	VERSION – Version and Authorization	133
7.3.2	OBSVM – Observation of the Master Antenna	134
7.3.3	OBSVH – Observation of the Slave Antenna	139
7.3.4	OBSVMCMP – Compressed Observation of the Master Antenna	141
7.3.5	OBSVHCMP – Compressed Observation of the Slave Antenna	144
7.3.6	OBSVBASE – Observation of the Base Station	146
7.3.7	BASEINFO – Base Station Information	148
7.3.8	GPSION – GPS Ionosphere Parameters	149
7.3.9	BD3ION – BDS-3 Ionosphere Parameters	151
7.3.10	BDSION – BDS Ionosphere Parameters	153
7.3.11	GALION – Galileo Ionosphere Parameters	154
7.3.12	GPSUTC – Conversion between GPS Time and UTC	155
7.3.13	BD3UTC – Conversion between BDS-3 Time and UTC	157
7.3.14	BDSUTC – Conversion between BDS Time and UTC	158
7.3.15	GALUTC – Conversion between Galileo Time and UTC	160
7.3.16	GPSEPH – GPS Ephemeris	162
7.3.17	QZSSEPH – QZSS Ephemeris	165
7.3.18	BD3EPH – BDS-3 Ephemeris	168
7.3.19	BDSEPH – BDS Ephemeris	173
7.3.20	GLOEPH – GLONASS Ephemeris	177
7.3.21	GALEPH – Galileo Ephemeris	181
7.3.22	IRNSSEPH – IRNSS Ephemeris	185
7.3.23	AGRIC	188
7.3.24	PVTSLN – Position and Heading Information	193

7.3.25	UNIOGLIST – Output Log List.....	196
7.3.26	BESTNAV – Best Position and Velocity	197
7.3.27	BESTNAVXYZ – Best Position and Velocity in ECEF Coordinate System	201
7.3.28	BESTNAVH – Best Position and Velocity (Slave Antenna)	204
7.3.29	BESTNAVXYZH – Best Position and Velocity in ECEF Coordinate System (Slave Antenna)	207
7.3.30	BESTSAT – Satellites Used in Position Solution	210
7.3.31	ADRNAV – RTK Position and Velocity	213
7.3.32	ADRNAVH – RTK Position and Velocity (Slave Antenna)	216
7.3.33	PPPNAV – Position and Velocity of PPP	219
7.3.34	SPPNAV – Pseudorange Position and Velocity	222
7.3.35	SPPNAVH – Pseudorange Position and Velocity (Slave Antenna)	225
7.3.36	STADOP – DOP of BESTNAV	228
7.3.37	STADOPH – DOP of BESTNAVH (Slave Antenna)	229
7.3.38	ADRDOP – DOP of ADRNAV	231
7.3.39	ADRDOPH – DOP of ADRNAVH (Slave Antenna)	232
7.3.40	PPPDOP – DOP of PPPNAV	234
7.3.41	SPPDOP – DOP of SPPNAV	235
7.3.42	SPPDOPH – DOP of SPPNAVH (Slave Antenna)	237
7.3.43	SATSINFO – Satellite Information	238
7.3.44	BASEPOS – Position of the Base Station	242
7.3.45	SATELLITE – Visible Satellites	245
7.3.46	SATECEF – Satellite Coordinates in ECEF Coordinate System	248
7.3.47	RECTIME – Time Information	250
7.3.48	UNIHEADING – Heading Information	252
7.3.49	UNIHEADING2 – Multi-Rover Heading Information	254
7.3.50	HEADINGSTATUS – Heading Status	256
7.3.51	RTKSTATUS – RTK Solution Status	257
7.3.52	RTKSTATUS2 – RTK Solution Status (Slave Antenna)	260
7.3.53	AGNSSSTATUS – AGNSS Status	263
7.3.54	RTCSTATUS – RTC Initialization Status	266
7.3.55	JAMSTATUS – Jamming Detection	267
7.3.56	FREQJAMSTATUS – Frequency Jamming Status	268
7.3.57	RTCMSTATUS – RTCM Data Status	270
7.3.58	HWSTATUS – Hardware Status	273
7.3.59	AGC – Automatic Gain Control	275
7.3.60	KSXT – Positioning and Heading Data Output	277
7.3.61	INFOPART1	280

N4 Products Commands and Logs Reference Book

7.3.62	INFOPART2.....	281
7.3.63	MSPOS – Best Position of Dual Antennas	282
7.3.64	TROPINFO – Zenith Tropospheric Delay	285
7.3.65	PPPB2BINFO1 – Information Type 1	286
7.3.66	PPPB2BINFO2 – Information Type 2.....	287
7.3.67	PPPB2BINFO3 – Information Type 3.....	288
7.3.68	PPPB2BINFO4 – Information Type 4.....	290
7.3.69	PPPB2BINFO5 – Information Type 5.....	291
7.3.70	PPPB2BINFO6 – Information Type 6.....	293
7.3.71	PPPB2BINFO7 – Information Type 7.....	295
7.3.72	E6MASKBLOCK – Mask Block	297
7.3.73	E6ORBITBLOCK – Orbit Corrections Block	301
7.3.74	E6CLOCKFULLBLOCK – Clock Full-Set Corrections Block.....	304
7.3.75	E6CLOCKSUBBLOCK – Clock Subset Corrections Block.....	306
7.3.76	E6CBIASBLOCK – Code Biases Block	309
7.3.77	E6PBIASBLOCK – Phase Biases Block.....	311
7.3.78	BSLNENUHD2 – Heading2 Baseline in ENU Coordinate System	313
7.3.79	BSLNXYZHD2 – Heading2 Baseline in XYZ Coordinate System.....	315
7.3.80	DOPHD2 – DOP of Heading2.....	317
7.3.81	L6MDCTYPE1 – Compact SSR Mask.....	318
7.3.82	L6MDCTYPE2 – Compact SSR GNSS Orbit Correction.....	321
7.3.83	L6MDCTYPE3 – Compact SSR GNSS Clock Correction	323
7.3.84	L6MDCTYPE4 – Compact SSR GNSS Satellite Code Bias.....	324
7.3.85	L6MDCTYPE5 – Compact SSR GNSS Satellite Phase Bias.....	325
7.3.86	L6MDCTYPE7 – Compact SSR GNSS URA	327
7.3.87	ENVINFO – Environment Information	328
8	Other Commands	331
8.1	UNLOG – Stop Message Output	331
8.2	FRESET – Clear NVM Data and Restart the Receiver	331
8.3	Reset.....	332
8.4	SAVECONFIG – Save Configuration into NVM.....	333
	Appendix 1: 32-bit CRC.....	334
	Appendix 2: RTCM V3 Differential Corrections	337
	Appendix 3: Event Output	339
1	EVENTFLAG – EVENT Position Information	339
2	EVENTSLN – EVENT Position and Time Information	341

Tables

Table 1-1 Frequently Used Commands.....	1
Table 1-2 Fixed Base Station Configuration	3
Table 1-3 Self-optimizing Base Station Configuration	4
Table 2-1 Receiver Command Types.....	6
Table 3-1 Receiver Operating Mode List.....	7
Table 3-2 Query the Receiver's Operating Mode	8
Table 3-3 MODE Message Structure	8
Table 3-4 Base Station Mode with Fixed Coordinates	9
Table 3-5 Base Station Mode with Self-optimized Coordinates.....	11
Table 3-6 Base Station Mode with Default Parameters	12
Table 3-7 Base Station ID Parameter	12
Table 3-8 Rover Station Mode Parameters	13
Table 3-9 Default Configuration of Rover Station Mode	14
Table 3-10 Heading2 Mode Parameter	16
Table 4-1 Configuration List	17
Table 4-2 Query the Receiver's Configuration	18
Table 4-3 Serial Port Configuration	19
Table 4-4 Supported Baud Rate	20
Table 4-5 Enable/Disable PPS.....	21
Table 4-6 PPS Configuration	21
Table 4-7 Undulation Configuration	23
Table 4-8 DGPS Configuration	23
Table 4-9 Default Configuration of DGPS TIMEOUT	23
Table 4-10 RTK Configuration	24
Table 4-11 RTK Reliability Configuration.....	25
Table 4-12 STANDALONE Configuration	26
Table 4-13 Heading Configuration.....	28
Table 4-14 Heading LENGTH Configuration.....	29
Table 4-15 Heading Offset and Pitch Offset Configuration	29
Table 4-16 SBAS Configuration.....	30
Table 4-17 EVENT Configuration	31
Table 4-18 EVENT2 Configuration	32
Table 4-19 SMOOTH Configuration	33
Table 4-20 Multi-path Mitigation Configuration	34
Table 4-21 NMEA 0183 Version Configuration	34
Table 4-22 RTCM B1C B2a Configuration	35

N4 Products Commands and Logs Reference Book

Table 4-23 RTCM Phaserange Rate Configuration	35
Table 4-24 RTCM Clock Offset Compensation	36
Table 4-25 Doppler Position Prediction Configuration	37
Table 4-26 AGNSS Configuration.....	37
Table 4-27 PPP Configuration	38
Table 4-28 PPP CONVERGE Configuration.....	39
Table 4-29 Anti-jamming Configuration	39
Table 4-30 Signal Group Configuration.....	41
Table 4-31 Frequency Combination	41
Table 4-32 Default Configuration and Supported Configuration	43
Table 4-33 Antenna Height Configuration.....	44
Table 4-34 Authorization Code Configuration	45
Table 4-35 Algorithm Reset Configuration.....	45
Table 4-36 Ionospheric Model Configuration	46
Table 4-37 Base Station Antenna Configuration	47
Table 4-38 PVT Algorithm Configuration.....	48
Table 4-39 Position Bias Compensation	48
Table 4-40 Network IP Address Configuration	49
Table 4-41 Network Serial Port Configuration	50
Table 4-42 Log Output Sequence	51
Table 4-43 Ntrip Server Parameter List	51
Table 4-44 Ntrip Client Parameter List.....	52
Table 4-45 RTCM Decoding Configuration.....	53
Table 4-46 Ephemeris Output Configuration	53
Table 4-47 Velocity STD Threshold Configuration.....	54
Table 4-48 RTK Assisting PPP Configuration.....	54
Table 4-49 Command Format Configuration	55
Table 5-1 Query the MASK Configuration.....	56
Table 5-2 MASK Command Parameters (1)	57
Table 5-3 MASK Command Parameters (2)	57
Table 5-4 MASK Command Parameters (3)	57
Table 5-5 Satellite Systems and Frequencies.....	58
Table 5-6 MASK RTCMCN0/CN0 Parameters.....	59
Table 5-7 UNMASK Command Parameter (1).....	60
Table 5-8 UNMASK Command Parameters (2).....	60
Table 6-1 Parameters of Assisted Position.....	61
Table 6-2 Parameters of Assisted Time	62
Table 7-1 Satellite Systems and Abbreviations.....	64
Table 7-2 DTM Data Structure.....	64

Table 7-3 GBS Data Structure.....	66
Table 7-4 GGA Data Structure	67
Table 7-5 GLL Data Structure	69
Table 7-6 GNS Data Structure	70
Table 7-7 GRS Data Structure.....	73
Table 7-8 GSA Data Structure.....	75
Table 7-9 GST Data Structure.....	76
Table 7-10 GSV Data Structure	78
Table 7-11 THS Data Structure	79
Table 7-12 RMC Data Structure	80
Table 7-13 ROT Data Structure	82
Table 7-14 VTG Data Structure	83
Table 7-15 ZDA Data Structure	84
Table 7-16 DTM Data Structure	85
Table 7-17 GBS Data Structure	86
Table 7-18 GGA Data Structure.....	87
Table 7-19 GLL Data Structure.....	89
Table 7-20 GNS Data Structure.....	91
Table 7-21 GRS Data Structure	93
Table 7-22 GSA Data Structure	95
Table 7-23 GST Data Structure	96
Table 7-24 GSV Data Structure	98
Table 7-25 THS Data Structure	99
Table 7-26 RMC Data Structure	100
Table 7-27 ROT Data Structure	102
Table 7-28 VTG Data Structure	102
Table 7-29 ZDA Data Structure	104
Table 7-30 GGAH Data Structure	105
Table 7-31 GLLH Data Structure	107
Table 7-32 GNSH Data Structure	108
Table 7-33 GRSH Data Structure	111
Table 7-34 GNSS ID	112
Table 7-35 GSAH Data Structure	115
Table 7-36 Satellite ID Numbers in NMEA Messages.....	116
Table 7-37 GSTH Data Structure.....	117
Table 7-38 GSVH Data Structure	119
Table 7-39 RMCH Data Structure.....	120
Table 7-40 VTGH Data Structure.....	122

N4 Products Commands and Logs Reference Book

Table 7-41 THS Data Structure	123
Table 7-42 HPR Message Structure	124
Table 7-43 HPR2 Message Structure	125
Table 7-44 TRA2 Message Structure	126
Table 7-45 ROT2 Message Structure	127
Table 7-46 HPD Message Structure	128
Table 7-47 QZQSM Message Structure	130
Table 7-48 Unicore ASCII and Binary Message Structure	131
Table 7-49 Three Sync Bytes of the Binary Header	131
Table 7-50 Binary Header Structure	131
Table 7-51 ASCII Header Structure	132
Table 7-52 VERSION Message Structure	133
Table 7-53 OBSVM Message Structure	135
Table 7-54 Satellite PRN Number in Unicore-defined Messages	136
Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages	137
Table 7-56 Channel Tracking Status	137
Table 7-57 OBSVH Message Structure	140
Table 7-58 OBSVMCMP Compressed Format	142
Table 7-59 Psrstd Index	143
Table 7-60 OBSVMCMP Message Structure	143
Table 7-61 OBSVHCMP Compressed Format	145
Table 7-62 OBSVHCMP Message Structure	145
Table 7-63 OBSVBASE Message Structure	147
Table 7-64 BASEINFO Message Structure	149
Table 7-65 GPSION Message Structure	150
Table 7-66 BD3ION Message Structure	152
Table 7-67 BDSION Message Structure	153
Table 7-68 GALION Message Structure	155
Table 7-69 GPSUTC Message Structure	156
Table 7-70 BD3UTC Message Structure	157
Table 7-71 BDSUTC Message Structure	159
Table 7-72 GALUTC Message Structure	160
Table 7-73 GPSEPH Message Structure	163
Table 7-74 QZSSEPH Message Structure	166
Table 7-75 BD3EPH Message Structure	169
Table 7-76 BDSEPH Message Structure	174
Table 7-77 GLOEPH Message Structure	177
Table 7-78 GLONASS Ephemeris Flags Coding	180
Table 7-79 P1 Flag Range Values	181

Table 7-80 GALEPH Message Structure	182
Table 7-81 IRNSSEPH Message Structure	185
Table 7-82 AGRIC Message Structure.....	189
Table 7-83 PVTSLN Message Structure	194
Table 7-84 UNIOGLIST Message Structure.....	196
Table 7-85 Port Identifier.....	197
Table 7-86 BESTNAV Message Structure.....	198
Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	200
Table 7-88 Galileo & BDS-3 Signal Mask.....	201
Table 7-89 Extended Solution Status	201
Table 7-90 BESTNAVXYZ Message Structure	202
Table 7-91 BESTNAVH Message Structure.....	205
Table 7-92 BESTNAVXYZH Message Structure	208
Table 7-93 BESTSAT Message Structure	210
Table 7-94 BESTSAT GPS Signal Mask	212
Table 7-95 BESTSAT GLONASS Signal Mask	212
Table 7-96 BESTSAT BDS Signal Mask	213
Table 7-97 BESTSAT Galileo Signal Mask.....	213
Table 7-98 ADRNAV Messsage Structure	214
Table 7-99 ADRNAVH Messsage Structure.....	217
Table 7-100 PPPNAV Message Structure	220
Table 7-101 SPPNAV Message Structure	222
Table 7-102 SPPNAVH Message Structure.....	225
Table 7-103 STADOP Message Structure.....	228
Table 7-104 STADOPH Message Structure.....	230
Table 7-105 ADRDOP Message Structure	231
Table 7-106 ADRDOPH Message Structure	233
Table 7-107 PPPDOP Message Structure	234
Table 7-108 SPPDOP Message Structure	236
Table 7-109 SPPDOPH Message Structure.....	237
Table 7-110 SPPDOPH Message Structure.....	239
Table 7-111 Frequency Flag	241
Table 7-112 System Identifier	241
Table 7-113 Frequency Identifier	241
Table 7-114 BASEPOS Message Structure	243
Table 7-115 SATELLITE Message Structure	246
Table 7-116 Satellite System.....	247
Table 7-117 SATECEF Message Structure	249

N4 Products Commands and Logs Reference Book

Table 7-118 RECTIME Message Structure	251
Table 7-119 UNIHEADING Message Structure	253
Table 7-120 UNIHEADING2 Message Structure	255
Table 7-121 HEADINGSTATUS Message Structure	256
Table 7-122 RTKSTATUS Message Structure	258
Table 7-123 RTKSTATUS2 Message Structure	261
Table 7-124 AGNSSSTATUS Message Structure	264
Table 7-125 RTCSTATUS Message Structure	266
Table 7-126 JAMSTATUS Message Structure	267
Table 7-127 FREQJAMSTATUS Message Structure	269
Table 7-128 RTCMSTATUS Message Structure	270
Table 7-129 Satellite Signals Corresponding to L1~L6	272
Table 7-130 HWSTATUS Message Structure	273
Table 7-131 HWFLAG Bit Description	274
Table 7-132 AGC Message Structure	275
Table 7-133 KSXT Message Structure	278
Table 7-134 INFOPART1 Message Structure	280
Table 7-135 INFOPART2 Message Structure	281
Table 7-136 MSPOS Message Structure	283
Table 7-137 TROPINFO Message Structure	285
Table 7-138 PPPB2BINFO1 Message Structure	287
Table 7-139 PPPB2BINFO2 Message Structure	288
Table 7-140 PPPB2BINFO3 Message Structure	289
Table 7-141 PPPB2BINFO4 Message Structure	291
Table 7-142 PPPB2BINFO5 Message Structure	292
Table 7-143 PPPB2BINFO6 Message Structure	294
Table 7-144 PPPB2BINFO7 Message Structure	296
Table 7-145 E6MASKBLOCK Message Structure	297
Table 7-146 Satellite Index	300
Table 7-147 Signal Index	300
Table 7-148 Navigation Message Index	301
Table 7-149 E6ORBITBLOCK Message Structure	302
Table 7-150 Validity Interval Index	303
Table 7-151 E6CLOCKFULLBLOCK Message Structure	305
Table 7-152 Delta Clock Multiplier Parameter Definition	306
Table 7-153 E6CLOCKSUBBLOCK Message Structure	307
Table 7-154 E6CBIASBLOCK Message Structure	309
Table 7-155 E6PBIASBLOCK Message Structure	311
Table 7-156 BSLNENUHD2 Message Structure	313

Table 7-157 BSLNXYZHD2 Message Structure.....	316
Table 7-158 DOPHD2 Message Structure	318
Table 8-1 Parameters of the UNLOG Command	331
Table 8-2 Parameter of the FRESET Command.....	332
Table 8-3 Parameters of the RESET Command.....	332
Table 8-4 Parameter of the SAVECONFIG Command	333
Table 0- 1 EVENTFLAG Data Structure	339
Table 0- 2 STATUS Bit Description	341
Table 0- 3 EVENTSLN Data Structure.....	342
Table 0- 4 Position or Velocity Type.....	344
Table 0- 5 Solution Status.....	345

1 Frequently Used Commands

Unicore high precision products support the input of commands in ASCII format (with XOR checksum) and abbreviated ASCII format (without XOR checksum). For example:

Input a command without checksum: RESET

Input a command with checksum: \$RESET*55

The abbreviated ASCII format without checksum is convenient to use, while the ASCII format with checksum can prevent the module from making errors when recognizing commands. By default, the module can only recognize commands without checksum. If you want to use commands with checksum, you need to set the parameter of CONFIG CMDFORMAT to 1 (see Section 4.40), and then input commands with checksum.

All commands are composed of a header and configuration parameters (which could be null, then there will be only one header left). The header field contains the command name, or message header.

Frequently used commands are listed below:

Table 1-1 Frequently Used Commands

Command Name	Description
freset	Clear the saved configurations, satellite ephemerides, position information, and reset the baud rate to 115200 bps.
version	Query version information
config	Query status of the serial port
mask BDS	Disable BDS. BDS/GPS/GLO/GAL can be disabled respectively.
unmask BDS	Enable BDS. BDS/GPS/GLO/GAL can be enabled respectively. The receiver tracks all GNSS by default.
config com1 115200	Configure COM1 port to operate at 115200 baud rate. The usable COM ports are: COM1, COM2, COM3. The baud rate could be: 9600, 19200, 38400, 57600, 115200, 230400, 460800, 921600.

Command Name	Description
unlog	Disable all outputs from the port in use
saveconfig	Save configurations
mode base time 60	After 60 seconds of automatic positioning, set the average value of horizontal and vertical positioning results as the base station coordinates. Restarting the receiver triggers a new calculation and repositioning of the datum coordinates.
mode base lat Lon height	Set datum coordinates manually: lat, lon, height (The coordinates do not change when restarting the receiver). For example, lat=40.07898324818, lon=116.23660197714, height=60.4265 Note: Longitude and latitude can be obtained by BESTNAV command. Southern Hemisphere corresponds to a negative latitude value; Western Hemisphere corresponds to a negative longitude value.
mode base	Set the base station mode
mode rover	Set the default rover station mode (This command transfers the receiver from base station mode to rover station mode.)
rtcm1033 comx 10 rtcm1006 comx 10 rtcm1074 comx 1 rtcm1124 comx 1 rtcm1084 comx 1 rtcm1094 comx 1	Set the base station and rover station to transmit RTCM messages via COMX. COMX could be COM1, COM2 or COM3.
<i>NMEA0183 Output Messages</i>	

Command Name	Description
gpgga comx 1	Set the output rate of GGA message to 1Hz. Users can set both of the message type and update rate. The update rate can be set to 1, 0.5, 0.2, 0.1, 0.05 and 0.02*, which corresponds to 1Hz, 2Hz, 5Hz, 10Hz, 20Hz and 50Hz* respectively. Message types include GGA, RMC, ZDA, VTG, etc.
gpths comx 1	Output the heading message THS of the current moment.

1.1 Base Station Configuration

In base station (fixed base station) mode, the receiver's antenna is placed at a fixed location with no changes during the whole use. Meanwhile, the precise coordinates of the base station and received satellite information are sent to the rover station (yet to be positioned) directly or after being processed (such as the RTCM correction data). The rover station receives both satellite observations and information from the base station to perform RTK solution to realize high precision positioning at centimeter level or millimeter level.

Applicable to: UM960, UM960L, UM982, UM980, UB9A0

When the precise coordinates are known, input the following commands to configure the receiver.

Table 1-2 Fixed Base Station Configuration

No.	Command	Description
1	mode base 40.078983248 116.236601977 60.42	Set the precise coordinates of base station: latitude, longitude, height
2	rtcm1006 com2 10	Antenna reference point coordinates of RTK base station (antenna height included)
3	rtcm1033 com2 10	Receiver and antenna description
4	rtcm1074 com2 1	GPS correction data
5	rtcm1124 com2 1	BDS correction data

* The 50 Hz output rate is supported by specific product and specific firmware.

No.	Command	Description
6	rtcm1084 com2 1	GLONASS correction data
7	rtcm1094 com2 1	Galileo correction data
8	saveconfig	Save configuration

When the coordinates of base station are unknown, users can set the receiver to automatically positioning for a period of time and get the average value as the coordinates of the base station. Relevant commands are shown in the table below.

Table 1-3 Self-optimizing Base Station Configuration

No.	Command	Description
1	mode base time 60	After 60 seconds of automatic positioning, set the average value of horizontal and vertical positioning results as the base station coordinates. Restarting the receiver triggers a new calculation and repositioning of the datum coordinates.
2	rtcm1006 com2 10	Antenna reference point coordinates of RTK base station (antenna height included)
3	rtcm1033 com2 10	Receiver and antenna description
4	rtcm1074 com2 1	GPS correction data
5	rtcm1124 com2 1	BDS correction data
6	rtcm1084 com2 1	GLONASS correction data
7	rtcm1094 com2 1	Galileo correction data
8	saveconfig	Save configuration

1.2 Rover Station Configuration

RTK rover station receives real-time correction data from the base station. Meanwhile, it receives satellite signals to perform RTK solution to realize high precision positioning.

Frequently used commands are:

MODE ROVER

SAVECONFIG

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

1.3 Heading Configuration

This command applies to single-board/module dual-antenna receivers. The heading result is the angle from True North to the baseline of the master antenna (ANT1) to the slave antenna (ANT2) in a clockwise direction. The heading function is enabled by default for dual-antenna receivers. See Figure 3-1 Heading Schematic for the details.

Frequently used commands are:

GPTHs 1

SAVECONFIG

Applicable to: UM982

1.4 Heading2 Configuration

Heading2 refers to the angle from True North to the baseline of the base to rover in a clockwise direction.

For dual-antenna receivers with heading function, heading2 is the angle from True North to the baseline of the base to the rover's master antenna (ANT1) in a clockwise direction. See Figure 3-1 Heading Schematic for the details.

Frequently used commands are:

MODE HEADING2

GPTHs2 ONCHANGED

SAVECONFIG

Applicable to: UM960, UM980, UB9A0, UM982

2 Unicore Command Types

Unicore commands for high precision GNSS receivers include the following types: MODE, CONFIG, MASK, AGNSS, data output commands, save configuration, factory reset, etc.

Table 2-1 Receiver Command Types

No.	Command	Description	Receiver Type
1	MODE	Set the receiver's operating mode, such as base/rover	UM960/UM960L/UM980 /UM982/UB9A0
		Query the receiver's operating mode	UM960/UM960L/UM980 /UM982/UB9A0
2	CONFIG	Configure the receiver's functions/interfaces	UM960/UM960L/UM980 /UM982/UB9A0
		Query the receiver's configuration	UM960/UM960L/UM980 /UM982/UB9A0
3	MASK	Set satellite system, frequency, and elevation angle tracked by the receiver	UM960/UM960L/UM980 /UM982/UB9A0
		Query satellite system, frequency, and elevation angle tracked by the receiver	UM960/UM960L/UM980 /UM982/UB9A0
4	AGNSS	Input assisted position and assisted time information	UM982/UM980/UB9A0
5	Data output commands	Request the output of positioning information, heading, etc.	UM960/UM960L/UM980 /UM982/UB9A0
6	Other commands	Save configuration, reset to factory settings, etc.	UM960/UM960L/UM980 /UM982/UB9A0

3 MODE Command

MODE command can be used to set the operating mode of the receiver. The receiver's operating modes include base mode, rover mode, heading mode, and high precision timing mode.

Re-entering a new command will make the receiver perform solution according to the latest input. For example, when the receiver is working in base mode, re-entering RTK rover mode will make it switch to rover mode and start RTK initialization.

The receiver supports all the operating modes above, but in actual use, the available functions are dependent on the authorization that the user bought.

The default setting is rover mode. The receiver can automatically identify RTCM format, so users do not need to specify the type of RTCM.

Syntax of the Command:

MODE [mode] [parameters]

Input Example:

MODE BASE 40.45628476579 116.2859754968 58.0984

MODE ROVER

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 3-1 Receiver Operating Mode List

No.	Mode	Description
1	BASE	Set the receiver to work in base station mode
2	ROVER	Set the receiver to work in rover station mode
3	HEADING2	Set the receiver to work in heading mode

3.1 Query the Receiver's Operating Mode

High precision receivers support using MODE command to query the operating mode.

Syntax of the Command:

MODE

Input Example:

MODE

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

#MODE,81,GPS,FINE,2230,547967000,0,0,18,518;MODE ROVER SURVEY,*1B

Table 3-2 Query the Receiver's Operating Mode

Command	Description
MODE	Query the receiver's operating mode, such as base/rover

Table 3-3 MODE Message Structure

ID	Field Type	Data Description
1	Header	Log header, see Table 7-51 ASCII Header Structure
2	MODE	Operating mode, as shown below: MODE ROVER UAV MODE ROVER AUTOMOTIVE MODE ROVER SURVEY MODE BASE MODE BASE TIME MODE HEADING2
3	HEADINGMODE	HEADING2 mode, as shown below: HEADINGMODE FIXLENGTH HEADINGMODE VARIABLELENGTH HEADINGMODE LOWDYNAMIC HEADINGMODE STATIC HEADINGMODE TRACTOR If HEADING2 is disabled, this field is null.

ID	Field Type	Data Description
4	*xx	Checksum, a hexadecimal number obtained by calculating an XOR of all characters from # to * (including # and excluding *)
5	[CR][LF]	Sentence terminator (ASCII only)

3.2 Fixed Base Station with Precise Coordinates

This command is used to set the coordinates of the base station to make the receiver work in base station mode. The receiver supports Geodetic Coordinate System and Earth-Centered Earth-Fixed (ECEF) Coordinate System. After the coordinates are set, the GPGGA message will always display the coordinates when outputting the positioning information.

If the 3D position error between the coordinates computed by the receiver (which can be output using the BASEPOS command) and the coordinates set by the user is more than 300 meters, no RTCM data will be output.

In open environment, it is recommended to configure the PVT engine to MULTI, that is, using the CONFIG PVTALG MULTI command, to improve the positioning accuracy.

Syntax of the Command:

MODE BASE [ID] [param1 param2 param3]

Input Example:

MODE BASE 40.45628476579 116.2859754968 58.0984

MODE BASE -2160489.0276 4383620.1006 4084738.1110

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 3-4 Base Station Mode with Fixed Coordinates

Command	Mode	ID	Parameter	Description
MODE	BASE	Base station ID, integer	param1	Latitude coordinate in Geodetic Coordinate System, in degrees, -90 ≤ param1 ≤ 90 (11 significant digits)

Command	Mode	ID	Parameter	Description
		between 0~4095 (can be omitted) ¹		The X-axis coordinate in ECEF Coordinate System, in meters, param1 < -90 or param1 > 90 (4 significant digits)
			param2	Longitude coordinate in Geodetic Coordinate System, in degrees, -180 ≤ param2 ≤ 180 (11 significant digits)
				The Y-axis coordinate in ECEF Coordinate System, in meters, param2 < -180 or param2 > 180 (4 significant digits)
			param3	Altitude, in meters, -30000 ≤ param3 ≤ 30000 (6 significant digits)
				The Z-axis coordinate in ECEF Coordinate System, in meters, Param3 < -30000 or Param3 > 30000 (4 significant digits)

3.3 Self-optimizing Base Station Mode

This command is used to set the receiver to work in base station mode with self-optimization.

In open environment, it is recommended to configure the PVT engine to MULTI, that is, using the CONFIG PVTALG MULTI command, to improve the positioning accuracy.

Syntax of the Command:

MODE BASE [ID] TIME [T] [Distance]

Input Example:

MODE BASE TIME 60

MODE BASE TIME 60 5

MODE BASE 1 TIME 60

¹ Restricted to RTCM3.2 only

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 3-5 Base Station Mode with Self-optimized Coordinates

Command	Mode	ID	Name	Parameter	Description
MODE	BASE	Integer between 0~4095 (can be omitted)	Time	T	Maximum time to calculate the average position, in seconds, cannot be a negative value, no more than 3600 s. The convergence time is counted from the position fix with good quality rather than from the first position fix.
				Distance	Distance, in meters. The receiver starts in self-optimizing base station mode and saves the optimized position in Flash. When the receiver restarts, it optimizes the position again. If the distance between the optimized coordinates and that saved in Flash is less than the value of "Distance", the receiver will set the coordinates saved in Flash as the base station coordinates. The range of "Distance" is $0 \leq \text{Distance} \leq 10$. If Distance = 0, the receiver will start in self-optimizing base station mode and set the optimized result as the coordinates of the base station.

3.4 Base Station Mode without Parameters

MODE BASE is the command to set the base station mode. If it is not followed by any parameter, the receiver will start the default base station configuration, setting the average value of the positioning results in 60 seconds as the coordinates of the base station. The average value in 60 seconds meets the following requirements: the optimizing time lasts for 60 seconds, or the horizontal error tolerance reaches the default value of 2.5 m and the vertical error tolerance reaches 3.5 m.

In open environment, it is recommended to configure the PVT engine to MULTI, that is, using the CONFIG PVTALG MULTI command, to improve the positioning accuracy.

Syntax of the Command:

MODE BASE

Input Example:

MODE BASE

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 3-6 Base Station Mode with Default Parameters

Command	Mode	Parameter	Description
MODE	BASE	-	Set as default base station mode

3.5 Base Station ID

Set the base station ID, an integer between 0 ~ 4095 ($0 \leq ID < 4096$).

Syntax of the Command:

MODE BASE [ID]

Input Example:

MODE BASE 1

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 3-7 Base Station ID Parameter

Command	Mode	ID	Description
MODE	BASE	$0 \leq ID < 4096$ (integer)	Set the receiver to work in base station mode and set its ID.

3.6 Rover Station Mode

This command is used to set the operating mode of the receiver as a rover station in different application scenarios.

Syntax of the Command:

MODE ROVER [parameter 1] [parameter 2 (optional)]

Input Example:

MODE ROVER UAV

MODE ROVER SURVEY

MODE ROVER UAV HIGHDYN

Applicable to: UM960, UM980, UB9A0, UM982

 Applicable to UM980 Build7923 and later versions.

 Applicable to UM982 Build7650 and later versions.

Table 3-8 Rover Station Mode Parameters

Command	Parameter 1	Parameter 2 (Optional)	Description
MODE ROVER	UAV	DEFAULT	UAV dynamic mode (default)
		HIGHDYN	UAV high dynamic mode
	SURVEY	DEFAULT	Precision surveying mode (default)
		MOW	Lawn mower mode
	AUTOMOTIVE	DEFAULT	Automotive dynamic mode (default)

 When [parameter 2] is null, the mode is default.

UAV dynamic mode (UAV): This mode is suitable for most UAV applications, such as agricultural UAVs, surveying UAVs, aerial photography UAVs, inspection UAVs, etc., with large vertical acceleration, and horizontal speed approximate to automobiles. The maximum horizontal speed is 50 m/s, the maximum vertical speed is 30 m/s, the maximum altitude is 18000 m, and the rate of change in position is large.

UAV high dynamic mode (UAV HIGHDYN): This mode is suitable for high dynamic applications such as drone light show and FPV drones.

Automotive dynamic mode (AUTOMOTIVE): This mode is suitable for passenger vehicles and logistics intelligent driving, with low vertical acceleration and diverse scene changes. The maximum horizontal speed is 100 m/s, the maximum vertical speed is 15 m/s, and the rate of change in position is moderate.

Precision surveying mode (SURVEY): This mode is suitable for high-precision application scenarios which require higher positioning accuracy but with lower dynamic features, such as surveying and mapping, precision agriculture, etc.

Default mode: The system will automatically choose different modes according to the product models. Users can query the default mode using corresponding command.

Table 3-9 Default Configuration of Rover Station Mode

Product Model	Default Mode	Description
UM980/UB9A0	SURVEY	Precision surveying mode
UM982	UAV	UAV dynamic mode
UM960	SURVEY MOW	Lawn mower mode

3.7 Heading2 Mode

This command is used to set the heading function between two receivers. Heading2 refers to the angle from True North to the baseline of the base to rover in a clockwise direction.

For dual-antenna receivers, Heading2 is the angle from True North to the baseline of the base to the rover's master antenna (ANT1) in a clockwise direction. The schematic diagram is shown in Figure 3-1 Heading Schematic.

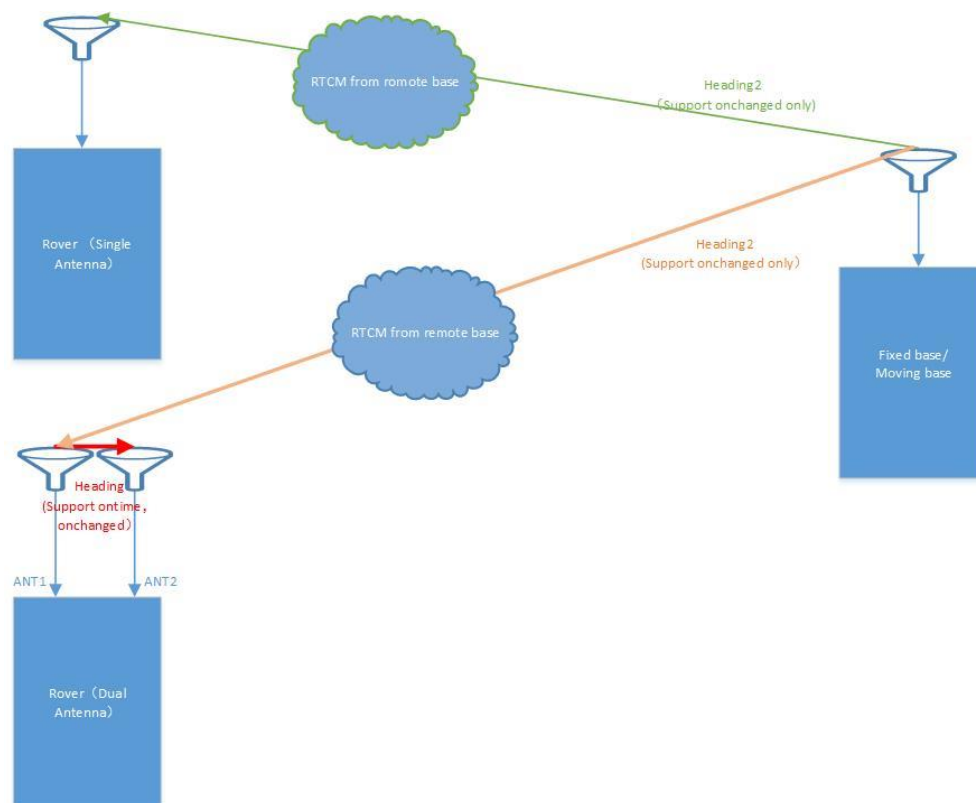


Figure 3-1 Heading Schematic

Syntax of the Command:

MODE HEADING2 [parameter]

Input Example:

MODE HEADING2

MODE HEADING2 FIXLENGTH

MODE HEADING2 VARIABLELENGTH

MODE HEADING2 STATIC

MODE HEADING2 LOWDYNAMIC

Applicable to: UM960, UM980, UB9A0, UM982

Table 3-10 Heading2 Mode Parameter

Command	Mode	Parameter	Description
MODE	HEADING2	FIXLENGTH	Enable Heading2 mode. The distance between the antenna of the moving base station and that of the heading receiver is fixed. The two antennas can move synchronously or in relative static state. (The default mode is FIXLENGTH if the parameter of mode heading2 is empty.)
		STATIC	Enable Heading2 mode. Both antennas of the moving base station and the heading receiver are in static state.
		VARIABLELENGTH	Enable Heading2 mode. The relative position and distance between the antenna of the moving base station and that of the heading receiver are in dynamic changes.
		LOWDYNAMIC	Enable Heading2 mode, low dynamic, suitable for low-speed moving carriers such as pile drivers. The distance between the antenna of the moving base station and that of the heading receiver is fixed.
		TRACTOR	For agricultural machinery, operating mode. The distance between the antenna of the moving base station and that of the heading receiver is fixed.

4 CONFIG Command

CONFIG is the header of the commands that are used to set the serial port, PPS, geoid undulation, DGNSS, RTK, etc. It supports the following configurations:

- 1) Serial port
- 2) PPS
- 3) Geoid undulation
- 4) DGPS
- 5) RTK
- 6) Heading
- 7) Heading2
- 8) SBAS
- 9) EVENT

...

The acceptable characters that can appear in the command include numbers, upper case and lower case letters, and specified characters including double quotation marks (" "), hyphen (-), colon (:), underscore (_), dollar sign (\$), comma (,), slash (/), and backslashes (\). Other characters appeared in the command cannot be decoded.

Syntax:

CONFIG [device/function] [parameter]

Example:

CONFIG COM1 115200 8 n 1

CONFIG PPS ENABLE BDS POSITIVE 100000 1000 0 0

CONFIG UNDULATION 9.7

CONFIG RTK TIMEOUT 60

CONFIG DGPS TIMEOUT 100

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-1 Configuration List

No.	Configuration Item	Description
1	COM1	Serial port configuration related to COM1, such as baud rate and parity bit
2	COM2	Serial port configuration related to COM2, such as baud rate and parity bit

No.	Configuration Item	Description
3	COM3	Serial port configuration related to COM3, such as baud rate and parity bit
4	PPS	PPS configuration: set the output period, pulse width, rising edge and falling edge
5	EVENT	External event configuration
6	UNDULATION	Geoid undulation configuration: input a specific undulation value or use the built-in geoid grid
7	RTK	RTK configuration, such as setting the mode and the maximum age of RTK data
8	DGPS	DGPS configuration, such as setting the maximum age of DGPS data

4.1 Query the Receiver's Configuration

High precision receivers support the use of CONFIG command to query the receiver's configuration.

Syntax of the Command:

CONFIG

Input Example:

CONFIG

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$CONFIG,COM1,CONFIG COM1 460800*65

\$CONFIG,COM2,CONFIG COM2 115200*23

\$CONFIG,COM3,CONFIG COM3 115200*23

\$CONFIG,PPS,CONFIG PPS ENABLE GPS POSITIVE 500000 1000 0 0*6E

Table 4-2 Query the Receiver's Configuration

Command	Description
CONFIG	Query the current function and configuration of the receiver

Note: CONFIG can query the current configuration of the receiver, including default

configurations.

4.2 Serial Port Configuration

Serial ports are interfaces used to input and output data. The command to control the serial port configuration starts with CONFIG as the header, followed by the port name and properties of the serial port, such as configuring the baud rate, data bits, parity, stop bit properties, etc.

Unicore high precision receivers support the configuration of three serial ports—COM1, COM2, and COM3, which have same functions but work independently according to their respective configuration. The three ports can be configured mutually. For example, COM2 can be configured through COM1, vice versa. It is recommended to reserve COM1 for upgrade when integrating GNSS boards or modules.

Syntax of the Command:

CONFIG [serial port number] [serial port property parameter]

Input Example:

CONFIG COM1 115200

CONFIG COM1 115200 8 n 1

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-3 Serial Port Configuration

Header	Serial Port	No.	Parameter	Description
CONFIG	COM1	1	Baud rate	Set the baud rate of the serial port. See Table 4-4 for the supported baud rate.
	COM2	2	Data bits	Set the data bits of the serial port. Please make sure that the preceding baud rate is not empty before setting this field.
	COM3			Note: Seven or eight data bits are supported in data transmission. The current products only support eight bits.

Header	Serial Port	No.	Parameter	Description
		3	Parity check	Set the parity check of the serial port. Please make sure that the preceding parameters are not empty before setting this field. Note: Three settings are supported for parity check in data transmission: N, E, O. The default setting is N.
		4	Stop bits	Set the stop bits of the serial port. Please make sure that the preceding parameters are not empty before setting this field. Note: One or two stop bits are supported in data transmission. The default setting is one bit.

Table 4-4 Supported Baud Rate

Serial Port	Baud Rate
COM1	9600, 19200, 38400, 57600, 115200, 230400, 460800, 921600
COM2	9600, 19200, 38400, 57600, 115200, 230400, 460800, 921600
COM3	9600, 19200, 38400, 57600, 115200, 230400, 460800, 921600

4.3 PPS Configuration

This command is used to set the pulse signal parameters such as the PPS period and pulse width, meanwhile compensating for the delay of PPS.

Syntax of the Command:

CONFIG PPS [parameter]

Input Example:

CONFIG PPS ENABLE GPS POSITIVE 500000 1000 0 0

Applicable to: UM960, UM960L², UM980, UB9A0, UM982

Table 4-5 Enable/Disable PPS

Header	Configuration Item	Enable/Disable	Description
CONFIG	PPS	DISABLE	Disable PPS output.
		ENABLE (default)	Enable PPS output. The receiver outputs PPS after the position is fixed and the PPS convergence is finished. If there is loss of lock on satellite signals and the receiver stops positioning, the PPS output would maintain for about 30 seconds.
		ENABLE2	Enable PPS output and keep the output state. After the position is fixed and the PPS convergence is finished, the receiver will output the same PPS as that in the ENABLE configuration.
		ENABLE3	Enable PPS output after the receiver starts up.

Table 4-6 PPS Configuration

Header	Configuration Item	Enable/Disable	Parameter	ASCII Value	Description
CONFIG	PPS	DISABLE	-	-	Disable PPS. It is not followed by any parameters.
		ENABLE (default)/ ENABLE2/ ENABLE3	Timeref	GPS/BDS/GAL /GLO	Time reference. BDST, GPST, GLOST and GALST are supported currently.
			polarity	POSITIVE	Pulse polarity, active high triggered by the rising edge

² UM960L does not support ENABLE2 and ENABLE3.

Header	Configuration Item	Enable/Disable	Parameter	ASCII Value	Description
				NEGATIVE	Pulse polarity, active low triggered by the falling edge
			Width	Pulse width, smaller than the period	Pulse width of the PPS signal (microseconds)
			Period	PPS output period	Valid values: 50, 100, 200, ..., 20000 (milliseconds)
			RfDelay	Integer from -32768 to 32767	RF delay (nanoseconds)
			UserDelay	Integer from -32768 to 32767	User-set delay (nanoseconds)

4.4 UNDULATION Configuration

This command allows users to enter a specific geoid undulation or use the built-in grid of geoid undulation.

 When setting the receiver to work in base station mode, you should configure the UNDULATION first.

Syntax of the Command:

CONFIG UNDULATION [parameter]

Input Example:

CONFIG UNDULATION 9.7

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-7 Undulation Configuration

Header	Configuration Item	Parameter	Description
CONFIG	UNDULATION	Auto	Use the built-in grid of geoid undulation (default)
		Separation (m)	Use the user-specified geoid undulation, ranging from -1000.0000 m to +1000.0000 m, four digits after the decimal point

4.5 DGPS Configuration

This command is used to set the maximum age of the differential data received from the base station. The differential data older than the specified age will be ignored, which can be used to disable DGPS positioning calculation.

Syntax of the Command:

CONFIG DGPS [parameter]

Input Example:

CONFIG DGPS TIMEOUT 100

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-8 DGPS Configuration

Header	Configuration Item	Parameter	Value	Description
CONFIG	DGPS	TIMEOUT	0	Disable DGPS positioning
			1-1800	Maximum age of differential data, in seconds, integers only. (the default values vary by product; please see the table below for specific information)

Table 4-9 Default Configuration of DGPS TIMEOUT

产品型号	默认配置
UM982	600 s

产品型号	默认配置
UM980	300 s
UM960; UM960L	300 s
UB9A0	300 s

4.6 RTK Configuration

This command is used to set the RTK computing engine, RTK operating mode, and to clean RTK parameters.

Syntax of the Command:

CONFIG RTK [parameter]

CONFIG RTK RELIABILITY [parameter 1] [parameter 2]

Input Example:

CONFIG RTK TIMEOUT 60

CONFIG RTK RELIABILITY 3 1

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-10 RTK Configuration

Header	Configuration Item	Parameter	Description	
CONFIG	RTK	TIMEOUT	0	Disable RTK function
			1-1800	Maximum age of RTK data*, in seconds. Versions without standalone authorization support 600 s at most.
		RELIABILITY	RTK reliability threshold: 1: Low reliability 2: Normal reliability 3: Relatively high reliability (default) 4: High reliability	
		USER_DEFAULTS	Default state	

Header	Configuration Item	Parameter	Description
		CN0THD	0: Normal threshold for CN0 1: High threshold for CN0
		MMPL	0: Normal threshold for multi-path mitigation 1: High threshold for multi-path mitigation
		RESET	Reset RTK solution
		DISABLE	Stop calculating RTK results, including float solution and fixed solution

* The default RTK TIMEOUT of UM982 is 600s, and that of UM980 is 120s.

Table 4-11 RTK Reliability Configuration

Header	Configuration Item	Parameter	Description
CONFIG	RTK RELIABILITY	Parameter 1: Reliability threshold of the RTK positioning engine	1: Low reliability 2: Normal reliability 3: Relatively high reliability (default) 4: High reliability
		Parameter 2: ADR reliability threshold	1: Low reliability (default) 2: Normal reliability 3: Relatively high reliability 4: High reliability

4.7 STANDALONE Configuration

This command is used to set the STANDALONE mode for the receiver. In STANDALONE mode, the receiver can perform centimeter-level positioning for a period of time even if it has not received differential correction data.

This mode is recommended to be used in open environment. It is also recommended to use the CONFIG PVTALG MULTI command to set the PVT engine to MULTI, in order to improve the positioning accuracy. Users can also input the MASK command to shield satellites with low elevation angle to reduce the multi-path effect and improve the positioning accuracy.

Syntax of the Command:

CONFIG STANDALONE [Function Parameter] [Param1] [Param2] [Param3]

Input Example:

CONFIG STANDALONE ENABLE 40.113452 114.212234 57.23

CONFIG STANDALONE DISABLE

Applicable to: UM960, UM980, UB9A0, UM982

Table 4-12 STANDALONE Configuration

Header	Configuration Item	Enable/Disable	Param1	Param2	Param3
CONFIG	STANDALONE	ENABLE	Param1 is the input coordinate: $-90 \leq \text{param1} \leq 90$, latitude in Geodetic Coordinate System, in degrees (11 significant digits)	Param2 is the input coordinate: $-180 \leq \text{param2} \leq 180$, longitude in Geodetic Coordinate System, in degrees (11 significant digits)	Param3 is the input coordinate: $-30000 \leq \text{param3} \leq 18000$, altitude, in meters (6 significant digits)
		ENABLE	Time parameter, which configures the waiting time to automatically enter standalone mode. $3 \leq \text{param1} \leq 100$, in seconds, default = 100 s.		

Header	Configuration Item	Enable/Disable	Param1	Param2	Param3
		ENABLE	If the parameters are empty, the receiver enters the default mode, using automatically calculated position as the initial value, and it enters the STANDALONE mode after 100 seconds by default.		
		DISABLE (default)			
		TIMEOUT	The duration time of the STANDALONE mode, $1800 \leq \text{param1} \leq 86400$, in seconds, the default is 86400 s.		

4.8 HEADING Configuration

This command is used to set single-board/module dual-antenna heading receivers. It sets the fixed baseline length, change of baseline length and low dynamic mode of heading. The single board/module dual-antenna receiver starts up with heading function enabled by default. Refer to Figure 3-1 Heading Schematic for the details.

Syntax of the Command:

CONFIG HEADING [parameter]

CONFIG HEADING LENGTH [parameter 1 (optional)] [parameter 2 (optional)]

Input Example:

CONFIG HEADING FIXLENGTH

CONFIG HEADING VARIABLELENGTH

CONFIG HEADING STATIC

CONFIG HEADING LOWDYNAMIC

Applicable to: UM982

Table 4-13 Heading Configuration

Header	Configuration Item	Parameter	Description
CONFIG	HEADING	FIXLENGTH	The distance between the master antenna (ANT1) and the slave antenna (ANT2) is fixed. ANT1 and ANT2 move synchronously or in relatively static state (default mode).
		VARIABLELENGTH	The relative position and distance between the master antenna (ANT1) and the slave antenna (ANT2) change dynamically in real time.
		STATIC	Both of the master antenna (ANT1) and slave antenna (ANT2) are in static state.
		LOWDYNAMIC	Low dynamic, which can be used for low speed moving carriers such as pile drivers.
		TRACTOR	The distance between the master antenna (ANT1) and the slave antenna (ANT2) is changing slowly, which is similar to the velocity of a tractor.
		LENGTH	This parameter is used to set the baseline length between the two antennas in order to regulate the heading calculation. It is fit for dual-antenna applications with fixed baseline. For the detailed configuration, see the table below.

Header	Configuration Item	Parameter	Description
		RELIABILITY	Heading reliability threshold: 1: Low reliability 2: Normal reliability 3: Relatively high reliability (default) 4: High reliability

Table 4-14 Heading LENGTH Configuration

Header	Configuration Item	Parameter 1	Parameter 2
CONFIG	HEADING LENGTH	Fixed length of the baseline, centimeters. If the length is 20 cm, input 20.	Error tolerance, centimeters. If the error tolerance is 3 cm, input 3.

Note: If parameter 1 and parameter 2 are not configured, the system will automatically use the default configuration.

4.9 Heading Offset and Pitch Offset Configuration

This command is used to set the offset value in order to correct the heading angle and pitch angle output in HEADING, GPTHS and HEADING2 messages.

Syntax of the Command:

CONFIG HEADING OFFSET [Headingoffset Pitchoffset]

Input Example:

CONFIG HEADING OFFSET 90 45

Applicable to: UM982, UM980, UB9A0

Table 4-15 Heading Offset and Pitch Offset Configuration

Header	Configuration Item	Parameter	Description
CONFIG	HEADING OFFSET	Headingoffset	Heading offset correction, degree, range: -180.0 ~ 180.0
		Pitchoffset	Pitch offset correction, degree, range: -90.0 ~ 90.0

4.10 SBAS Configuration

This command is used to enable or disable SBAS. The choice of SBAS can be made automatically by the receiver (AUTO mode) or specified by the user. If the user knows the operation of SBAS in their region, it is recommended to be specified by the user.

Syntax of the Command:

CONFIG SBAS [parameter 1] [parameter 2]

Input Example:

CONFIG SBAS ENABLE WAAS

CONFIG SBAS TIMEOUT 600

Applicable to: UM960, UM980, UB9A0, UM982

Table 4-16 SBAS Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Description
CONFIG	SBAS	ENABLE	Auto	Automatic mode
		ENABLE	WAAS	Enable WAAS only
			GAGAN	Enable GAGAN only
			MSAS	Enable MSAS only
			EGNOS	Enable EGNOS only
			SDCM	Enable SDCM only
			ASECNA	Enable ASECNA only
			KASS	Enable KASS only
			SPAN	Enable SPAN only
			BDS	Enable BDS SBAS only
			SLAS ³	Enable QZSS SLAS only
		DISABLE	-	Disable SBAS (Default)

³ SLAS is supported by UM980, UM982 and UB9A0 only.

Header	Configuration Item	Parameter 1	Parameter 2	Description
		TIMEOUT*	t	SBAS timeout, range: 120~1800s, default=1200s; if the value is set to 0, SBAS is disabled.

* The TIMEOUT configuration is applicable to UM982 Build9669 and later versions.

4.11 EVENT Configuration

This command is used to set the EVENT function and related parameters. EVENT is disabled by default.

Syntax of the Command:

CONFIG EVENT [parameter 1] [parameter 2] [parameter 3]

Input Example:

CONFIG EVENT ENABLE POSITIVE 10

Applicable to: UM960, UM980, UB9A0, UM982

Table 4-17 EVENT Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Parameter 3
CONFIG	EVENT	DISABLE (Disable EVENT, default)		
		ENABLE (Enable EVENT)	POSITIVE (Rising edge triggering)	TGUARD (The minimum time between two valid pulses, unit: ms. If the time is less than TGUARD, the second Event will be ignored. Default = 4, minimum = 2, maximum = 3,599,999)
			NEGATIVE (Falling edge triggering)	

4.12 EVENT2 Configuration

This command is used to set the EVENT2 function and related parameters. EVENT2 is disabled by default.

Syntax of the Command:

CONFIG EVENT2 [parameter 1] [parameter 2] [parameter 3]

Input Example:

CONFIG EVENT2 ENABLE POSITIVE 10

Applicable to: UM982

Table 4-18 EVENT2 Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Parameter 3
CONFIG	EVENT	DISABLE (Disable EVENT2, default)		
		ENABLE (Enable EVENT2)	POSITIVE (Rising edge triggering)	TGUARD (The minimum time between two valid pulses, unit: ms. If the time is less than TGUARD, the second Event will be ignored. Default = 4, minimum = 2, maximum = 3,599,999)
			NEGATIVE (Falling edge triggering)	

4.13 SMOOTH Configuration

This command is used to set the SMOOTH function when calculating RTK results, heading results, and Doppler velocity in SPPNAV. The SMOOTH function is disabled by default.

Syntax of the Command:

CONFIG SMOOTH [computing engine] [parameter]

Input Example:

CONFIG SMOOTH RTKHEIGHT 10

CONFIG SMOOTH HEADING 10

CONFIG SMOOTH PSRVEL enable

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-19 SMOOTH Configuration

Header	Configuration Item	Computing Engine	Parameter	Description
CONFIG	SMOOTH	RTKHEIGHT	Time length	Unit: epoch, range: 0~100
		HEADING	Time length	Unit: epoch, range: 0~100
		PSRVEL	Enable	Enable smoothing of Doppler velocity in SPPNAV.
			Disable	Disable smoothing of Doppler velocity in SPPNAV.

4.14 MMP – Multi-path Mitigation Configuration

This command is used to enable/disable the multi-path mitigation function for the pseudorange measurement in the raw observation message. It is disabled by default.

Syntax of the Command:

CONFIG MMP [parameter]

Input Example:

CONFIG MMP ENABLE

Applicable to: UM980, UB9A0

Table 4-20 Multi-path Mitigation Configuration

Header	Configuration Item	Parameter	Description
CONFIG	MMP	ENABLE	Enable multi-path mitigation for the pseudorange measurement in the raw observation message
		DISABLE	Disable multi-path mitigation for the pseudorange measurement in the raw observation message (default)

4.15 NMEA Version Configuration

This command is used to set the NMEA version. The default version is V410.

Syntax of the Command:

CONFIG NMEA0183 [parameter]

Input Example:

CONFIG NMEA0183 V410

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-21 NMEA 0183 Version Configuration

Header	Configuration Item	Parameter	Description
CONFIG	NMEA0183	V410	Set NMEA version to be V410 ⁴ (extended to support BDS)
		V411	Set NMEA version to be V411 (Refer to the official document of NMEA V411 for more information.)

4.16 RTCM B1C B2a Configuration

This command is used to set whether to encode BDS B1C & B2a signals in RTCM protocol. The configuration is enabled by default.

Syntax of the Command:

⁴ The "0" in parameter "V410" cannot be omitted.

CONFIG RTCMB1CB2a [parameter]

Input Example:

CONFIG RTCMB1CB2a ENABLE

Applicable to: UM980, UB9A0, UM982

Table 4-22 RTCM B1C B2a Configuration

Header	Configuration Item	Parameter	Description
CONFIG	RTCMB1CB2a	ENABLE	Encode B1C & B2a signals in RTCM (default)
		DISABLE	Do not encode B1C & B2a signals in RTCM

4.17 RTCMPHASERATE – RTCM Phaserange Rate Configuration

This command is used to set the positive and negative sign for the Phaserange Rate in RTCM MSM5 & MSM7 format messages.

Syntax of the Command:

CONFIG RTCMPHASERATE [parameter]

Input Example:

CONFIG RTCMPHASERATE POSITIVE

Applicable to: UM980, UB9A0, UM982

 Applicable to UM982 Build9669 and later versions.

Table 4-23 RTCM Phaserange Rate Configuration

Header	Configuration Item	Parameter	Description
CONFIG	RTCMPHASERATE	POSITIVE	The same value as the Phaserange Rate in RTCM MSM5 & MSM7 format messages (default)
		NEGATIVE	The opposite value of the Phaserange Rate in RTCM MSM5 & MSM7 format messages

4.18 RTCMCLOCKOFFSET – RTCM Clock Offset Compensation

This command is used to enable/disable the receiver to compensate for the clock offset when outputting RTCM raw data. It is enabled by default.

Syntax of the Command:

CONFIG RTCMCLOCKOFFSET [parameter]

Input Example:

CONFIG RTCMCLOCKOFFSET DISABLE

Applicable to: UM980, UB9A0, UM982, UM960

Table 4-24 RTCM Clock Offset Compensation

Header	Configuration Item	Parameter	Description
CONFIG	RTCMCLOCKOFFSET	ENABLE (default)	Enable RTCM clock offset compensation
		DISABLE	Disable RTCM clock offset compensation

4.19 PSRVELDRPOS – Doppler Position Prediction

This command is used to enable/disable the prediction of position using Doppler calculation. The Doppler position prediction is enabled by default. After it is enabled, the receiver will use the real-time Doppler velocity to predict the next position when the pseudorange measurement quality is poor while the Doppler calculation is successful and with good quality. In this condition, the positioning quality indicator in GGA message is output as 1, but the number of satellites in use is output as 0.

Syntax of the Command:

CONFIG PSRVELDRPOS [parameter]

Input Example:

CONFIG PSRVELDRPOS ENABLE

CONFIG PSRVELDRPOS DISABLE

Applicable to: UM980, UB9A0, UM982, UM960

Table 4-25 Doppler Position Prediction Configuration

Header	Configuration Item	Parameter	Description
CONFIG	PSRVELDRPOS	ENABLE	Enable Doppler position prediction (default)
		DISABLE	Disable Doppler position prediction

4.20 AGNSS Configuration

This command is used to enable/disable the AGNSS function. AGNSS can reduce the Time to First Fix (TTFF) after receiving the assisted GNSS information, such as satellite ephemeris and time. After AGNSS is enabled, the TTFF will be reduced to less than 5 s.

Syntax of the Command:

```
CONFIG AGNSS [parameter]
```

Input Example:

```
CONFIG AGNSS ENABLE
```

Applicable to: UM980, UB9A0, UM982, UM960

 Applicable to UM980 Build7923 and later versions.

 Applicable to UM982 Build7650 and later versions.

Table 4-26 AGNSS Configuration

Header	Configuration Item	Parameter	Description
CONFIG	AGNSS	ENABLE	Enable AGNSS
		DISABLE	Disable AGNSS (default)

4.21 PPP Configuration

This command is used to set the receiver's PPP function. It is supported by specific firmware.

Syntax of the Command:

```
CONFIG PPP [parameter1] [parameter2]
```

```
CONFIG PPP CONVERGE [parameter1] [parameter2]
```

Input Example:

CONFIG PPP ENABLE B2b-PPP

CONFIG PPP DISABLE

CONFIG PPP CONVERGE 10 20

Applicable to: UM980, UB9A0, UM982

 Applicable to UM980 Build7923 and later versions.

 Applicable to UM982 Build7650 and later versions.

Table 4-27 PPP Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Description
CONFIG	PPP	ENABLE	B2b-PPP*	B2b-PPP
			E6-HAS*	E6 HAS
			AUTO	Automatically choose the appropriate PPP service according to the application scenario
			SSR-RX	RXN PPP SSR service
			L6MDCPPP*	QZSS L6E (MADOCA) PPP
		DATUM	WGS84	Refer to the WGS84 standard
			PPPORIGINAL	Use the coordinate system of the PPP service (default)
		TIMEOUT		Range: 90 ~ 180 s; Default = 120 s; If TIMEOUT is set to 0, PPP is disabled.
		CONVERGE		PPP convergence threshold, see the table below
		DISABLE		Disable PPP (default)

Table 4-28 PPP CONVERGE Configuration

Header	Configuration Item	Parameter 1	Parameter 2
CONFIG	PPP CONVERGE	HorSTD Horizontal standard deviation threshold ⁵ , in centimeters	VerSTD Vertical standard deviation threshold ⁶ , in centimeters

☞ B2b-PPP is supported by UM980 Build7923 and later versions in SIGNALGROUP 2 mode, and UM982 Build7650 and later versions in SIGNALGROUP 3 6 mode.

☞ E6-HAS is supported by UM980 Build11833 and later versions, and UM982 Build11826 and later versions.

☞ L6MDCPPP is supported by UM980 Build16606 and later versions.

4.22 ANTIJAM – Anti-jamming Configuration

This command is used to set the mode of anti-jamming function.

☞ If you have used the JAMMING command, please note that it has been replaced by the new command ANTIJAM.

Syntax of the Command:

CONFIG ANTIJAM [mode]

Input Example:

CONFIG ANTIJAM DISABLE

CONFIG ANTIJAM AUTO

CONFIG ANTIJAM FORCE

Applicable to: UM960, UM980, UB9A0

☞ Applicable to UM980 Build10110 and later versions.

Table 4-29 Anti-jamming Configuration

Header	Configuration Item	Parameter	Description
CONFIG	ANTIJAM	Disable	Disable the anti-jamming function

^{5, 6} The horizontal STD is recommended to be set above 10 cm, and the vertical STD above 15 cm.

Header	Configuration Item	Parameter	Description
		AUTO	Autonomous (default)
		FORCE	Force the anti-jamming mode. After enabling this mode, the power consumption will increase.

4.23 SIGNALGROUP – Signal Group Configuration

This command is used to set the combination of signals tracked by the master antenna and slave antenna of the receiver. Parameter 1 represents the signals tracked by the master antenna and parameter 2 represents the signals tracked by the slave antenna.

The master antenna supports receiving SBAS L1C/A by default. The slave antenna does not support SBAS.

Single-antenna products only support the configuration of parameter 1. If parameter 2 is configured, a system error will be returned and a prompt will appear to indicate that parameter 2 is not supported.

Dual-antenna products support the configuration of parameter 1 and parameter 2. When parameter 2 is not configured, it will be set to 0 by default.

The method to configure parameter 1 and parameter 2 is shown in the table below.

After the module is configured, if the new configuration is different from the old one, the module will reset automatically and adopt the new configuration. The configuration of SIGNALGROUP will be saved automatically; it is unnecessary to use Saveconfig to save the configuration.

Therefore, if you configure the module with more than one configuration including the SIGNALGROUP, you should save other configurations first in order to avoid the module rebooting due to the configuration of SIGNALGROUP.

Syntax of the Command:

```
CONFIG SIGNALGROUP [parameter 1] [parameter 2]
```

Input Example:

```
CONFIG SIGNALGROUP 1
```

```
CONFIG SIGNALGROUP 2 3
```

Applicable to: UM980, UB9A0, UM982

Table 4-30 Signal Group Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Description
CONFIG	SIGNALGROUP	TypeNum	TypeNum	See Table 4-31 Frequency Combination

Table 4-31 Frequency Combination

TypeNum	Description
0	Disable the slave antenna
1	BDS: B1I, B2I, B3I, B1C, B2a, B2b GPS: L1C/A, L2C/L2P, L5 GLO: G1, G2 GAL: E1, E5a, E5b QZSS: L1C/A, L2C, L5
2	BDS: B1I, B2I, B3I, B1C, B2a, B2b GPS: L1C/A, L1C, L2C, L2P(Y), L5 GLO: G1, G2, G3 GAL: E1, E5a, E5b, E6 QZSS: L1C/A, L1C, L2C, L5 NavIC: L5
3	BDS: B1I, B3I, B1C, B2b-PPP GPS: L1C/A, L2C/L2P, L5 GLO: G1, G2 GAL: E1, E5a, E5b, E6 QZSS: L1C/A, L2C, L5
4	BDS: B1I, B2I, B3I GPS: L1C/A, L2C/L2P, L5 GLO: G1, G2 GAL: E1, E5a, E5b QZSS: L1C/A, L2C, L5

TypeNum	Description
5	BDS: B1I, B2I, B3I GPS: L1C/A, L2C/L2P GLO: G1, G2 GAL: E1, E5b QZSS: L1C/A, L2C
6	BDS: B1I, B3I GPS: L1C/A, L2C/L2P GLO: G1, G2 GAL: E1, E5b QZSS: L1C/A, L2C
7	BDS: B1I, B2I, B3I, B1C, B2a, B2b GPS: L1C/A, L2C/L2P, L5 GLO: G1, G2 GAL: E1, E5a, E5b QZSS: L1C/A, L2C, L5
8	GPS: L1C/A, L2C/L2P, L5 BDS: B1I, B3I, B1C, B2a GAL: E1, E5a, E5b
9	BDS: B1I, B2I, B3I, B1C, B2a, B2b GPS: L1C/A, L2P(Y)/L2C, L5 GLO: L1C/A, L2C/A GAL: E1C, E5A, E5B QZSS: L1C/A, L2C, L5
10	BDS: B1I, B2I, B3I, B1C, B2a, B2b GPS: L1C/A, L2C/L2P, L5 GLO: G1, G2 GAL: E1, E5a, E5b QZSS: L1C/A, L2C, L5, L6

Table 4-32 Default Configuration and Supported Configuration

Product Model	Default TypeNum		Supported TypeNum		Note
	Master antenna	Slave antenna	Master antenna	Slave antenna	
UM982	4	5	4	5	
			3	6	
			5	0	Low power consumption
			7	0	For base station mode only
UM980	1		1		
			2		
			8*		This mode supports up to 50 Hz.
			10		
UB9A0	2		2		
			9		This mode supports up to 50 Hz.

☞ UM980 SIGNALGROUP 8 supports up to 50Hz positioning and velocity output, as well as 50Hz raw data output (RTCM format).

☞ UM982 SIGNALGROUP 3 6 supports 20Hz data update rate only for some logs after the Build10979 version.

4.24 ANTENNADELTAHEN – Antenna Height Configuration

This command is used to set the antenna height (height of the antenna relative to the marking point on the ground) and the plane offset when the receiver works as a base station, which will affect the description of the antenna in the RTCM 1006 differential message.

Syntax of the Command:

CONFIG ANTENNADELTAHEN [Height] [East] [North]

Input Example:

CONFIG ANTENNADELTAHEN 1.521 0.0 0.0

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-33 Antenna Height Configuration

Header	Configuration Item	Parameter	Value	Description
CONFIG	ANTENNADELTAHEN	Height	0.0000-6.5535	Antenna height, the vertical distance from the center of the marking point on the ground to the antenna reference point (ARP), in meters, 0.0000 by default
		East	0.0000-100.0000	East offset from the center of the marking point on the ground to the antenna reference point (ARP), in meters, 0.0000 by default
		North	0.0000-100.0000	North offset from the center of the marking point on the ground to the antenna reference point (ARP), in meters, 0.0000 by default

4.25 AUTHCODE – Authorization Code Configuration

This command is used to add authorization code for the receiver. Once the correct code is entered, the receiver will automatically save the authorization information and restart. The saved information cannot be erased by updating firmware or using FRESET command. Entering a wrong code will make the receiver work abnormally.

Syntax of the Command:

Config AUTHCODE [string]

Input Example:

Config AUTHCODE

0x000000bf:080101007502:961101144100099:E9CC4A711D000001:556fb037:696CC7A
E564AAC66AA92AA8116D26CE71E15692D581B2CA308C5D90E4FDC2DBE6FBDB48942
BF0DF7CAF1271DBA54D7123D73585EA4E8FA496C847E184D126C5607A2050E696812
D9EB05015B4A0630531380CE34A893F49F1192984BD279AC9FB09EB0EAEACA71F010
8B56302F9120DC2BBA5394A969B31A5959AB1F25DE0416

Applicable to: UM980, UB9A0, UM982

Table 4-34 Authorization Code Configuration

Header	Configuration Item	Parameter	Description
CONFIG	AUTHCODE	string	String of authorization code

4.26 ALGRESET – Algorithm Reset Configuration

This command is used to reset the algorithms.

Syntax of the Command:

CONFIG ALGRESET [type]

Input Example:

CONFIG ALGRESET HEADING

Applicable to: UM980, UB9A0, UM982, UM960

Table 4-35 Algorithm Reset Configuration

Header	Configuration Item	Computing Engine	Description
CONFIG	ALGRESET	RTK1	Reset the master antenna's RTK algorithm
		RTK2	Reset the slave antenna's RTK algorithm; only applicable to UM982
		HEADING	Reset the HEADING algorithm, only applicable to UM982

Header	Configuration Item	Computing Engine	Description
		PPP	Reset the master antenna's PPP algorithm, only applicable to UM982, UM980 and UB9A0
		ADR	Reset the ADR algorithm for the master antenna and slave antenna

4.27 IONMODE – Ionospheric Model Configuration

This command is used to set the ionospheric model used by the receiver.

Syntax of the Command:

CONFIG IONMODE [type]

Input Example:

CONFIG IONMODE GPSK8

Applicable to: UM980, UB9A0, UM982, UM960

 Applicable to UM982 Build9669 and later versions.

 Applicable to UM980 Build10110 and later versions.

Table 4-36 Ionospheric Model Configuration

Header	Configuration Item	Parameter	Description
CONFIG	IONMODE	GPSK8	GPS ionospheric model (default)
		BD2K8	BDS-2 ionospheric model
		BD3GIM*	BDS-3 ionospheric model (not supported currently)
		GALNTCM*	Galileo ionospheric model (not supported currently)

4.28 BASEANTENNAMODEL – Base Station Antenna Configuration

This command is used to set the antenna ID, name, type, and phase center offset (only field 1-5 are supported currently) when the receiver works as a base station. It will affect the antenna description in differential message RTCM 1005, RTCM 1006, RTCM 1007, and RTCM 1033.

The antenna phase center offset and the value that changes with the elevation angle conforms to the definition offered by NGS.

The antenna name in RTCM v3.2 complies with the IGS standard, which allows spaces to appear in it. In view of this problem, double quotation marks (") are needed to enclose the antenna name. For example, the HX-CGX601A Antenna is specified by IGS as HXCCGX601A HXCS, therefore, "HXCCGX601A HXCS" should be entered when inputting the command.

Syntax of the Command:

```
CONFIG BASEANTENNAMODEL [name] [SN] [setupID] [type]
```

Input Example:

```
CONFIG BASEANTENNAMODEL "HXCCGX601A HXCS" 62815 1 USER
```

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 4-37 Base Station Antenna Configuration

Header	Configuration Item	Parameter	ASCII Value	Description
CONFIG	BASEANTENNAMODEL	name	String	Antenna name, up to 31 ASCII characters, default = ADVNULLANTENNA
		SN	String	Antenna serial number, up to 31 ASCII characters, default = a0001
		setupID	0-255	Antenna ID, integer from 0 to 255, default = 0
		type	NO or USER	Antenna type, default = NO

4.29 PVTAGL – PVT Algorithm Configuration

This command is used to set the calculation mode of the PVT algorithm.

Syntax of the Command:

CONFIG PVTALG [parameter1]

Input Example:

CONFIG PVTALG MULTI

Applicable to: UM980, UB9A0, UM982

Table 4-38 PVT Algorithm Configuration

Header	Configuration Item	Parameter 1	Description
CONFIG	PVTALG	SINGLE	Single-frequency solution
		AUTO	Single-frequency solution with ionospheric error estimation
		MULTI	Dual-frequency solution

Note: The default mode for UM980 and UB9A0 is AUTO and that for UM982 is SINGLE.

4.30 PSRPOSBIAS – Position Bias Compensation

This command is used to enable/disable the function of position bias compensation. When it is enabled, it will compensate for the inherent bias of pseudorange positioning and RTK positioning.

Syntax of the Command:

CONFIG PSRPOSBIAS [parameter 1]

Input Example:

CONFIG PSRPOSBIAS ENABLE

Applicable to: UM960, UM980, UB9A0, UM982

Table 4-39 Position Bias Compensation

Header	Configuration Item	Parameter 1	Description
CONFIG	PSRPOSBIAS	ENABLE	Enable position bias compensation

Header	Configuration Item	Parameter 1	Description
		DISABLE (default)	Disable position bias compensation

4.31 Network IP Address Configuration

The network device ETH1 is the network interface of the receiver. CONFIG is the header of the network configuration command, followed by the network device and network device properties, which are used for setting the IPv4 address. High precision GNSS receiver supports one network device: ETH1.

Syntax of the Command:

```
CONFIG ETH1 [parameter]
```

Input Example:

```
CONFIG ETH1 DHCP
```

```
CONFIG ETH1 192.168.0.100 192.168.0.1 255.255.255.0 192.168.0.1
```

Applicable to: UB9A0

Table 4-40 Network IP Address Configuration

Header	Configuration Item	Parameter	Description
CONFIG	ETH1	DHCP	Obtain configuration using DHCP mode
		IPv4 list	IP GateWay NetMask DNS_Server. Use ASCII "SPACE" as segmented symbol. Local IP, IP gateway, IP Netmask, DNS server

4.32 Network Serial Port Configuration

The network serial port is an interface of receiver to input and output data. CONFIG is the header of the serial port configuration command, followed by the network serial port device and network serial port properties, which are used for setting the port number of network serial ports, IP and port number of the server, etc.

High precision GNSS receiver supports three network serial ports: icom1, icom2, and icom3. The three serial ports of the receiver have the same function, but the data input and output of each network serial port is configured to work independently.

Syntax of the Command:

CONFIG [port] [parameter]

Input Example:

CONFIG ICOM1 TCP 30001

CONFIG ICOM1 TCP 192.168.0.2 30001

Applicable to: UB9A0

Table 4-41 Network Serial Port Configuration

Header	Port	Parameter	Description
CONFIG	ICOM1 ICOM2 ICOM3	Disable	Disable the server connection function of the TCP/IP client
	ICOM1 ICOM2 ICOM3	Protocol	TCP/UDP. (TCP protocol by default)
		IP	Set up the IPv4 address for the server end of network ports; the network port is in SERVER mode by default.
		Port ⁷	Set up port number. Range: 1 ~ 65534. Use the local port number (local) for SERVER mode; otherwise, use a server port number

4.33 LOGSEQ – LOG Output Sequence Configuration

This command is used to configure the log output sequence.

Syntax of the Command:

CONFIG LOGSEQ [parameter]

Input Example:

CONFIG LOGSEQ 1

CONFIG LOGSEQ 2

Applicable to: UB9A0

⁷ The port number 40000 cannot be configured as it is allocated to the internal system programming. It is recommended to use 30001/30002/30003, and try to avoid using ports above 32768.

Table 4-42 Log Output Sequence

Header	Configuration Item	Parameter	Description
CONFIG	LOGSEQ	1	The output sequence is: Position, RTCM, OBSVM, EPHEM
		2	The output sequence is: RTCM, OBSVM, EPHEM, Position (by default)

4.34 Ntripserver Configuration

Ntrip server is the specific device for receiver uploading data to Ntrip caster, now only supporting Ntrip protocol V1.

High precision GNSS receivers support three Ntrip servers (NCOM1, NCOM2, NCOM3).

Syntax of the Command:

CONFIG [Ntrip server device number] [parameter]

Input Example:

CONFIG NCOM1 10.0.100.2 9000 UB9A0_RTCM32 SERV_PASSWORD

Applicable to: UB9A0

Table 4-43 Ntrip Server Parameter List

Command	Port	Parameter	Description
CONFIG	NCOM1 NCOM2 NCOM3	Disable	Disable Ntrip server
	NCOM1 NCOM2 NCOM3	Caster IP	Ntrip caster TCP IPv4 address
		port	Ntrip caster TCP port number
		mountport	Ntrip caster mount point
		password	Ntrip caster password for uploading data

4.35 Ntripclient Configuration

Ntrip client is the specific device for receiver downloading data from Ntrip caster, now

only supporting Ntrip protocol V1.

High precision GNSS receivers only support one Ntrip client: NCOM20.

Syntax of the Command:

CONFIG [Ntrip client device number] [parameter]

Input Example:

CONFIG NCOM20 10.0.100.2 9000 UB9A0_RTCM32 UNAME CLI_PASSWORD

Applicable to: UB9A0

Table 4-44 Ntrip Client Parameter List

Command	Port	Parameter	Description
CONFIG	NCOM20	Disable	Disabled Ntrip client
	NCOM20	Caster IP	Ntrip caster IPv4 address or domain name
		port	Ntrip caster TCP port number
		mountport	Ntrip caster mount point
		uname	Ntrip caster user name for downloading data
		cli_password	Ntrip caster password for downloading data

4.36 RTCMDECAUTO – RTCM Decoding Configuration

When the base station sends RTCM 3.0 data and RTCM 3.2 data simultaneously, this command can be used to configure the receiver to decode the RTCM 3.2 data and filter out RTCM 3.0 data.

Syntax of the Command:

CONFIG RTCMDECAUTO [parameter]

Input Example:

CONFIG RTCMDECAUTO ENABLE

Applicable to: UM980, UM982, UB9A0

Table 4-45 RTCM Decoding Configuration

Header	Configuration Item	Parameter	Description
CONFIG	RTCMDECAUTO	ENABLE	Enable RTCM data filtration
		DISABLE	Disable RTCM data filtration (default)

4.37 ALLEPHRTCM – Ephemeris Output Configuration

This command is used to configure the number of ephemeris output each time. After it is enabled, the receiver will output the ephemeris of all satellites simultaneously.

Syntax of the Command:

CONFIG ALLEPHRTCM [parameter]

Input Example:

CONFIG ALLEPHRTCM ENABLE

Applicable to: UM980, UM982, UB9A0

Table 4-46 Ephemeris Output Configuration

Header	Configuration Item	Parameter	Description
CONFIG	ALLEPHRTCM	ENABLE	Output the ephemeris of all satellites simultaneously
		DISABLE	Output the ephemeris of only one satellite each time (by default)

4.38 VELSTDTHD – Velocity STD Threshold Configuration

This command is used to configure the threshold of velocity standard deviation (STD). When the velocity STD exceeds the configured value, the velocity will be marked as invalid.

Syntax of the Command:

CONFIG VELSTDTHD [parameter 1] [parameter 2] [parameter 3]

Input Example:

CONFIG VELSTDTHD ENABLE 120 120

Applicable to: UM982, UB9A0

Table 4-47 Velocity STD Threshold Configuration

Header	Configuration Item	Parameter 1	Parameter 2	Parameter 3
CONFIG	VELSTDTHD	ENABLE Enable the velocity STD threshold configuration	HORSTD Velocity STD value in the horizontal direction, cm/s, an integer between 10 and 1000, default = 50	VERSTD Velocity STD value in the vertical direction, cm/s, an integer between 10 and 1000, default = 50
		DISABLE (default) Disable the velocity STD threshold configuration	-	-

4.39 RTKASITPPP – RTK Assisting PPP Configuration

This command is used to enable or disable the use of RTK positioning results to assist in PPP convergence and positioning.

Syntax of the Command:

CONFIG RTKASITPPP [parameter]

Input Example:

CONFIG RTKASITPPP ENABLE

Applicable to: UM982, UB9A0

Table 4-48 RTK Assisting PPP Configuration

Header	Configuration Item	Parameter	Description
CONFIG	RTKASITPPP	ENABLE	Enable the use of RTK positioning results to assist in PPP convergence and positioning (default)
		DISABLE	Disable the use of RTK positioning results to assist in PPP convergence and positioning

4.40 CMDFORMAT – Command Format Configuration

This command is used to configure the input command format. When the parameter is set to 1, the input command shall be followed by a checksum.

The checksum mode can prevent the module from making errors when recognizing commands. If you use commands with a checksum, you need to first configure the parameter of CMDFORMAT to 1, and then enter commands with an XOR checksum, for example: \$RESET*55.

Syntax of the Command:

CONFIG CMDFORMAT [parameter]

Input Example:

CONFIG CMDFORMAT 1

Applicable to: UM982, UB9A0

Table 4-49 Command Format Configuration

Header	Configuration Item	Parameter	Description
CONFIG	CMDFORMAT	0	Disable the command checking mode (by default); input commands without checksum
		1	Enable the command checking mode; input commands with XOR checksum

5 MASK Command

5.1 Query the MASK Configuration

High precision receivers support the use of MASK command to query the current configuration.

Syntax of the Command:

MASK

Input Example:

MASK

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$CONFIG,MASK,MASK 5.000000*15

\$CONFIG,MASK,MASK GPS*4A

\$CONFIG,MASK,MASK 10.000000*21

\$CONFIG,MASK,GPSSMaskPrn:12,*13

\$CONFIG,MASK,QZSSMaskPrn:194,*63

Table 5-1 Query the MASK Configuration

Command	Description
MASK	Query the current MASK configuration

5.2 MASK Configuration

This command is used to disable the receiver tracking specific satellite system and frequency, and to set the elevation mask angle. Taking the elevation mask angle as an example, the receiver will automatically track satellites above the angle and ignore those below the angle unless the configuration is reset. The default elevation mask angle is 5 degrees.

Note: MASK/UNMASK [satellite system] and MASK/UNMASK [satellite ID] cannot be mixed with each other. For example, if you MASK a [satellite system], you cannot UNMASK a specific [satellite ID]; otherwise, the UNMASK [satellite ID] would not work.

Syntax of the Command:

MASK [frequency/satellite system]

MASK [elevation mask angle]

MASK [satellite system] PRN [satellite ID]

MASK RTCMCNO [CN0] [frequency (optional)]

Input Example:

MASK GPS	Disable the receiver tracking GPS
MASK BDS	Disable the receiver tracking BDS
MASK GLO	Disable the receiver tracking GLONASS
MASK GAL	Disable the receiver tracking Galileo
MASK QZSS	Disable the receiver tracking QZSS
MASK 10	Set the elevation mask angle as 10 degrees
MASK 0	Set the elevation mask angle as 0 degree
MASK B1	Disable the receiver tracking BDS B1 signal
MASK E5a	Disable the receiver tracking Galileo E5a signal
MASK GPS PRN 10	Disable the receiver tracking GPS No.10 satellite

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 5-2 MASK Command Parameters (1)

Command	Parameter 1
MASK	Frequency/satellite system (see Table 5-5 Satellite Systems and Frequencies)

Table 5-3 MASK Command Parameters (2)

Command	Parameter 1
MASK	Elevation mask angle (ranging from -90° to 90°; default = 5°)

Table 5-4 MASK Command Parameters (3)

Command	Parameter 1	Fixed Value	Parameter 2
MASK	Satellite system	PRN	Satellite ID: (see Table 7-54 Satellite PRN Number in Unicore-defined Messages)

Table 5-5 Satellite Systems and Frequencies

No.	GNSS	Frequency	Description
1	GPS	L1, L1CA, L1C, L2, L2C, L2P, L5	Supported frequencies of GPS: L1CA (i.e. L1C/A), L1C, L2C, L2P, L5. When masking L1, it disables L1C/A and L1C. When masking L2, it disables L2C and L2P.
2	BDS	B1, B2, B3, B1I, B2I, B3I, BD3B1C, BD3B2A, BD3B2B	Supported frequencies of BDS-2: B1I, B2I, B3I Supported frequencies of BDS-3: B1I, B3I Supported frequencies of BDS-3: BD3B1C, BD3B2A, BD3B2B When masking B1, it disables B1I and BD3B1C. When masking B2, it disables B2I, B2a and B2b. When masking B3, it disables B3I.
3	GLO	R1, R2, R3	Supported frequencies of GLONASS: R1, R2, R3
4	GAL	E1, E5a, E5b, E6C	Supported frequencies of Galileo: E1, E5b, E5a, E6C
5	QZSS	Q1, Q2, Q5, Q1CA, Q1C, Q2C	Supported frequencies of QZSS: Q1, Q2, Q5 (i.e. QZSS L5), Q1CA (i.e. QZSS L1C/A), Q1C (i.e. QZSS L1C), Q2C (i.e. QZSS L2C) When masking Q1, it disables QZSS L1C/A and QZSS L1C. When masking Q2, it disables QZSS L2C. When masking Q5, it disables QZSS L5.
6	IRNSS	I5	Supported frequencies of IRNSS: I5 (IRNSS L5) When masking I5, it disables IRNSS L5.

Table 5-6 MASK RTCMCN0/CN0 Parameters

Command	Configuration Item	Parameter 1	Parameter 2 (Optional)
MASK	RTCMCN0	C/N0, limits the RTCM observation data output	Frequency (see Table 5-5 Satellite Systems and Frequencies). If parameter 2 is null, all frequencies will be configured.
	CN0	C/N0, limits the observation data output of OBSV messages	Frequency (see Table 5-5 Satellite Systems and Frequencies). If parameter 2 is null, all frequencies will be configured.

 The MASK RTCMCN0/CN0 command is applicable to UM982 Build9669 and later versions.

5.3 UNMASK Configuration

This command is used to enable the receiver to track specific satellite system and frequency.

Syntax of the Command:

UNMASK [frequency/satellite system]

UNMASK [satellite system] PRN [satellite ID]

Input Example:

UNMASK GPS Enable the receiver to track GPS
 UNMASK BDS Enable the receiver to track BDS
 UNMASK GLO Enable the receiver to track GLONASS
 UNMASK GAL Enable the receiver to track Galileo
 UNMASK B1 Enable the receiver to track BDS B1 signal
 UNMASK E5a Enable the receiver to track Galileo E5a signal

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 5-7 UNMASK Command Parameter (1)

Command	Parameter
UNMASK	Frequency/satellite system (see Table 5-5 Satellite Systems and Frequencies)

Table 5-8 UNMASK Command Parameters (2)

Command	Parameter 1	Fixed Value	Parameter 2
UNMASK	Satellite system	PRN	Satellite ID (see Table 7-54 Satellite PRN Number in Unicore-defined Messages)

6 Assisted Position and Time

6.1 Assisted Position

This command is used to input assisted position (The difference between the assisted position and the actual position should not exceed 10000 m).

Syntax of the Command:

\$AIDPOS,Latitude,LatDir,Longitude,LonDir,Altitude

Input Example:

\$AIDPOS,4002.229934,N,11618.096855,E,37.254

Applicable to: UM982, UM980, UB9A0

Table 6-1 Parameters of Assisted Position

ID	Parameter	Type	Description
1	Latitude	DOUBLE	Latitude, the format is ddmm.mmmmmm dd – degrees mm.mmmmmm – minutes
2	LatDir	Str	North or South latitude indicator N – North latitude S – South latitude
3	Longitude	DOUBLE	Longitude, the format is dddmm.mmmmmm ddd – degrees mm.mmmmmm – minutes
4	LonDir	Str	East or West longitude indicator E – East longitude W – West longitude
5	Altitude	DOUBLE	Ellipsoidal height, meters

6.2 Assisted Time

This command is used to input assisted time (UTC time +/- 3 s).

Syntax of the Command:

\$AIDTIME,Year,Month,Day,Hour,Minute,Second,Millisecond,Leapsec

Input Example:

\$AIDTIME,2021,12,3,15,2,36,400,18

Applicable to: UM982, UM980, UB9A0

Table 6-2 Parameters of Assisted Time

ID	Parameter	Type	Description
1	Year	UINT	Year
2	Month	UINT	Month
3	Day	UINT	Day
4	Hour	UINT	Hour
5	Minute	UINT	Minute
6	Second	UINT	Second
7	Millisecond	UINT	Millisecond
8	Leapsec	UINT	Leap second

7 Data Output Commands

Data output commands, including NMEA standard commands, Unicore-extended NMEA format commands, and Unicore defined commands, are used to output positioning and heading information.

Syntax:

[Command name] [serial port (optional)] [output rate/ONCHANGED (optional)]

Example:

GPGGA 1

GPGGA COM2 1

GPSONA ONCHANGED

OBSVBASEA COM1 ONCHANGED

VERSIONA

-
-  [Serial port] and [output rate] are optional parameters. If you do not specify the [serial port], the message will be output at the current port; if you do not specify the [output rate], the message will be output only once.
 -  The ONCHANGED trigger means to output a message only when the message is changed. ONCHANGED only applies to particular messages in Unicore format. Refer to each section for the details.
 -  The currently supported output rates include 1 Hz, 2 Hz, 5 Hz, 10 Hz, 20 Hz and 50 Hz*, corresponding to the parameters 1, 0.5, 0.2, 0.1, 0.05, 0.02* respectively.
-

7.1 NMEA Data Output Commands

When requesting NMEA messages, users should add **GP** before each command name, such as GPGSV, GPGGA, etc. Do not use other characters such as GB, GL, GA or GN to request messages. In the message output, GP represents GPS, GB represents BDS ... GN represents GNSS multi-system joint positioning (**but the input command is still GP**).

The table below shows the symbols corresponding to each satellite system.

* The 50 Hz output rate is supported by specific product and specific firmware.

Table 7-1 Satellite Systems and Abbreviations

Satellite System	Input Command	Output Message
GPS	GP---	GP---
BDS		GB---
GLONASS		GL---
Galileo		GA---
QZSS		GQ---
Multi-system joint positioning		GN---

7.1.1 NMEA Version 4.10 (Default)

7.1.1.1 GPDTM – Datum Reference

This command is used to output local geodetic datum information, including latitude, longitude, offset, etc.

Abbreviated ASCII Syntax:

GPDTM 1 Output 1Hz GPDTM message at the current port

GPDTM COM2 1 Output 1Hz GPDTM message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNDTM,W84,,0.0,N,0.0,E,0.0,W84*71

Table 7-2 DTM Data Structure

ID	Field	Description	Symbol
1	\$--DTM	Log header	

ID	Field	Description	Symbol
2	Datum code	Local datum code: W84 = WGS84 W72 = WGS72 S85 = SGS85 P90 = PE90 999 = User defined IHO datum code ¹	ccc
3	Sub code	One character subdivision datum code when available or user defined reference character for user defined datums, null field otherwise.	a
4	Lat offset	Latitude offset, minutes, N/S, accurate to 1 decimal place	x.x
5	Lat dir	Latitude offset direction (N, S)	a
6	Lon offset	Longitude offset, minutes, E/W, accurate to 1 decimal place	x.x
7	Lon dir	Longitude offset direction (E, W)	a
8	Alt offset	Altitude offset, meters, accurate to 1 decimal place	x.x
9	Rf datum code	Reference datum code: W84 = WGS84 W72 = WGS72 S85 = SGS85 P90 = PE90	ccc
10	*xx	Checksum	
11	[CR][LF]	Sentence terminator	

¹ If the datum is not in the above list, use the IHO datum code; if the datum is unknown, this field is null.

7.1.1.2 GPGBS – GNSS Satellite Fault Detection

This message is used to support Receiver Autonomous Integrity Monitoring (RAIM). It contains information of the failed satellites.

Abbreviated ASCII Syntax:

GPGBS 1 Output 1Hz GPGBS message at the current port

GPGBS COM2 1 Output 1Hz GPGBS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGBS,023509.00,0.5,0.4,1.3,39,0.0,2.1,10.6,5,6*42

Table 7-3 GBS Data Structure

ID	Field	Description	Symbol
1	\$--GBS	Log header	
2	Utc	UTC time of the position fix, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Lat exp	Expected error in latitude, meters, accurate to 1 decimal place	x.x
4	Lon exp	Expected error in longitude, meters, accurate to 1 decimal place	x.x
5	Alt exp	Expected error in altitude, meters, accurate to 1 decimal place	x.x
6	ID	ID number of failed satellite GPS: 1~32 GLONASS: 65~99 Galileo: 1~36, 37~64 SBAS: 33~64	x.x
7	pro	Probability of missed detection for failed satellite, accurate to 1 decimal place	x.x
8	est	Estimate of bias on failed satellite, in meters, accurate to 1 decimal place	x.x
9	Dev std	Standard deviation of bias estimate, accurate to 1 decimal place	x.x

ID	Field	Description	Symbol
10	Sys id	GNSS system ID, see Table 7-34 GNSS ID	h
11	Signal id	GNSS signal ID, see Table 7-34 GNSS ID	h
12	*xx	Checksum	
13	[CR][LF]	Sentence terminator	

7.1.1.3 GPGGA – Global Positioning System Fix Data

This command is used to output time, position, and fix related data.

Abbreviated ASCII Syntax:

GPGGA 1 Output 1Hz GPGGA message at the current port

GPGGA COM2 1 Output 1Hz GPGGA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGGA,023634.00,4004.73871635,N,11614.19729418,E,1,28,0.7,61.0988,M,-
8.4923,M,,*58

Table 7-4 GGA Data Structure

ID	Field	Description	Symbol
1	\$--GGA	Log header	
2	utc	UTC of the position, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
4	lat dir	Latitude direction (N = North, S = South)	a

ID	Field	Description	Symbol
5	lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
6	lon dir	Longitude direction (E = East, W = West)	a
7	qual	GPS quality indicator 0 = Fix not available or invalid 1 = Single point positioning 2 = Differential positioning 3 = GPS PPS mode 4 = RTK Int 5 = RTK Float 6 = Dead reckoning mode 7 = Manual input mode 8 = Simulator mode	x
8	# sats	Number of satellites in use, may be different from the number in view.	xx
9	hdop	Horizontal dilution of precision, accurate to 1 decimal place	x.x
10	alt	Altitude above/below MSL (geoid), accurate to 4 decimal places	x.x
11	a-units	Unit of altitude (M = m)	M
12	undulation	Geoidal separation, the difference between the Earth ellipsoid surface and mean-sea-level (geoid) surface. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
13	u-units	Unit of geoidal separation (M = m)	M

ID	Field	Description	Symbol
14	age	Age of differential data, in seconds (Time since last SC104 Type 1 or 9 update), accurate to 2 decimal places. Null field when differential positioning is not used.	x.x
15	stn ID	Differential reference station ID, 0000-1023	xxxx
16	*xx	Checksum	*hh
17	[CR][LF]	Sentence terminator	

7.1.1.4 GPGLL – Geographic Position

This command is used to output geographic longitude/latitude information.

Abbreviated ASCII Syntax:

GPGLL 1 Output 1Hz GPGLL message at the current port

GPGLL COM2 1 Output 1Hz GPGLL message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGLL,4004.73885655,N,11614.19746477,E,023842.00,A,A*75

Table 7-5 GLL Data Structure

ID	Field	Description	Symbol
1	\$--GLL	Log header	
2	lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
3	lat dir	Latitude direction (N = North, S = South)	a
4	lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
5	lon dir	Longitude direction (E = East, W = West)	a

ID	Field	Description	Symbol
6	Utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
7	status	Status: V = Data not valid A = Adaptive D = Differential	A
8	mode ind	Mode indicator: N = Data not valid A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode M = Manual input mode S = Simulator mode	a
9	*xx	Checksum	*hh
10	[CR][LF]	Sentence terminator	

7.1.1.5 GPGNS – GNSS Fix Data

This command is used to output GNSS fix data.

Abbreviated ASCII Syntax:

GPGNS 1 Output 1Hz GPGNS message at the current port

GPGNS COM2 1 Output 1Hz GPGNS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGNS,024034.00,4004.73854216,N,111614.19720023,E,ANAAA,28,0.8,61.6865,-
8.4923,,S*4E

Table 7-6 GNS Data Structure

ID	Field	Description	Symbol
1	\$--GNS	Log header	

N4 Products Commands and Logs Reference Book

ID	Field	Description	Symbol
2	utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
4	Lat dir	Latitude direction (N = North, S = South)	a
5	Lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
6	Lon dir	Longitude direction (E = East, W = West)	a
7	mode	Mode indicator. The length of this field is variable, with the first 3 characters indicating GPS, GLONASS, and Galileo. Each satellite system takes one of the following values: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK Int S = Simulator mode	c--c
8	Use sat	Number of satellites in use, 00-99.	xx
9	Hdop	Horizontal dilution of precision (HDOP), accurate to 1 decimal place	x.x

ID	Field	Description	Symbol
10	Ant alt	Antenna altitude, meters, re: mean-sea-level (geoid), accurate to 4 decimal places	x.x
11	Geo sep	Geoidal separation, the difference between the Earth ellipsoid surface and mean-sea-level (geoid) surface, meters. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
12	Age	¹ Age of differential data, seconds, accurate to 2 decimal places. Null field when differential positioning is not used.	x.x
13	Station id	² Differential reference station ID. Null field when differential positioning is not used.	x.x
14	status	Navigational status indicator S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

^{1,2} If the log header is \$GNGNS and more than one satellite systems are used in differential mode, the age of differential data (field 12) and differential reference station ID (field 13) are null.

7.1.1.6 GPGRS – GNSS Range Residuals

This command is used to output the range residuals for satellites used in the navigation solution. It supports Receiver Autonomous Integrity Monitoring (RAIM).

Abbreviated ASCII Syntax:

GPGRS 1 Output 1Hz GPGRS message at the current port

GPGRS COM2 1 Output 1Hz GPGRS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

N4 Products Commands and Logs Reference Book

Message Output:

```
$GNGRS,024356.00,0,0.1,0.2,0.1,0.2,0.4,,,,,,,,1,1*7D
$GNGRS,024356.00,0,0.1,0.1,0.3,0.1,0.2,,,,,,,,1,4*7C
$GNGRS,024356.00,0,0.1,,0.1,0.0,0.1,,,,,,,,1,8*5F
$GNGRS,024356.00,0,0.7,0.2,0.4,0.1,,,,,,,,3,7*53
$GNGRS,024356.00,0,0.1,0.1,0.1,0.1,,,,,,,,3,1*55
$GNGRS,024356.00,0,0.1,0.1,0.1,0.1,,,,,,,,3,2*56
$GNGRS,024356.00,0,0.2,1.4,0.7,0.2,0.7,0.5,0.2,0.2,0.3,0.3,0.6,1.0,4,1*55
$GNGRS,024356.00,0,1.8,0.3,0.3,0.6,1.2,,,,,,,,4,1*70
$GNGRS,024356.00,0,0.2,0.3,0.2,0.1,0.3,0.2,0.2,0.1,0.1,0.1,0.2,0.1,4,8*58
$GNGRS,024356.00,0,0.3,0.1,0.1,0.1,0.2,,,,,,,,4,8*75
$GNGRS,024356.00,0,0.2,0.4,0.2,0.2,0.2,0.2,0.6,0.2,,,,,4,11*61
$GNGRS,024356.00,0,0.2,0.7,,,,,,,,,5,1*56
$GNGRS,024356.00,0,0.1,0.2,,,,,,,,,5,6*57
$GNGRS,024356.00,0,0.1,0.1,,,,,,,,,5,8*5A
```

Table 7-7 GRS Data Structure

ID	Field	Description	Symbol
1	\$--GRS	Log header	
2	Utc	UTC time of GGA/GNS fix associated with this sentence, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Mode	Mode: 0 = residuals were used to calculate the position given in the matching GGA/GNS sentence 1 = residuals were recomputed after the GGA/GNS position was computed	x
4	Res	Range residuals for satellites used in the navigation solution, in meters. Range: $\pm$ 999, accurate to 1 decimal place.	x.x
5			x.x
6			x.x

ID	Field	Description	Symbol
7		If the range residual exceeds ± 99.9 , then the decimal part is dropped, resulting in an integer (for example, -103.7 becomes -103)	x.x
8			x.x
9			x.x
10			x.x
11			x.x
12			x.x
13			x.x
14			x.x
15			x.x
16	Sys id	GNSS system ID, see Table 7-34 GNSS ID	h
17	Signal id	GNSS signal ID, see Table 7-34 GNSS ID	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

7.1.1.7 GPGSA – GNSS DOP and Active Satellites

This command is used to output the receiver operating mode, satellites used in the navigation solution, dilution of precision (DOP), etc.

Abbreviated ASCII Syntax:

GPGSA 1 Output 1Hz GPGSA message at the current port

GPGSA COM2 1 Output 1Hz GPGSA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGSA,M,3,10,12,23,25,32,,,,,,,,1.7,0.7,1.5,1*3D

\$GNGSA,M,3,05,09,24,31,,,,,,,,1.7,0.7,1.5,3*32

\$GNGSA,M,3,01,02,03,06,08,09,13,16,19,20,36,37,1.7,0.7,1.5,4*34

\$GNGSA,M,3,38,39,46,59,60,,,,,,,,1.7,0.7,1.5,4*34

\$GNGSA,M,3,02,07,,,,,,,,1.7,0.7,1.5,5*39

N4 Products Commands and Logs Reference Book

Table 7-8 GSA Data Structure

ID	Field	Description	Symbol
1	\$--GSA	Log header	
2	mode MA	Satellite operating mode: M = Manual, forced to operate in 2D or 3D mode A = Automatic, allowed to automatically switch 2D/3D	a
3	mode 123	Positioning mode: 1 = Fix not available 2 = 2D 3 = 3D	x
4	prn	ID numbers of satellites used in solution, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
5			xx
6			xx
7			xx
8			xx
9			xx
10			xx
11			xx
12			xx
13			xx
14			xx
15			xx
16	pdop	PDOP, accurate to 1 decimal place	x.x
17	hdop	HDOP, accurate to 1 decimal place	x.x
18	vdop	VDOP, accurate to 1 decimal place	x.x
19	SysID	GNSS system ID, see Table 7-34 GNSS ID	h
20	*xx	Checksum	*hh

ID	Field	Description	Symbol
21	[CR][LF]	Sentence terminator	

7.1.1.8 GPGST – GNSS Pseudorange Error Statistics

This command is used to output pseudorange measurement error statistics.

Abbreviated ASCII Syntax:

GPGST 1 Output 1Hz GPGST message at the current port

GPGST COM2 1 Output 1Hz GPGST message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGST,054013.00,0.67,1.67,1.37,115.3800,1.432,1.620,3.399*41

Table 7-9 GST Data Structure

ID	Field	Description	Symbol
1	\$--GST	Log header	
2	utc	UTC time of the GGA/GNS fix associated with this sentence, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	rms	Standard deviation of pseudoranges and DGNSS corrections (RMS value), accurate to 2 decimal places	x.x
4	smjr std	Standard deviation of semi-major axis of error ellipse (m), accurate to 2 decimal places	x.x
5	smnr std	Standard deviation of semi-minor axis of error ellipse (m), accurate to 2 decimal places	x.x
6	orient	Orientation of semi-major axis of error ellipse (degrees from true north), accurate to 4 decimal places	x.x

ID	Field	Description	Symbol
7	lat std	Standard deviation of latitude error (m), accurate to 3 decimal places	x.x
8	lon std	Standard deviation of longitude error (m), accurate to 3 decimal places	x.x
9	alt std	Standard deviation of altitude error (m), accurate to 3 decimal places	x.x
10	*xx	Checksum	*hh
11	[CR][LF]	Sentence terminator	

7.1.1.9 GPGSV – GNSS Satellites in View

This command is used to output the number of satellites in view, satellite ID numbers, etc.

Abbreviated ASCII Syntax:

GPGSV 1 Output 1Hz GPGSV message at the current port

GPGSV COM2 1 Output 1Hz GPGSV message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GPGSV,2,1,06,32,48,134,47,31,70,011,46,25,24,046,32,29,27,081,39,1*61

\$GPGSV,2,2,06,26,60,213,46,16,20,213,30,1*64

\$GPGSV,2,1,05,32,48,134,43,31,70,011,43,25,24,046,34,29,27,081,37,4*6E

\$GPGSV,2,2,05,26,60,213,44,4*56

\$GPGSV,1,1,03,32,48,134,49,25,24,046,41,26,60,213,50,8*59

\$GLGSV,2,1,06,82,04,015,32,71,34,167,43,65,36,322,37,73,27,042,37,1*72

\$GLGSV,2,2,06,74,66,350,47,72,76,245,48,1*73

\$GLGSV,2,1,05,82,04,015,28,71,34,167,43,65,36,322,32,73,27,042,39,3*73

\$GLGSV,2,2,05,72,76,245,45,3*49

\$GBGSV,6,1,21,36,72,016,49,19,24,172,36,39,75,082,50,30,13,111,38,1*7B

\$GBGSV,6,2,21,10,30,201,35,27,10,062,32,01,34,140,40,07,40,195,39,1*74

\$GBGSV,6,3,21,16,78,051,49,22,59,233,48,09,69,327,45,59,38,144,43,1*73

\$GBGSV,6,4,21,03,42,188,39,04,25,124,36,40,48,180,45,45,41,261,40,1*7D

\$GBGSV,6,5,21,60,28,227,36,02,33,224,32,46,25,059,35,21,32,308,35,1*7F

\$GBGSV,6,6,21,06,79,008,47,1*46

\$GBGSV,4,1,15,36,72,016,33,19,24,172,29,39,75,082,34,30,13,111,25,8*7A
 \$GBGSV,4,2,15,10,30,201,23,27,10,062,22,07,40,195,27,16,78,051,29,8*71
 \$GBGSV,4,3,15,22,59,233,32,09,69,327,28,40,48,180,31,45,41,261,27,8*7E
 \$GBGSV,4,4,15,46,25,059,24,21,32,308,22,06,79,008,30,8*4E
 \$GBGSV,3,1,10,10,30,201,40,01,34,140,45,07,40,195,44,16,78,051,49,B*0E
 \$GBGSV,3,2,10,09,69,327,48,03,42,188,45,04,25,124,42,02,33,224,41,B*0D
 \$GBGSV,3,3,10,05,16,248,37,06,79,008,48,B*00
 \$GAGSV,2,1,07,05,71,159,50,09,20,141,41,03,49,308,44,31,11,046,32,1*74
 \$GAGSV,2,2,07,02,10,226,38,24,59,047,47,25,60,226,48,1*4D
 \$GAGSV,2,1,07,05,71,159,52,09,20,141,42,03,49,308,47,31,11,046,34,2*73
 \$GAGSV,2,2,07,02,10,226,41,24,59,047,50,25,60,226,51,2*4E
 \$GAGSV,2,1,07,05,71,159,48,09,20,141,35,03,49,308,39,31,11,046,29,7*78
 \$GAGSV,2,2,07,02,10,226,27,24,59,047,45,25,60,226,45,7*4A
 \$GQGSV,1,1,02,02,70,095,46,07,42,163,35,1*6F
 \$GQGSV,1,1,02,02,70,095,46,07,42,163,40,6*6A
 \$GQGSV,1,1,02,02,70,095,50,07,42,163,47,8*64

Table 7-10 GSV Data Structure

ID	Field	Description	Symbol
1	\$--GSV	Log header	
2	# msgs	Total number of GSV messages, 1~9	x
3	msg #	GSV message number, 1~9	x
4	# sats	Total number of satellites in view	xx
5	Sat id	Satellite ID number, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
6	Elevation	Elevation, an integer in degrees, 90° maximum	xx
7	Azi	Azimuth, degrees True, an integer within 000~359	xxx
8	CN0	Carrier to noise ratio (C/N0), an integer within 0 ~ 99 dB-Hz, null when not tracking	xx
9	Next sat	The 2 nd ~ 3 rd SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a	xx
10			xx

ID	Field	Description	Symbol
11		maximum of four sets per sentence. Null fields are not required for unused sets when less than four sets are transmitted.	xxx
12			xx
13		The 4 th SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a maximum of four sets per sentence. Null fields are not required for unused sets when less than four sets are transmitted.	xx
14			xx
15			xxx
16			xx
17	SignalID	GNSS signal ID, see Table 7-34 GNSS ID	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

7.1.1.10 GPTHS – True Heading and Status

This command is used to output true heading and status.

Abbreviated ASCII Syntax:

GPTHS 1 Output 1Hz GPTHS message at the current port

GPTHS COM2 1 Output 1Hz GPTHS message at COM2

Applicable to: UM982

Message Output:

\$GNTHS,341.3344,A*1F

Table 7-11 THS Data Structure

ID	Field	Description	Symbol
1	\$--THS	Log header	
2	Heading	Heading, degrees True, accurate to 4 decimal places	x.x

ID	Field	Description	Symbol
3	Mode	Mode indicator: A = Autonomous E = Estimated (dead reckoning) M = Manual input S = Simulator V = Data not valid	a
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.1.1.11 GPRMC – Recommended Minimum Specific GNSS Data

This command is used to output time, date, position, velocity, etc.

Abbreviated ASCII Syntax:

GPRMC 1 Output 1Hz GPRMC message at the current port

GPRMC COM2 1 Output 1Hz GPRMC message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNRMC,054733.00,A,4004.73893635,N,11614.19823325,E,0.002,155.1,301221,6.9,W,A,
V*4B

Table 7-12 RMC Data Structure

ID	Field	Description	Symbol
1	\$--RMC	Log header	
2	utc	UTC of position fix, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	pos status	Status: A = Data valid V = Navigation receiver warning	A

N4 Products Commands and Logs Reference Book

ID	Field	Description	Symbol
4	lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
5	lat dir	Latitude direction (N = North, S = South)	a
6	lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
7	lon dir	Longitude direction (E = East, W = West)	a
8	speed Kn	Speed over ground, knots, accurate to 3 decimal places	x.x
9	track true	Course over ground, degrees True, measured clockwise from the North, accurate to 1 decimal place	x.x
10	date	Date: ddmmyy	xxxxxx
11	mag var	Magnetic variation, degrees, accurate to 1 decimal place	x.x
12	var dir	Magnetic variation direction	a
13	mode ind	Mode indicator: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK int S = Simulator mode V = Mode invalid (except for A and D)	a

ID	Field	Description	Symbol
14	mode status	Navigational status: S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

7.1.1.12 GPROT – Rate of Turn

This command is used to output the rate of turn and direction of turn.

Abbreviated ASCII Syntax:

GPROT 1 Output 1Hz GPROT message at the current port

GPROT COM2 1 Output 1Hz GPROT message at COM2

Applicable to: UM982

Message Output:

\$GNROT,0.0,V*38

Table 7-13 ROT Data Structure

ID	Field	Description	Symbol
1	\$--ROT	Log header	
2	rate	Rate of turn, degrees/minute, accurate to 1 decimal place	x.x
3	Status	Status: A = Data valid V = Data invalid	A
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.1.1.13 GPVTG – Course over Ground and Ground Speed

This command is used to output the actual course and speed relative to the ground.

N4 Products Commands and Logs Reference Book

Abbreviated ASCII Syntax:

GPVTG 1 Output 1Hz GPVTG message at the current port

GPVTG COM2 1 Output 1Hz GPVTG message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNVTG,335.750,T,342.678,M,0.00437,N,0.00810,K,A*3F

Table 7-14 VTG Data Structure

ID	Field	Description	Symbol
1	\$--VTG	Log header	
2	Course true	Course over ground, degrees True, accurate to 3 decimal places	x.x
3	Course ind	Course indicator, a fixed character of T	T
4	Course mag	Course over ground, degrees Magnetic, accurate to 3 decimal places	x.x
5	Course ind	Course indicator, a fixed character of M	M
6	speed Kn	Speed over ground, knots, accurate to 5 decimal places	x.x
7	N	Unit of speed, a fixed character of N	N
8	speed Km	Speed over ground, km/h, accurate to 5 decimal places	x.x
9	K	Unit of speed, a fixed character of K	K
10	Mode ind	Mode indicator: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode M = Manual input mode N = Data not valid P = High precision mode S = Simulator mode	xxxxxx
11	*xx	Checksum	*hh
12	[CR][LF]	Sentence terminator	

7.1.1.14 GPZDA – Time and Date

This command is used to output UTC, day, month, year, etc.

Abbreviated ASCII Syntax:

GPZDA 1 Output 1Hz GPZDA message at the current port

GPZDA COM2 1 Output 1Hz GPZDA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNZDA,054931.00,30,12,2021,,*73

Table 7-15 ZDA Data Structure

ID	Field	Description	Symbol
1	\$--ZDA	Log header	
2	Utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Day	Day, 01~31	xx
4	Month	Month, 01~12	xx
5	Year	Year	xxxx
6	Local zone hour	Local zone hours, 00~±13	xx
7	Local zone minute	Local zone minutes, 00~±59	xx
8	*xx	Checksum	*hh
9	[CR][LF]	Sentence terminator	

7.1.2 NMEA Version 4.11

7.1.2.1 GPDTM – Datum Reference

This command is used to output local geodetic datum information, including latitude, longitude, offset, etc.

Abbreviated ASCII Syntax:

N4 Products Commands and Logs Reference Book

GPDTM 1 Output 1Hz GPDTM message at the current port

GPDTM COM2 1 Output 1Hz GPDTM message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNDTM,W84,,0.0,N,0.0,E,0.0,W84*71

Table 7-16 DTM Data Structure

ID	Field	Description	Symbol
1	\$--DTM	Log header	
2	Datum code	Local datum code: W84 = WGS84 W72 = WGS72 S85 = SGS85 P90 = PE90 999 = user-defined IHO datum code ¹	ccc
3	Sub code	One character subdivision datum code when available or user defined reference character for user defined datums, null field otherwise.	a
4	Lat offset	Latitude offset, minutes, N/S, accurate to 1 decimal place	x.x
5	Lat dir	Latitude offset direction (N, S)	a
6	Lon offset	Longitude offset, minutes, E/W, accurate to 1 decimal place	x.x
7	Lon dir	Longitude offset direction (E, W)	a
8	Alt offset	Altitude offset, meters, accurate to 1 decimal place	
9	Rf datum code	Reference datum code: W84 = WGS84 W72 = WGS72 S85 = SGS85 P90 = PE90	ccc

ID	Field	Description	Symbol
10	*xx	Checksum	
11	[CR][LF]	Sentence terminator	

¹ If the datum is not in the above list, use the IHO datum code; if the datum is unknown, this field is null.

7.1.2.2 GPGBS – GNSS Satellite Fault Detection

This message is used to support Receiver Autonomous Integrity Monitoring (RAIM). It contains information of the failed satellites.

Abbreviated ASCII Syntax:

GPGBS 1 Output 1Hz GPGBS message at the current port

GPGBS COM2 1 Output 1Hz GPGBS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGBS,055214.00,0.3,0.3,0.8,45,0.0,-1.2,8.4,4,1*58

Table 7-17 GBS Data Structure

ID	Field	Description	Symbol
1	\$--GBS	Log header	
2	Utc	UTC time of the position fix, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Lat exp	Expected error in latitude, meters, accurate to 1 decimal place	x.x
4	Lon exp	Expected error in longitude, meters, accurate to 1 decimal place	x.x
5	Alt exp	Expected error in altitude, meters, accurate to 1 decimal place	x.x

ID	Field	Description	Symbol
6	ID	ID number of failed satellite GPS:1~32 BDS:1~64 GLONASS:65~96 Galileo:1~36, 37~64 SBAS:33~64	x.x
7	pro	Probability of missed detection for failed satellite, accurate to 1 decimal place	x.x
8	est	Estimate of bias on failed satellite, in meters, accurate to 1 decimal place	x.x
9	Dev std	Standard deviation of bias estimate, accurate to 1 decimal place	x.x
10	Sys id	GNSS system ID, see Table 7-34 GNSS ID	h
11	Signal id	GNSS signal ID, see Table 7-34 GNSS ID	h
12	*xx	Checksum	
13	[CR][LF]	Sentence terminator	

7.1.2.3 GPGLA – Global Positioning System Fix Data

This command is used to output time, position, and fix related data.

Abbreviated ASCII Syntax:

GPGLA 1 Output 1Hz GPGLA message at the current port

GPGLA COM2 1 Output 1Hz GPGLA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGGA,055234.00,4004.73879510,N,11614.19821957,E,1,28,0.7,61.8089,M,-
8.4923,M,,*50

Table 7-18 GGA Data Structure

ID	Field	Description	Symbol
1	\$--GGA	Log header	

ID	Field	Description	Symbol
2	utc	UTC of the position, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	lat	Latitude, in the format of ddmm.mmmmmmmmm dd – Degree mm.mmmmmmmmm – Minute	IIII.II
4	lat dir	Latitude direction (N = North, S = South)	a
5	lon	Longitude, in the format of dddmm.mmmmmmmmm ddd – Degree mm.mmmmmmmmm – Minute	yyyyy.yy
6	lon dir	Longitude direction (E = East, W = West)	a
7	qual	GPS quality indicator 0 = Fix not available or invalid 1 = Single point positioning 2 = Differential positioning 3 = GPS PPS mode 4 = RTK Int 5 = RTK Float 7 = Manual input mode 8 = Simulator mode	x
8	# sats	Number of satellites in use, may be different from the number in view.	xx
9	hdop	Horizontal dilution of precision, accurate to 1 decimal place	x.x
10	alt	Altitude above/below MSL (geoid), accurate to 4 decimal places	x.x
11	a-units	Unit of altitude (M = m)	M

ID	Field	Description	Symbol
12	undulation	Geoidal separation, the difference between the Earth ellipsoid surface and mean-sea-level (geoid) surface. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
13	u-units	Unit of geoidal separation (M = m)	M
14	age	Age of differential data, in seconds (Time since last SC104 Type 1 or 9 update), accurate to 2 decimal places. Null field when differential positioning is not used.	x.x
15	stn ID	Differential reference station ID, 0000-1023	xxxx
16	*xx	Checksum	*hh
17	[CR][LF]	Sentence terminator	

7.1.2.4 GPGLL – Geographic Position

This command is used to output geographic longitude/latitude information.

Abbreviated ASCII Syntax:

GPGLL 1 Output 1Hz GPGLL message at the current port

GPGLL COM2 1 Output 1Hz GPGLL message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGLL,4004.73879998,N,111614.19807677,E,055322.00,A,A*7C

Table 7-19 GLL Data Structure

ID	Field	Description	Symbol
1	\$--GLL	Log header	
2	lat	Latitude, in the format of ddmm.mmmmmmmmm dd – Degree mm.mmmmmmmmm – Minute	IIII.II
3	lat dir	Latitude direction (N = North, S = South)	a

ID	Field	Description	Symbol
4	lon	Longitude, in the format of dddmm.mmmmmmmmm ddd – Degree mm.mmmmmmmmm – Minute	yyyyy.yy
5	lon dir	Longitude direction (E = East, W = West)	a
6	Utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
7	status	Status: A = Data valid V = Data not valid D = Differential	A
8	mode ind	Mode indicator: N = Data not valid A = Autonomous mode D = Differential mode M = Manual input mode S = Simulator mode	a
9	*xx	Checksum	*hh
10	[CR][LF]	Sentence terminator	

7.1.2.5 GPGNS – GNSS Fix Data

This command is used to output GNSS fix data.

Abbreviated ASCII Syntax:

GPGNS 1 Output 1Hz GPGNS message at the current port

GPGNS COM2 1 Output 1Hz GPGNS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGNS,060920.00,4004.73891567,N,11614.19148292,E,AAAAA,28,0.7,62.5759,-

8.4925,,,S*4C

Table 7-20 GNS Data Structure

ID	Field	Description	Symbol
1	\$--GNS	Log header	
2	Utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
4	Lat dir	Latitude direction (N = North, S = South)	a
5	Lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
6	Lon dir	Longitude direction (E = East, W = West)	a
7	Mode	Mode indicator. The length of this field is variable, with the first 6 characters indicating GPS, GLONASS, Galileo, BDS, QZSS, and NavIC (IRNSS). Each satellite system takes one of the following values: A = Autonomous mode D = Differential mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK Int S = Simulator mode	c--c
8	Use sat	Number of satellites in use, 00-99	xx

ID	Field	Description	Symbol
9	Hdop	Horizontal dilution of precision (HDOP), accurate to 1 decimal place	x.x
10	Ant alt	Antenna altitude, meters, re: mean-sea-level (geoid), accurate to 4 decimal places	x.x
11	Geo sep	Geoidal separation, the difference between the Earth ellipsoid surface and mean-sea-level (geoid) surface, meters. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
12	Age	¹ Age of differential data, seconds, accurate to 2 decimal places. Null field when differential positioning is not used.	x.x
13	Station id	² Differential reference station ID. Null field when differential positioning is not used.	x.x
14	status	Navigational status indicator S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

^{1,2} If the log header is \$GNGNS and more than one satellite systems are used in differential mode, the age of differential data (field 12) and differential reference station ID (field 13) are null.

7.1.2.6 GPGRS – GNSS Range Residuals

This command is used to output the range residuals for satellites used in the navigation solution. It supports Receiver Autonomous Integrity Monitoring (RAIM).

Abbreviated ASCII Syntax:

GPGRS 1 Output 1Hz GPGRS message at the current port

GPGRS COM2 1 Output 1Hz GPGRS message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

N4 Products Commands and Logs Reference Book

Message Output:

```
$GNGRS,055557.00,0,1.5,0.0,0.4,0.1,0.1,,,,,1,1*78
$GNGRS,055557.00,0,0.2,0.5,0.1,0.2,,,,,1,4*57
$GNGRS,055557.00,0,0.0,0.1,,,,,1,8*5E
$GNGRS,055557.00,0,0.3,0.1,0.2,0.1,,,,,3,7*53
$GNGRS,055557.00,0,0.1,0.0,0.1,0.1,,,,,3,1*55
$GNGRS,055557.00,0,0.0,0.0,0.0,0.0,,,,,3,2*57
$GNGRS,055557.00,0,0.2,0.5,0.5,0.1,0.4,0.3,0.5,0.2,0.4,0.2,0.2,0.2,4,1*56
$GNGRS,055557.00,0,0.4,0.8,1.6,0.6,1.4,,,,,4,1*75
$GNGRS,055557.00,0,,,2.4,,1.5,1.7,1.1,1.7,0.7,1.0,0.6,4,8*58
$GNGRS,055557.00,0,1.3,1.2,1.8,,,,,4,8*7C
$GNGRS,055557.00,0,0.1,0.2,0.2,0.1,0.2,0.0,0.4,0.1,,,,4,11*65
$GNGRS,055557.00,0,0.1,0.6,,,,,5,1*55
$GNGRS,055557.00,0,0.1,0.4,,,,,5,6*50
$GNGRS,055557.00,0,0.1,0.0,,,,,5,8*5A
```

Table 7-21 GRS Data Structure

ID	Field	Description	Symbol
1	\$--GRS	Log header	
2	Utc	UTC time of GGA/GNS fix associated with this sentence, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Mode	Mode: 0 = residuals were used to calculate the position given in the matching GGA/GNS sentence 1 = residuals were recomputed after the GGA/GNS position was computed	x
4	Res	Range residuals for satellites used in the navigation solution, in meters. Range: ± 999 , accurate to 1 decimal place. If the range residual exceeds ± 99.9 , then the decimal part is dropped, resulting in an integer (for example, -103.7 becomes -103)	x.x
5			x.x
6			x.x
7			x.x
8			x.x

ID	Field	Description	Symbol
9			x.x
10			x.x
11			x.x
12			x.x
13			x.x
14			x.x
15			x.x
16	Sys id	GNSS system ID, see Table 7-34 GNSS ID	h
17	Signal id	GNSS signal ID, see Table 7-34 GNSS ID	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

7.1.2.7 GPGSA – GNSS DOP and Active Satellites

This command is used to output the receiver operating mode, satellites used in the navigation solution, dilution of precision (DOP), etc.

Abbreviated ASCII Syntax:

GPGSA 1 Output 1Hz GPGSA message at the current port

GPGSA COM2 1 Output 1Hz GPGSA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGSA,M,3,03,16,26,29,31,32,,,,,,,,1.4,0.7,1.2,1*34

\$GNGSA,M,3,03,05,24,25,,,,,,,,1.4,0.7,1.2,3*39

\$GNGSA,M,3,01,03,04,06,07,09,10,16,21,22,36,39,1.4,0.7,1.2,4*3D

\$GNGSA,M,3,40,45,59,60,,,,,,,,1.4,0.7,1.2,4*36

\$GNGSA,M,3,02,07,,,,,,,,1.4,0.7,1.2,5*3D

N4 Products Commands and Logs Reference Book

Table 7-22 GSA Data Structure

ID	Field	Description	Symbol
1	\$--GSA	Log header	
2	mode MA	Satellite operating mode: M = Manual, forced to operate in 2D/3D mode A = Automatic, allowed to automatically switch 2D/3D	a
3	mode 123	Positioning mode: 1 = Fix not available 2 = 2D 3 = 3D	x
4	prn	ID numbers of satellites used in solution, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
5			xx
6			xx
7			xx
8			xx
9			xx
10			xx
11			xx
12			xx
13			xx
14			xx
15			xx
16	pdop	PDOP, accurate to 1 decimal place	x.x
17	hdop	HDOP, accurate to 1 decimal place	x.x
18	vdop	VDOP, accurate to 1 decimal place	x.x
19	SysID	GNSS system ID, see Table 7-34 GNSS ID	h
20	*xx	Checksum	*hh

ID	Field	Description	Symbol
21	[CR][LF]	Sentence terminator	

7.1.2.8 GPGST – GNSS Pseudorange Error Statistics

This command is used to output pseudorange measurement error statistics.

Abbreviated ASCII Syntax:

GPGST 1 Output 1Hz GPGST message at the current port

GPGST COM2 1 Output 1Hz GPGST message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNGST,060458.00,0.71,1.62,1.44,9.1113,1.618,1.441,3.761*42

Table 7-23 GST Data Structure

ID	Field	Description	Symbol
1	\$--GST	Log header	
2	utc	UTC time of the GGA/GNS fix associated with this sentence, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	rms	Standard deviation of pseudoranges and DGNS corrections (RMS value), accurate to 2 decimal places	x.x
4	smjr std	Standard deviation of semi-major axis of error ellipse (m), accurate to 2 decimal places	x.x
5	smnr std	Standard deviation of semi-minor axis of error ellipse (m), accurate to 2 decimal places	x.x
6	orient	Orientation of semi-major axis of error ellipse (degrees from true north), accurate to 4 decimal places	x.x

ID	Field	Description	Symbol
7	lat std	Standard deviation of latitude error (m), accurate to 3 decimal places	x.x
8	lon std	Standard deviation of longitude error (m), accurate to 3 decimal places	x.x
9	alt std	Standard deviation of altitude error (m), accurate to 3 decimal places	x.x
10	*xx	Checksum	*hh
11	[CR][LF]	Sentence terminator	

7.1.2.9 GPGSV – GNSS Satellites in View

This command is used to output the number of satellites in view, satellite ID numbers, etc.

Abbreviated ASCII Syntax:

GPGSV 1 Output 1Hz GPGSV message at the current port

GPGSV COM2 1 Output 1Hz GPGSV message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GPGSV,2,1,08,03,29,287,33,04,14,313,23,32,37,141,44,31,65,039,46,1*63

\$GPGSV,2,2,08,25,14,047,30,29,28,068,39,26,72,222,48,16,31,218,36,1*6F

\$GPGSV,2,1,08,03,29,287,34,04,14,313,29,32,37,141,40,31,65,039,43,4*6A

\$GPGSV,2,2,08,25,14,047,30,29,28,068,33,26,72,222,44,16,31,218,29,4*62

\$GPGSV,2,1,05,03,29,287,41,04,14,313,31,32,37,141,46,25,14,047,37,8*6F

\$GPGSV,2,2,05,26,72,222,51,8*5F

\$GLGSV,2,1,05,71,21,169,38,65,47,313,38,73,17,049,36,74,57,013,45,1*7C

\$GLGSV,2,2,05,72,65,211,47,1*4A

\$GLGSV,1,1,04,71,21,169,40,65,47,313,35,73,17,049,37,72,65,211,45,3*78

\$GBGSV,6,1,22,36,65,034,48,19,14,172,33,39,74,101,49,29,04,152,31,1*7A

\$GBGSV,6,2,22,30,19,103,38,10,34,206,36,27,11,053,31,01,34,140,39,1*7F

\$GBGSV,6,3,22,07,44,200,39,16,79,073,48,22,51,219,46,09,73,329,44,1*74

\$GBGSV,6,4,22,59,38,145,43,03,41,188,39,04,25,124,35,40,53,185,45,1*74

\$GBGSV,6,5,22,45,48,272,43,60,28,227,34,02,32,224,32,46,18,064,32,1*7A

\$GBGSV,6,6,22,21,38,299,37,06,82,023,46,1*77

\$GBGSV,5,1,19,36,65,034,34,19,14,172,26,39,74,101,35,29,04,152,26,8*7A
 \$GBGSV,5,2,19,30,19,103,26,10,34,206,26,01,34,140,27,07,44,200,29,8*73
 \$GBGSV,5,3,19,16,79,073,30,22,51,219,32,09,73,329,28,59,38,145,32,8*79
 \$GBGSV,5,4,19,04,25,124,21,40,53,185,33,45,48,272,30,60,28,227,27,8*78
 \$GBGSV,5,5,19,46,18,064,23,21,38,299,25,06,82,023,31,8*4D
 \$GBGSV,3,1,10,10,34,206,41,01,34,140,45,07,44,200,44,16,79,073,50,B*0E
 \$GBGSV,3,2,10,09,73,329,48,03,41,188,44,04,25,124,42,02,32,224,41,B*0B
 \$GBGSV,3,3,10,05,16,247,38,06,82,023,49,B*0C
 \$GAGSV,2,1,08,05,61,163,49,09,12,145,31,03,57,301,44,08,07,318,30,1*78
 \$GAGSV,2,2,08,31,04,049,30,02,17,232,39,24,51,046,45,25,68,240,48,1*7A
 \$GAGSV,2,1,08,05,61,163,51,09,12,145,33,03,57,301,48,08,07,318,34,2*78
 \$GAGSV,2,2,08,31,04,049,32,02,17,232,40,24,51,046,48,25,68,240,50,2*71
 \$GAGSV,2,1,07,05,61,163,48,09,12,145,27,03,57,301,42,31,04,049,26,7*78
 \$GAGSV,2,2,07,02,17,232,31,24,51,046,43,25,68,240,46,7*4B
 \$GQGSV,1,1,03,02,71,088,46,07,42,163,36,03,14,145,30,1*55
 \$GQGSV,1,1,03,02,71,088,45,07,42,163,40,03,14,145,28,6*59
 \$GQGSV,1,1,03,02,71,088,50,07,42,163,47,03,14,145,33,8*5E

Table 7-24 GSV Data Structure

ID	Field	Description	Symbol
1	\$--GSV	Log header	
2	# msgs	Total number of GSV messages, minimum value 1	x
3	msg #	GSV message number, minimum value 1	x
4	# sats	Total number of satellites in view	xx
5	Sat id	Satellite ID number, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
6	Elevation	Elevation, an integer in degrees, 90° maximum	xx
7	Azi	Azimuth, degrees True, an integer within 000~359	xxx
8	CNO	Carrier to noise ratio (C/N0), an integer within 0 ~ 99 dB-Hz, null when not tracking	xx
9	Next sat	The 2 nd ~ 3 rd SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a	xx
10			xx

ID	Field	Description	Symbol
11		maximum of four sets per sentence. Null fields are not required for unused sets when less than four sets are transmitted.	xxx
12			xx
13		The 4 th SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a maximum of four sets per sentence.	xx
14			xx
15		Null fields are not required for unused sets when less than four sets are transmitted.	xxx
16			xx
17	SysID	GNSS system ID, see Table 7-34 GNSS ID	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

7.1.2.10 GPTHS – True Heading and Status

This command is used to output true heading and status.

Abbreviated ASCII Syntax:

GPTHS 1 Output 1Hz GPTHS message at the current port

GPTHS COM2 1 Output 1Hz GPTHS message at COM2

Applicable to: UM982

Message Output:

\$GNTHS,341.3065,A*1F

Table 7-25 THS Data Structure

ID	Field	Description	Symbol
1	\$--THS	Log header	
2	Heading	Heading, degrees True, accurate to 4 decimal places	x.x
3	Mode	Mode indicator: A = Autonomous M = Manual input S = Simulator V = Data not valid	a

ID	Field	Description	Symbol
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.1.2.11 GPRMC – Recommended Minimum Specific GNSS Data

This command is used to output time, date, position, velocity, etc.

Abbreviated ASCII Syntax:

GPRMC 1 Output 1Hz GPRMC message at the current port

GPRMC COM2 1 Output 1Hz GPRMC message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNRMC,061402.00,A,4004.73846648,N,11614.19829285,E,0.003,12.5,301221,6.9,W,A,V
*78

Table 7-26 RMC Data Structure

ID	Field	Description	Symbol
1	\$--RMC	Log header	
2	utc	UTC of position fix, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	pos status	Status: A = Data valid V = Navigation receiver warning	A
4	lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
5	lat dir	Latitude direction (N = North, S = South)	a
6	lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy

N4 Products Commands and Logs Reference Book

ID	Field	Description	Symbol
7	lon dir	Longitude direction (E = East, W = West)	a
8	speed Kn	Speed over ground, knots, accurate to 3 decimal places	x.x
9	track true	Course over ground, degrees True, measured clockwise from the North, accurate to 1 decimal place	x.x
10	date	Date: ddmmyy	xxxxxx
11	mag var	Magnetic variation, degrees, accurate to 1 decimal place	x.x
12	var dir	Magnetic variation direction	a
13	mode ind	Mode indicator: A = Autonomous mode D = Differential mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK Int S = Simulator mode V = Mode invalid (except for A and D)	a
14	mode status	Navigational status: S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

7.1.2.12 GPROT – Rate of Turn

This command is used to output the rate of turn and direction of turn.

Abbreviated ASCII Syntax:

GPROT 1 Output 1Hz GPROT message at the current port

GPROT COM2 1 Output 1Hz GPROT message at COM2

Applicable to: UM982

Message Output:

\$GNROT,0.0,V*38

Table 7-27 ROT Data Structure

ID	Field	Description	Symbol
1	\$--ROT	Log header	
2	rate	Rate of turn, degrees/minute, accurate to 1 decimal place	x.x
3	status	Status: A = Data valid V = Data invalid	A
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.1.2.13 GPVTG – Course Over Ground and Ground Speed

This command is used to output the actual course and speed relative to the ground.

Abbreviated ASCII Syntax:

GPVTG 1 Output 1Hz GPVTG message at the current port

GPVTG COM2 1 Output 1Hz GPVTG message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNVTG,123.119,T,130.046,M,0.00444,N,0.00822,K,A*38

Table 7-28 VTG Data Structure

ID	Field	Description	Symbol
1	\$--VTG	Log header	
2	Course true	Course over ground, degrees True, accurate to 3 decimal places	x.x
3	Course ind	Course indicator, a fixed character of T	T

ID	Field	Description	Symbol
4	Course mag	Course over ground, degrees Magnetic, accurate to 3 decimal places	x.x
5	Course ind	Course indicator, a fixed character of M	M
6	speed Kn	Speed over ground, knots, accurate to 5 decimal places	x.x
7	N	Unit of speed, a fixed character of N	N
8	speed Km	Speed over ground, km/h, accurate to 5 decimal places	x.x
9	K	Unit of speed, a fixed character of K	K
10	Mode ind	Mode indicator: A = Autonomous mode D = Differential mode M = Manual input mode V = Data not valid P = High precision mode S = Simulator mode	xxxxxx
11	*xx	Checksum	*hh
12	[CR][LF]	Sentence terminator	

7.1.2.14 GPZDA – Time and Date

This command is used to output UTC, day, month, year, etc.

Abbreviated ASCII Syntax:

GPZDA 1 Output 1Hz GPZDA message at the current port

GPZDA COM2 1 Output 1Hz GPZDA message at COM2

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

\$GNZDA,061555.00,30,12,2021,,*7B

Table 7-29 ZDA Data Structure

ID	Field	Description	Symbol
1	\$--ZDA	Log header	
2	Utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Day	Day, 01~31	xx
4	Month	Month, 01~12	xx
5	Year	Year	xxxx
6	Local zone hour	Local zone hours, 00~±13	xx
7	Local zone minute	Local zone minutes, 00~±59	xx
8	*xx	Checksum	*hh
9	[CR][LF]	Sentence terminator	

7.2 NMEA Data Output Commands Extended by Unicore

7.2.1 GPGGAH – Global Positioning System Fix Data (Slave Antenna)

This command is used to output time, position, and fix related data which is calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPGGAH 1 Output 1Hz GPGGAH message at the current port

GPGGAH COM2 1 Output 1Hz GPGGAH message at COM2

Applicable to: UM982

Message Output:

\$GNGGAH,073346.00,4004.73874301,N,11614.19077585,E,1,28,0.6,64.2831,M,-
8.4925,M,,*18

N4 Products Commands and Logs Reference Book

Table 7-30 GGAH Data Structure

ID	Field	Description	Symbol
1	\$--GGAH	Log header	
2	utc	UTC of position, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
4	lat dir	Latitude direction (N = North, S = South)	a
5	lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
6	lon dir	Longitude direction (E = East, W = West)	a
7	qual	GPS quality indicator 0 = Fix not available or invalid 1 = Single point positioning 2 = Differential positioning 3 = GPS PPS mode 4 = RTK Int 5 = RTK Float 6 = Dead reckoning mode 7 = Manual input mode 8 = Simulator mode	x
8	# sats	Number of satellites in use, may be different from the number in view.	xx
9	hdop	Horizontal dilution of precision, accurate to 1 decimal place	x.x

ID	Field	Description	Symbol
10	alt	Altitude above/below MSL (geoid), accurate to 4 decimal places	x.x
11	a-units	Unit of altitude (M = m)	M
12	undulation	Undulation, the difference between the Earth ellipsoid surface and geoid surface. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
13	u-units	Unit of undulation (M =m)	M
14	age	Age of differential data, in seconds, accurate to 2 decimal places. This value is the average age of the most recent differential corrections in use. Null field when differential GNSS is not used.	x.x
15	stn ID	Differential base station ID, 0000-1023	xxxx
16	*xx	Checksum	*hh
17	[CR][LF]	Sentence terminator	

7.2.2 GPGLLH – Geographic Position (Slave Antenna)

This command is used to output geographic longitude/latitude information which is calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPGLLH 1 Output 1Hz GPGLLH message at the current port

GPGLLH COM2 1 Output 1Hz GPGLLH message at COM2

Applicable to: UM982

Message Output:

\$GNGLLH,4004.73814597,N,11614.19908275,E,054501.00,A,D*37

Table 7-31 GLLH Data Structure

ID	Field	Description	Symbol
1	\$--GLLH	Log header	
2	lat	Latitude, in the format of ddmm.mmmmmmmmm dd – Degree mm.mmmmmmmmm – Minute	IIII.II
3	lat dir	Latitude direction (N = North, S = South)	a
4	lon	Longitude, in the format of dddmm.mmmmmmmmm ddd – Degree mm.mmmmmmmmm – Minute	yyyyy.yy
5	lon dir	Longitude direction (E = East, W = West)	a
6	Utc	UTC of position, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
7	status	Status: V = Data not valid A = Autonomous D = Differential	A
8	mode ind	Positioning system mode indicator: N = No fix A = Autonomous positioning D = Differential positioning E = Estimated (dead reckoning) mode M = Manual input S = Simulator	a
9	*xx	Checksum	*hh
10	[CR][LF]	Sentence terminator	

7.2.3 GPGNSH – GNSS Fix Data (Slave Antenna)

This command is used to output GNSS fix data which is calculated with the slave

antenna.

Abbreviated ASCII Syntax:

GPGNSH 1 Output 1Hz GPGNSH message at the current port

GPGNSH COM2 1 Output 1Hz GPGNSH message at COM2

Applicable to: UM982

Message Output:

\$GNGNSH,074444.00,4004.73864213,N,11614.19082153,E,ANAAA,28,0.7,64.6536, -
8.4925,,,S*08

Table 7-32 GNSH Data Structure

ID	Field	Description	Symbol
1	\$--GNSH	Log header	
2	utc	UTC of position, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Lat	Latitude, in the format of ddmm.mmmmmmmm dd – Degree mm.mmmmmmmm – Minute	IIII.II
4	Lat dir	Latitude direction (N = North, S = South)	a
5	Lon	Longitude, in the format of dddmm.mmmmmmmm ddd – Degree mm.mmmmmmmm – Minute	yyyyy.yy
6	Lon dir	Longitude direction (E = East, W = West)	a

N4 Products Commands and Logs Reference Book

ID	Field	Description	Symbol
7	mode	Mode indicator. The length of this field is variable, with the first 3 characters indicating GPS, GLONASS, and Galileo. Each satellite system takes one of the following modes: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK Int S = Simulator mode	c--c
8	Use sat	Number of satellites in use, 00-99.	xx
9	Hdop	Horizontal dilution of precision (HDOP), accurate to 1 decimal place	x.x
10	Ant alt	Antenna altitude, meters, above MSL (geoid), accurate to 4 decimal places	x.x
11	Geo sep	Geoidal separation: the difference between the earth ellipsoid surface and the geoid surface, meters. If the geoid is above the ellipsoid, the value is positive; otherwise, it is negative. Accurate to 4 decimal places.	x.x
12	Age	¹ Age of differential data, seconds, accurate to 2 decimal places. Null if the mode is not differential positioning.	x.x
13	Station id	² Differential base station ID. Null if the mode is not differential positioning.	x.x

ID	Field	Description	Symbol
14	status	Navigational status indicator S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

^{1,2} If the log header is \$GNGNS and more than one satellite systems are used in differential mode, the differential data age (field 12) and differential base station ID (field 13) are null.

7.2.4 GPGRSH – GNSS Range Residuals (Slave Antenna)

This command is used to output the residuals for satellites involved in the navigation solution using the slave antenna. It supports Receiver Autonomous Integrity Monitoring (RAIM).

Abbreviated ASCII Syntax:

GPGRSH 1 Output 1Hz GPGRSH message at the current port

GPGRSH COM2 1 Output 1Hz GPGRSH message at COM2

Applicable to: UM982

Message Output:

```
$GNGRSH,055209.00,0,0.0,0.8,0.1,,0.1,2.2,0.2,,,,,1,1*18
$GNGRSH,055209.00,0,0.1,0.4,0.1,,0.1,1.5,0.2,,,,,1,4*14
$GNGRSH,055209.00,0,0.0,0.2,,,0.0,0.1,,,,,1,8*18
$GNGRSH,055209.00,0,0.1,0.4,0.1,0.1,,,,,2,1*14
$GNGRSH,055209.00,0,0.1,0.1,0.1,0.3,,,,,2,3*11
$GNGRSH,055209.00,0,0.6,0.7,0.3,0.8,0.1,0.1,,,,,3,7*1C
$GNGRSH,055209.00,0,0.2,0.2,0.1,0.2,0.0,0.0,,,,,3,1*13
$GNGRSH,055209.00,0,0.1,0.1,0.1,0.1,0.0,0.0,,,,,3,2*13
$GNGRSH,055209.00,0,0.3,0.2,0.6,0.1,0.4,0.8,1.2,0.9,0.4,0.4,1.0,2.0,4,1*14
$GNGRSH,055209.00,0,0.9,0.6,0.6,0.4,0.3,0.2,0.8,1.3,0.2,,,,,4,1*3D
$GNGRSH,055209.00,0,0.2,0.1,0.1,0.1,0.1,0.2,0.2,0.1,0.1,0.2,0.2,4,8*1E
$GNGRSH,055209.00,0,0.2,0.2,0.2,0.1,0.1,0.1,0.2,0.2,0.1,,,,,4,8*32
$GNGRSH,055209.00,0,,,0.1,0.0,,0.2,,,,,4,11*0B
```

N4 Products Commands and Logs Reference Book

\$GNGRSH,055209.00,0,0.2,0.1,0.1,,,0.1,0.2,,0.1,,,,4,11*26

\$GNGRSH,055209.00,0,0.3,0.2,0.1,,,,,,,,5,1*38

\$GNGRSH,055209.00,0,1.2,0.4,0.1,,,,,,,,5,6*39

\$GNGRSH,055209.00,0,0.2,0.0,0.1,,,,,,,,5,8*32

Table 7-33 GRSH Data Structure

ID	Field	Description	Symbol
1	\$--GRSH	Log header	
2	Utc	UTC time of GGA/GNS, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	Mode	Mode: 0 = residuals were used to calculate the position given in the GGA/GNS message 1 = residuals were recomputed after the position in GGA/GNS message was computed	x
4	Res	Range residuals for satellites used in the navigation solution, in meters. Range: ± 999 , accurate to 1 decimal place. If the range residual exceeds ± 99.9 , drop the decimal part and take the integer (for example, -103.7 becomes -103)	x.x
5			x.x
6			x.x
7			x.x
8			x.x
9			x.x
10			x.x
11			x.x
12			x.x
13			x.x
14			x.x

ID	Field	Description	Symbol
15			x.x
16	Sys id	GNSS system ID. See Table 7-34 GNSS ID	h
17	Signal id	Signal ID. See Table 7-34 GNSS ID	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

Table 7-34 GNSS ID

GNSS	GNSS ID	Signal ID	Signal Channel
GPS	1 (GP)	0	All signals
		1	L1 C/A
		2	L1 P(Y)
		3	L1 M
		4	L2 P(Y)
		5	L2C-M
		6	L2C-L
		7	L5-I
		8	L5-Q
		9-F	Reserved
GLONASS	2 (GL)	0	All signals
		1	G1 C/A
		2	G1 P
		3	G2 C/A
		4	GLONASS (M) G2 P
		5-F	Reserved
Galileo	3 (GA)	0	All signals

N4 Products Commands and Logs Reference Book

GNSS	GNSS ID	Signal ID	Signal Channel
		1	E5a
		2	E5b
		3	E5 a+b
		4	E6-A
		5	E6-BC
		6	L1-A
		7	L1-BC
		8-F	Reserved
BDS	4 (GB)	0	All signals
		1	B1I
		2	B1Q
		3	B1C
		4	B1A
		5	B2-a
		6	B2-b
		7	B2 a+b
		8	B3I
		9	B3Q
		A	B3A
		B	B2I
		C	B2Q
		D-F	Reserved
QZSS	5 (GQ)	0	All signals
		1	L1 C/A
		2	L1C (D)

GNSS	GNSS ID	Signal ID	Signal Channel
		3	L1C (P)
		4	LIS
		5	L2C-M
		6	L2C-L
		7	L5-I
		8	L5-Q
		9	L6D
		A	L6E
		B-F	Reserved
NavIC (IRNSS)	6 (GI)	0	All signals
		1	L5-SPS
		2	S-SPS
		3	L5-RS
		4	S-RS
		5	L1-SPS
		6-F	Reserved
RESERVED	7 to F		

7.2.5 GPGSAH – GNSS DOP and Active Satellites (Slave Antenna)

This command is used to output the receiver's operating mode, satellites used in the navigation solution, dilution of precision (DOP), etc. which are calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPGSAH 1 Output 1Hz GPGSAH message at the current port

GPGSAH COM2 1 Output 1Hz GPGSAH message at COM2

Applicable to: UM982

N4 Products Commands and Logs Reference Book

Message Output:

\$GNGSAH,M,3,26,29,31,32,,,,,,,,1.1,0.6,0.9,1*76

\$GNGSAH,M,3,01,04,09,19,21,31,,,,,,,,1.1,0.6,0.9,3*7D

\$GNGSAH,M,3,01,03,04,06,07,09,16,19,20,22,28,36,1.1,0.6,0.9,4*73

\$GNGSAH,M,3,37,39,40,46,59,60,,,,,,,,1.1,0.6,0.9,4*7D

Table 7-35 GSAH Data Structure

ID	Field	Description	Symbol
1	\$--GSAH	Log header	
2	mode MA	Operation mode: M = Manual, forced to operate in 2D or 3D mode A = Automatic, allowed to automatically switch 2D/3D	a
3	mode 123	Positioning mode: 1 = Fix not available 2 = 2D 3 = 3D	x
4	prn	ID numbers of satellites used in solution, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
5			xx
6			xx
7			xx
8			xx
9			xx
10			xx
11			xx
12			xx
13			xx
14			xx
15			xx
16	pdop	PDOP, accurate to 1 decimal place	x.x

ID	Field	Description	Symbol
17	hdop	HDOP, accurate to 1 decimal place	x.x
18	vdop	VDOP, accurate to 1 decimal place	x.x
19	SysID	GNSS system ID, see Table 7-34 GNSS ID	h
20	*xx	Checksum	*hh
21	[CR][LF]	Sentence terminator	

Table 7-36 Satellite ID Numbers in NMEA Messages

GNSS Satellite ID Number	SBAS Satellite ID Number
GPS: 1~32	WAAS 33~64
BDS: 1~64	BDSBAS 65~75
GLONASS: 65~96	SDCM 33~64
Galileo: 1~36	EGNOS 37~64
QZSS: 1~10	QZSS-SAIF 55~63
IRNSS: 1~15	GAGAN 33~64
-	KASS 47

7.2.6 GPGSTH – GNSS Pseudorange Error Statistics (Slave Antenna)

This command is used to output pseudorange measurement error statistics calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPGSTH 1 Output 1Hz GPGSTH message at the current port

GPGSTH COM2 1 Output 1Hz GPGSTH message at COM2

Applicable to: UM982

Message Output:

\$GNGSTH,055543.00,0.45,0.01,0.01,127.6430,0.010,0.010,0.019*0F

Table 7-37 GSTH Data Structure

ID	Field	Description	Symbol
1	\$--GSTH	Log header	
2	utc	UTC time of GGA/GNS, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	rms	Standard deviation of pseudoranges and DGNS corrections (RMS value), accurate to 2 decimal places	x.x
4	smjr std	Standard deviation of semi-major axis of error ellipse (m), accurate to 2 decimal places	x.x
5	smnr std	Standard deviation of semi-minor axis of error ellipse (m), accurate to 2 decimal places	x.x
6	orient	Orientation of semi-major axis of error ellipse (degrees from true north), accurate to 4 decimal places	x.x
7	lat std	Standard deviation of latitude error (m), accurate to 3 decimal places	x.x
8	lon std	Standard deviation of longitude error (m), accurate to 3 decimal places	x.x
9	alt std	Standard deviation of altitude error (m), accurate to 3 decimal places	x.x
10	*xx	Checksum	*hh
11	[CR][LF]	Sentence terminator	

7.2.7 GPGSVH – GNSS Satellites in View (Slave Antenna)

This command is used to output the number of satellites in view, satellite ID numbers, and other information which is calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPGSVH 1 Output 1Hz GPGSVH message at the current port

GPGSVH COM2 1 Output 1Hz GPGSVH message at COM2

Applicable to: UM982

Message Output:

\$GPGSVH,2,1,08,16,28,217,38,32,39,140,45,03,29,290,32,31,66,033,50,1*2F
\$GPGSVH,2,2,08,04,12,313,34,26,69,220,46,25,16,046,34,29,28,071,37,1*2A
\$GPGSVH,2,1,07,32,39,140,41,03,29,290,37,31,66,033,46,04,12,313,35,4*21
\$GPGSVH,2,2,07,26,69,220,46,25,16,046,35,29,28,071,41,4*11
\$GLGSVH,2,1,05,74,15,049,37,66,38,321,45,76,41,264,42,72,21,168,35,1*3F
\$GLGSVH,2,2,05,65,63,206,44,1*07
\$GLGSVH,1,1,04,66,38,321,42,76,41,264,43,72,21,168,36,65,63,206,43,3*31
\$GBGSVH,6,1,21,27,15,113,36,46,73,006,50,06,81,019,49,07,43,199,36,1*36
\$GBGSVH,6,2,21,16,79,068,51,19,55,235,42,10,33,205,34,28,13,062,34,1*3A
\$GBGSVH,6,3,21,36,40,265,35,59,38,145,43,40,52,184,43,20,24,178,35,1*3B
\$GBGSVH,6,4,21,22,31,308,40,04,25,124,36,03,42,188,35,01,34,140,41,1*37
\$GBGSVH,6,5,21,60,28,227,38,39,74,097,51,09,72,329,46,02,32,224,35,1*3A
\$GBGSVH,6,6,21,37,24,062,35,1*0D
\$GBGSVH,6,1,21,27,15,113,39,46,73,006,52,06,81,019,49,07,43,199,41,8*32
\$GBGSVH,6,2,21,16,79,068,48,19,55,235,47,10,33,205,36,28,13,062,39,8*31
\$GBGSVH,6,3,21,36,40,265,45,59,38,145,43,40,52,184,46,20,24,178,37,8*32
\$GBGSVH,6,4,21,22,31,308,41,04,25,124,37,03,42,188,38,01,34,140,39,8*3C
\$GBGSVH,6,5,21,60,28,227,40,39,74,097,53,09,72,329,47,02,32,224,35,8*3F
\$GBGSVH,6,6,21,37,24,062,44,8*02
\$GBGSVH,3,1,09,06,81,019,50,07,43,199,43,16,79,068,50,10,33,205,40,B*42
\$GBGSVH,3,2,09,04,25,124,40,03,42,188,42,01,34,140,40,09,72,329,49,B*49
\$GBGSVH,3,3,09,02,32,224,39,B*79
\$GAGSVH,2,1,06,19,27,146,38,04,79,220,51,09,34,312,39,31,44,232,43,2*32
\$GAGSVH,2,2,06,21,25,048,44,01,76,038,52,2*3C
\$GAGSVH,2,1,06,19,27,146,34,04,79,220,48,09,34,312,40,31,44,232,38,7*31
\$GAGSVH,2,2,06,21,25,048,36,01,76,038,50,7*3E
\$GQGSVH,1,1,03,03,13,146,35,02,71,090,49,07,42,163,35,1*19
\$GQGSVH,1,1,03,03,13,146,32,02,71,090,49,07,42,163,42,6*19

N4 Products Commands and Logs Reference Book

Table 7-38 GSVH Data Structure

ID	Field	Description	Symbol
1	\$--GSVH	Log header	
2	# msgs	Total number of GSV messages, 1~9	x
3	msg #	GSV message number, 1~9	x
4	# sats	Number of satellites in view	xx
5	Sat id	Satellite ID number, see Table 7-36 Satellite ID Numbers in NMEA Messages	xx
6	Elevation	Elevation, an integer in degrees, max: 90	xx
7	Azi	Azimuth, degrees True, an integer within 000~359	xxx
8	CNO	Carrier to noise ratio (C/N0), an integer within 0 ~ 99 dB-Hz, null when not tracking	xx
9	Next sat	The 2 nd ~ 3 rd SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a maximum of four sets per message. Null fields are not required for unused sets when less than four sets are transmitted.	xx
10			xx
11			xxx
12			xx
13		The 4 th SV, a variable number of "Satellite ID-Elevation-Azimuth-SNR" sets are allowed up to a maximum of four sets per message. Null fields are not required for unused sets when less than four sets are transmitted.	xx
14			xx
15			xxx
16			xx
17	SignalID/ SystemID	Signal ID for NMEA 0183 Version 4.10; system ID for NMEA 0183 Version 4.11. Refer to Table 7-34 GNSS ID.	h
18	*xx	Checksum	*hh
19	[CR][LF]	Sentence terminator	

7.2.8 GPRMCH – Recommended Minimum Specific GNSS Data (Slave Antenna)

This command is used to output time, date, position, velocity, etc. which is calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPRMCH 1 Output 1Hz GPRMCH message at the current port

GPRMCH COM2 1 Output 1Hz GPRMCH message at COM2

Applicable to: UM982

Message Output:

\$GNRMCH,055808.00,A,4004.73817916,N,11614.19891207,E,0.004,99.7,311221,6.9,W,D,
V*3A

Table 7-39 RMCH Data Structure

ID	Field	Description	Symbol
1	\$--RMCH	Log header	
2	utc	UTC of position fix, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	pos status	Status: A = Data valid V = Navigation receiver warning	A
4	lat	Latitude, in the format of ddmm.mmmmmmmmm dd – Degree mm.mmmmmmmmm – Minute	IIII.II
5	lat dir	Latitude direction (N = North, S = South)	a
6	lon	Longitude, in the format of dddmm.mmmmmmmmm ddd – Degree mm.mmmmmmmmm – Minute	yyyyy.yy
7	lon dir	Longitude direction (E = East, W = West)	a

ID	Field	Description	Symbol
8	speed Kn	Speed over ground, knots, accurate to 3 decimal places	x.x
9	track true	Course over ground, degrees True, measured clockwise from the North, accurate to 1 decimal place	x.x
10	date	Date: ddmmyy	xxxxxx
11	mag var	Magnetic variation, degrees, accurate to 1 decimal place	x.x
12	var dir	Magnetic variation direction	a
13	mode ind	Mode indicator: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode F = RTK Float M = Manual input mode N = No fix P = High precision mode R = RTK int S = Simulator mode V = Invalid mode (except for A and D)	a
14	mode status	Navigational status: S = Safe C = Caution U = Unsafe V = Navigational status not valid	a
15	*xx	Checksum	*hh
16	[CR][LF]	Sentence terminator	

7.2.9 GPVTGH – Course over Ground and Ground Speed (Slave Antenna)

This command is used to output the course over ground and ground speed calculated with the slave antenna.

Abbreviated ASCII Syntax:

GPVTGH 1 Output 1Hz GPVTGH message at the current port

GPVTGH COM2 1 Output 1Hz GPVTGH message at COM2

Applicable to: UM982

Message Output:

\$GNVTGH,113.125,T,120.041,M,0.01474,N,0.02730,K,D*73

Table 7-40 VTGH Data Structure

ID	Field	Description	Symbol
1	\$--VTGH	Log header	
2	Course true	Course over ground, degrees True, accurate to 3 decimal places	x.x
3	Course ind	Course indicator, a fixed character of T	T
4	Course mag	Course over ground, degrees Magnetic, accurate to 3 decimal places	x.x
5	Course ind	Course indicator, a fixed character of M	M
6	speed Kn	Speed over ground, knots, accurate to 5 decimal places	x.x
7	N	Unit of speed, a fixed character of N	N
8	speed Km	Speed over ground, km/h, accurate to 5 decimal places	x.x
9	K	Unit of speed, a fixed character of K	K
10	Mode ind	Mode indicator: A = Autonomous mode D = Differential mode E = Estimated (dead reckoning) mode M = Manual input mode V = Data not valid P = High precision mode S = Simulator mode	xxxxxxx
11	*xx	Checksum	*hh

ID	Field	Description	Symbol
12	[CR][LF]	Sentence terminator	

7.2.10 GPTHS2 – True Heading and Status

This message contains the heading information of the baseline (from the base station to the rover station) measured in degrees relative to the true north. To output this message, the receiver needs to be able to work in HEADING2 mode. This log **only** supports ONCHANGED trigger.

Abbreviated ASCII Syntax:

GPTHS2 ONCHANGED Output GPTHS2 message at the current port

Applicable to: UM960, UM980, UB9A0

Message Output:

\$GNTHS2,88.3640,T*0F

Table 7-41 THS Data Structure

ID	Field	Description	Symbol
1	\$--THS2	Log header	
2	Heading	Heading, degrees True, accurate to 4 decimal places	x.x
3	Mode	Mode indicator, a fixed value of T	a
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.2.11 GPHPR – Attitude Parameters

This log contains the heading, pitch, and roll angles for dual-antenna carriers.

Abbreviated ASCII Syntax:

GPHPR 1

Applicable to: UM982

Message Output:

\$GNHPR,074615.00,320.9610,-66.1712,000.0000,4,47,0.00,0999*45

Table 7-42 HPR Message Structure

ID	Field	Description	Symbol
1	\$--HPR	Log header	
2	utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	heading	Heading, 0~360°, accurate to 4 decimal places	hhh.hhhh
4	pitch	Pitch, -90~90°, accurate to 4 decimal places	ppp.pppp
5	roll	Roll, -90~90°, accurate to 4 decimal places	rrr.rrrr
6	QF	Solution quality indicator: 0 = Fix invalid 1 = Single point positioning 2 = Differential GPS 4 = RTK fix 5 = RTK float 6 = Dead reckoning mode 7 = Manual input mode (fixed value) 8 = Extra wide-lane 9 = SBAS	q
7	sat No.	Satellite number	n
8	age	Age of differential data, in seconds, accurate to 2 decimal places	dd.dd
9	stn ID	Base station ID	xxxx
10	*xx	Checksum	*hh
11	[CR][LF]	Sentence terminator	

7.2.12 GPHPR2 – Attitude Parameters

This log contains the heading, pitch, and roll angles in HEADING2 mode. It only supports ONCHANGED trigger.

Abbreviated ASCII Syntax:

GPHPR2 ONCHANGED

Applicable to: UM980, UB9A0, UM982

 Applicable to UM982 Build9669 and later versions

Message Output:

\$GNHPR2,013025.00,006.2031,000.6226,000.0000,4,38,0.00,3223*63

Table 7-43 HPR2 Message Structure

ID	Field	Description	Symbol
1	\$--HPR2	Log header	
2	utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	heading	Heading, 0~360°, accurate to 4 decimal places	hhh.hhhh
4	pitch	Pitch, -90~90°, accurate to 4 decimal places	ppp.pppp
5	roll	Roll, -90~90°, accurate to 4 decimal places	rrr.rrrr
6	QF	Solution quality indicator: 0 = Fix invalid 1 = Single point positioning 2 = Differential GPS 4 = RTK fix 5 = RTK float 6 = Dead reckoning mode 7 = Manual input mode (fixed value) 8 = Extra wide-lane 9 = SBAS	q
7	sat No.	Satellite number	n
8	age	Age of differential data, in seconds, accurate to 2 decimal places	dd.dd
9	stn ID	Base station ID	xxxx
10	*xx	Checksum	*hh

ID	Field	Description	Symbol
11	[CR][LF]	Sentence terminator	

7.2.13 GPTRA2 – Heading, Pitch & Roll Information

This log contains the heading, pitch, and roll angles in HEADING2 mode. It only supports ONCHANGED trigger.

Abbreviated ASCII Syntax:

GPTRA2 ONCHANGED Output 1Hz GPTRA2 message at the current port

GPTRA2 COM2 ONCHANGED Output 1Hz GPTRA2 message at COM2

Applicable to: UM980, UB9A0, UM982

 Applicable to UM982 Build9669 and later versions

Message Output:

\$GNTRA2,090415.00,88.36,-0.09,0.00,4,30,0.00,0000*7D

Table 7-44 TRA2 Message Structure

ID	Field	Description	Symbol
1	\$--TRA2	Log header	
2	utc	UTC, in the format of hhmmss.ss hh – Hour mm – Minute ss.ss – Second	hhmmss.ss
3	heading	Heading, 0~360 degrees, accurate to 2 decimal places	hhh.hh
4	pitch	Pitch: -90~90 degrees, accurate to 2 decimal places	ppp.pp
5	roll	Roll: -90~90 degrees, accurate to 2 decimal places	rrr.rr

ID	Field	Description	Symbol
6	Sol status	GPS quality indicator 0 = Fix not available or invalid 1 = Single point positioning 2 = Differential GPS or SBAS 4 = RTK fix 5 = RTK float 6 = Estimated (dead reckoning) mode	q
7	Sat num	Satellite number	n
8	Age	Age of differential data, in seconds, accurate to 2 decimal places	dd.dd
9	Station ID	Base station ID	xxxx
10	*xx	Checksum	*hh
11	[CR][LF]	Sentence terminator	

7.2.14 GPROT2 – Rate of Turn

This log contains the rate of turn and direction of turn in HEADING2 mode. It only supports ONCHANGED trigger.

Abbreviated ASCII Syntax:

GPROT2 ONCHANGED Output 1Hz GPROT2 message at the current port
GPROT2 COM2 ONCHANGED Output 1Hz GPROT2 message at COM2

Applicable to: UM980, UB9A0, UM982

 [Applicable to UM982 Build9669 and later versions](#)

Message Output:

\$GNROT2,-0.0,A*30

Table 7-45 ROT2 Message Structure

ID	Field	Description	Symbol
1	\$--ROT2	Log header	
2	rate	Rate of turn, degrees/minute, accurate to 1 decimal place, "-" = bow turns to port	x.x

ID	Field	Description	Symbol
3	status	Status: A = Data valid V = Data invalid	A
4	*xx	Checksum	*hh
5	[CR][LF]	Sentence terminator	

7.2.15 GPHPD – Positioning and Heading Information

This command is used to output time, orientation, position, speed information, etc.

Abbreviated ASCII Syntax:

GPHPD 1 Output 1Hz GPHPD message at the current port

GPHPD COM2 1 Output 1Hz GPHPD message at COM2

Applicable to: UM982

 This command will be supported in future versions.

Message Output:

\$GPHPD,2319,462170.00,251.77,-48.16,178.48,40.0789783,116.2365145,63.03,-
0.001,0.000,-0.003,-0.001,-0.002,-0.001,0.000,48,48*5ac824c3

Table 7-46 HPD Message Structure

ID	Field	Description	Symbol
1	\$GPHPD	Log header, constantly outputs GPHPD	
2	GPSWeek	Number of weeks from Jan. 6 th 1980 to the present (receiver time)	xxxx
3	GPSTime	Milliseconds of the week (receiver time), accurate to 2 decimal places	xxxxxx.xx
4	Heading	Heading, 0 ~ 360, degrees, accurate to 2 decimal places	xx.xx
5	Pitch	Pitch, -90 ~ 90, degrees, accurate to 2 decimal places	x.xxx
6	Track	Course over ground, degrees True, 0~359.99, accurate to 2 decimal places	xx.xx

ID	Field	Description	Symbol
7	Latitude	Latitude (WGS84), degrees, accurate to 7 decimal places	xx.xxxxxxx
8	Longitude	Longitude (WGS84), degrees, accurate to 7 decimal places	xxx.xxxxxxx
9	Altitude	Altitude (WGS84), meters, accurate to 2 decimal places	xxx.xx
10	Ve	Velocity in the easterly direction, m/s, accurate to 3 decimal places	x.xxx
11	Vn	Velocity in the northerly direction, m/s, accurate to 3 decimal places	x.xxx
12	Vu	Velocity in the up direction, m/s, accurate to 3 decimal places	x.xxx
13	Ae	East velocity difference between two measurements, m/s, accurate to 3 decimal places	x.xxx
14	An	North velocity difference between two measurements, m/s, accurate to 3 decimal places	x.xxx
15	Au	Up velocity difference between two measurements, m/s, accurate to 3 decimal places	x.xxx
16	Baseline	Baseline length, meters, accurate to 3 decimal places	x.xxx
17	NSV1	Number of visible satellites for the master antenna	xx
18	NSV2	Number of visible satellites for the slave antenna	xx
19	*xx	Checksum	*hh
20	[CR][LF]	Sentence terminator	

7.2.16 QZQSM – Disaster and Crisis Report

QZSS provides the service of disaster and crisis report (DC Report) based on the L1 SAIF signal. When disasters such as earthquake and tsunami happen, QZSS will broadcast the warning information.

This log outputs the L1S DCR information, which is in accordance with the IS-QZSS-DCR ICD. It only supports ASCII format. Use the QZQSM [output rate] command to

enable the DCR information output.

Abbreviated ASCII Syntax:

QZQSM 1

Applicable to: UM980, UM982, UB9A0, UM981

Message Output:

[illegible]

Table 7-47 QZQSM Message Structure

ID	Field	Description	Symbol
1	\$QZQSM	Log header	
2	PRN	56, 57, 61 (PRN 184, 185, 189) 55 (PRN 183) 58 (PRN 186)	XX
3	DC Message	Hexadecimal	HEX
4	*xx	Checksum	
5	[CR][LF]	Sentence terminator (ASCII only)	-

7.3 Unicore Data Output Commands

Unicore data output commands support ASCII and binary formats. Binary format is compact and strictly machine readable, which makes the message size much smaller and allows the receiver to transmit and receive more data. ASCII format starts with "#", which is not calculated in CRC. Unicore data format is defined as follows:

Basic Format:

Header 3 Sync bytes, 24 bytes in total. Please always check the header length.

Data	Variable
------	----------

CRC 4 bytes

Table 7-48 Unicore ASCII and Binary Message Structure

ID	Structure	Description
1	Header	All Unicore messages have a header. Binary format header has 3 syn bytes and 24 bytes in total. See Table 7-50 Binary Header Structure for more information. Please always check the header length before decoding binary messages. ASCII format header is described in Table 7-51 ASCII Header Structure.
2	Data	Data field, the length is variable according to different message types. Please refer to specific messages for more information.
3	CRC	Unicore messages end with 32-bit CRC. Binary format messages contain a 32-bit CRC calculating all data including the header. ASCII format CRC calculates all data except "#".

Table 7-49 Three Sync Bytes of the Binary Header

Byte	Hex	Decimal
First	0xAA	170
Second	0x44	68
Third	0xB5	181

Table 7-50 Binary Header Structure

ID	Field	Type	Description	Binary Bytes	Binary Offset
1	Sync	UCHAR	Hexadecimal 0xAA.	1	0
2	Sync	UCHAR	Hexadecimal 0x44.	1	1
3	Sync	UCHAR	Hexadecimal 0xB5.	1	2
4	CPUIDle	UCHAR	CPU idle 0-100	1	3
5	Message ID	USHORT	Message ID	2	4
6	MessageLength	USHORT	Message length	2	6
7	TimeRef	UCHAR	Reference time (GPST or BDST)	1	8
8	TimeStatus	UCHAR	Time status	1	9

ID	Field	Type	Description	Binary Bytes	Binary Offset
9	Wn	USHORT	Week number	2	10
10	Ms	ULONG	Seconds of week (ms)	4	12
11	Version	ULONG	Release version	4	16
12	Reserved	UCHAR	Reserved	1	20
13	Leap sec	UCHAR	Leap second	1	21
14	DelayMs	USHORT	Output delay	2	22

Table 7-51 ASCII Header Structure

ID	Field	Type	Description
1	Sync	CHAR	Sync character. The ASCII message always starts with a "#".
2	Message	CHAR	The ASCII name of the log or command in this manual.
3	CPUIIdle	UCHAR	The minimum percentage of time that the processor is idle, calculated once per second.
4	TimeRef	UCHAR	Reference time (GPST or BDST)
5	TimeStatus	UCHAR	GPS time quality indicator. The value is Unknown or Fine, of which the former indicates that the receiver has not yet calculated the precise GPS time.
6	Wn	USHORT	GPS week number
7	Ms	ULONG	GPS seconds of week (ms)
8	Version	ULONG	Unicore format version number
9	Reserved	UCHAR	Reserved
10	Leap sec	UCHAR	Leap second
11	Output Delay	USHORT	Output delay (Difference between the data output time and GNSS signal receiving time), ms

7.3.1 VERSION – Version and Authorization

The Version message contains the product name, authorization, PN and SN, hardware version and firmware version information. The authorization date format is year/month/day.

Message ID: 37

ASCII Syntax:

VERSIONA

Binary Syntax:

VERSIONB

Message Output:

```
#VERSIONA,79,GPS,FINE,2326,378237000,15434,0,18,889;"UM982","R4.10Build15434","
HRPT00-S10C-P","2310415000012-
LR23A2225208904","ff2740966a10124c","2024/08/08"*769fd54f
```

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 7-52 VERSION Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	VERSIONA header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Type	Product model 0 = UNKNOWN 17 = UM982 18 = UM980 19 = UM960 24 = UM960L 26 = UM981 52 = UB9A0	Enum	4	H
3	sw version	Firmware version	Char[33]	33	H+4
4	Auth	Authorization type. Invalid when the authorization code expires.	Char[129]	129	H+37

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
5	Psn	PN and SN. Before "-" are 13 PN numbers, and after "-" are 15 SN numbers.	Char[66]	66	H+166
6	efuse ID	Board ID	Char[33]	33	H+232
7	comp time	Firmware compile time YYYY/MM/DD	Char[43]	43	H+265
8	Xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+308
9	[CR][LF]	Sentence terminator (ASCII only)	-		

7.3.2 OBSVM – Observation of the Master Antenna

OBSVM contains the channel measurements for the satellites currently tracked by the receiver. For dual-antenna receivers, OBSVM outputs the master antenna's raw observation data.

Message ID: 12

ASCII Syntax:

OBSVMA COM1 1

Binary Syntax:

OBSVMB COM1 1

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#OBSVMA,94,GPS,FINE,2190,117395000,0,0,18,17;18,0,26,21720097.812,-
114139892.254585,52,181,-2263.222,4270,0,6262.010,00181c23,0,4,21162081.928,-
111207490.841520,349,1600,-225.810,2010,0,0.000,0018104b,0,31,23853967.973,-
125353430.240712,16,89,-2865.568,4666,0,6267.010,00181c63,0,27,20924379.679,-
109958370.210834,547,1390,2341.516,2953,0,4.010,00181c83,0,16,20322104.147,-
106793385.550616,59,216,-518.194,3848,0,970.010,00181ca3,0,18,24441329.785,-
128440030.962618,15,106,850.996,4281,0,3268.010,00181cc3,0,34,39461753.070,-
207372954.189817,294,679,60.342,3964,0,6267.010,00181da3,0,35,37928367.004,-
199314917.709832,436,1004,77.257,3491,0,5037.010,00181dc3,7,52,23348014.480,-
```

124764670.630508,74,237,-2702.620,4022,0,254.010,00191c23,11,54,22454359.660,-
120157814.237355,165,1600,-2435.304,2260,0,0.000,0019104b,10,56,22207432.072,-
118794787.240679,108,1600,3984.848,2660,0,0.000,001910ab,4,55,20768970.641,-
110866113.369865,12,87,1123.037,4537,0,1748.010,00191ce3,0,18,20791545.038,-
109260348.040017,22,113,717.752,4422,0,6267.010,005b1c23,0,24,25006179.764,-
131408344.422726,34,160,-1447.680,3982,0,6268.010,005b1c43,0,31,28623544.586,-
150417707.949574,15,121,-2204.498,3966,0,346.010,005b1c63,0,33,28224656.356,-
148321530.956877,529,1240,-1071.997,3280,0,91.010,005b1ca3,0,12,25003241.058,-
131392963.047669,71,246,1277.601,3765,0,4137.010,005b1cc3,0,11,25867003.553,-
135931981.151064,86,301,2863.429,3516,0,89.010,005b1d03*db2fc208

Table 7-53 OBSVM Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	OBSVM header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	obs Number	Number of observation messages	Ulong	4	H
3	System Freq	GLONASS frequency number (GLONASS frequency + 7). It is not applicable for GPS, BDS and Galileo, which outputs 0.	UShort	2	H+4
4	PRN/slot	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicore-defined Messages	UShort	2	H+6
5	psr	Pseudorange measurement, meters	Double	8	H+8
6	adr	Carrier phase (accumulated Doppler range), cycles	Double	8	H+16
7	psr std	Pseudorange measurement standard deviation * 100	UShort	2	H+24
8	adr std	Carrier phase standard deviation * 10000	UShort	2	H+26

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	dopp	Instantaneous carrier Doppler frequency (Hz)	Float	4	H+28
10	C/N0	Carrier to noise ratio C/N0 = $10[\log_{10}(S/N0)]$ (dB-Hz). Carrier to noise ratio * 100	UShort	2	H+32
11	Reserved	Reserved	UShort	2	H+34
12	locktime	Continuous tracking time (no cycle slip), seconds	Float	4	H+36
13	ch-tr-status	Tracking status, refer to Table 7-56 Channel Tracking Status		4	H+40
14...	Next OBS offset = H+4+ (#obs x 40) An epoch contains the observations of all frequencies and all satellites. Each frequency observation accounts for 40 bytes and loops from the 3 rd to the 13 th field.				
variable	xxxx	32-bit CRC	Hex	4	H+4+ (#obs x 40)
variable	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-54 Satellite PRN Number in Unicore-defined Messages

GNSS	PRN
BDS	1~63
GPS	1~32
GLONASS	38~61
Galileo	1~36
SBAS	120~158
QZSS	193~202

GNSS	PRN
IRNSS	1~15

Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages

GNSS	PRN
GPS	1~32
QZSS	33~42
GLONASS	43~66
Galileo	75~110
SBAS	120~158
BDS	161~223
IRNSS	67~74, 111~117

Table 7-56 Channel Tracking Status

Nibble #	Bit #	Mask	Description	Range Value
N0	0	0x00000001	Reserved	
	1	0x00000002		
	2	0x00000004		
	3	0x00000008		
N1	4	0x00000010	SV channel number	0-n (0 = first, n = last) n depends on the receiver
	5	0x00000020		
	6	0x00000040		
	7	0x00000080		
N2	8	0x00000100		
	9	0x00000200		
	10	0x00000400	Carrier phase flag	0 = invalid, 1 = valid
	11	0x00000800	Reserved	

Nibble #	Bit #	Mask	Description	Range Value
N3	12	0x00001000	Pseudorange flag	0 = invalid, 1 = valid
	13	0x00002000	Reserved	
	14	0x00004000		
	15	0x00008000		
N4	16	0x00010000	Satellite system	0 = GPS 1 = GLONASS 2 = SBAS 3 = GAL 4 = BDS 5 = QZSS 6 = IRNSS 7 = Reserved
	17	0x00020000		
	18	0x00040000		
	19	0x00080000	Reserved	
N5	20	0x00100000	Reserved	
	21	0x00200000	Signal type	Depends on the supported satellite system:
	22	0x00400000		
	23	0x00800000		
N6	24	0x01000000		
	25	0x02000000		<u>GPS:</u> 0 = L1 C/A 9 = L2P (Y) ⁸ 3 = L1C pilot 11 = L1C data semicodeless 6 = L5 data 14 = L5 pilot 17 = L2C (L) <u>BDS:</u> 0 = B1I 4 = B1Q 8 = B1C (Pilot) 23 = B1C (Data) 5 = B2Q 17 = B2I 12 = B2a (Pilot) 28 = B2a (Data) 6 = B3Q

⁸ When the value of Bit 26 is 1, the L2P (Y) in Bit 25 is actually the L2C signal.

Nibble #	Bit #	Mask	Description	Range Value
				<u>GLONASS:</u> 21 = B3I 0 = L1 C/A 13 = B2b (I) 5 = L2 C/A 6 = G3I <u>GAL:</u> 7 = G3Q 1 = E1B 2 = E1C <u>QZSS:</u> 12 = E5A pilot 0 = L1 C/A 17 = E5B pilot 1 = L1C/B 18 = E6B 3 = L1C pilot 22 = E6C 4 = L1S 6 = L5 data <u>SBAS:</u> 11 = L1C data 0 = L1 C/A 14 = L5 pilot 6 = L5 (I) 17 = L2C (L) 21 = L6D 27 = L6E IRNSS 6 = L5 data 14 = L5 pilot
	26	0x04000000	L2C flag	0: L2P (Y); 1: L2C
	27	0x08000000	Reserved	
	28	0x10000000	Reserved	
N7	29	Reserved	Reserved	
	30	0x40000000	Reserved	
	31	0x80000000	Reserved	

7.3.3 OBSVH – Observation of the Slave Antenna

OBSVH contains the channel measurements for the satellites tracked by the slave antenna.

Message ID: 13

ASCII Syntax:

OBSVHA COM1 1

Binary Syntax:

OBSVHB COM1 1

Applicable to: UM982

Message Output:

#OBSVHA,97,GPS,FINE,2190,359897000,0,0,18,14;0*9d38304c

Table 7-57 OBSVH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	OBSVHheader	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	obs Number	Number of observation messages	Ulong	4	H
3	System Freq	GLONASS frequency number (GLONASS frequency + 7). It is not applicable for GPS, BDS and Galileo, which outputs 0.	UShort	2	H+4
4	PRN/ slot	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicare-defined Messages	UShort	2	H+6
5	psr	Pseudorange measurement, meters	Double	8	H+8
6	adr	Carrier phase (accumulated Doppler range), cycles	Double	8	H+16
7	psr std	Pseudorange measurement standard deviation * 100	UShort	2	H+24
8	adr std	Carrier phase standard deviation * 10000	UShort	2	H+26

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	dopp	Instantaneous carrier Doppler frequency (Hz)	Float	4	H+28
10	C/N0	Carrier to noise ratio C/N0 = $10[\log_{10}(S/N0)]$ (dB-Hz). Carrier to noise ratio * 100	UShort	2	H+32
11	Reserved	Reserved	UShort	2	H+34
12	locktime	Continuous tracking time (no cycle slip), seconds	Float	4	H+36
13	ch-tr-status	Tracking status, refer to Table 7-56 Channel Tracking Status		4	H+40
14...	Next OBS offset = H+4+ (#obs x 40) An epoch contains the observations of all frequencies and all satellites. Each frequency observation accounts for 40 bytes and loops from the 3 rd to the 13 th field.				
variable	xxxx	32-bit CRC	Hex	4	H+4+ (#obs x 40)
variable	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.4 OBSVMCMP – Compressed Observation of the Master Antenna

OBSVMCMP contains the compressed OBSVM data.

Message ID: 138

ASCII Syntax:

OBSVMCMPA COM1 1

BINARY Syntax:

OBSVMCMPB COM1 1

Applicable to: UM980, UB9A0, UM960, UM982

 Applicable to UM982 Build9669 and later versions

Message Output:

```
#OBSVMCMPA,97,GPS,FINE,2244,271100000,0,0,18,14;15,231c38056534f76f3f39820a7
47fff9e7519c015e0020000,231cd0012392f75f2639820a8f905fd82019c01560030000,4
31c380562a20030e916b20965478889431fc01560030000,631c3805c35cf43fad949a0b
0e037f8f850ac01560020000,631cd001bad8f42f9e949a0bbfcbd9ce420ac015e0020000,
831c380598dcf4cf102cd30b9e9687f2190cc015e0010000,a31c300109070260ace7bb0
93919828463162015c0020000,e31c3805f873fb6f0dadfe0926ca54e23220c0158003000
0,e31cd0018aa4fbcfe2acfe09f5ace6982020c015c0030000,071d300129740cd017ca160
c7457ebcf7a10200040010000,231d3805014609f0e7165f0aba44fbb0651ac015200300
00,231dd001fce208b0c0165f0a5d8c9be9201ac015a0030000,431d3805df6f06d090925
e0bac1a36ae621dc01560020000,631d3805026f06305463350bb9bd4ac3e703c015a00
20000,631dd001562a06d03a63350bd5057d803003c01540030000*d04eae82
```

Table 7-58 OBSVMCMP Compressed Format

Data	Bit (from low to high)	Length (Bits)	Scale Factor	Unit
Channel Tracking Status	0-31	32	Refer to Table 7-56 Channel Tracking Status	-
Doppler	32-59	28	1/256	Hz
PSR (Pseudorange)	60-95	36	1/128	m
ADR (Carrier phase/accumulated Doppler range)	96-127	32	1/256	Cycles
Psr Std	128-131	4	See Table 7-59 Psrstd Index	m
Adr Std	132-135	4	(n+1)/512	Cycles
PRN	136-143	8	1	-
Lock time	144-164	21	1/32	s
C/N0	165-169	5	20+n	dB-Hz
GLONASS frequency number	170-175	N+7	1	-
Reserved	176-191	16		

Table 7-59 Psrstd Index

Index	Data
0	0.050
1	0.075
2	0.113
3	0.169
4	0.253
5	0.380
6	0.570
7	0.854
8	1.281
9	2.375
10	4.750
11	9.500
12	19.000
13	38.000
14	76.000
15	152.000

Table 7-60 OBSVMCMP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	OBSVMCMP header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure. The time in the Header refers to the observation time of the base station.		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	obs Number	Number of observation messages	Ulong	4	H
3	Cmp record	Compressed format of OBSVM, see Table 7-58 OBSVMCMP Compressed Format	Hex	24	H+4
4	Next Cmp offset = H+4+ (#obs x 24)				
Variable	xxxx	32-bit CRC	Hex	4	H+4+ (#obs x 24)
Variable	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.5 OBSVHCMP – Compressed Observation of the Slave Antenna

OBSVHCMP contains the compressed OBSVH data.

Message ID: 139

ASCII Syntax:

OBSVHCOMPA COM1 1

BINARY Syntax:

OBSVHCMPB COM1 1

Applicable to: UM982

 Applicable to UM982 Build9669 and later versions.

Message Output:

```
#OBSVHCOMPA,97,GPS,FINE,2244,271111000,0,0,18,14;8,231c3805d95bf4cfc78e9b0be8
f5fe8ed90a201640020000,431c3805b86906904ad9340b8f6b91c395034016a0020000,6
31c3805b86ffbbfee0eff093daf22e22020c01660030000,831c3805c09e00d06d09b2097e
358f89541f601660030000,a31c3805c06c06205c085e0be7d77caee71d401660020000,c
31c380514420910c84f5e0a333561b1311a601620030000,e31c38057430f78f6af6820ae
5ab9e9e53192016c0020000,231d380560daf4ff561bd40b33ec0cf27a0c2016c0010000*
24135d12
```

Table 7-61 OBSVHCMP Compressed Format

Data	Bit (from low to high)	Length (Bits)	Scale Factor	Unit
Channel Tracking Status	0-31	32	Refer to Table 7-56 Channel Tracking Status	-
Doppler	32-59	28	1/256	Hz
PSR (Pseudorange)	60-95	36	1/128	m
ADR (Carrier phase/accumulated Doppler range)	96-127	32	1/256	Cycles
Psr Std	128-131	4	See Table 7-59 Psrstd Index	m
Adr Std	132-135	4	(n+1)/512	Cycles
PRN	136-143	8	1	-
Lock time	144-164	21	1/32	S
C/N0	165-169	5	20+n	dB-Hz
GLONASS frequency number	170-175	N+7	1	-
Reserved	176-191	16		

Table 7-62 OBSVHCMP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	OBSVHCMP header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure. The time in the Header refers to the observation time of the base station.		H	0
2	obs Number	Number of observation messages	Ulong	4	H

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	Cmp record	Compressed format of OBSVH, see Table 7-61 OBSVHCMP Compressed Format	Hex	24	H+4
4	Next Cmp offset = H+4+ (#obs x 24)				
Variable	xxxx	32-bit CRC	Hex	4	H+4+ (#obs x 24)
Variable	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.6 OBSVBASE – Observation of the Base Station

OBSVBASE contains the observation of the base station. The log **only** supports ONCHANGED trigger.

Message ID: 284

ASCII Syntax:

OBSVBASEA COM1 ONCHANGED

Binary Syntax:

OBSVBASEB COM1 ONCHANGED

Applicable to: UM982, UM980, UB9A0, UM960, UM960L

Message Output:

```
#OBSVBASEA,92,GPS,FINE,2249,205089000,0,0,18,74;24,0,1,19949528.980,-
104835482.170960,0,0,0.000,4500,0,0.001,00001c00,0,1,19949532.536,-
81689986.637729,0,0,0.000,4900,0,0.001,02201c00,0,1,19949531.929,-
78286236.510802,0,0,0.000,5300,0,0.001,01c01c00,0,3,24393288.815,-
128187597.395405,0,0,0.000,3100,0,0.001,00001c00,0,3,24393312.277,-
99886437.505261,0,0,0.000,2900,0,0.001,02201c00,0,3,24393311.741,-
95724503.606254,0,0,0.000,3200,0,0.001,01c01c00,0,7,22345353.436,-
117425624.537871,0,0,0.000,4200,0,0.001,00001c00,0,7,22345357.939,-
91500486.474533,0,0,0.000,4100,0,0.001,02201c00,0,8,23355052.211,-
122731627.217417,0,0,0.000,3500,0,0.001,00001c00,0,8,23355058.822,-
```

N4 Products Commands and Logs Reference Book

95635036.671759,0,0,0.000,4100,0,0.001,02201c00,0,8,23355058.125,-
 91650242.898597,0,0,0.000,4500,0,0.001,01c01c00,0,14,21044513.242,-
 110589663.518782,0,0,0.000,4300,0,0.001,00001c00,0,14,21044514.689,-
 86173762.987424,0,0,0.000,4700,0,0.001,02201c00,0,14,21044519.746,-
 82583190.254938,0,0,0.000,5200,0,0.001,01c01c00,0,14,21044513.135,-
 110589662.770497,0,0,0.000,4400,0,0.001,00601c00,0,17,22264289.041,-
 116999629.117075,0,0,0.000,4100,0,0.001,00001c00,0,17,22264290.650,-
 91168542.230887,0,0,0.000,4200,0,0.001,02201c00,0,19,25085746.602,-
 131826487.397418,0,0,0.000,3600,0,0.001,00001c00,0,19,25085754.035,-
 102721938.513004,0,0,0.000,3100,0,0.001,01201c00,0,21,21374822.792,-
 112325452.257686,0,0,0.000,4500,0,0.001,00001c00,0,21,21374822.721,-
 87526326.180750,0,0,0.000,4200,0,0.001,01201c00,0,30,21595580.723,-
 113485542.603204,0,0,0.000,4400,0,0.001,00001c00,0,30,21595585.190,-
 88430293.120489,0,0,0.000,4500,0,0.001,02201c00,0,30,21595584.940,-
 84745697.365627,0,0,0.000,4900,0,0.001,01c01c00*e25781b8

Table 7-63 OBSVBASE Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	OBSVBASE header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure. Note: The time in Header refers to the observation time of the base station.		H	0
2	obs Number	Number of observation messages	Ulong	4	H
3	System Freq	GLONASS frequency number (GLONASS frequency + 7). It is not applicable for GPS, BDS and Galileo, which outputs 0.	UShort	2	H+4
4	PRN/ slot	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicore-defined Messages.	UShort	2	H+6
5	psr	Pseudorange measurement, meters	Double	8	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
6	adr	Carrier phase (accumulated Doppler range), cycles	Double	8	H+16
7	psr std	Pseudorange measurement standard deviation * 100	UShort	2	H+24
8	adr std	Carrier phase standard deviation * 10000	UShort	2	H+26
9	dopp	Instantaneous carrier Doppler frequency (Hz)	Float	4	H+28
10	C/N0	Carrier to noise ratio C/N0 = $10[\log_{10}(S/N0)]$ (dB-Hz). Carrier to noise ratio * 100	UShort	2	H+32
11	reserved	Reserved	UShort	2	H+34
12	locktime	Continuous tracking time (no cycle slip), seconds	Float	4	H+36
13	ch-tr-status	Tracking status, refer to Table 7-56 Channel Tracking Status		4	H+40
14...	Next OBS offset = H+4+ (#obs x 40) An epoch contains the observations of all frequencies and all satellites. Each frequency observation accounts for 40 bytes and loops from the 3 rd to the 13 th field.				
Variable	xxxx	32-bit CRC	Hex	4	H+4+ (#obs x 40)
Variable	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.7 BASEINFO – Base Station Information

This log contains the position, ID, and health status of the base station. The log supports ONCHANGED trigger.

Message ID: 176

N4 Products Commands and Logs Reference Book

ASCII Syntax:

BASEINFOA 1

BASEINFOA ONCHANGED

Binary Syntax:

BASEINFOB 1

BASEINFOB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

#BASEINFOA,56,GPS,FINE,2190,376748000,0,0,18,153;00000000,-
2160493.199,4383620.763,4084734.120,"0000",0*2edbd87a

Table 7-64 BASEINFO Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BASEINFO Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Status	Status of the base station: 0 = valid 1 = Invalid	Ulong	4	H
3	X	ECEF X-coordinate	Double	8	H+4
4	Y	ECEF Y-coordinate	Double	8	H+12
5	Z	ECEF Z-coordinate	Double	8	H+20
6	Station id	Base station ID	Char[5]	8	H+28
7	reserved	Reserved	Ulong	4	H+36
8	xxxx	32-bit CRC	Hex	4	H+40
9	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.8 GPSTION – GPS Ionosphere Parameters

This log provides the ionosphere model parameters broadcast by GPS. The log supports

ONCHANGED trigger.

Message ID: 8

ASCII Syntax:

GPSONA 1

GPSONA ONCHANGED

Binary Syntax:

GPSONB 1

GPSONB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GPSONA,90,GPS,FINE,2190,371250000,0,0,18,21;1.490116119384766e-08,-
7.450580596923828e-09,-5.960464477539062e-08,1.192092895507812e-
07,1.2902400000000000e+05,-
1.9660800000000000e+05,6.553600000000000e+04,3.276800000000000e+05,0,0,0,0*c5
974f70
```

Table 7-65 GPSON Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GPSON	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	a0	Constant term of alpha parameter	Double	8	H
3	a1	1 st order term of alpha parameter	Double	8	H+8
4	a2	2 nd order term of alpha parameter	Double	8	H+16
5	a3	3 rd order term of alpha parameter	Double	8	H+24
6	b0	Constant term of beta parameter	Double	8	H+32
7	b1	1 st order term of beta parameter	Double	8	H+40
8	b2	2 nd order term of beta parameter	Double	8	H+48
9	b3	3 rd order term of beta parameter	Double	8	H+56

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	usSVID	ID numbers of satellites used to calculate ionosphere parameters	Ushort	2	H+64
11	usWeek	GPS week when calculating the ionosphere parameters	Ushort	2	H+66
12	ulSec	GPS second when calculating the ionosphere parameters, milliseconds	ULong	4	H+68
13	reserved	Reserved	Ulong	4	H+72
14	xxxx	32-bit CRC	Hex	4	H+76
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.9 BD3ION – BDS-3 Ionosphere Parameters

This log provides the ionosphere model parameters broadcast by BeiDou3. The log supports ONCHANGED trigger.

Message ID: 21

ASCII Syntax:

BD3IONA 1

BD3IONA ONCHANGED

Binary Syntax:

BD3IONB 1

BD3IONB ONCHANGED

Applicable to: UM960, UM980, UB9A0, UM982

Message Output:

```
#BD3IONA,89,GPS,FINE,2190,371265000,0,0,18,22;0.000000000000000e+00,0.0000000  
00000000e+00,0.000000000000000e+00,0.000000000000000e+00,0.000000000000000  
0e+00,0.000000000000000e+00,0.000000000000000e+00,0.000000000000000e+00,0.0  
000000000000000e+00,0*cd77c4ca
```

Table 7-66 BD3ION Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BD3ION	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	A1	Ionospheric delay correction model parameter 1	FLOAT	4	H
3	A2	Ionospheric delay correction model parameter 2	FLOAT	4	H+4
4	A3	Ionospheric delay correction model parameter 3	FLOAT	4	H+8
5	A4	Ionospheric delay correction model parameter 4	FLOAT	4	H+12
6	A5	Ionospheric delay correction model parameter 5	FLOAT	4	H+16
7	A6	Ionospheric delay correction model parameter 6	FLOAT	4	H+20
8	A7	Ionospheric delay correction model parameter 7	FLOAT	4	H+24
9	A8	Ionospheric delay correction model parameter 8	FLOAT	4	H+28
10	A9	Ionospheric delay correction model parameter 9	FLOAT	4	H+32
11	reserved	Reserved	ULONG	4	H+40
12	xxxx	32-bit CRC	Hex	4	H+44
13	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.10 BDSION – BDS Ionosphere Parameters

This log provides the ionosphere model parameters broadcast by BDS. The log supports ONCHANGED trigger.

Message ID: 4

ASCII Syntax:

BDSIONA 1

BDSIONA ONCHANGED

Binary Syntax:

BDSIONB 1

BDSIONB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#BDSIONA,97,GPS,FINE,2190,362233000,0,0,18,15;1.396983861923218e-
08,4.470348358154297e-08,-5.364418029785156e-07,8.940696716308594e-
07,1.4336000000000000e+05,-
3.7683200000000000e+05,4.5875200000000000e+05,5.2428800000000000e+05,36,0,0,0*9
4da1274
```

Table 7-67 BDSION Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BDSION	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	a0	Constant term of alpha parameter	Double	8	H
3	a1	1 st order term of alpha parameter	Double	8	H+8
4	a2	2 nd order term of alpha parameter	Double	8	H+16
5	a3	3 rd order term of alpha parameter	Double	8	H+24
6	b0	Constant term of beta parameter	Double	8	H+32
7	b1	1 st order term of beta parameter	Double	8	H+40

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
8	b2	2 nd order term of beta parameter	Double	8	H+48
9	b3	3 rd order term of beta parameter	Double	8	H+56
10	usSVID	ID numbers of satellites used to calculate ionosphere parameters	Ushort	2	H+64
11	usWeek	GPS week when calculating the ionosphere parameters	Ushort	2	H+66
12	ulSec	GPS second when calculating the ionosphere parameters, milliseconds	ULong	4	H+68
13	reserved	Reserved	Ulong	4	H+72
14	xxxx	32-bit CRC	Hex	4	H+76
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.11 GALION – Galileo Ionosphere Parameters

This log provides the ionosphere model parameters broadcast by Galileo. The log supports ONCHANGED trigger.

Message ID: 9

ASCII Syntax:

GALIONA 1

GALIONA ONCHANGED

Binary Syntax:

GALIONB 1

GALIONB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GALIONA,96,GPS,FINE,2218,465990000,0,0,18,21;1.2400000000000000e+02,4.9218750
00000000e-01,1.2939453125000000e-02,0,0,0,0,0*9e349a84
```

Table 7-68 GALION Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GALION	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	a0	1 st order term of alpha parameter	Double	8	H
3	a1	2 nd order term of alpha parameter	Double	8	H+8
4	a2	3 rd order term of alpha parameter	Double	8	H+16
5	SF1	Ionospheric disturbance flag for Region 1	UCHAR	1	H+24
6	SF2	Ionospheric disturbance flag for Region 2	UCHAR	1	H+25
7	SF3	Ionospheric disturbance flag for Region 3	UCHAR	1	H+26
8	SF4	Ionospheric disturbance flag for Region 4	UCHAR	1	H+27
9	SF5	Ionospheric disturbance flag for Region 5	UCHAR	1	H+28
10	reserved	Reserved	Ulong	4	H+29
11	xxxx	32-bit CRC	Hex	4	H+33
12	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.12 GPSUTC – Conversion between GPS Time and UTC

This log contains time conversion parameters between GPST and UTC. The log supports ONCHANGED trigger.

Message ID: 19

ASCII Syntax:

GPSUTCA 1

GPSUTCA ONCHANGED

Binary Syntax:

GPSUTCB 1

GPSUTCB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

#GPSUTCA,97,GPS,FINE,2190,362356000,0,0,18,15;2190,589824,-

1.862645149230957e-09,-5.329070518e-15,2185,7,18,18,0,0*4a84abce

Table 7-69 GPSUTC Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GPSUTC	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	utc wn	UTC reference week number	Ulong	4	H
3	tot	Reference time of UTC parameters	Ulong	4	H+4
4	A0	Clock bias of GPST relative to UTC	Double	8	H+8
5	A1	Clock rate of GPST relative to UTC	Double	8	H+16
6	wn lsf	Future week number when a new leap second is added (based on GPST)	Ulong	4	H+24
7	dn	Future day number in the week when a new leap second is added (the range is 1 to 7 where Sunday = 1 and Saturday = 7)	Ulong	4	H+28
8	deltat ls	Existing leap seconds of GPST relative to UTC before the next leap second is added.	Long	4	H+32
9	deltat lsf	Future leap seconds of GPST relative to UTC after the new leap second is added.	Long	4	H+36

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	deltat utc	Time offset of GPST relative to UTC	Ulong	4	H+40
11	reserved	Reserved	Ulong	4	H+44
12	xxxx	32-bit CRC	Hex	4	H+48
13	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.13 BD3UTC – Conversion between BDS-3 Time and UTC

This log contains time conversion parameters between BDST and UTC. The log supports ONCHANGED trigger.

Message ID: 22

ASCII Syntax:

BD3UTCA 1

BD3UTCA ONCHANGED

Binary Syntax:

BD3UTCB 1

BD3UTCB ONCHANGED

Applicable to: UM960, UM980, UB9A0, UM982

Message Output:

```
#BD3UTCA,97,GPS,FINE,2190,362396000,0,0,18,14;0,0,0.0000000000000000e+00,0.0000
00000e+00,0.0000000000000000e+00,0,0,0,0,0*4bd9130e
```

Table 7-70 BD3UTC Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BD3UTC	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	utc wn	UTC reference week number	Ulong	4	H
3	tot	Reference time of UTC parameters	Ulong	4	H+4

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
4	A0	Clock bias of BDST relative to UTC	Double	8	H+8
5	A1	Clock drift of BDST relative to UTC	Double	8	H+16
6	A2	Clock drift rate of BDST relative to UTC	Double	8	H+24
7	wn lsf	Future week number when a new leap second is added (based on BDST)	Ulong	4	H+32
8	dn	Future day number in the week when a new leap second is added (the range is 0 to 6 where Sunday = 0 and Saturday = 6)	Ulong	4	H+36
9	deltat ls	Existing leap seconds of BDST relative to UTC before the next leap second is added.	Long	4	H+40
10	deltat lsf	Future leap seconds of BDST relative to UTC after the new leap second is added.	Long	4	H+44
11	reserved	Reserved	Ulong	4	H+48
12	reserved	Reserved	Ulong	4	H+52
13	xxxx	32-bit CRC	Hex	4	H+456
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.14 BDSUTC – Conversion between BDS Time and UTC

This log contains time conversion parameters between BDST and UTC. The log supports ONCHANGED trigger.

Message ID: 2012

ASCII Syntax:

BDSUTCA 1

BDSUTCA ONCHANGED

N4 Products Commands and Logs Reference Book

Binary Syntax:

BDSUTCB 1

BDSUTCB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#BDSUTCA,97,GPS,FINE,2190,362435000,0,0,18,14;0,0,0.0000000000000000e+00,-  
2.042810365e-14,829,6,4,0,0*c81b21f3
```

Table 7-71 BDSUTC Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BDSUTC	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	Reserved	Reserved	Ulong	4	H+4
4	A0	Clock bias of BDT relative to UTC	Double	8	H+8
5	A1	Clock rate of BDT relative to UTC	Double	8	H+16
6	wn lsf	Future week number when a new leap second is added (based on BDS time)	Ulong	4	H+24
7	dn	Future day number in the week when a new leap second is added (the range is 0 to 6 where Sunday = 0 and Saturday = 6)	Ulong	4	H+28
8	deltat ls	Existing leap seconds of BDT relative to UTC before the next leap second is added.	Long	4	H+32
9	deltat lsf	Future leap seconds of BDT relative to UTC after the new leap second is added.	Long	4	H+36

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	Reserved	Reserved	Ulong	4	H+40
11	reserved	Reserved	Ulong	4	H+44
12	xxxx	32-bit CRC	Hex	4	H+48
13	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.15 GALUTC – Conversion between Galileo Time and UTC

This log contains time conversion parameters between Galileo time and UTC. The log supports ONCHANGED trigger.

Message ID: 20

ASCII Syntax:

GALUTCA 1

GALUTCA ONCHANGED

Binary Syntax:

GALUTCB 1

GALUTCB ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GALUTCA,97,GPS,FINE,2190,362475000,0,0,18,14;2.793967723846436e-09,-
1.776356839400250e-15,18,96,1166,1161,7,18,6.984919309616089e-10,-
1.865174681370263e-14,345600,14*d266704b
```

Table 7-72 GALUTC Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GALUTC	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	A0	Clock bias of Galileo time relative to UTC	Double	8	H+0
3	A1	Clock rate of Galileo time relative to UTC	Double	8	H+8
4	deltat ls	Existing leap seconds of Galileo time relative to UTC before the next leap second is added.	long	4	H+16
5	tot	Reference time of UTC parameters	Ulong	4	H+20
6	utc wn	UTC reference week number	Ulong	4	H+24
7	ulWNlsf	Future week number when a new leap second is added (based on Galileo time)	Ulong	4	H+28
8	dn	Future day number in the week when a new leap second is added (the range is 1 to 7 where Sunday = 1 and Saturday = 7)	Ulong	4	H+32
9	deltat lsf	Future leap seconds of Galileo time relative to UTC after the new leap second is added.	Long	4	H+36
10	dA0g	The constant term of the conversion parameter between Galileo time and GPS time.	Long	8	H+40
11	dA1g	The first order term of the conversion parameter between Galileo time and GPS time.	Ulong	8	H+48
12	ulT0g	The reference second of week used to convert between Galileo time and GPS time.	Ulong	4	H+56

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
13	ulWN0g	The reference week number used to convert between Galileo time and GPS time.	Ulong	4	H+60
14	xxxx	32-bit CRC	Hex	4	H+64
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.16 GPSEPH – GPS Ephemeris

This log contains GPS ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 106

ASCII Syntax:

GPSEPHA COM1 60

GPSEPHA COM1 ONCHANGED

Binary Syntax:

GPSEPHB COM1 60

GPSEPHB COM1 ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GPSEPHA,97,GPS,FINE,2190,362528000,0,0,18,1;10,360210.0,0,30,30,2190,2190,36720
0.0,2.656037435e+07,4.374825086e-09,4.615227840e-01,7.3941934388e-03,-
2.5487093877e+00,0.000000000e+00,9.177252650e-06,2.07281250e+02,-
1.78125000e+00,-2.048909664e-08,1.136213541e-07,9.7216383679e-
01,4.053740283e-10,-2.969634463e-03,-7.97997526e-09,30,367200.0,2.328306437e-
09,-2.8089155e-04,-9.3223207e-12,0.0000000e+00,TRUE,1.458581356e-
04,4.00000000e+00*ef6608ff
```

Table 7-73 GPSEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GPSEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	Satellite PRN number: GPS: 1 to 32 QZSS: 33 to 42	Ulong	4	H
3	Tow	Time stamp of subframe 0, seconds	Double	8	H+4
4	health	Health status, a 6-bit health code as defined in ICD-GPS-200a	Ulong	4	H+12
5	IODE1	Issue of data, ephemeris 1	Ulong	4	H+16
6	IODE2	Issue of data, ephemeris 2 = GPS IODE1	Ulong	4	H+20
7	Week	GPS reference week number (GPS week)	Ulong	4	H+24
8	Z Week	Z count week number. This is the week number from subframe 1 of the ephemeris. The "TOW week" (field #7) is derived from this to account for rollover.	Ulong	4	H+28
9	Toe	Reference time of ephemeris, seconds	Double	8	H+32
10	A	Semi-major axis of the satellite orbit, meters	Double	8	H+40
11	ΔN	Mean motion difference, radians/second	Double	8	H+48
12	M0	Mean anomaly at reference time, radians	Double	8	H+56
13	Ecc	Eccentricity of the satellite orbit	Double	8	H+64
14	ω	Argument of perigee, radians	Double	8	H+72
15	cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+80
16	cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+88

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
17	crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+96
18	crs	Orbit radius (amplitude of sine, meters)	Double	8	H+104
19	cic	Inclination (amplitude of cosine, radians)	Double	8	H+112
20	cis	Inclination (amplitude of sine, radians)	Double	8	H+120
21	IO	Inclination angle at reference time, radians	Double	8	H+128
22	IDOT	Rate of change of inclination angle, radians/second	Double	8	H+136
23	Ω0	Right ascension of ascending node, radians	Double	8	H+144
24	Ω dot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+152
25	iodc	Issue of data, clock	Ulong	4	H+160
26	toc	Reference time for satellite clock corrections, seconds	Double	8	H+164
27	tgd	Group delay, seconds	Double	8	H+172
28	af0	Satellite clock bias parameter, seconds	Double	8	H+180
29	af1	Satellite clock rate parameter, s/s	Double	8	H+188
30	af2	Satellite clock drift parameter, s/s/s	Double	8	H+196
31	AS	Anti-spoofing: 0 = FALSE 1 = TRUE	Enum	4	H+204
32	N	Corrected mean motion, radians/second	Double	8	H+208

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
33	URA	User range accuracy, m ² . The ICD specifies an algorithm to convert the URA index transmitted in the ephemeris to a nominal standard deviation value. Here outputs the square (variance) of the nominal value.	Double	8	H+216
34	xxxx	32-bit CRC	Hex	4	H+224
35	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.17 QZSSEPH – QZSS Ephemeris

This log contains QZSS ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 110

ASCII Syntax:

QZSSEPHA COM1 60

QZSSEPHA COM1 ONCHANGED

Binary Syntax:

QZSSEPHB COM1 60

QZSSEPHB COM1 ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#QZSSEPHA,78,GPS,FINE,2262,368756700,0,0,18,16;4,368730.0,0,185,185,2262,2262,37
0800.0,4.216498367e+07,2.569749898e-09,1.905190738e+00,7.5245622196e-02,-
1.5526664328e+00,1.514703035e-05,3.799796104e-06,-
3.61250000e+01,4.70875000e+02,3.501772881e-07,2.438202500e-06,6.1294064513e-
01,4.364467512e-10,-2.354107999e+00,-1.81507561e-09,953,370800.0,-
3.725290298e-09,9.4612129e-05,2.2737368e-13,0.0000000e+00,FALSE,7.292162191e-
05,7.84000000e+00*7c79248b
```

Table 7-74 QZSSEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	QZSSEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	Satellite PRN number QZSS: 1 to 10	Ulong	4	H
3	Tow	Time stamp of subframe 0, seconds	Double	8	H+4
4	health	Health status, a 6-bit health code as defined in ICD-GPS-200a	Ulong	4	H+12
5	IODE1	Issue of data, ephemeris 1	Ulong	4	H+16
6	IODE2	Issue of data, ephemeris 2 = GPS IODE1	Ulong	4	H+20
7	Week	GPS reference week number (GPS Week)	Ulong	4	H+24
8	Z Week	Z count week number. This is the week number from subframe 1 of the ephemeris. The "TOW week" (field#7) is derived from this to account for rollover.	Ulong	4	H+28
9	Toe	Reference time of ephemeris, seconds	Double	8	H+32
10	A	Semi-major axis of the satellite orbit, meters	Double	8	H+40
11	ΔN	Mean motion difference, radians/second	Double	8	H+48
12	M0	Mean anomaly at reference time, radians	Double	8	H+56
13	Ecc	Eccentricity of the satellite orbit	Double	8	H+64

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
14	ω	Argument of perigee, radians	Double	8	H+72
15	cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+80
16	cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+88
17	crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+96
18	crs	Orbit radius (amplitude of sine, meters)	Double	8	H+104
19	cic	Inclination (amplitude of cosine, radians)	Double	8	H+112
20	cis	Inclination (amplitude of sine, radians)	Double	8	H+120
21	IO	Inclination angle at reference time, radians	Double	8	H+128
22	IDOT	Rate of change of inclination angle, radians/second	Double	8	H+136
23	Ω	Right ascension of ascending node, radians	Double	8	H+144
24	Ω dot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+152
25	iodc	Issue of data, clock	Ulong	4	H+160
26	toc	Reference time for satellite clock corrections, seconds	Double	8	H+164
27	tgd	Group delay, seconds	Double	8	H+172
28	af0	Satellite clock bias parameter, seconds	Double	8	H+180

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
29	af1	Satellite clock rate parameter, s/s	Double	8	H+188
30	af2	Satellite clock drift parameter, s/s/s	Double	8	H+196
31	AS	Anti-spoofing: 0 = FALSE 1 = TRUE	Enum	4	H+204
32	N	Corrected mean motion, radians/second	Double	8	H+208
33	URA	User range accuracy, m ² . The ICD specifies an algorithm to convert the URA index transmitted in the ephemeris to a nominal standard deviation value. Here outputs the square (variance) of the nominal value.	Double	8	H+216
34	xxxx	32-bit CRC	Hex	4	H+224
35	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.18 BD3EPH – BDS-3 Ephemeris

This log contains BDS-3 ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 2999

ASCII Syntax:

BD3EPHA COM1 60

BD3EPHA COM1 ONCHANGED

Binary Syntax:

N4 Products Commands and Logs Reference Book

BD3EPHB COM1 60

BD3EPHB COM1 ONCHANGED

Applicable to: UM960, UM980, UB9A0, UM982

Message Output:

```
#BD3EPHA,77,GPS,FINE,2211,180091000,0,0,18,4;44,0,3,15,21,21,2211,2211,176400.0,1
76400.0,-1.423828125e+01,1.108884811e-02,3.726583799e-09,-1.069685670e-
13,1.309681137e+00,8.019023808e-04,6.109550176e-01,2.244487405e-
07,8.259899914e-06,1.940156250e+02,6.187500000e+00,1.210719347e-
08,7.450580597e-09,9.593903595e-01,-4.500187451e-11,1.952617584e+00,-
6.803497679e-09,176400.0,-2.153683454e-09,-1.199077815e-
08,0.000000000e+00,0.000000000e+00,0.000000000e+00,-2.910383046e-
10,6.693656906e-04,1.219113699e-11,0.000000000e+00,588,0,27,0,7,0,0,1*b90d9566
```

Table 7-75 BD3EPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BD3EPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	Satellite PRN number (BDS: 1 to 63)	UChar	1	H
3	Health	Satellite health status: 0=healthy, 1=unhealthy	UChar	1	H+1
4	SatType	Satellite type (GEO/MEO/IGSO) 1 = GEO 2 = IGSO 3 = MEO	UChar	1	H+2
5	SISMAI	Signal-in-space monitoring accuracy	UChar	1	H+3
6	IODE	When outputting B1C and B2a ephemeris, this field is the issue of ephemeris data; when outputting B2b ephemeris, this field is reserved.	UShort	2	H+4

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
7	IODC	When outputting B1C and B2a ephemeris, this field is the issue of clock data; when outputting B2b ephemeris, this field is reserved.	UShort	2	H+6
8	Week	GPS reference week number (GPS week)	UShort	2	H+8
9	Zweek	Z count week number based on GPS week. This is the week number from subframe 1 of the ephemeris (TOE week)	UShort	2	H+10
10	Tow	Time stamp of subframe 1, seconds	Double	8	H+12
11	Toe	Reference time of ephemeris, seconds	Double	8	H+20
12	DeltaA	Deviation of the semi-major axis at the reference time relative to the reference value, meters	Double	8	H+28
13	dDeltaA	Rate of change of the semi-major axis, meters/second	Double	8	H+36
14	ΔN	Difference between the satellite mean angular velocity and the calculated value at the reference time, radians/second	Double	8	H+44
15	d ΔN	Rate of change of the difference between the satellite mean angular velocity and the calculated value at the reference time, radians/second ²	Double	8	H+52
16	M0	Mean anomaly at reference time, radians	Double	8	H+60
17	Ecc	Eccentricity	Double	8	H+68
18	ω	Argument of perigee, radians	Double	8	H+76

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
19	Cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+84
20	Cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+92
21	crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+100
22	crs	Orbit radius (amplitude of sine, meters)	Double	8	H+108
23	cic	Orbit inclination (amplitude of cosine, radians)	Double	8	H+116
24	cis	Orbit inclination (amplitude of sine, radians)	Double	8	H+124
25	I0	Inclination angle at reference time, radians	Double	8	H+132
26	IDOT	Rate of change of inclination angle, radians/second	Double	8	H+140
27	$\Omega 0$	Right ascension of ascending node, radians	Double	8	H+148
28	Ω dot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+156
29	toc	Reference time for satellite clock corrections, seconds	Double	8	H+164
30	Tgdb1cp	Group delay differential for B1C pilot, seconds	Double	8	H+172
31	Tgdb2ap	Group delay differential for B2a pilot, seconds	Double	8	H+180
32	Tgdb2bl*	Group delay differential for B2b I-component, seconds	Double	8	H+188

* Not supported by Build7160 and Build7676.

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
33	Tgdb2bQ*	Group delay differential for B2b Q-component, seconds	Double	8	H+196
34	ISCb2ad	Inter-signal correction of B2a data relative to B2a pilot, seconds	Double	8	H+204
35	ISCb1cd	Inter-signal correction of B1C data relative to B1C pilot, seconds	Double	8	H+212
36	af0	Satellite clock bias parameter, seconds	Double	8	H+220
37	af1	Satellite clock drift parameter, s/s	Double	8	H+228
38	af2	Rate of change of the satellite clock drift parameter, s/s ²	Double	8	H+236
39	iTop	Time of week of data prediction	INT	4	H+244
40	SISAl oe	Tangential and normal precision index of satellite orbit	UChar	1	H+248
41	SISAl oc b	Accuracy index of satellite orbit radial and satellite clock fixed bias	UChar	1	H+249
42	SISAl oc 1	Accuracy index of satellite clock frequency offset	UChar	1	H+250
43	SISAl oc 2	Accuracy index of satellite clock frequency drift	UChar	1	H+251
44	Reserved	Reserved	INT	4	H+252
45	Reserved	Reserved	INT	4	H+256
46	FreqType	If this field is 0, the message output is B1C ephemeris. If this field is 1, the message output is B2a ephemeris. If this field is 2, the message output is B2b ephemeris.	UINT	4	H+260

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
47	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+264
48	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.19 BDSEPH – BDS Ephemeris

This log contains BDS ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 108

ASCII Syntax:

BDSEPHA COM1 60

BDSEPHA COM1 ONCHANGED

Binary Syntax:

BDSEPHB COM1 60

BDSEPHB COM1 ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#BDSEPHA,97,GPS,FINE,2190,362675000,0,0,18,5;60,360000.0,0,1,1,2190,2190,360000.0
,4.216441036e+07,-4.103028050e-09,2.042808580e+00,3.8967351429e-
05,2.4660025037e+00,-1.457566395e-05,-2.235500142e-05,6.85031250e+02,-
4.52843750e+02,1.438893378e-07,-1.206062734e-07,1.2597663760e-
01,1.132190017e-10,-1.993009969e+00,5.03270963e-09,1,360000.0,4.980000000e-
08,4.980000000e-08,-1.45519e-07,8.26006e-14,0.00000e+00,TRUE,7.291643104e-
05,4.000000000e+00*493bb7fb
```

Table 7-76 BDSEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BDSEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	Satellite PRN number (BDS: 1 to 63)	Ulong	4	H
3	Tow	Time stamp of subframe 1 (based on GPS time), seconds	Double	8	H+4
4	Health	Health status, a 1-bit health code defined in the BDS ICD	Ulong	4	H+12
5	AODE	Age of data, ephemeris	Ulong	4	H+16
6	AODE	Age of data, ephemeris (same as field 5)	Ulong	4	H+20
7	Week	GPS reference week number (GPS week)	Ulong	4	H+24
8	Z Week	Z count week number based on GPS week. This is the week number from subframe 1 of the ephemeris. The "TOE week" (field 7) is derived from this to account for rollover.	Ulong	4	H+28
9	Toe	Reference time of ephemeris, seconds	Double	8	H+32
10	A	Semi-major axis of the satellite orbit, meters	Double	8	H+40
11	ΔN	Mean motion difference, radians/second	Double	8	H+48

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
12	M0	Mean anomaly at reference time, radians	Double	8	H+56
13	Ecc	Eccentricity	Double	8	H+64
14	ω	Argument of perigee, radians	Double	8	H+72
15	Cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+80
16	Cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+88
17	crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+96
18	crs	Orbit radius (amplitude of sine, meters)	Double	8	H+104
19	cic	Inclination (amplitude of cosine, radians)	Double	8	H+112
20	cis	Inclination (amplitude of sine, radians)	Double	8	H+120
21	I0	Inclination angle at reference time, radians	Double	8	H+128
22	IDOT	Rate of change of inclination angle, radians/second	Double	8	H+136
23	Ω 0	Right ascension of ascending node, radians	Double	8	H+144
24	Ω dot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+152
25	AODC	Age of data, clock	Ulong	4	H+160
26	toc	Reference time for satellite clock corrections (based on GPS time), seconds	Double	8	H+164

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
27	tgdl	Group delay differential for B1 signal (Equipment time delay differential for B1 signal), seconds	Double	8	H+172
28	tgdl	Group delay differential for B2 signal (Equipment time delay differential for B2 signal), seconds	Double	8	H+180
29	af0	Satellite clock bias parameter, seconds	Double	8	H+188
30	af1	Satellite clock rate parameter, s/s	Double	8	H+196
31	af2	Satellite clock drift parameter, s/s/s	Double	8	H+204
32	AS	Anti-spoofing: 0 = FALSE 1 = TRUE	Enum	4	H+212
33	N	Corrected mean motion, radians/second	Double	8	H+216
34	URA	User range accuracy, m ² . The ICD specifies an algorithm to convert the URA index transmitted in the ephemeris to a nominal standard deviation value. Here outputs the square (variance) of the nominal value.	Double	8	H+224
35	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+232
36	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.20 GLOEPH – GLONASS Ephemeris

This log contains GLONASS ephemeris information. GLONASS ephemerides use PZ90.02 geodetic datum. The log supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 107

ASCII Syntax:

GLOEPHA COM1 60

GLOEPHA COM1 ONCHANGED

Binary Syntax:

GLOEPHB COM1 60

GLOEPHB COM1 ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GLOEPHA,88,GPS,FINE,2305,116282000,0,0,18,30;40,12,1,0,2305,114318000,10782,71,
0,0,43,0,1.890321777343750e+06,-
1.100072509765625e+07,2.298513378906250e+07,3.121249198913574e+03,-
2.802515029907227e+02,-3.969745635986328e+02,-0.000000931322575,-
2.793967723846436e-06,-2.793967723846436e-06,-9.616464376449585e-05,-
2.793967724e-09,9.094947017729282e-13,38040,2,3,0,12*2f2935b8
```

Table 7-77 GLOEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GLOEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Sloto	Slot information - PRN identification (Slot + 37).	Ushort	2	H

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	frequ	Frequency channel, in the range of 0 to 20	Ushort	2	H+2
4	sat type	Satellite type 0 = GLO_SAT 1 = GLO_SAT_M (M type) 2 = GLO_SAT_K (K type)	Uchar	1	H+4
5	Reserved	Reserved		1	H+5
6	e week	Reference week of ephemeris (GPS week)	Ushort	2	H+6
7	e time	Reference time of ephemeris (GPS reference time), ms	Ulong	4	H+8
8	t offset	Integer seconds between GPS time and GLONASS time. A positive value implies that GLONASS is ahead of GPS time.	Ulong	4	H+12
9	Nt	Number of days past from the Jan 1st of a leap year	Ushort	2	H+16
10	Reserved	Reserved		1	H+18
11	Reserved	Reserved		1	H+19
12	issue	Number of 15-minute intervals relative to the reference time of ephemeris	Ulong	4	H+20
13	health	Ephemeris health, where 0 = healthy 1 = unhealthy	Ulong	4	H+24

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
14	pos x	X coordinate for satellite at reference time (PZ-90.02), meters	Double	8	H+28
15	pos y	Y coordinate for satellite at reference time (PZ-90.02), meters	Double	8	H+36
16	pos z	Z coordinate for satellite at reference time (PZ-90.02), meters	Double	8	H+44
17	vel x	X coordinate for satellite velocity at reference time (PZ-90.02), m/s	Double	8	H+52
18	vel y	Y coordinate for satellite velocity at reference time (PZ-90.02), m/s	Double	8	H+60
19	vel z	Z coordinate for satellite velocity at reference time (PZ-90.02), m/s	Double	8	H+68
20	LS acc x	X coordinate for lunisolar acceleration at reference time (PZ-90.02), m/s ²	Double	8	H+76
21	LS acc y	Y coordinate for lunisolar acceleration at reference time (PZ-90.02), m/s ²	Double	8	H+84
22	LS acc z	Z coordinate for lunisolar acceleration at reference time (PZ-90.02), m/s ²	Double	8	H+92
23	tau_n	Correction to the n th satellite time t_n relative to GLONASS time t_c, in seconds	Double	8	H+100

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
24	delta_tau_n	Time difference between the RF signal transmitted in L2 sub-band and that transmitted in L1 sub-band by the n th satellite, seconds	Double	8	H+108
25	gamma	Frequency correction, s/s	Double	8	H+116
26	Tk	Time of frame start (since start of GLONASS day), seconds	Ulong	4	H+124
27	P	Technological parameter	Ulong	4	H+128
28	Ft	Prediction of user range accuracy	Ulong	4	H+132
29	age	Age of data, day	Ulong	4	H+136
30	Flags	Information flags, see Table 7-78 GLONASS Ephemeris Flags Coding	Ulong	4	H+140
31	xxxx	32-bit CRC	Hex	4	H+144
32	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-78 GLONASS Ephemeris Flags Coding

Bit	Description	Value	Mask
0	P1 flag: time interval between two adjacent tb values	see Table 7-79 P1 Flag Range Values	00000001
1			00000002
2	P2 flag: Oddness or Evenness of tb value	0=even, 1=odd	00000004
3	P3 flag: number of satellites contained in the almanac of the current subframe	0=4, 1=5	00000008
4	Reserved		

Bit	Description	Value	Mask
...			
31			

Table 7-79 P1 Flag Range Values

State	Description
00	0 minutes
01	30 minutes
10	45 minutes
11	60 minutes

7.3.21 GALEPH – Galileo Ephemeris

This log contains Galileo ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 109

ASCII Syntax:

GALEPHA COM1 60

GALEPHA COM1 ONCHANGED

Binary Syntax:

GALEPHB COM1 60

GALEPHB COM1 ONCHANGED

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#GALEPHA,97,GPS,FINE,2190,363656000,0,0,18,3;36,TRUE,TRUE,0,0,0,0,0,107,0,82,356
400,5.44061113e+03,2.4787e-09,-1.46715796e+00,2.844742266e-04,-
1.325646591e+00,-8.5607e-06,9.0413e-06,1.590e+02,-1.839e+02,9.3132e-09,-
3.9116e-08,9.965504471e-01,-2.6823e-10,-1.201660091e+00,-5.44451250e-
09,356400,-3.108567325e-04,-5.357492e-12,0.0e+00,356400,-3.108558012e-04,-
5.357492e-12,0.0e+00,5.821e-09,6.752e-09*e8487c09
```

Table 7-80 GALEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	GALEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	SatId	Satellite ID (Galileo: 1 to 36)	Ulong	4	H
3	FNAVReceived	Indicates FNAV ephemeris data received	Bool	4	H+4
4	INAVReceived	Indicates INAV ephemeris data received	Bool	4	H+8
5	E1BHealth	E1b health status (valid only if INAVReceived is TRUE)	Uchar	1	H+12
6	E5aHealth	E5a health status (valid only if FNAVReceived is TRUE)	Uchar	1	H+13
7	E5bHealth	E5b health status (valid only if INAVReceived is TRUE)	Uchar	1	H+14
8	E1BDVS	E1b data validity status (valid only if INAVReceived is TRUE)	Uchar	1	H+15
9	E5aDVS	E5a data validity status (valid only if FNAVReceived is TRUE)	Uchar	1	H+16
10	E5bDVS	E5b data validity status (valid only if INAVReceived is TRUE)	Uchar	1	H+17
11	SISA	Signal in space accuracy	Uchar	1	H+18
12	Reserved	Reserved	Uchar	1	H+19
13	IODNav	Issue of data, ephemeris	Ulong	4	H+20
14	Toe	Reference time of ephemeris, seconds	Ulong	4	H+24
15	RootA	Square root of semi-major axis, meter ^{1/2}	Double	8	H+28

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
16	DeltaN	Mean motion difference, radians/second	Double	8	H+36
17	M0	Mean anomaly at reference time, radians	Double	8	H+44
18	Ecc	Eccentricity of the satellite orbit	Double	8	H+52
19	Omega	Argument of perigee, radians	Double	8	H+60
20	Cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+68
21	Cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+76
22	Crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+84
23	Crs	Orbit radius (amplitude of sine, meters)	Double	8	H+92
24	Cic	Inclination (amplitude of cosine, radians)	Double	8	H+100
25	Cis	Inclination (amplitude of sine, radians)	Double	8	H+108
26	I0	Inclination angle at TOE time, radians	Double	8	H+116
27	IDot	Rate of change of inclination angle, radians/second	Double	8	H+124
28	Omega0	Right ascension of ascending node, radians	Double	8	H+132
29	OmegaDot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+140

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
30	FNAVT0c	Satellite clock bias parameter, seconds (valid only if FNAVReceived is TRUE)	Ulong	4	H+148
31	FNAVAf0	Satellite clock bias parameter, seconds (valid only if FNAVReceived is TRUE)	Double	8	H+152
32	FNAVAf1	Satellite clock rate parameter, s/s (valid only if FNAVReceived is TRUE)	Double	8	H+160
33	FNAVAf2	Satellite clock drift parameter, s/s ² (valid only if FNAVReceived is TRUE)	Double	8	H+168
34	INAVT0c	Satellite clock bias parameter, seconds (valid only if INAVReceived is TRUE)	Ulong	4	H+176
35	INAVAf0	Satellite clock bias parameter, seconds (valid only if INAVReceived is TRUE)	Double	8	H+180
36	INAVAf1	Satellite clock rate parameter, s/s (valid only if INAVReceived is TRUE)	Double	8	H+188
37	INAVAf2	Satellite clock drift parameter, s/s ² (valid only if INAVReceived is TRUE.)	Double	8	H+196
38	E1E5aBGD	E1, E5a broadcast group delay	Double	8	H+204
39	E1E5bBGD	E1, E5b broadcast group delay (valid only if INAVReceived is TRUE)	Double	8	H+212
40	xxxx	32-bit CRC	Hex	4	H+220
41	[CR][LF]	Sentence terminator (ASCII only)	-		-

7.3.22 IRNSSEPH – IRNSS Ephemeris

This log contains IRNSS ephemeris information. It supports ONCHANGED trigger. If you use ONTIME trigger (i.e. the output frequency is fixed), the recommended time interval is more than 60 seconds because of the large amount of ephemeris data; it is not recommended to output this log at 1 Hz. When it is output together with 50 Hz observation data, it is recommended to use the ONCHANGED trigger.

Message ID: 112

ASCII Syntax:

IRNSSEPHA COM1 60

IRNSSEPHA COM1 ONCHANGED

Binary Syntax:

IRNSSEPHB COM1 60

IRNSSEPHB COM1 ONCHANGED

Applicable to: UM980, UB9A0

Message Output:

```
#IRNSSEPHA,87,GPS,FINE,2305,116273000,0,0,18,31;2,9685.0,0,193,0,2305,0,115536.0,4
.216456644e+07,4.968778398e-09,-1.455813652e+00,2.0113651408e-
03,3.0523021218e+00,2.138316631e-05,-2.254918218e-
05,7.77500000e+02,6.59937500e+02,-2.346932888e-07,-2.123415470e-
07,5.0866932453e-01,4.564475843e-10,1.506952289e+00,-4.93877715e-
09,0,115536.0,-1.862645149e-09,6.0655642e-05,2.3760549e-
11,0.0000000e+00,0,7.292510329e-05,4.0*298210c8
```

Table 7-81 IRNSSEPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	IRNSSEPH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	Satellite PRN number IRNSS: 1 to 15	Ulong	4	H

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	TOWC	Time stamp of subframe 1, TOWC*12 is the start time of the next subframe, seconds	Double	8	H+4
4	L5 health	Health status of navigation data on L5 SPS signal 0=healthy; 1=unhealthy	Ulong	4	H+12
5	IODEC	Issue of data ephemeris and clock	Ulong	4	H+16
6	S health	Health status of navigation data on S SPS signal 0=healthy; 1=unhealthy	Ulong	4	H+20
7	Week	GPS week number (GPS Week)	Ulong	4	H+24
8	Reserved	Reserved	Ulong	4	H+28
9	Toe	Time of ephemeris, seconds	Double	8	H+32
10	A	Semi-major axis of satellite orbit, meters	Double	8	H+40
11	ΔN	Mean motion difference, radians/second	Double	8	H+48
12	M0	Mean anomaly at reference time, radians	Double	8	H+56
13	Ecc	Eccentricity of satellite orbit	Double	8	H+64
14	ω	Argument of perigee, radians	Double	8	H+72
15	cuc	Argument of latitude (amplitude of cosine, radians)	Double	8	H+80
16	cus	Argument of latitude (amplitude of sine, radians)	Double	8	H+88
17	crc	Orbit radius (amplitude of cosine, meters)	Double	8	H+96

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
18	crs	Orbit radius (amplitude of sine, meters)	Double	8	H+104
19	cic	Inclination (amplitude of cosine, radians)	Double	8	H+112
20	cis	Inclination (amplitude of sine, radians)	Double	8	H+120
21	i0	Inclination angle at reference time, radians	Double	8	H+128
22	IDOT	Rate of change of inclination angle, radians/second	Double	8	H+136
23	Ω0	Right ascension of ascending node, radians	Double	8	H+144
24	Ω dot	Rate of change of the right ascension of ascending node, radians/second	Double	8	H+152
25	Reserved	Reserved	Ulong	4	H+160
26	toc	Reference time for satellite clock corrections, seconds	Double	8	H+164
27	tgd	Total group delay for IRNSS S signal, seconds	Double	8	H+172
28	af0	Satellite clock bias parameter, seconds	Double	8	H+180
29	af1	Satellite clock rate parameter, s/s	Double	8	H+188
30	af2	Satellite clock drift parameter, s/s ²	Double	8	H+196
31	Flag	Bit0: Alert Flag, 1 = Alert (The utilization of navigation data shall be at the users' own risk.) Bit1: AutoNav mode, 1 = AutoNav (Satellite broadcasts primary navigation parameters from AutoNav data sets with no uplink from ground for maximum of seven days.)	Enum	4	H+204

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
32	N	Corrected mean motion, radians/second	Double	8	H+208
33	URA	User range accuracy, m ² . The ICD specifies an algorithm to convert the URA index transmitted in the ephemeris to a nominal standard deviation value. Here outputs the square (variance) of the nominal value.	Double	8	H+216
34	xxxx	32-bit CRC	Hex	4	H+224
35	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.23 AGRIC

AGRIC message contains the receiver's position, velocity, serial number, heading, and baseline information.

Message ID: 11276

ASCII Syntax:

AGRICA 1

AGRICA COM2 1

Binary Syntax:

AGRICB 1

AGRICB COM2 1

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Message Output:

```
#AGRICA,97,GPS,FINE,2190,363942000,0,0,18,12;GNSS,232,21,12,30,5,5,24,1,0,5,15,1,0.0
000,0.0000,0.0000,0.0000,0.0000,0.0000,0.0000,0.0000,0.0000,0.005,-
0.003,0.001,0.004,0.042,0.050,0.044,40.07898274722,116.23663152683,60.0036,-
2160488.6213,4383615.6655,4084732.9679,1.8493,1.8902,4.4654,0.0000,0.0000,0.0000
,0.000000000000,0.000000000000,0.0000,-
```

N4 Products Commands and Logs Reference Book

0.000000000000,0.000000000000,0.0000,363942000,0.000,15.213205, -
8.492279,0.000000,0.000000,5,0,0,0*0b2e294a

Table 7-82 AGRIC Message Structure

ID	Field Type	Description	Format	Binary Bytes	Binary Offset
1	AGRIC header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	GNSS		Char	4	H
3	length	Command length, from GNSS to CRC, 232 bytes in total, a fixed value of 0XE8	uchar	1	H+4
4	Year	UTC-year, for example: 2016: 16; 2116: 116	uchar	1	H+5
5	Month	UTC-month	uchar	1	H+6
6	Day	UTC-day	uchar	1	H+7
7	Hour	UTC-hour	uchar	1	H+8
8	Minute	UTC-minute	uchar	1	H+9
9	Second	UTC-second	uchar	1	H+10
10	Postype	Rover position status: 0: Invalid solution; 1: Single point solution; 2: Pseudorange differential solution; 4: Fixed solution; 5: Float solution 7: Input a fixed position (only supported by specific versions)	uchar	1	H+11

ID	Field Type	Description	Format	Binary Bytes	Binary Offset
11	Heading Status	Heading solution status of master and slave antennas 0: Invalid solution; 4: Fixed solution; 5: Float solution	uchar	1	H+12
12	Num GPS Sta	Number of GPS satellites used in the solution	uchar	1	H+13
13	Num BDS Sta	Number of BDS satellites used in the solution	uchar	1	H+14
14	Num GLO Sta	Number of GLONASS satellites used in the solution	uchar	1	H+15
15	Baseline_N	Baseline vector from the base station to the rover station, northern component	float	4	H+16
16	Baseline_E	Baseline vector from the base station to the rover station, eastern component	float	4	H+20
17	Baseline_U	Baseline vector from the base station to the rover station, vertical component	float	4	H+24
18	Baseline_NStd	Baseline vector from the base station to the rover station, northern component standard deviation	float	4	H+28
19	Baseline_EStd	Baseline vector from the base station to the rover station, eastern component standard deviation	float	4	H+32

N4 Products Commands and Logs Reference Book

ID	Field Type	Description	Format	Binary Bytes	Binary Offset
20	Baseline_UStd	Baseline vector from the base station to the rover station, vertical component standard deviation	float	4	H+36
21	Heading	Heading	float	4	H+40
22	Pitch	Pitch	float	4	H+44
23	Roll	Roll	float	4	H+48
24	Speed	Speed, scalar	float	4	H+52
25	Velocity of North	North velocity	float	4	H+56
26	Velocity of East	East velocity	float	4	H+60
27	Velocity of Up	Up velocity	float	4	H+64
28	Xigma_Vx	North velocity standard deviation	float	4	H+68
29	Xigma_Vy	East velocity standard deviation	float	4	H+72
30	Xigma_Vz	Up velocity standard deviation	float	4	H+76
31	lat	Latitude of the rover station: -90~90 degrees, positive for the North and negative for the South	double	8	H+80
32	lon	Longitude of the rover station: -180~180 degrees, positive for the East and negative for the West	double	8	H+88
33	alt	Height of the rover station	double	8	H+96
34	ECEF_X	X axis of the ECEF coordinate system	double	8	H+104

ID	Field Type	Description	Format	Binary Bytes	Binary Offset
35	ECEF_Y	Y axis of the ECEF coordinate system	double	8	H+112
36	ECEF_Z	Z axis of the ECEF coordinate system	double	8	H+120
37	Xigma_lat	Latitude standard deviation	float	4	H+128
38	Xigma_lon	Longitude standard deviation	float	4	H+132
39	Xigma_alt	Height standard deviation	float	4	H+136
40	Xigma_ECEF_X	ECEF_X standard deviation	float	4	H+140
41	Xigma_ECEF_Y	ECEF_Y standard deviation	float	4	H+144
42	Xigma_ECEF_Z	ECEF_Z standard deviation	float	4	H+148
43	BASE_lat	Latitude of the base station: -90~90 degrees	double	8	H+152
44	BASE_lon	Longitude of the base station: -180~180 degrees	double	8	H+160
45	BASE_alt	Height of the base station	double	8	H+168
46	SEC_lat	Latitude of the slave antenna: -90~90 degrees	double	8	H+176
47	SEC_lon	Longitude of the slave antenna: -180~180 degrees	double	8	H+184
48	SEC_alt	Height of the slave antenna	double	8	H+192
49	GPS_WEEK_SECONDS	Milliseconds of GPS week	int	4	H+200
50	Diffage	Differential age	float	4	H+204
51	Speed_Heading	Direction of velocity	float	4	H+208
52	Undulation	Undulation	float	4	H+212

ID	Field Type	Description	Format	Binary Bytes	Binary Offset
53	Remain_float_3	Reserved	float	4	H+216
54	Remain_float_4	Reserved	float	4	H+220
55	Num GAL Sta	Number of Galileo satellites	uchar	1	H+224
56	Speed_Type	0: speed solution status valid 1: speed solution status invalid	uchar	1	H+225
57	Remain_char_3	Reserved	uchar	1	H+226
58	Remain_char_4	Reserved	uchar	1	H+227
59	xxxx	32-bit CRC	HEX	4	H+228
60	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.24 PVTSLN – Position and Heading Information

This log contains the best position, best velocity, and heading information. It integrates multiple messages into one package, which facilitates the terminal device to process data.

Message ID: 1021

ASCII Syntax:

PVTSLNA 1

Binary Syntax:

PVTSLNB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#PVTSLNA,97,GPS,FINE,2190,364536000,0,0,18,13;SINGLE,60.5060,40.07898130522,11
6.23663134427,4.3353,1.8063,1.8796,0.000,SINGLE,60.5060,40.07898130522,116.2366
3134427,-8.4923,46,28,46,28,0.0009,-0.0031,-
0.0032,NONE,0.0000,0.0000,0.0000,0,0,0,2.1753,1.3480,0.6840,1.8392,1.7072,5.0,28,25
,26,29,31,32,34,39,77,79,83,98,99,161,162,163,166,167,169,176,179,182,196,199,200,205,
```

206,219,220*1e33c8cb

Table 7-83 PVTSLN Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PVTSLN header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure	H	H	0
2	bestpos_type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H
3	bestpos_hgt	Height above mean sea level, meters	FLOAT	4	H+4
4	bestpos_lat	Latitude, degrees (Output 11 digits after the decimal point)	DOUBLE	8	H+8
5	bestpos_lon	Longitude, degrees (Output 11 digits after the decimal point)	DOUBLE	8	H+16
6	bestpos_hgtstd	Height standard deviation	FLOAT	4	H+24
7	bestpos_latstd	Latitude standard deviation	FLOAT	4	H+28
8	bestpos_lonstd	Longitude standard deviation	FLOAT	4	H+32
9	bestpos_diffage	Differential age of BESTNAV when the position is fixed	FLOAT	4	H+36
10	psrpos_type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+40
11	psrpos_hgt	Height above mean sea level	FLOAT	4	H+44
12	psrpos_lat	Latitude	DOUBLE	8	H+48
13	psrpos_lon	Longitude	DOUBLE	8	H+56
14	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	FLOAT	4	H+64
15	bestpos_svs	Number of tracked satellites	UCHAR	1	H+68

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
16	bestpos_solnsvs	Number of satellites used in solution	UCHAR	1	H+69
17	psrpos_svs	Number of tracked satellites	UCHAR	1	H+70
18	psrpos_solnsvs	Number of satellites used in solution	UCHAR	1	H+71
19	psrvel_north	North velocity, m/s	DOUBLE	8	H+72
20	psrvel_east	East velocity, m/s	DOUBLE	8	H+80
21	psrvel_ground	Horizontal speed over ground, m/s	DOUBLE	8	H+88
22	heading_type	Heading type, refer to Table 0- 5 Solution Status	Enum	4	H+96
23	heading_length	Baseline length (0 to 3000 meters)	FLOAT	4	H+100
24	heading_degree	Heading (0 to 360.0 degrees)	FLOAT	4	H+104
25	heading_pitch	Pitch (± 90 degrees)	FLOAT	4	H+108
26	heading_trackedsvs	Number of satellites tracked by the master antenna	UCHAR	1	H+112
27	heading_solnsvs	Number of satellites used in heading solution	UCHAR	1	H+113
28	heading_ggl1	Number of satellites with L1 frequency used in heading solution	UCHAR	1	H+114
29	heading_ggl1l2	Number of satellites with L1 L2 frequencies used in heading solution	UCHAR	1	H+115
30	gdop	Geometric dilution of precision	FLOAT	4	H+116
31	pdop	Position dilution of precision	FLOAT	4	H+120
32	hdop	Horizontal dilution of precision	FLOAT	4	H+124

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
33	htdop	Horizontal and time dilution of precision	FLOAT	4	H+128
34	tdop	Time dilution of precision	FLOAT	4	H+132
35	cutoff	Elevation cutoff angle	FLOAT	4	H+136
36	PRN No	PRN number of tracked satellites	USHORT	2	H+140
37	PRN_list[41]	PRN of tracked satellites, null field until the position solution is available	USHORT	41*2	H+142
38	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+224
39	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.25 UNIOGLIST – Output Log List

This command is used to output the list of operating logs. Binary format is not supported.

ASCII Syntax:

UNIOGLIST

Applicable to: UM960, UM980, UB9A0, UM982

Message Output:

```
#UNIOGLIST,66,GPS,FINE,2203,447089000,0,0,18,33;
```

```
< 3
< PSRPOSA COM1 1
< GPGGA COM1 1
< HWSTATUSA COM1 1
```

Table 7-84 UNIOGLIST Message Structure

ID	Field Type	Data Description	Format
1	UNIOGLIST (ASCII)header	Log header, see Table 7-51 ASCII Header Structure	

ID	Field Type	Data Description	Format
2	#port	Number of messages, maximum=30	Long
3	LOG	LOG string	
4	port	Output port, refer to Table 7-85 Port Identifier	Enum
5	message	Message name of the log, no suffix for abbreviated ASCII, suffix A for ASCII and B for binary	Char []
6	trigger	Trigger mode of output messages, ONTIME or ONCE	
7	period	Log period for ONTIME trigger, seconds	
8...	Next port		
Variable	xxxx	32-bit CRC	Hex
Variable	[CR][LF]	Sentence terminator	-

Table 7-85 Port Identifier

Port Name	Description
COM1	COM port 1
COM2	COM port 2
COM3	COM port 3

7.3.26 BESTNAV – Best Position and Velocity

This log contains the best GNSS and INS (if available) position and velocity computed by the receiver using the master antenna. It also contains several status indicators, including the differential age, which can be used to predict the abnormal operation caused by the interruption of the transmission of differential correction data. If the differential age is 0, it indicates that no differential correction is used.

Message ID: 2118

ASCII Syntax:

BESTNAVA 1

Binary Syntax:

BESTNAVB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#BESTNAVA,97,GPS,FINE,2294,472312000,0,0,18,16;SOL_COMPUTED,SINGLE,40.07895
888272,116.23651029820,65.8312,-
8.4925,WGS84,1.2221,1.1053,2.1970,"0",0.000,0.000,50,28,28,0,1,12,12,41,SOL_COMPUT
ED,DOPPLER_VELOCITY,0.000,0.000,0.0046,335.592288,0.0045,0.0194,0.0123*c1b4f7fe
```

Table 7-86 BESTNAV Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BESTNAV header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	p-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 (binary = 61) is supported for now.	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
12	stn id	Base station ID, default = 0	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BD S3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+71
23	V-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s, positive indicates increasing altitude (up) and negative indicates decreasing altitude (down)	Double	8	H+104
30	Verspd std	Vertical speed standard deviation, m/s	Float	4	H+112
31	Horspd std	Horizontal speed standard deviation, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-87 GPS/GLONASS/BDS-2 Signal Mask

Bit	Mask	Description
0	0x01	GPS L1 used in solution
1	0x02	GPS L2 used in solution
2	0x04	GPS L5 used in solution
3	0x08	BDS B3I used in solution
4	0x10	GLONASS L1 used in solution
5	0x20	GLONASS L2 used in solution
6	0x40	BDS B1I used in solution
7	0x80	BDS-2 B2I used in solution

Table 7-88 Galileo & BDS-3 Signal Mask

Bit	Mask	Description
0	0x01	GALILEO E1 used in solution
1	0x02	GALILEO E5b used in solution
2	0x04	GALILEO E5A used in solution
3	0x08	Reserved
4	0x10	BDS-3 B1I used in solution
5	0x20	BDS-3 B3I used in solution
6	0x40	BDS-3 B2a used in solution
7	0x80	BDS-3 B1C used in solution

Table 7-89 Extended Solution Status

Bit	Description
0	RTK solution verification 0 = unchecked 1 = checked
1-3	Pseudorange ionospheric correction 0 = Unknown 1 = Klobuchar broadcast ephemeris correction 2 = SBAS ionospheric grid correction 3 = Multi-frequency correction 4 = Pseudorange differential correction

7.3.27 BESTNAVXYZ – Best Position and Velocity in ECEF Coordinate System

This log contains the best position and velocity computed by the receiver in ECEF coordinate system. The “status” fields of position and velocity indicate the validity of the corresponding data.

Message ID: 240

ASCII Syntax:

BESTNAVXYZA 1

Binary Syntax:

BESTNAVXYZB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#BESTNAVXYZA,97,GPS,FINE,2190,364674000,0,0,18,9;SOL_COMPUTED,SINGLE,-
2160488.6043,4383615.8972,4084733.1053,0.0000,0.0000,0.0000,SOL_COMPUTED,DO
PPLER_VELOCITY,-
0.0023,0.0003,0.0020,0.0377,0.0503,0.0411,"",0.000,0.000,0.000,47,28,28,0,0,12,0,09*29
9636fe
```

Table 7-90 BESTNAVXYZ Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BESTNAVXYZ header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	P-sol status	Solution status, refer to Table 0-5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0-4 Position or Velocity Type	Enum	4	H+4
4	P-X	X-coordinate of position, m	Double	8	H+8
5	P-Y	Y-coordinate of position, m	Double	8	H+16
6	P-Z	Z-coordinate of position, m	Double	8	H+24
7	P-X σ	Standard deviation of P-X, m	Float	4	H+32
8	P-Y σ	Standard deviation of P-Y, m	Float	4	H+36
9	P-Z σ	Standard deviation of P-Z, m	Float	4	H+40
10	V-sol status	Solution status, refer to Table 0-5 Solution Status	Enum	4	H+44

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
11	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+48
12	V-X	Velocity along X-axis, m/s	Double	8	H+52
13	V-Y	Velocity along Y-axis, m/s	Double	8	H+60
14	V-Z	Velocity along Z-axis, m/s	Double	8	H+68
15	V-X σ	Standard deviation of V-X, m/s	Float	4	H+76
16	V-Y σ	Standard deviation of V-Y, m/s	Float	4	H+80
17	V-Z σ	Standard deviation of V-Z, m/s	Float	4	H+84
18	stn ID	Base station ID, default = 0	Char[4]	4	H+88
19	V-latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+92
20	diff_age	Differential age, s	Float	4	H+96
21	sol_age	Solution age, s	Float	4	H+100
22	#SVs	Number of satellites tracked	Uchar	1	H+104
23	#solnSVs	Number of satellites used in solution	Uchar	1	H+105
24	#ggL1	Number of satellites with L1/G1/B1 signals used in solution	Uchar	1	H+106
25	#solnMultiSVs	Number of satellites with L1/G1/B1/E1 signals used in solution	Uchar	1	H+107
26	Reserved	Reserved	Char	1	H+108
27	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+109

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
28	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+110
29	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+111
30	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+112
31	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.28 BESTNAVH – Best Position and Velocity (Slave Antenna)

This log contains the best GNSS and INS (if available) position and velocity computed by the receiver using the slave antenna. It also contains several status indicators, including the differential age, which can be used to predict the abnormal operation caused by the interruption of the transmission of differential correction data. If the differential age is 0, it indicates that no differential correction is used.

Message ID: 2119

ASCII Syntax:

BESTNAVHA 1

Binary Syntax:

BESTNAVHB 1

Applicable to: UM982

Message Output:

```
#BESTNAVHA,97,GPS,FINE,2190,364700000,0,0,18,13;INSUFFICIENT_OBS,NONE,40.078
98868399,116.23660520125,59.8754,-
8.4923,WGS84,2.9766,2.8787,10.0570,"0",0.000,11374.000,0,0,0,33,02,00,00,INSUFFICI
ENT_OBS,NONE,0.000,0.000,0.0301,33.043127,-0.0892,0004000c*7b4767e9
```

Table 7-91 BESTNAVH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BESTNAVH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	p-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 (binary = 61) is supported for now	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID, default = 0	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+71
23	V-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s, positive indicates increasing altitude (up) and negative indicates decreasing altitude (down)	Double	8	H+104

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
30	Verspd std	Vertical speed standard deviation, m/s	Float	4	H+112
31	Horspd std	Horizontal speed standard deviation, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.29 BESTNAVXYZH – Best Position and Velocity in ECEF Coordinate System (Slave Antenna)

This log contains the best position and velocity computed by the receiver using the slave antenna in ECEF coordinate system. The "status" fields of position and velocity indicate the validity of the corresponding data.

Message ID: 242

ASCII Syntax:

BESTNAVXYZHA 1

Binary Syntax:

BESTNAVXYZHB 1

Applicable to: UM982

Message Output:

```
#BESTNAVXYZHA,97,GPS,FINE,2190,364732000,0,0,18,13;INSUFFICIENT_OBS,NONE,-
2160485.5484,4383615.5669,4084733.8716,0.0000,0.0000,0.0000,INSUFFICIENT_OBS,N
ONE,0.0227,-0.0831,-
0.0382,0.5312,0.8483,0.5947,"",0.000,0.000,11406.000,0,0,0,0,0,02,0,00*58985f99
```

Table 7-92 BESTNAVXYZH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BESTNAVXYZH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	P-sol status	Solution status, refer to Table 0-5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0-4 Position or Velocity Type	Enum	4	H+4
4	P-X	X-coordinate of position, m	Double	8	H+8
5	P-Y	Y-coordinate of position, m	Double	8	H+16
6	P-Z	Z-coordinate of position, m	Double	8	H+24
7	P-X σ	Standard deviation of P-X, m	Float	4	H+32
8	P-Y σ	Standard deviation of P-Y, m	Float	4	H+36
9	P-Z σ	Standard deviation of P-Z, m	Float	4	H+40
10	V-sol status	Solution status, refer to Table 0-5 Solution Status	Enum	4	H+44
11	vel type	Velocity type, refer to Table 0-4 Position or Velocity Type	Enum	4	H+48
12	V-X	Velocity along X-axis, m/s	Double	8	H+52
13	V-Y	Velocity along Y-axis, m/s	Double	8	H+60
14	V-Z	Velocity along Z-axis, m/s	Double	8	H+68
15	V-X σ	Standard deviation of V-X, m/s	Float	4	H+76
16	V-Y σ	Standard deviation of V-X, m/s	Float	4	H+80
17	V-Z σ	Standard deviation of V-X, m/s	Float	4	H+84
18	stn ID	Base station ID, default = 0	Char[4]	4	H+88

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
19	V-latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+92
20	diff_age	Differential age, s	Float	4	H+96
21	sol_age	Solution age, s	Float	4	H+100
22	#SVs	Number of satellites tracked	Uchar	1	H+104
23	#solnSVs	Number of satellites used in solution	Uchar	1	H+105
24	#ggL1	Number of satellites with L1/G1/B1 signals used in solution	Uchar	1	H+106
25	#solnMultiSVs	Number of satellites with L1/G1/B1/E1 signals used in solution	Uchar	1	H+107
26	Reserved	Reserved	Char	1	H+108
27	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+109
28	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+110
29	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+111
30	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+112
31	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.30 BESTSAT – Satellites Used in Position Solution

This log contains information of satellites used in the position solution.

Message ID: 1041

ASCII Syntax:

BESTSATA 1

Binary Syntax:

BESTSATB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#BESTSATA,79,GPS,FINE,2203,226245800,0,0,18,22;43,GPS,2,GOOD,00000013,GPS,5,GOOD,00000013,GPS,7,GOOD,00000003,GPS,13,GOOD,00000013,GPS,15,GOOD,00000013,GPS,18,GOOD,00000007,GPS,20,GOOD,00000013,GPS,29,GOOD,00000013,GPS,30,GOOD,00000007,QZSS,195,GOOD,00000017,QZSS,196,GOOD,00000017,QZSS,199,GOOD,00000017,GLONASS,42+8,GOOD,00000003,GLONASS,43+3,GOOD,00000001,GLONASS,44+12,GOOD,00000003,GLONASS,57+9,GOOD,00000003,GLONASS,58+11,GOOD,00000003,GALILEO,4,GOOD,00000017,GALILEO,11,GOOD,00000017,GALILEO,12,GOOD,00000017,GALILEO,19,GOOD,00000017,GALILEO,33,GOOD,00000017,BEIDOU,1,GOOD,00000017,BEIDOU,2,GOOD,00000017,BEIDOU,3,GOOD,00000017,BEIDOU,4,GOOD,00000017,BEIDOU,6,GOOD,00000017,BEIDOU,7,GOOD,00000007,BEIDOU,8,GOOD,00000017,BEIDOU,10,GOOD,00000007,BEIDOU,13,GOOD,00000017,BEIDOU,16,GOOD,00000017,BEIDOU,19,GOOD,00000005,BEIDOU,20,GOOD,00000015,BEIDOU,27,GOOD,00000005,BEIDOU,29,GOOD,00000015,BEIDOU,30,GOOD,00000015,BEIDOU,32,GOOD,00000015,BEIDOU,35,GOOD,00000005,BEIDOU,38,GOOD,00000015,BEIDOU,39,GOOD,00000015,BEIDOU,59,GOOD,00000015,BEIDOU,60,GOOD,00000015*34479d6a
```

Table 7-93 BESTSAT Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BESTSAT Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	#entries	Number of satellites tracked	Ulong	4	H+0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	Satellite system	GNSS satellite system list, see Table 7-116 Satellite System	Enum	4	H+4
4	Satellite ID	Satellite PRN number (see Table 7-54 Satellite PRN Number in Unicore-defined Messages) In binary messages, satellite ID is composed of two parts of Ushort characters. The 2 lowest order bytes are system identifiers (such as the PRN for GPS and channel for GLONASS) and they are Ushort characters; the 2 highest order bytes are frequency channel for GLONASS and zero for other systems. In ASCII messages, satellite ID field is the system identifier. If the system is GLONASS and the frequency channel is not zero, the frequency channel is appended to the system identifier. For example, the system ID is 13, and the frequency channel is -2, then the output is 13-2.	Ulong	4	H+8
5	Status	In binary messages, the value is "0"; in ASCII messages, the value is "GOOD".	Enum	4	H+12
6	Signal mask	Table 7-94 BESTSAT GPS Signal Mask Table 7-95 BESTSAT GLONASS Signal Mask Table 7-96 BESTSAT BDS Signal Mask	Hex	4	H+16

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
		Table 7-97 BESTSAT Galileo Signal Mask			
7	Next satellite offset = H + 4 + (#entries x 16)				
8	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+4+ (#entries x 16)
9	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-94 BESTSAT GPS Signal Mask

Bit	MASK	Description
0	0x01	GPS L1 used in Solution
1	0x02	GPS L2 used in Solution
2	0x00 or 0x01	GPS L5 used in Solution
3	Reserved	Reserved
4	0x00 or 0x01	If the satellite is a common-view satellite shared with the base station, this bit is set to 0x01, otherwise it is set to 0x00.

Table 7-95 BESTSAT GLONASS Signal Mask

Bit	MASK	Description
0	0x01	GLONASS L1 used in Solution
1	0x02	GLONASS L2 used in Solution
2	0x04	GLONASS L3 used in Solution
3	Reserved	Reserved

Bit	MASK	Description
4	0x00 or 0x01	If the satellite is a common-view satellite shared with the base station, and the satellite is used in ambiguity resolution, this bit is set to 0x01, otherwise it is set to 0x00.

Table 7-96 BESTSAT BDS Signal Mask

Bit	MASK	Description
0	0x01	BeiDou B1 used in Solution
1	0x02	BeiDou B2 used in Solution
2	0x04	BeiDou B3 used in Solution
3	Reserved	Reserved
4	0x00 or 0x01	If the satellite is a common-view satellite shared with the base station, this bit is set to 0x01, otherwise it is set to 0x00.

Table 7-97 BESTSAT Galileo Signal Mask

Bit	MASK	Description
0	0x01	Galileo E1 used in Solution
1	0x02	Galileo E5A used in Solution
2	0x04	Galileo E5B used in Solution
3	0x08	Galileo ALTBOC used in Solution
4	0x00 or 0x01	If the satellite is a common-view satellite shared with the base station, this bit is set to 0x01, otherwise it is set to 0x00.

7.3.31 ADRNAV – RTK Position and Velocity

This log contains the position, accuracy, status, and velocity of the carrier phase RTK positioning.

Message ID: 142

ASCII Syntax:

ADRNAVA 1

Binary Syntax:

ADRNAVB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#ADRNAVA,97,GPS,FINE,2190,364787000,0,0,18,1;INSUFFICIENT_OBS,NONE,0.0000000
0000,0.000000000000,-
17.0000,17.0000,WGS84,0.0000,0.0000,0.0000,"0",0.000,0.000,46,0,0,0,0,0,0,0,INSUF
FICIENT_OBS,NONE,0.000,0.000,0.0000,0.000000,0.0000,00000000*f4ac8d54
```

Table 7-98 ADRNAV Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	ADRNAV header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 is supported for now. ASCII = WGS84, binary = 61.	Enum	4	H+36

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask, refer to Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	Hex	1	H+71
23	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s, positive indicates increasing altitude (up) and negative indicates decreasing altitude (down)	Double	8	H+104
30	Verspd std	Vertical speed standard deviation, m/s	Float	4	H+112
31	Horspd std	Horizontal speed standard deviation, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.32 ADRNAVH – RTK Position and Velocity (Slave Antenna)

This log contains the position, accuracy, status, and velocity of the carrier phase RTK positioning solution which is calculated with the slave antenna.

Message ID: 2117

ASCII Syntax:

ADRNAVHA 1

Binary Syntax:

ADRNAVHB 1

Applicable to: UM982

Message Output:

```
#ADRNAVHA,97,GPS,FINE,2190,364822000,0,0,18,9;INSUFFICIENT_OBS,NONE,0.000000
00000,0.000000000000,-
17.0000,17.0000,WGS84,0.0000,0.0000,0.0000,"0",0.000,0.000,0,0,0,0,0,0,0,0,INSUFFI
CIENT_OBS,NONE,0.000,0.000,0.0000,0.000000,0.0000,000000000*da9317a3
```

Table 7-99 ADRNAVH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	ADRNAVH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 is supported for now. ASCII = WGS84, binary = 61.	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask, refer to Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	Hex	1	H+71
23	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s. Positive indicates increasing altitude (up) and negative indicates decreasing altitude (down).	Double	8	H+104
30	Verspd std	Vertical speed standard deviation, m/s	Float	4	H+112
31	Horspd std	Horizontal speed standard deviation, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.33 PPPNAV – Position and Velocity of PPP

This log contains the position, accuracy, and status of the precise point positioning (PPP). PPP is only supported by specific version.

Message ID: 1026

ASCII Syntax:

PPPNAVA 1

Binary Syntax:

PPPNAVB 1

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPNAVA,64,GPS,FINE,2207,464961000,0,0,18,13;SOL_COMPUTED,PPP_CONVERGING
,40.07899442145,116.23661087189,65.8944,-
8.4923,WGS84,1.8755,1.4254,2.4821,"0",1.000,0.000,53,48,48,46,0,00,03,ff*2d9412be
```

Table 7-100 PPPNAV Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPNAV header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, output WGS84 currently. ASCII = WGS84, binary = 61. The actual output coordinate system can be set by CONFIG PPP DATUM command. Currently, PPP supports WGS84 and the original coordinate system of B2b-PPP.	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
12	stn id	Base station ID (in the format of 99 & satellite ID): If the positioning type is B2b PPP, the base station ID is one of 9959, 9960 or 9961. If the positioning type is E6 HAS, the station ID is 9901. If the positioning type is QZSS L6 MDC PPP, the station ID is one of 9934, 9936 or 9939.	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask, refer to Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	Hex	1	H+71
23	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+72

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
24	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.34 SPPNAV – Pseudorange Position and Velocity

This log contains the pseudorange position, accuracy, status, and velocity.

Message ID: 46

ASCII Syntax:

SPPNAVA 1

Binary Syntax:

SPPNAVB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#SPPNAVA,97,GPS,FINE,2294,472312000,0,0,18,14;SOL_COMPUTED,SINGLE,40.078958
88272,116.23651029820,65.8312,-
8.4925,WGS84,1.2221,1.1053,2.1970,"0",0.000,0.000,50,28,28,0,1,12,12,41,SOL_COMPUT
ED,DOPPLER_VELOCITY,0.000,0.000,0.0046,335.592288,0.0045,0.0194,0.0123*fab56d4
e
```

Table 7-101 SPPNAV Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SPPNAV header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 is supported for now. ASCII = WGS84, binary = 61.	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask, refer to Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	Hex	1	H+71
23	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s. Positive indicates increasing altitude (up) and negative indicates decreasing altitude (down).	Double	8	H+104
30	Verspd std	Standard deviation of vertical speed, m/s	Float	4	H+112
31	Horspd std	Standard deviation of horizontal speed, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.35 SPPNAVH – Pseudorange Position and Velocity (Slave Antenna)

This log contains the pseudorange position, accuracy, status, and velocity calculated with the slave antenna.

Message ID: 2116

ASCII Syntax:

SPPNAVHA 1

Binary Syntax:

SPPNAVHB 1

Applicable to: UM982

Message Output:

```
#SPPNAVHA,97,GPS,FINE,2190,364950000,0,0,18,13;INSUFFICIENT_OBS,NONE,40.0789
8868399,116.23660520125,59.8754,-
8.4923,WGS84,2.9766,2.8787,10.0570,"0",0.000,11624.000,0,0,0,0,33,02,00,00,INSUFFICI
ENT_OBS,NONE,0.000,0.000,0.0301,33.043127,-0.0892,0004000C*808205f0
```

Table 7-102 SPPNAVH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SPPNAVH header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 is supported for now. ASCII = WGS84, binary = 61.	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID	Char[4]	4	H+52
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask, refer to Table 7-87 GPS/GLONASS/BDS-2 Signal Mask	Hex	1	H+71
23	sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s. Positive indicates increasing altitude (up) and negative indicates decreasing altitude (down).	Double	8	H+104
30	Verspd std	Standard deviation of vertical speed, m/s	Float	4	H+112
31	Horspd std	Standard deviation of horizontal speed, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.36 STADOP – DOP of BESTNAV

This log contains dilution of precision (DOP) for all satellites used in the BESTNAV solution.

Message ID: 954

ASCII Syntax:

STADOPA 1

Binary Syntax:

STADOPB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#STADOPA,46,GPS,FINE,2298,280151000,0,0,18,12;280151000,0.8094,0.7129,0.3831,0.6046,0.3779,0.2902,0.2421,5.0,0.0,50,4,7,8,9,16,18,26,31,34,35,36,39,51,60,61,58,59,49,50,161,163,219,220,162,164,165,166,167,169,170,176,182,189,190,196,199,200,205,206,187,181,76,77,79,84,82,98,99,86,85*3e6acf8a
```

Table 7-103 STADOP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	STADOP Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2* #PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.37 STADOPH – DOP of BESTNAVH (Slave Antenna)

This log contains dilution of precision (DOP) for all satellites used in the BESTNAVH solution.

Message ID: 2122

ASCII Syntax:

STADOPHA 1

Binary Syntax:

STADOPHB 1

Applicable to: UM982

Message Output:

```
#STADOPHA,46,GPS,FINE,2298,280151000,0,0,18,28;280151000,0.8182,0.7199,0.3888,0
.6079,0.3856,0.2972,0.2456,5.0,0.0,49,16,9,8,4,26,18,7,31,34,36,35,39,58,60,59,50,49,51,6
1,161,163,220,219,162,164,165,169,167,166,176,170,182,190,189,196,181,206,205,200,1
99,79,77,76,99,98,84,82,86,85*fd39dcfc
```

Table 7-104 STADOPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	STADOPH Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicare-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2*# PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.38 ADRDOP – DOP of ADRNAV

This log contains dilution of precision (DOP) for all satellites used in the ADRNAV solution.

Message ID: 953

ASCII Syntax:

ADRDOPA 1

Binary Syntax:

ADRDOPB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#ADRDOPA,59,GPS,FINE,2298,280152000,0,0,18,7;280152000,0.8093,0.7129,0.3831,0.6
045,0.3779,0.2902,0.2421,5.0,0.0,50,4,7,8,9,16,18,26,31,34,35,36,39,51,60,61,58,59,49,50,
161,163,219,220,162,164,165,166,167,169,170,176,182,189,190,196,199,200,205,206,187
,181,76,77,79,84,82,98,99,86,85*0eea644e
```

Table 7-105 ADRDOP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	ADRDOP Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28
10	Cutoff	Elevation cutoff angle	Float	4	H+32

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicare-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2 *#PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.39 ADRDOPH – DOP of ADRNAVH (Slave Antenna)

This log contains dilution of precision (DOP) for all satellites used in the ADRNAVH solution.

Message ID: 2121

ASCII Syntax:

ADRDOPHA 1

Binary Syntax:

ADRDOPHB 1

Applicable to: UM982

Message Output:

```
#ADRDOPHA,46,GPS,FINE,2298,280151000,0,0,18,19;280151000,0.8182,0.7199,0.3888,0.6079,0.3856,0.2972,0.2456,5.0,0.0,49,16,9,8,4,26,18,7,31,34,36,35,39,58,60,59,50,49,51,61,161,163,220,219,162,164,165,169,167,166,176,170,182,190,189,196,181,206,205,200,199,79,77,76,99,98,84,82,86,85*1e0ad999
```

Table 7-106 ADRDOPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	ADRDOPH Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2*#PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.40 PPPDOP – DOP of PPPNAV

This log contains dilution of precision (DOP) for all satellites used in the PPPNAV solution. PPP is supported by specific versions only.

Message ID: 1025

ASCII Syntax:

PPPDOPA 1

Binary Syntax:

PPPDOPB 1

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPDOPA,60,GPS,FINE,2298,280475000,0,0,18,18;280475000,0.7632,0.6743,0.3574,0.5
637,0.3700,0.0000,0.0000,5.0,0.0,51,4,7,8,9,16,18,26,21,34,35,36,39,51,60,61,58,59,49,50,
62,161,163,219,220,162,164,165,166,167,169,170,176,182,189,190,196,199,200,205,206,
187,181,76,77,79,84,82,98,99,86,85*bb86e61e
```

Table 7-107 PPPDOP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPDOP Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2*#PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.41 SPPDOP – DOP of SPPNAV

This log contains dilution of precision (DOP) for all satellites used in the SPPNAV solution. The log supports ONCHANGED trigger. In order to output SPPDOP message, SPPNAV needs to be output first.

Message ID: 173

ASCII Syntax:

SPPDOPA 1

SPPDOPA ONCHANGED

Binary Syntax:

SPPDOPB 1

SPPDOPB ONCHANGED

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#SPPDOPA,46,GPS,FINE,2298,280151000,0,0,18,41;280151000,1.8370,1.5714,0.9515,1.3668,0.7752,0.6649,0.3985,5.0,0.0,28,4,8,9,16,26,34,35,39,76,77,79,84,98,99,161,163,166,1
```

67,169,170,176,189,190,196,199,200,219,220*6f7a59fd

Table 7-108 SPPDOP Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SPPDOP Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24
9	Edop	East DOP	Float	4	H+28
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2*#PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.42 SPPDOPH – DOP of SPPNAVH (Slave Antenna)

This log contains dilution of precision (DOP) for all satellites used in the SPPNAVH solution. The log supports ONCHANGED trigger.

Message ID: 2120

ASCII Syntax:

SPPDOPHA 1

SPPDOPHA ONCHANGED

Binary Syntax:

SPPDOPHB 1

SPPDOPHB ONCHANGED

Applicable to: UM982

Message Output:

```
#SPPDOPHA,46,GPS,FINE,2298,280151000,0,0,18,52;280151000,1.8370,1.5714,0.9515,1
.3668,0.7752,0.6649,0.3985,5.0,0.0,28,4,8,9,16,26,34,35,39,76,77,79,84,98,99,161,163,166
,167,169,170,176,189,190,196,199,200,219,220*3a8ad917
```

Table 7-109 SPPDOPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SPPDOPH Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Ulong	4	H
3	gdop	Geometric DOP	Float	4	H+4
4	Pdop	Position DOP	Float	4	H+8
5	Tdop	Time DOP	Float	4	H+12
6	Vdop	Vertical DOP	Float	4	H+16
7	Hdop	Horizontal DOP	Float	4	H+20
8	Ndop	North DOP	Float	4	H+24

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	Edop	East DOP	Float	4	H+28
10	Cutoff	Elevation cutoff angle	Float	4	H+32
11	Reserved	Reserved	Float	4	H+36
12	#PRN	Number of tracked satellites	UShort	2	H+40
13	PRN	PRN of tracked satellites, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages, null field until the position solution is available.	UShort	2	H+42
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+42+2*#PRN
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.43 SATSINFO – Satellite Information

This log contains all the satellite information tracked by the GNSS board/module, including the number of satellites, satellite PRN, elevation, azimuth, signal-to-noise ratio of different frequencies, etc.

Message ID: 2124

ASCII Syntax:

SATSINFOA 1

Binary Syntax:

SATSINFOB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#SATSINFOA,96,GPS,FINE,2215,367199000,0,0,18,16;50,2,0,0,0,63,2,302,51,0,45,0,2,0,42,
9,2,4,48,17,0,37,0,3,0,43,14,3,0,39,9,3,5,225,14,0,42,0,2,0,37,9,2,6,35,64,0,47,0,3,0,52,14,3,0,
```

48,9,3,9,80,33,0,42,0,3,0,44,14,3,0,40,9,3,11,300,56,0,46,0,3,0,50,14,3,0,46,9,3,12,277,37,0,4
 2,0,2,0,41,9,2,17,134,31,0,44,0,2,0,41,9,2,19,130,53,0,46,0,2,0,43,9,2,20,232,47,0,46,0,2,0,42
 ,9,2,25,316,15,0,38,0,3,0,45,14,3,0,40,9,3,28,0,0,0,37,0,2,0,31,9,2,194,170,8,5,38,0,3,5,41,14,
 3,5,37,9,3,195,112,67,5,45,0,3,5,49,14,3,5,47,9,3,196,132,61,5,42,0,3,5,48,14,3,5,46,9,3,199,
 163,43,5,36,0,3,5,46,14,3,5,44,9,3,39,116,64,1,43,0,2,1,49,5,2,55,316,30,1,43,0,2,1,46,5,2,52,
 242,10,1,39,0,2,1,39,5,2,38,35,28,1,40,0,2,1,41,5,2,61,93,29,1,42,0,2,1,45,5,2,54,22,62,1,47,0
 ,2,1,50,5,2,40,180,27,1,42,0,2,1,45,5,2,46,342,4,1,34,0,2,1,39,5,2,11,93,61,4,33,0,3,4,52,17,3,
 4,50,21,3,42,114,67,4,34,0,4,4,51,21,4,4,48,8,4,4,49,12,4,2,224,33,4,45,17,2,4,41,21,2,10,21
 4,52,4,29,0,3,4,46,17,3,4,45,21,3,28,306,28,4,29,0,4,4,44,21,4,4,41,8,4,4,42,12,4,40,180,42,4,
 31,0,4,4,44,21,4,4,43,8,4,4,43,12,4,8,289,63,4,31,0,3,4,48,17,3,4,46,21,3,43,8,79,4,36,0,4,4,5
 1,21,4,4,47,8,4,4,50,12,4,7,197,46,4,28,0,3,4,47,17,3,4,45,21,3,21,47,30,4,31,0,4,4,43,21,4,4,
 43,8,4,4,43,12,4,23,243,4,4,24,8,2,4,30,12,2,4,123,26,4,43,17,2,4,41,21,2,5,248,16,4,38,17,2,
 4,35,21,2,1,139,36,4,28,0,3,4,46,17,3,4,43,21,3,34,111,40,4,32,0,4,4,48,21,4,4,44,8,4,4,41,12,
 4,38,317,74,4,35,0,4,4,49,21,4,4,47,8,4,4,49,12,4,2,311,18,3,39,2,3,3,45,17,3,3,43,12,3,4,136,
 38,3,43,2,3,3,48,17,3,3,46,12,3,10,0,0,3,47,2,3,3,53,17,3,3,50,12,3,11,325,63,3,43,2,3,3,47,17
 ,3,3,45,12,3,12,71,45,3,42,2,3,3,45,17,3,3,42,12,3,19,63,32,3,40,2,3,3,40,17,3,3,38,12,3,24,20
 3,15,3,37,2,3,3,43,17,3,3,40,12,3,25,260,32,3,42,2,3,3,46,17,3,3,44,12,3,9,181,7,3,37,2,3,3,41
 ,17,3,3,39,12,3,36,286,19,3,34,2,3,3,42,17,3,3,38,12,3*a79d3813

Table 7-110 SPPDOPH Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SATSINFO header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Sat number	Number of tracked satellites	Byte	1	H
3	Version number	Version number, default = 2	Byte	1	H+1
4	reserve	Reserved	Byte	1	H+2
5	reserve	Reserved	Byte	1	H+3
6	reserve	Reserved	Byte	1	H+4
7	Frq flag	Frequency flag, see Table 7-111 Frequency Flag	Byte	1	H+5

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
8	PRN	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicare-defined Messages	Byte	1	H+6
9	Azimuth	Azimuth, degrees	Short	2	H+7
10	Elevation	Elevation, degrees	Byte	1	H+9
11	Sys status	System identifier, see Table 7-112 System Identifier	Byte	1	H+10
12	SNR	Signal-to-noise ratio	Byte	1	H+11
13	Freq status	Frequency identifier, see Table 7-113 Frequency Identifier	Byte	1	H+12
14	Freq No	Number of frequencies contained in the current PRN	Byte	1	H+13
15	Next Frq info	Next frequency information (if available)		4	H+14
16	Next frequency offset = H+6+sat*(4+freq No*4), "freq No." is updated according to the real time calculation. See Figure 7-1 Explanation of the Binary Offset of SATSINFO				
17	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+6+sat*(4+freq No*4)
18	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

$$\begin{array}{c}
 \text{Length (PRN + Azimuth + Elevation)} \quad \text{Length (Sys status + SNR + Freq status + Freq No)} \\
 \uparrow \qquad \qquad \qquad \uparrow \\
 \text{SatsInfo} = \text{H} + 6 + \text{Sat} * (4 + \text{Freq No} * 4) \\
 \downarrow \qquad \downarrow \qquad \downarrow \qquad \downarrow \\
 \text{Header} \quad \text{Sat number} \quad \text{Freq No} \\
 \downarrow \\
 \text{Length (Sat number + Version number + reserve + reserve + reserve + Frq flag)}
 \end{array}$$

Figure 7-1 Explanation of the Binary Offset of SATSINFO

Table 7-111 Frequency Flag

Bit	Description	Value
Bit7	Reserved	0
Bit6	Reserved	0
Bit5	BDS B2b, GPS L2P	0: not included; 1: included
Bit4	BDS B2a, GLO G3, GAL E6	0: not included; 1: included
Bit3	BDS B1C, GPS L1C	0: not included; 1: included
Bit2	GPS L5, BDS B3I, GAL E5a, IRNSS L5	0: not included; 1: included
Bit1	GPS L2C, GLO L2, BDS B2I, GAL E5b	0: not included; 1: included
Bit0	GPS L1C/A, GLO L1, BDS B1I, GAL E1	0: not included; 1: included

Table 7-112 System Identifier

Bit	Description	Note
Bit7	0 = GPS	
Bit6	1 = GLONASS	
	2 = SBAS	
Bit5	3 = GAL	
Bit4	4 = BDS	
	5 = QZSS	
Bit3	6 = IRNSS	
Bit2		
Bit1		
Bit0		

Table 7-113 Frequency Identifier

Bit	Description	Note
Bit7	GPS: BDS:	
	0 = L1 C/A 0 = B1I	
	9 = L2P (Y) 4 = B1Q	
	3 = L1C pilot 8 = B1C(Pilot)	
	11 = L1C data 23 = B1C(Data)	
	6 = L5 data 5 = B2Q	

Bit	Description	Note
	14 = L5 pilot	17 = B2I
	17 = L2C (L)	12 = B2a(Pilot)
		28 = B2a(Data)
	GLONASS:	6 = B3Q
	0 = L1 C/A	21 = B3I
	5 = L2 C/A	13= B2b(I)
	6 = G3I	
	7 = G3Q	GAL:
		1 = E1B
	QZSS:	2 = E1C
	0 = L1 C/A	12 = E5A pilot
	6 = L5 data	17 = E5B pilot
	14 = L5 pilot	18 = E6B
	17 = L2C (L)	22 = E6C
	18 = L61 Data	
	22 = L61 Pilot	SBAS:
	24 = L62 Data1	0 = L1 C/A
	25 = L62 Data2	6 = L5 (I)
	IRNSS:	
	6 = L5 data	
	14 = L5 pilot	

7.3.44 BASEPOS – Position of the Base Station

This message outputs the real-time position of the base station when the module works in fixed base station mode in order to monitor the position of the base station and provide information to judge whether the base station is moved by external objects.

Note: This command does not work in moving base station mode.

Message ID: 49

ASCII Syntax:

BASEPOSA 1

Binary Syntax:

BASEPOSB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#BASEPOSA,96,GPS,FINE,2207,289028000,0,0,18,20;SOL_COMPUTED,SINGLE,40.07899
984715,116.23661761328,64.8315,8.4923,WGS84,2.8968,2.0472,6.2202,"0",0.000,0.000,
55,28,28,0,16,12,01,51,SOL_COMPUTED,DOPPLER_VELOCITY,0.000,0.000,0.0044,52.887
930,0.0082,0.0205,0.0116*80a5f451
```

Table 7-114 BASEPOS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BASEPOS header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	p-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	lat	Latitude, degrees	Double	8	H+8
5	lon	Longitude, degrees	Double	8	H+16
6	hgt	Height above mean sea level, meters	Double	8	H+24
7	undulation	Geoid undulation, the distance between the geoid and the WGS84 ellipsoid, meters	Float	4	H+32
8	datum id#	Datum ID, only WGS84 (binary = 61) is supported for now	Enum	4	H+36
9	lat σ	Latitude standard deviation, m	Float	4	H+40
10	lon σ	Longitude standard deviation, m	Float	4	H+44
11	hgt σ	Height standard deviation, m	Float	4	H+48
12	stn id	Base station ID, default = 0	Char[4]	4	H+52

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
13	diff_age	Differential age, s	Float	4	H+56
14	sol_age	Solution age, s	Float	4	H+60
15	#SVs	Number of satellites tracked	Uchar	1	H+64
16	#solnSVs	Number of satellites used in solution	Uchar	1	H+65
17	Reserved	Reserved	Uchar	1	H+66
18	Reserved	Reserved	Uchar	1	H+67
19	Reserved	Reserved	Uchar	1	H+68
20	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+69
21	Galileo&BD S3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+70
22	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+71
23	V-sol status	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H+72
24	vel type	Velocity type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+76
25	latency	A measure of latency in the velocity time tag, in seconds. Subtracting latency from epoch time gives accurate velocity.	Float	4	H+80
26	age	Differential age, s	Float	4	H+84
27	hor spd	Horizontal speed over ground, m/s	Double	8	H+88

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
28	trk gnd	Actual direction of motion over ground (track over ground) with respect to True North, in degrees	Double	8	H+96
29	vert spd	Vertical speed, m/s, positive indicates increasing altitude (up) and negative indicates decreasing altitude (down)	Double	8	H+104
30	Verspd std	Standard deviation of vertical speed, m/s	Float	4	H+112
31	Horspd std	Standard deviation of horizontal speed, m/s	Float	4	H+116
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+120
33	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.45 SATELLITE – Visible Satellites

This message outputs the visible satellites and detailed information.

Message ID: 1042

ASCII Syntax:

SATELLITEA 1

Binary Syntax:

SATELLITEB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#SATELLITEA,97,GPS,FINE,2190,364984000,0,0,18,13;GPS,TRUE,TRUE,9,3,0,25.2,308.1,0.000,0.000,10,0,2.4,175.2,0.000,0.000,12,0,0.2,39.3,0.000,0.000,16,0,12.5,210.8,0.000,0.000,25,0,31.8,47.4,0.000,0.000,26,0,51.2,209.4,0.000,0.000,29,0,25.0,90.5,0.000,0.000,31,0,71.2,345.0,0.000,0.000,32,0,56.6,127.5,0.000,0.000*a60a9635
```

Table 7-115 SATELLITE Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SATELLITE header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Satellite system	GNSS satellite system, see Table 7-116 Satellite System	Enum	4	H
3	sat vis	Satellite visibility, 0 = FALSE, 1 = TRUE	Enum	4	H+4
4	comp alm	Completeness of BDS/GPS/GLONASS almanac, 0 = FALSE, 1 = TRUE	Enum	4	H+8
5	#sat	Number of satellites with data to follow	Ulong	4	H+12
6	PRN/slot	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicore-defined Messages In binary messages, satellite ID is composed of two parts of Ushort characters. The 2 lowest order bytes are system identifiers (such as the PRN for GPS and channel for GLONASS); the 2 highest order bytes are frequency channel for GLONASS and zero for other systems. In ASCII messages, satellite ID field is the system identifier. If the system is GLONASS and the frequency channel is not zero, the frequency channel is appended to the system identifier. For example, the system ID is 13, and the frequency channel is -2, then the output is 13-2.	Ulong	4	H+16

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
7	health	Satellite health status, 0 = healthy, 1 = unhealthy	Ulong	4	H+20
8	elev	Elevation, degrees	Double	8	H+24
9	az	Azimuth, degrees	Double	8	H+32
10	reserved	Reserved	Double	8	H+40
11	reserved	Reserved	Double	8	H+48
12	The next satellite offset is the byte length from field 6 to field 11 multiplied by the number of #sat.				
13	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+12+ (#sat x 40)
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-116 Satellite System

Binary Value	Satellite System Name in ASCII Format
0	GPS
1	GLONASS
2	SBAS
5	GALILEO
6	BEIDOU
7	QZSS
9	NAVIC

7.3.46 SATECEF – Satellite Coordinates in ECEF Coordinate System

This message contains the decoded satellite information required when computing a position, including satellite coordinates (ECEF WGS84), satellite clock calibration, ionospheric calibration and tropospheric calibration.

Message ID: 2115

ASCII Syntax:

SATECEFA 1

Binary Syntax:

SATECEFB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#SATECEFA,97,GPS,FINE,2190,365060000,0,0,18,12;28,GPS,25,-15074001.0000,-
1321521.1250,21554962.0000,78939.508,8.906,4.603,0.0,GPS,26,-
5199400.0000,25154968.0000,6019832.0000,50877.914,6.491,3.066,0.0,GPS,29,-
24350838.0000,1869061.6250,10471350.0000,-138099.781,10.301,5.618,0.0,GPS,31,-
5542408.0000,14613293.0000,21302554.0000,-47215.703,5.403,2.538,0.0,GPS,32,-
18396664.0000,16438964.0000,9706892.0000,-12763.542,6.180,2.902,0.0,QZSS,194,-
26913374.0000,25085678.0000,25578198.0000,-202.491,5.491,2.560,0.0,QZSS,199,-
25393438.0000,33651112.0000,4994.1079,3.026,7.522,3.566,0.0,GALILEO,3,7417062.50
00,15510334.0000,24086542.0000,-153400.016,7.043,3.451,1.0,GALILEO,5,-
12822431.0000,21697142.0000,15516904.0000,-
66745.031,5.324,2.456,1.0,GALILEO,24,-
14646293.0000,12395834.0000,22518314.0000,-
391926.406,5.595,2.636,1.0,GALILEO,25,-3816618.5000,28188316.0000,8166408.5000,-
167453.578,6.307,2.980,1.0,BEIDOU,1,-34395868.0000,24403858.0000,-356958.1562,-
87413.930,8.793,4.208,2.0,BEIDOU,2,4489574.5000,41931996.0000,342.9382,227784.93
8,8.965,4.403,2.0,BEIDOU,3,-14650923.0000,39556356.0000,-
831224.1250,141089.422,7.682,3.588,2.0,BEIDOU,6,-
11866700.0000,23972774.0000,32526292.0000,215105.672,5.396,2.463,2.0,BEIDOU,7,-
12324336.0000,40175348.0000,-4187626.7500,18499.482,8.480,4.034,2.0,BEIDOU,9,-
3438167.7500,24575944.0000,34374596.0000,-
117248.531,5.592,2.592,2.0,BEIDOU,16,-
```

N4 Products Commands and Logs Reference Book

16779596.0000,22749714.0000,31341410.0000,12072.259,5.408,2.465,2.0,BEIDOU,19,-
 14636672.0000,23563198.0000,-
 3078972.7500,274718.438,9.268,4.502,2.0,BEIDOU,21,12200400.0000,10552887.0000,2
 2784140.0000,-286255.938,9.488,5.114,2.0,BEIDOU,22,-
 1677701.1250,24076402.0000,14022415.0000,-
 288599.844,5.802,2.686,2.0,BEIDOU,36,-
 7533112.0000,16531093.0000,21199316.0000,-
 254393.703,5.393,2.461,2.0,BEIDOU,39,-
 20703172.0000,22689450.0000,28809826.0000,10351.210,5.451,2.486,2.0,BEIDOU,40,-
 20012358.0000,37200804.0000,70317.0625,69271.031,7.476,3.475,2.0,BEIDOU,45,8088
 047.5000,25093244.0000,9098498.0000,191929.906,8.316,4.061,2.0,BEIDOU,46,-
 18328430.0000,-1177068.3750,21021694.0000,-26218.129,9.093,4.596,2.0,BEIDOU,59,-
 32338378.0000,27044200.0000,513189.9062,6.267,8.236,3.879,2.0,BEIDOU,60,7289870.
 5000,41498212.0000,-1629297.3750,-43.630,9.758,4.989,2.0*017f82f3

Table 7-117 SATECEF Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	SATECEF header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	SatNum	Satellite number	Ulong	4	H
3	GNSS_SYSTEM	GNSS satellite system, see Table 7-116 Satellite System	Enum	4	H+4
4	Prn	Satellite PRN number, see Table 7-54 Satellite PRN Number in Unicore-defined Messages In binary messages, satellite ID is composed of two parts of Ushort characters. The 2 lowest order bytes are system identifiers (such as the PRN for GPS and channel for GLONASS); the 2 highest order bytes are frequency channel for GLONASS and zero for other	UINT	4	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
		systems. In ASCII messages, satellite ID field is the system identifier. If the system is GLONASS and the frequency channel is not zero, the frequency channel is appended to the system identifier. For example, the system ID is 13, and the frequency channel is -2, then the output is 13-2.			
5	SatCoord_X	X coordinate of satellite (ECEF, m)	Float	4	H+12
6	SatCoord_Y	Y coordinate of satellite (ECEF, m)	Float	4	H+16
7	SatCoord_Z	Z coordinate of satellite (ECEF, m)	Float	4	H+20
8	Satclk	Satellite clock calibration (m)	Float	4	H+24
9	IonoDelay	Ionospheric delay, m	Float	4	H+28
10	TropDelay	Tropospheric delay, m	Float	4	H+32
11	dReserved1	Reserved	Double	8	H+36
12	Next satellite offset = H + 4 + (#SatNum x 40)				
13	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.47 RECTIME – Time Information

This log provides time related information, including receiver clock offset, UTC time offset, etc.

Message ID: 102

ASCII Syntax:

RECTIMEA 1

Binary Syntax:

RECTIMEB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#RECTIMEA,97,GPS,FINE,2190,365121000,0,0,18,12;VALID,3.580410506e-04,0.000000000e+00,-18.000000000000,2021,12,30,5,25,3000,VALID*7e364e74
```

Table 7-118 RECTIME Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	RECTIME header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	clock status	Clock model status. 0 = VALID; 3 = INVALID. The enum of 0 or 3 is displayed when the binary information is output.	Enum	4	H
3	offset	Receiver clock offset relative to GPS time, s. Positive indicates that the receiver clock is ahead of GPS time. To calculate the GPS time, use the formula below: GPS time = receiver time - clock offset	Double	8	H+4
4	Offset std	Standard deviation of the receiver clock offset, s	Double	8	H+12
5	utc offset	GPS time offset relative to UTC time, computed using almanac parameters, s. UTC time = GPS time + UTC offset + receiver clock offset	Double	8	H+20
6	utc year	UTC year	Ulong	4	H+28
7	utc month	UTC month (0-12) ⁹	Uchar	1	H+32
8	utc day	UTC day (0-31) ¹⁰	Uchar	1	H+33

^{9,10} If UTC time is unknown, the values of month and day are both 0s.

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	utc hour	UTC hour (0-23)	Uchar	1	H+34
10	utc min	UTC minute (0-59)	Uchar	1	H+35
11	utc ms	UTC millisecond (0-60999) ¹¹	Ulong	4	H+36
12	utc status	UTC status: 0 = INVALID; 1 = VALID; 2 = WARNING ¹² The enum of 0, 1, or 2 is displayed when the binary information is output.	Enum	4	H+40
13	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+44
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.48 UNIHEADING – Heading Information

This log outputs the heading information of the receiver in motion. Heading refers to the clockwise angle between True North and the baseline vector from the master antenna to the slave antenna.

Message ID: 972

ASCII Syntax:

UNIHEADINGA 1

Binary Syntax:

UNIHEADINGB 1

Applicable to: UM982

Message Output:

```
#UNIHEADINGA,97,GPS,FINE,2190,365174000,0,0,18,12;INSUFFICIENT_OBS,NONE,0.000
0,0.0000,0.0000,0.0000,0.0000,0.0000,"",0,0,0,0,0,0,0,0*ee072604
```

¹¹ The maximum value is 60999 when leap second is used.

¹² Indicates that leap second is used as default due to the lack of almanac.

Table 7-119 UNIHEADING Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	UNIHEADING header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol stat	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	length	Baseline length	Float	4	H+8
5	heading	Heading (0 to 360.0 degrees)	Float	4	H+12
6	pitch	Pitch ($\pm$ 90 degrees)	Float	4	H+16
7	Reserved	Reserved	Float	4	H+20
8	hdgstddev	Standard deviation of heading	Float	4	H+24
9	ptchstddev	Standard deviation of pitch	Float	4	H+28
10	stn id	Base station ID	Char[4]	4	H+32
11	#SVs	Number of satellites tracked	Uchar	1	H+36
12	#solnSVs	Number of satellites used in solution	Uchar	1	H+37
13	#obs	Number of satellites above the elevation mask angle	Uchar	1	H+38
14	#multi	Number of satellites with L2 signal above the elevation mask angle	Uchar	1	H+39
15	Reserved	Reserved	Uchar	1	H+40
16	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Uchar	1	H+41

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
17	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Uchar	1	H+42
18	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Uchar	1	H+43
19	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+44
20	[CR][LF]	Sentence terminator (ASCII only)	–	–	–

Note: If INS is enabled, when [sol stat] is 0, there is a [pos type] named INS. In that case, the receiver outputs heading and pitch angles calculated by INS and converted to the results in GNSS dual-antenna heading mode. Users need to consider the solution status and position type together to judge the validity of the heading information and the source of calculation.

7.3.49 UNIHEADING2 – Multi-Rover Heading Information

This log outputs the heading information of the receiver in motion. Heading refers to the clockwise angle between True North and the baseline vector from the moving base station to the heading receiver. This log can be output by the heading receiver. It is similar to the UNIHEADING log, but has an additional rover ID field.

Message ID: 1331

ASCII Syntax:

UNIHEADING2A ONCHANGED

Binary Syntax:

UNIHEADING2B ONCHANGED

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#UNIHEADING2A,50,GPS,FINE,2207,282484000,0,0,18,675,SOL_COMPUTED,NARROW_I
NT,10736.3838,88.3470,0.0876,0.0000,0.0001,0.0001,"201",52,29,29,29,3,01,3,c3*89877
3d6
```

Table 7-120 UNIHEADING2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	UNIHEADING2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol stat	Solution status, refer to Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	length	Baseline length	Float	4	H+8
5	heading	Heading (0 to 360.0 degrees)	Float	4	H+12
6	pitch	Pitch ($\pm$ 90 degrees)	Float	4	H+16
7	Reserved	Reserved	Float	4	H+20
8	hdgstddev	Standard deviation of heading	Float	4	H+24
9	ptchstddev	Standard deviation of pitch	Float	4	H+28
10	Master stn ID	Master station ID	Char[4]	4	H+32
11	#SVs	Number of satellites tracked	Uchar	1	H+36
12	#solnSVs	Number of satellites used in solution	Uchar	1	H+37
13	#obs	Number of satellites above the elevation mask angle	Uchar	1	H+38
14	#multi	Number of satellites with L2 signal above the elevation mask angle	Uchar	1	H+39
15	Reserved	Reserved	Uchar	1	H+40
16	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Uchar	1	H+41

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
17	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Uchar	1	H+42
18	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Uchar	1	H+43
19	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+44
20	[CR][LF]	Sentence terminator (ASCII only)	-	-	

7.3.50 HEADINGSTATUS – Heading Status

This log outputs information used in Heading solution.

Message ID: 521

ASCII Syntax:

HEADINGSTATUSA 1

Binary Syntax:

HEADINGSTATUSB 1

Applicable to: UM982

Message Output:

#HEADINGSTATUSA,40,GPS,FINE,2255,117816000,0,0,18,15;233.0000,123.0000,0.0,0.0,0.0,0.0,0,0*5d660f9c

Table 7-121 HEADINGSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	HEADINGSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	CfgLength	Baseline length configuration in the CONFIG HEADING LENGTH	Float	4	H
3	Cfgtol	Error tolerance configuration in the CONFIG HEADING LENGTH	Float	4	H+4
4	Reserved	Reserved	Float	4	H+8
5	Reserved	Reserved	Float	4	H+12
6	Reserved	Reserved	Float	4	H+16
7	Reserved	Reserved	Float	4	H+20
8	Reserved	Reserved	UINT	4	H+24
9	Reserved	Reserved	UINT	4	H+28
10	Xxxx	32-bit CRC	Hex	4	H+32
11	[CR][LF]	Sentence terminator (ASCII only)			

7.3.51 RTKSTATUS – RTK Solution Status

This log outputs RTK solution information, such as the current solution status, differential data status, etc.

Message ID: 509

ASCII Syntax:

RTKSTATUSA 1

Binary Syntax:

RTKSTATUSB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

```
#RTKSTATUSA,97,GPS,FINE,2190,365354000,0,0,18,1;0,0,0,0,0,0,0,0,0,0,NONE,0,0,0,0,0*
f06a8a06
```

Table 7-122 RTKSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	RTKSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	gpsSource	Source data decoding status for GPS satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H
3	Reserved	Reserved	UINT	4	H+4
4	bdsSource1	Source data decoding status for BDS satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+8
5	bdsSource2	Source data decoding status for BDS satellite 33 to 63. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+12
6	Reserved	Reserved	UINT	4	H+16
7	gloSource	Source data decoding status for GLONASS satellite 1 to 23. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+20
8	Reserved	Reserved	UINT	4	H+24

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	galSource1	Source data decoding status for Galileo satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+28
10	galSource2	Source data decoding status for Galileo satellite 33 to 36. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+32
11	QzssSource	Source data decoding status for QZSS satellite 193 to 202. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+36
12	Reserved	Reserved	UINT	4	H+40
13	Pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+44
14	Calculate status	0: No differential data input 1: Insufficient observation at the differential source 2: High latency of differential data 3: Active ionosphere (valid for base station mode) 4: Insufficient observation at the ROVER 5: RTK solution available Indicates the RTK/RTD solution status.	Enum	4	H+48

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
15	Ion detected	Ionospheric scintillation detected 0: No effect on RTK solution 1~255: Negative effect on RTK solution	uchar	1	H+52
16	Dual rtk flag*	0xFF: The baseline length between the two antennas is not configured. 0: The baseline length is not solved (Not both of the antennas have achieved a fixed solution) 1: Within the limit 2: Out of the limit For dual-antenna products only	Uchar	1	H+53
17	ADR Number	Number of valid carrier phase observations	Uchar	1	H+54
18	Reserved	Reserved	Uchar	1	H+55
19	Xxxx	32-bit CRC	Hex	4	H+56
20	[CR][LF]	Sentence terminator			

* Field 16 (Dual rtk flag) is applicable to UM982 Build9669 and later versions.

7.3.52 RTKSTATUS2 – RTK Solution Status (Slave Antenna)

This log outputs RTK solution information, such as the current solution status, differential data status, etc. computed using the slave antenna.

Message ID: 691

ASCII Syntax:

RTKSTATUS2A 1

Binary Syntax:

RTKSTATUS2B 1

Applicable to: UM982

Message Output:

```
#RTKSTATUS2A,39,GPS,FINE,2331,283227000,16117,0,18,54;89D24A00,0,81C0B1BF,3C
000161,0,6380E,0,1805096,2,4E,0,NARROW_INT,5,0,FF,110,0*8b15c636
```

Table 7-123 RTKSTATUS2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	RTKSTATUS 2 Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	gpsSource	Source data decoding status for GPS satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H
3	Reserved	Reserved	UINT	4	H+4
4	bdsSource1	Source data decoding status for BDS satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+8
5	bdsSource2	Source data decoding status for BDS satellite 33 to 63. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+12
6	Reserved	Reserved	UINT	4	H+16
7	gloSource	Source data decoding status for GLONASS satellite 1 to 23. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+20
8	Reserved	Reserved	UINT	4	H+24

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	galSource1	Source data decoding status for Galileo satellite 1 to 32. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+28
10	galSource2	Source data decoding status for Galileo satellite 33 to 36. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+32
11	QzssSource	Source data decoding status for QZSS satellite 193 to 202. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT	4	H+36
12	Reserved	Reserved	UINT	4	H+40
13	Pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+44
14	Calculate status	0: No differential data input 1: Insufficient observation at the differential source 2: High latency of differential data 3: Active ionosphere (valid for base station mode) 4: Insufficient observation at the ROVER 5: RTK solution available Indicates the RTK/RTD solution status.	Enum	4	H+48

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
15	Ion detected	Ionospheric scintillation detected 0: No effect on RTK solution 1~255: Negative effect on RTK solution	uchar	1	H+52
16	Dual rtk flag*	0xFF: The baseline length between the two antennas is not configured. 0: The baseline length is not solved (Not both of the antennas have achieved a fixed solution) 1: Within the limit 2: Out of the limit For dual-antenna products only	Uchar	1	H+53
17	ADR Number	Number of valid carrier phase observations using the slave antenna	Uchar	1	H+54
18	Reserved	Reserved	Uchar	1	H+55
19	Xxxx	32-bit CRC	Hex	4	H+56
20	[CR][LF]	Sentence terminator			

7.3.53 AGNSSSTATUS — AGNSS Status

This command is used to query the AGNSS status.

Message ID: 512

ASCII Syntax:

AGNSSSTATUSA 1

Binary Syntax:

AGNSSSTATUSB 1

Applicable to: UM982, UM980, UB9A0

Message Output:

#AGNSSSTATUSA,77,GPS,FINE,2216,457483000,0,0,18,9;0000004EF7FFFFFF,0C003FFF
BFFCBFFF,0000000000DF7FFF,0000000B67945FDF,0,F,01,07,2022,0,070418.26,18,0,0,4
004.73963848,11614.19678280,57.9901*67b51741

Table 7-124 AGNSSSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	AGNSSSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2,3,4, 5	Source	GPS: 64 bits, 1 bit represents 1 satellite; BDS: 64 bits, 1 bit represents 1 satellite; GLO: 64 bits, 1 bit represents 1 satellite; GAL: 64 bits, 1 bit represents 1 satellite. Source data decoding status. Set the corresponding bit to 1 after receiving the correction data for 1 satellite, in hexadecimal format.	UINT[2]	8	H
6	Reserved	Reserved	UINT	4	H+32
7	Calculate status	Bit 0: assisted data input 0 – no assisted data input 1 – assisted data input	UINT	4	H+36
		Bit 1: available satellites 0 – insufficient 1 – sufficient Note: The ephemeris sent by the AGNSS server may not match the observations.			

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
		Bit2: validity of the assisted time 0 – invalid 1 – valid			
		Bit3: validity of the assisted position 0 – invalid 1 – valid			
8	Aid day	Assisted UTC day, double digits, 01 ~ 31	UINT	4	H+40
9	Aid mon	Assisted UTC month, double digits, 01 ~ 12	UINT	4	H+44
10	Aid year	Assisted UTC year, four digits	UINT	4	H+48
11	Reserved	Reserved	UINT	4	H+52
12	Aid Time	Assisted time, hour-minute-second, hhmmss.sss	Double	8	H+56
13	Aid LeapSecond	Assisted leap second	UShort	2	H+64
14	Reserved	Reserved	UShort	2	H+66
15	Reserved	Reserved	UINT	4	H+68
16	Aid Lat	Assisted latitude, ddm.mmmmmmm	Double	8	H+72
17	Aid Lon	Assisted longitude, dddmm.mmmmmmm	Double	8	H+80
18	Aid Height	Assisted height, 4 digits after the decimal point, meters	Double	8	H+88
19	xxxx	32-bit CRC	Hex	4	H+96
20	[CR][LF]	Sentence terminator			

7.3.54 RTCSTATUS – RTC Initialization Status

This command is used to check the initialization status of the RTC register. The message only supports 1 Hz output.

Message ID: 510

ASCII Syntax:

RTCSTATUSA 1

Binary Syntax:

RTCSTATUSB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

#RTCSTATUSA,97,GPS,FINE,2190,365386000,0,0,18,14;1,0,0,0,2190,365386,1495,0,0*ac0f615a

Table 7-125 RTCSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	RTCSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Type	0: invalid 1: valid Display the status of RTC counter	Uchar	1	H
3~5	Reserved*3	Reserved	Uchar*3	3	H+1
6	Week	Week number. When the number is invalid, the value is -1.	INT	4	H+4
7	Second	Seconds of week	UINT	4	H+8
8	Subsecond	Sub-second, μ s	UINT	4	H+12
9	Reserved	Reserved	UINT	4	H+16

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	Reserved	Reserved	UINT	4	H+20
11	Xxxx	Checksum	Hex	4	H+24
12	[CR][LF]	Sentence terminator			

7.3.55 JAMSTATUS – Jamming Detection

This command is used to check the information of jamming detection. It only supports 1 Hz output.

Message ID: 511

ASCII Syntax:

JAMSTATUSA 1

Binary Syntax:

JAMSTATUSB 1

Applicable to: UM980, UB9A0, UM982, UM960, UM960L

Message Output:

#JAMSTATUSA,97,GPS,FINE,2190,365412000,0,0,18,14;SINGLE,0,0,0,0*e31418ea

Table 7-126 JAMSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	JAMSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	CWRatio	In the range of 0 to 255. Indicates the strength of the jamming signal. The higher the value is, the greater the impact it has on positioning.	Uchar	1	H+4
4	CWFlag	0: NO CW JAM 1: CW JAM 2: Strong CW JAM	Uchar	1	H+5
5, 6	Reserved	Reserved	Uchar*2	2	H+6
7	Xxxx	Checksum	Hex	4	H+8
8	[CR][LF]	Sentence terminator			

7.3.56 FREQJAMSTATUS – Frequency Jamming Status

This command is used to check the jamming information of each frequency, including L1, L2, and L5. It only supports 1 Hz message output.

Message ID: 519

ASCII Syntax:

FREQJAMSTATUSA 1

Binary Syntax:

FREQJAMSTATUSB 1

Applicable to: UM980, UB9A0, UM960, UM982

 Applicable to UM982 Build9669 and later versions

Message Output:

#FREQJAMSTATUSA,97,GPS,FINE,2164,559464000,0,0,18,8;SINGLE,255,2,0,0,0,0,0,0*b0c
dc7de

Table 7-127 FREQJAMSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	FREQJAMSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Pos type	Position type, refer to Table 0- 4 Position or Velocity Type	Enum	4	H
3	L1CWRatio	Range: 0~255 The strength of the jamming signal The higher the strength, the greater the impact on positioning	UCHAR	1	H+4
4	L1CWFlag	0: NO CW JAM 1: CW JAM 2: Strong CW JAM	UCHAR	1	H+5
5	L2CWRatio	Range: 0~255 The strength of the jamming signal The higher the strength, the greater the impact on positioning	UCHAR	1	H+6
6	L2CWFlag	0: NO CW JAM 1: CW JAM 2: Strong CW JAM	UCHAR	1	H+7
7	L5CWRatio	Range: 0~255 The strength of the jamming signal The higher the strength, the greater the impact on positioning	UCHAR	1	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
8	L5CWFlag	0: NO CW JAM 1: CW JAM 2: Strong CW JAM	UCHAR	1	H+9
9, 10	Reserved	Reserved	Uchar*2	2	H+10
11	Xxxx	Checksum	Hex	4	H+12
12	[CR][LF]	Sentence terminator			

7.3.57 RTCMSTATUS – RTCM Data Status

This command is used to check the RTCM data status. It only supports ONCHANGED trigger.

Message ID: 2125

ASCII Syntax:

RTCMSTATUSA ONCHANGED

Binary Syntax:

RTCMSTATUSB ONCHANGED

Applicable to: UM960L, UM980, UB9A0, UM982, UM960

Message Output:

#RTCMSTATUSA,76,GPS,FINE,2219,392572000,0,0,18,187;1124,21186,0,21,0,6,11,0,0,21
*601a7581

Table 7-128 RTCMSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	RTCMSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	Msg ID	MSM1~MSM7 ID (including RTCM1006/RTCM1033)	UINT	4	H
3	Msg Num	Number of messages	UINT	4	H+4
4	Base ID	Base station ID	UINT	4	H+8
5	Sats Num	Number of satellites in the current message	UINT	4	H+12
6	L1 num	Number of L1 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+16
7	L2 num	Number of L2 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+17
8	L3 num	Number of L3 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+18
9	L4 num	Number of L4 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+19
10	L5 num	Number of L5 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+20
11	L6 num	Number of L6 observables, see Table 7-129 Satellite Signals Corresponding to L1~L6	UCHAR	1	H+21
12	Xxxx	Checksum	Hex	4	H+22
13	[CR][LF]	Sentence terminator			

Table 7-129 Satellite Signals Corresponding to L1~L6

GNSS	Signal ID	Signal Channel
GPS	1	L1C/A
	2	L2P
	3	L2C
	4	L5
	5	L1C
	6	Reserved
GLONASS	1	G1C/A
	2	G1P
	3	G2C/A
	4	G2P
	5 ~ 6	Reserved
Galileo	1	E1
	2	E6
	3	E5B
	4	E5A+B
	5	E5A
	6	Reserved
QZSS	1	L1C/A
	2	LEX
	3	L2C
	4	L5
	5	L1C
	6	Reserved
BDS	1	B1

GNSS	Signal ID	Signal Channel
	2	B3
	3	B2
	4	B2A
	5	B2B
	6	B1C

7.3.58 HWSTATUS – Hardware Status

This message contains the hardware status. It only supports 1 Hz output.

Message ID: 218

ASCII Syntax:

HWSTATUSA 1

Binary Syntax:

HWSTATUSB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

#HWSTATUSA,97,GPS,FINE,2221,111183000,0,0,18,15;66807,0.920,1.020,0.908,1,-
0.693,0.0,0x00,0,0x0377,0,0*9d7ce51d

Table 7-130 HWSTATUS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	HWSTATUS Header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Reserved	Reserved	Int	4	H
3	DC09	The normal voltage range of DC09 is 0.85~1.0V; 3 digits after the decimal point are valid	Float	4	H+4
4	DC10	The normal voltage range of DC	Float	4	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
		10 is 0.95~1.1V; 3 digits after the decimal point are valid			
5	DC18	The normal voltage range of DC18 is 1.7~1.9V; 3 digits after the decimal point are valid	Float	4	H+12
6	Clockflag	Validity flag of ClockDrift 0 = Invalid 1 = Valid	UINT	4	H+16
7	ClockDrift	Equivalent velocity of clock drift, m/s	Float	4	H+20
8	Reserved	Reserved	Float	4	H+24
9	hwFlag	Hardware information, see the table below for the description of each bit.	UCHAR	1	H+28
10	Reserved	Reserved	UCHAR	1	H+29
11	PLL_LOCK	PLL status	USHORT	2	H+30
12	Reserved	Reserved	UINT	4	H+32
13	Reserved	Reserved	UINT	4	H+36
14	Xxxx	Checksum	Hex	4	H+40
15	[CR][LF]	Sentence terminator			

Table 7-131 HWFLAG Bit Description

Bit	Description
Bit0	0 = oscillator, 1 = crystal
Bit1	0 = VCXO, 1 = TCXO
Bit2	0 = 26 MHz oscillator, 1 = 20 MHz oscillator
Bit3	0 = only supports oscillator, 1 = supports oscillator and crystal

Bit	Description
Bit4	0 = internal clock, 1 = external clock
Bit5	
Bit6	
Bit7	Check status: 0 = unknown, 1 = valid

7.3.59 AGC – Automatic Gain Control

This log outputs the automatic gain control (AGC) information. If the antenna link is abnormal when an open circuit occurs, the AGC will increase the gain. When signal interference raises the noise floor, the AGC will reduce the gain. This is the general rule of AGC, but due to the difference between the hardware of the modules, the AGC values may be different.

Message ID: 220

ASCII Syntax:

AGCA 1

Binary Syntax:

AGCB 1

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

#AGCA,65,GPS,FINE,2190,375570000,0,0,18,37;44,46,63,-1,-1,41,1,0,-1,-1*634f1e4b

Table 7-132 AGC Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	AGC header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	ANT1L1	Value of L1 signal received by the master antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H
3	ANT1L2	Value of L2 signal received by the master antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H+2
4	ANT1L5	Value of L5 signal received by the master antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H+4
5	Reserved	Reserved	Short	2	H+6
6	Reserved	Reserved	Short	2	H+8
7	ANT2L1	Value of L1 signal received by the slave antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H+10

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
8	ANT2L2	Value of L2 signal received by the slave antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H+12
9	ANT2L5	Value of L5 signal received by the slave antenna. AGC register supports values in the range of 0 to 255. If the value is -1, it indicates that the channel is invalid.	Short	2	H+14
10	Reserved	Reserved	Short	2	H+16
11	Reserved	Reserved	Short	2	H+18
12	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+20
13	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.60 KSXT – Positioning and Heading Data Output

This message contains the time, positioning and heading information of the GNSS receiver. It only supports ASCII format.

ASCII Syntax:

KSXT 1 Output 1Hz KSXT message at the current port

KSXT COM2 1 Output 1Hz KSXT message at COM2

Applicable to: UM980, UB9A0, UM982, UM960

Message Output:

\$KSXT,20190909084745.00,116.23662400,40.07897925,68.3830,299.22,-
67.03,190.28,0.022,,1,3,46,28,,,,-0.004,-0.021,-0.020,,*27

Table 7-133 KSXT Message Structure

ID	Field Type	Data Description	Symbol
1	\$KSXT	Log header, see Table 7-51 ASCII Header Structure	
2	Utc	UTC time	yyyymmddhhmmss.ss
3	Lon	Longitude, degrees (Output 8 digits after the decimal point)	DDD.DDDDDDDD
4	Lat	Latitude, degrees (Output 8 digits after the decimal point)	DD.DDDDDDDD
5	Height	Height above mean sea level, meters (Output 4 digits after the decimal point)	xxxxx.xxxx
6	Heading	Azimuth (Output 2 digits after the decimal point)	xxx.xx
7	Pitch	Pitch angle (Output 2 digits after the decimal point)	xxx.xx
8	Track true	Course over ground (Output 2 digits after the decimal point)	xxx.xx
9	Vel	Horizontal velocity, km/h (Output 3 digits after the decimal point)	xxx.xxx
10	Roll	Roll (Output 2 digits after the decimal point)	xxx.xx
11	Pos qual	Position quality indicator: 0 = Fix not available or invalid 1 = Single point positioning 2 = RTK float solution 3 = RTK fixed solution	X

N4 Products Commands and Logs Reference Book

ID	Field Type	Data Description	Symbol
12	Heading qual	Heading quality indicator: 0 = Fix not available or invalid 1 = Single point positioning 2 = RTK float solution 3 = RTK fixed solution	X
13	#hsolnSVs	Number of satellites used by the slave antenna to perform solution	xx
14	#msolnSVs	Number of satellites used by the master antenna to perform solution	xx
15	East	East coordinate, in Geographic Coordinate System with the base station as the origin, in meters, 3 digits after the decimal point.	xxx.xxx
16	North	North coordinate, in Geographic Coordinate System with the base station as the origin, in meters, 3 digits after the decimal point.	xxx.xxx
17	Up	Up coordinate, in Geographic Coordinate System with the base station as the origin, in meters, 3 digits after the decimal point.	xxx.xxx
18	EastVel	East velocity, in Geographic Coordinate System with the base station as the origin, 3 digits after the decimal point, km/h (null if no value)	xxx.xxx
19	northVel	North velocity, in Geographic Coordinate System with the base station as the origin, 3 digits after the decimal point, km/h (null if no value)	xxx.xxx
20	upVel	Up velocity, in Geographic Coordinate System with the base station as the origin, 3 digits after the decimal point, km/h (null if no value)	xxx.xxx

ID	Field Type	Data Description	Symbol
21	Reserved	Reserved	
22	Reserved	Reserved	
23	*xx	Checksum, a hexadecimal number obtained by calculating an XOR of all characters from \$ to * (excluding \$ and *)	*FF
24	[CR][LF]	Sentence terminator	[CR][LF]

7.3.61 INFOPART1

Read user-defined information stored in the space of PART1.

Message ID: 1019

ASCII Syntax:

INFOPART1A

Binary Syntax:

INFOPART1B

Applicable to: UM980, UB9A0, UM982

Message Output:

#INFOPART1A,69,GPS,FINE,2190,376054000,0,0,18,953;0*723399e1

Table 7-134 INFOPART1 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	INFOPART1 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Count	Number of messages	Uchar	1	H
3	Info id	0~7	Uchar	1	H+1
4	Length	Data length	Ushort	2	H+2

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
5	Data	Content of information, 128 bytes at most. Output the actual data length when less than 128 bytes.	Uchar[128]	128	H+4
6	Output message in a continuous loop of #Count times				
7	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+X
8	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.62 INFOPART2

Read user-defined information stored in the space of PART2.

Message ID: 1020

ASCII Syntax:

INFOPART2A

Binary Syntax:

INFOPART2B

Applicable to: UM980, UB9A0, UM982

Message Output:

#INFOPART2A,67,GPS,FINE,2190,376094000,0,0,18,753;0*c5702fa1

Table 7-135 INFOPART2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	INFOPART2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Count	Number of messages	Uchar	1	H

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	Info id	0~23	Uchar	1	H+1
4	Length	Data length	Ushort	2	H+2
5	Data	Content of information, 128 bytes at most. Output the actual data length when less than 128 bytes.	Uchar[128]	128	H+4
6	Output message in a continuous loop of #Count times				
7	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+X
8	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.63 MSPOS – Best Position of Dual Antennas

This message contains the best position calculated with the master antenna and slave antenna.

Message ID: 520

ASCII Syntax:

MSPOSA 1

Binary Syntax:

MSPOSB 1

Applicable to: UM982

 Applicable to UM982 Build9669 and later versions

Message Output:

```
#MSPOSA,86,GPS,FINE,2247,471141000,0,0,18,25;SOL_COMPUTED,SINGLE,40.0789638
1103,116.23651058490,64.4448,1.3441,1.2328,2.9707,46,28,,SOL_COMPUTED,SINGLE,4
0.07896511614,116.23651086865,64.5809,1.3723,1.1967,2.9210,45,28,,0",0.000*a71a5
80e
```

Table 7-136 MSPOS Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	MSPOS header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Master_p-sol status	Solution status calculated with the master antenna, refer to Table 0- 5 Solution Status	Enum	4	H
3	Master_pos type	Position type calculated with the master antenna, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	Master_lat	Latitude calculated with the master antenna, degrees	Double	8	H+8
5	Master_lon	Longitude calculated with the master antenna, degrees	Double	8	H+16
6	Master_Hgt	Height above mean sea level calculated with the master antenna, meters	Double	8	H+24
7	Master_lat σ	Latitude standard deviation calculated with the master antenna, meters	Float	4	H+32
8	Master_lon σ	Longitude standard deviation calculated with the master antenna, meters	Float	4	H+36
9	Master_hgt σ	Height standard deviation calculated with the master antenna, meters	Float	4	H+40
10	MasterObs	Number of satellites observed by the master antenna	UCHAR	1	H+44

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
11	MasterSatUse	Number of satellites used in solution by the master antenna	UCHAR	1	H+45
12	Reserved	Reserved	Short	2	H+46
13	Slave_p-sol status	Solution status calculated with the slave antenna, refer to Table 0- 5 Solution Status	Enum	4	H+48
14	Slave_pos type	Position type calculated with the slave antenna, refer to Table 0- 4 Position or Velocity Type	Enum	4	H+52
15	Slave_lat	Latitude calculated with the slave antenna, degrees	Double	8	H+56
16	Slave_lon	Longitude calculated with the slave antenna, degrees	Double	8	H+64
17	Slave_Hgt	Height above mean sea level calculated with the slave antenna, meters	Double	8	H+72
18	Slave_lat σ	Latitude standard deviation calculated with the slave antenna, meters	Float	4	H+80
19	Slave_lon σ	Longitude standard deviation calculated with the slave antenna, meters	Float	4	H+84
20	Slave_hgt σ	Height standard deviation calculated with the slave antenna, meters	Float	4	H+88
21	SlaveObs	Number of satellites observed by the slave antenna	UCHAR	1	H+92

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
22	SlaveSatUse	Number of satellites used in solution by the slave antenna	UCHAR	1	H+93
23	Reserved	Reserved	Short	2	H+94
24	stn id	Base station ID, default = 0	Char[4]	4	H+96
25	age	Age of differential data, s	Float	4	H+100
26	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+104
27	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.64 TROPINFO – Zenith Tropospheric Delay

TROPINFO contains the zenith tropospheric delay information. It only supports ONCE or ONCHANGED trigger. Besides, it is available only if PPP is enabled.

Message ID: 2318

ASCII Syntax:

TROPINFOA ONCHANGED

Binary Syntax:

TROPINFOB ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#TROPINFOA,85,GPS,FINE,2244,93693000,0,0,18,63;SAASTAMOINEN,2.354103,2.29224
6,0.061857,0.026856,0.000000*89ed6541
```

Table 7-137 TROPINFO Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	TROPINFO header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

Table 7-138 PPPB2BINFO1 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO1 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Prn	PRN (161 based)	Short	2	H
3	Iodssr	Issue of Data, State Space Representation	Uchar	1	H+2
4	Iodp	Issue of Data, PRN mask	Uchar	1	H+3
5	Sow	Epoch time, second of day	UINT	4	H+4
6	Mask	PRN bit mask	Uchar[32]	32	H+8
7	Xxxx	32-bit CRC	HEX	4	H+40
8	[CR][LF]	Sentence terminator (ASCII only)			

7.3.66 PPPB2BINFO2 – Information Type 2

This command is used to output PPP-B2b information type 2, including satellite orbit corrections and User Range Accuracy Index. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2304

ASCII Syntax:

PPPB2BINFO2A ONCHANGED

Binary Syntax:

PPPB2BINFO2B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO2A,86,GPS,FINE,2203,366269000,0,0,18,1;219,1,0,20631,72,86,-84,25,-
24,0,27,84,50,39,71,18,4,27,90,57,-3,129,-1,0,27,93,86,-
```

182,90,163,4,27,0,0,0,0,0,0,0,0,0,0,0,0*16d92a8c

Table 7-139 PPPB2BINFO2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Prn	PRN (161 based)	Ushort	2	H
3	Iodssr	Issue of Data, State Space Representation	Uchar	1	H+2
4	Reserved	Reserved	Uchar	1	H+3
5	SOW	Epoch time, second of day	UINT	4	H+4
6	OrbitCorr	Orbit corrections	StOrbitCorr[6]	72	H+8
7	XXXX	32-bit CRC	HEX	4	H+80
8	[CR][LF]	Sentence terminator (ASCII only)			

typedef struct

```
{
    USHORT usPrn; //SatSlot in ICD
    USHORT usIodn; // Issue of Data, Navigation
    SHORT sRadial; //radial correction
    SHORT sInTrack; //tangential correction
    SHORT sCross; //normal correction
    UCHAR uclODCorr; //Issue of Data, Correction
    UCHAR ucURAI; //User Range Accuracy Index
} _PACKED_ StOrbitCorr;
```

7.3.67 PPPB2BINFO3 — Information Type 3

This command is used to output PPP-B2b information type 3, including differential code

bias corrections. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2306

ASCII Syntax:

PPPB2BINFO3A ONCHANGED

Binary Syntax:

PPPB2BINFO3B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO3A,78,GPS,FINE,2203,366263000,0,0,18,1;219,1,3,20631,40,8,0,15,1,43,2,5
0,4,-305,5,-259,7,-227,8,-199,12,0,0,0,0,0,0,0,0,0,0,0,0,0,0,44,8,0,-35,1,-43,2,-37,4,-
255,5,-210,7,-212,8,-182,12,0,0,0,0,0,0,0,0,0,0,0,0,0,0,45,8,0,-490,1,-355,2,-350,4,-
327,5,-284,7,-270,8,-243,12,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0*943febbe
```

Table 7-140 PPPB2BINFO3 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BIN FO3 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Prn	PRN (161 based)	Ushort	2	H
3	Iodssr	Issue of Data, State Space Representation	Uchar	1	H+2
4	SatNum	Satellite number	Uchar	1	H+3
5	Sow	Epoch time, second of day	UINT	4	H+4
6	CodeBias	Differential code bias	StCodeBias_t [SatNum]	64*Sat Num	H+8
7	xxxx	32-bit CRC	HEX	4	H+8+64* SatNum
8	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

typedef struct

```
{
    USHORT usMode; //signal type and data processing mode
    SHORT sCodeCorr; //differential code bias (DCB)
}_PACKED_ StCodeCorr_t;

typedef struct
{
    USHORT usSatSlot; //satellite slot
    USHORT usBiasNum; //number of DCB
    StCodeCorr_t stCodeCorr[15]; //DCB corrections
}_PACKED_ StCodeBias_t;
```

7.3.68 PPPB2BINFO4 — Information Type 4

This command is used to output PPP-B2b information type 4, including satellite clock bias corrections. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2308

ASCII Syntax:

PPPB2BINFO4A ONCHANGED

Binary Syntax:

PPPB2BINFO4B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO4A,85,GPS,FINE,2203,366294000,0,0,18,1;219,1,2,20674,0,0,0,0,-
16383,0,-16383,0,-16383,0,-16383,0,-16383,7,71,0,-16383,5,119,0,-16383,0,-
16383,3,79,0,-16383,0,-16383,0,-16383,0,-16383,1,-52,0,-16383,0,-
16383,3,773,4,1225,3,775,0,-16383,0,-16383*3a7fd61c
```

Table 7-141 PPPB2BINFO4 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO4 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Prn	PRN (161 based)	Ushort	2	H
3	Iodssr	Issue of Data, State Space Representation	Uchar	1	H+2
4	Iodp	Issue of Data, PRN mask	Uchar	1	H+3
5	Sow	Epoch time, second of day	UINT	4	H+4
6	SubType	Subtype identifier	Uchar	1	H+8
7	Reserved	Reserved	Uchar[3]	3	H+9
8	ClkCorr	Clock bias corrections	StClkCorr_t[23]	92	H+12
9	xxxx	32-bit CRC	HEX	4	H+104
10	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

```
typedef struct
```

```
{
    USHORT uslodCorr; //issue of data, correction
    SHORT  sC0;      //clock bias corrections
} _PACKED_ StClkCorr_t;
```

7.3.69 PPPB2BINFO5 — Information Type 5

This command is used to output PPP-B2b information type 5, including User Range Accuracy Index. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2310

ASCII Syntax:

PPPB2BINFO5A ONCHANGED

Binary Syntax:

PPPB2BINFO5B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO5A,85,GPS,FINE,2203,366294000,0,0,18,1;219,1,2,20674,0,0,0,0,-
16383,0,-16383,0,-16383,0,-16383,0,-16383,7,71,0,-16383,5,119,0,-16383,0,-
16383,3,79,0,-16383,0,-16383,0,-16383,0,-16383,1,-52,0,-16383,0,-
16383,3,773,4,1225,3,775,0,-16383,0,-16383,0,-16383,0,-16383,0,-16383,0,-
16383,7,71,0,-16383,5,119,0,-16383,0,-16383,3,79,0,-16383,0,-16383,0,-16383,0,-
16383,1,-52,0,-16383,0,-16383,3,773,4,1225,3,775,0,-16383,0,-16383,0,-16383,0,-
16383,0,-16383,0,-16383,0,-16383,7,71,0,-16383,5,119,0,-16383,0,-16383,3,79,0,-
16383,0,-16383,0,-16383,0,-16383,1,-52,0,-16383,0,-16383,3,773,4,1225,3,775,0,-
16383,0,-16383,0,-16383*3a7fd61c
```

Table 7-142 PPPB2BINFO5 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO5 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Prn	PRN (161 based)	Ushort	2	H
3	Iodssr	Issue of Data, State Space Representation	Uchar	1	H+2
4	IODP	Issue of Data, PRN mask	Uchar	1	H+3
5	Subtype	Subtype identifier	Uchar	1	H+4
6	Reserved	Reserved	Uchar	1	H+5
7	Reserved	Reserved	Uchar	1	H+6
8	Reserved	Reserved	Uchar	1	H+7
9	SOW	Epoch time, second of day	UINT	4	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	URAI	User range accuracy index	StURAI-t[70]	140	H+12
11	XXXX	32-bit CRC	HEX	4	H+152
12	[CR][LF]	Sentence terminator (ASCII only)			

typedef struct

```
{
    UCHAR ucCLASS;
    UCHAR ucValue;
}_PACKED_ StURAI_t;
```

7.3.70 PPPB2BINFO6 – Information Type 6

This command is used to output PPP-B2b information type 6, including satellite clock bias corrections and orbit corrections. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2312

ASCII Syntax:

PPPB2BINFO6A ONCHANGED

Binary Syntax:

PPPB2BINFO6B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO6A,85,GPS,FINE,2203,366294000,0,0,18,1;219,1,2,20674,1,2,0,0,-
16383,20674,1,0,0,0,219,1,2,3,4,5,6,220,1,2,3,4,5,6*3a7fd61c
```

Table 7-143 PPPB2BINFO6 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO6 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	PRN (161 based)	Ushort	2	H
3	NumC	Number of satellites with clock bias corrections	Uchar	1	H+2
4	NumO	Number of satellites with orbit corrections	Uchar	1	H+3
5	RawNumc	Clock bias corrections	StNumC	96	H+4
6	RawNumo	Orbit corrections	StNumO	80	H+100
7	XXXX	32-bit CRC	HEX	4	H+180
8	[CR][LF]	Sentence terminator (ASCII only)			

typedef struct

```
{
    USHORT usIODCorr;
    SHORT sC0;
}_PACKED_ StClkCorr6_t;
```

typedef struct

```
{
    UINT uiSow;
    UCHAR uclodssr;
    UCHAR uclodp;
    USHORT usSatStartIndex;
    StClkCorr6_t astClkCorr[22];
}_PACKED_ StNumC_t;
```

typedef struct

```
{
```

```
    USHORT usPrn;  
    USHORT uslodn;  
    SHORT sRadial;  
    SHORT sInTrack;  
    SHORT sCross;  
    UCHAR uclodCorr;  
    UCHAR ucURAI;  
}_PACKED_ StOrbitCorr_t;  
typedef struct  
{  
    UINT uiSow;  
    UCHAR uclodssr;  
    UCHAR aucReserved[3];  
    StOrbitCorr_t astOrbitCorr[6];  
}_PACKED_ StNumO_t;
```

7.3.71 PPPB2BINFO7 – Information Type 7

This message is used to broadcast satellite clock bias corrections and orbit corrections. The difference between this message and Information Type 6 is that satellite clock bias corrections are matched with satellites by SatSlot rather than by mask. For more details, please refer to PPP-B2b ICD. PPP is supported by specific versions only. This log **only** supports ONCHANGED trigger.

Message ID: 2314

ASCII Syntax:

PPPB2BINFO7A ONCHANGED

Binary Syntax:

PPPB2BINFO7B ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#PPPB2BINFO7A,85,GPS,FINE,2203,366294000,0,0,18,1;219,1,2,20674,1,2,0,0,219,1,2,20  
674,1,0,0,0,219,1,2,3,4,5,6,220,1,2,3,4,5,6*3a7fd61d
```

Table 7-144 PPPB2BINFO7 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	PPPB2BINFO6 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	PRN	PRN (161 based)	Ushort	2	H
3	NumC	Number of satellites with clock bias corrections	Uchar	1	H+2
4	NumO	Number of satellites with orbit corrections	Uchar	1	H+3
5	RawNumc	Clock bias corrections	StNumC	128	H+4
6	RawNumo	Orbit corrections	StNumO	80	H+132
7	XXXX	32-bit CRC	HEX	4	H+212
8	[CR][LF]	Sentence terminator (ASCII only)			

typedef struct

```
{
    INT iPrn;
    USHORT usIODCorr;
    SHORT sC0;
}_PACKED_ StClkCorr7_t;
```

typedef struct

```
{
    UINT uiSow;
    UCHAR uclodssr;
    UCHAR uclodp;
    UCHAR aucReserved[2];
    StClkCorr7_t astRawClkCorr[15];
}_PACKED_ StNumC7_t;
```

typedef struct

```
{
    USHORT usPrn;
    USHORT uslodn;
```

This log contains the mask block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

ASCII Syntax:

Binary Syntax:

Applicable to: UM980, UM982, UB9A0, UM981

[illegible]

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6MASKBLOCK header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7
7	Nsys	Indicates the number of GNSS for which corrections are provided	USHORT	2	H+8
8	Reserved	Reserved	USHORT	2	H+10
Output the following contents Nsys times. The current number of Nsys is 2.					
9	GNSS ID	GNSS ID 0: GPS 1: Reserved 2: Galileo 3-15: Reserved	USHORT	2	H+12

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
10	Sat Mask	Satellite Mask is a 40-bit field that specifies the satellites of the GNSS identified by GNSS ID which are corrected ("1") and those which are not ("0"). The list of satellite indexes is provided in Table 7-146 Satellite Index. The MSB of the field corresponds to Satellite Index = 0.	Hex	5	H+14
11	Signal Mask	Signal Mask is a 16-bit field that indicates the signals of the GNSS identified by GNSS ID for which biases are provided in the Code Bias and Phase Bias content blocks. The list of signals is provided in Table 7-147 Signal Index. For each signal, "1" indicates that biases are provided and "0" indicates that they are not. The MSB of the field corresponds to Signal Index = 0.	Hex	2	H+19
12	CMAF	Cell Mask Availability Flag which indicates if the Cell Mask is provided ("1") or not ("0")	UCHAR	1	H+21
13	CM	Cell Mask. The Cell Mask field indicates with one bit whether biases are provided ("1") or not ("0") for each satellite of the satellite mask (i.e. each "1" of the Satellite Index Table) and for each signal of the signal mask (i.e. each "1" of the Signal Index Table).	Hex	40	H+22

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
14	NM	Navigation Message index, see Table 7-148 Navigation Message Index	UCHAR	1	H+62
15	Reserved	Reserved	UCHAR[3]	3	H+63
16	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+12+2*54
17	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-146 Satellite Index

Satellite Index	Galileo SVID	GPS PRN
0	1	1
1	2	2
...	...	...
39	40	40

Table 7-147 Signal Index

Signal Index	Galileo	GPS
0	E1-B I/NAV OS	L1 C/A
1	E1-C	Reserved
2	E1-B + E1-C	Reserved
3	E5a-I F/NAV OS	L1C(D)
4	E5a-Q	L1C(P)
5	E5a-I+E5a-Q	L1C(D+P)
6	E5b-I I/NAV OS	L2 CM
7	E5b-Q	L2 CL

Signal Index	Galileo	GPS
8	E5b-I+E5b-Q	L2 CM+CL
9	E5-I	L2 P
10	E5-Q	Reserved
11	E5-I + E5-Q	L5 I
12	E6-B C/NAV HAS	L5 Q
13	E6-C	L5 I + L5 Q
14	E6-B + E6-C	Reserved
15	Reserved	Reserved

Table 7-148 Navigation Message Index

Navigation Message Index	Galileo	GPS
0	I/NAV	LNAV (L1 C/A)
1-7	Reserved	Reserved

7.3.73 E6ORBITBLOCK – Orbit Corrections Block

This log contains the orbit corrections block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

Message ID: 2320

ASCII Syntax:

E6ORBITBLOCKA ONCHANGED

Binary Syntax:

E6ORBITBLOCKB ONCHANGED

Applicable to: UM980, UM982, UB9A0, UM981

Message Output:

```
#E6ORBITBLOCKA,62,GPS,FINE,2287,384303800,0,0,18,26;2700,50,19,25,0,10,0,13,-16,-
150,-25,17,71,-34,-48,113,-352,-54,-84,48,-28,-33,23,30,42,167,119,60,-21,83,-
19,13,91,18,10,32,84,-171,-113,145,-74,-82,110,20,-345,-4,46,102,-59,-178,-74,103,-8,-
23,14,169,-331,160,-66,1,-49,106,-22,54,37,-72,-15,65,-10,74,-163,233,-422,-54,-
```

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6ORBITBLOC K header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
7	VI	Validity Interval, see Table 7-150 Validity Interval Index	SHORT	2	H+8
8	Reserved	Reserved	SHORT	2	H+10
Output the following contents 68 times according to the satellite data provided by the current HAS service.					
9	IODref	Reference IOD. Indicates the Orbit and Clock Data corrected.	USHORT	2	H+12
10	DR	Delta Radial correction. Value "1000000000000" indicates data not available. Unit: m; scale: 0.0025; values range ± 10.2375	SHORT	2	H+14
11	DIT	Delta In-Track correction. Value "1000000000000" indicates data not available. Unit: m; scale: 0.008; values range: ± 16.376	SHORT	2	H+16
12	DCT	Delta Cross-Track correction. Value "1000000000000" indicates data not available. Unit: m; scale: 0.008; values range ± 16.376	SHORT	2	H+18
13	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+12+8*68
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-150 Validity Interval Index

Validity Interval Index	Validity Interval
0	5 s
1	10 s
2	15 s

Validity Interval Index	Validity Interval
3	20 s
4	30 s
5	60 s
6	90 s
7	120 s
8	180 s
9	240 s
10	300 s
11	600 s
12	900 s
13	1800 s
14	3600 s
15	Reserved

7.3.74 E6CLOCKFULLBLOCK – Clock Full-Set Corrections Block

This log contains the clock full-set corrections block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

Message ID: 2321

ASCII Syntax:

E6CLOCKFULLBLOCKA ONCHANGED

Binary Syntax:

E6CLOCKFULLBLOCKB ONCHANGED

Applicable to: UM980, UM982, UB9A0, UM981

Message Output:

#E6CLOCKFULLBLOCKA,63,GPS,FINE,2287,384268800,0,0,18,27;2667,8,15,24,15,5,0,0,0,0,0,-639,40,-311,118,365,-322,-166,60,-717,-159,-142,-4096,-190,333,-254,-619,-97,-

783,-504,-705,-107,285,-279,-142,-4096,-21,-72,-424,189,241,260,12,61,-111,27,-25,-
62,181,71,-104,-88,101,-36,154,11,-73,-76,74,-19,3,-64,-
88,0,0,0,0,0,0,0,0,0,0,0,0,0,0,0*3f50e3fc

Table 7-151 E6CLOCKFULLBLOCK Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6CLOCKFULLBLOCK header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7
7	VI	Validity Interval, see Table 7-150 Validity Interval Index	SHORT	2	H+8
8	Reserved	Reserved	SHORT	2	H+10

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
9	DCM	Delta Clock Multipliers The 2-bit DCM for each system is defined in Table 7-152 Delta Clock Multiplier Parameter Definition.	UCHAR[4]	4	H+12
10	DCC	Delta Clock Corrections Value "1000000000000" indicates data not available. Value "0111111111111" indicates the satellite shall not be used. Unit: m; scale: 0.0025; values range: ± 10.2375	SHORT[68]	136	H+16
11	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+152
12	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-152 Delta Clock Multiplier Parameter Definition

DCM Value	Multiplier
"00"	1
"01"	2
"10"	3
"11"	4

7.3.75 E6CLOCKSUBBLOCK – Clock Subset Corrections Block

This log contains the clock subset corrections block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

Message ID: 2322

ASCII Syntax:

E6CLOCKSUBBLOCKA ONCHANGED

Binary Syntax:

E6CLOCKSUBBLOCKB ONCHANGED

Applicable to: UM980, UM982, UB9A0, UM981

Table 7-153 E6CLOCKSUBBLOCK Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6CLOCKSUBBLOCK header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7
7	VI	Validity Interval, see Table 7-150 Validity Interval Index	SHORT	2	H+8
8	Nsys	Indicates the number of GNSS for which corrections are provided	SHORT	2	H+10

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
Output the following contents Nsys times. The current number of Nsys is 2.					
9	GNSS ID	GNSS ID 0: GPS 1: Reserved 2: Galileo 3-15: Reserved	USHORT	2	H+12
10	DCM	Delta Clock Multipliers The 2-bit DCM for each system is defined in Table 7-152 Delta Clock Multiplier Parameter Definition.	USHORT	2	H+14
11	Sat Mask	Satellite Mask is a 40-bit field that specifies the satellites of the GNSS identified by GNSS ID which are corrected ("1") and those which are not ("0"). The list of satellite indexes is provided in Table 7-146 Satellite Index. The MSB of the field corresponds to Satellite Index = 0.	Hex	5	H+16
12	Reserved	Reserved	UCHAR[3]	3	H+21
13	DCC	Delta Clock Corrections Value "1000000000000" indicates data not available. Value "0111111111111" indicates the satellite shall not be used. Unit: m; scale: 0.0025; values range: ± 10.2375	SHORT[36]	72	H+24
14	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+96
15	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.76 E6CBIASBLOCK – Code Biases Block

This log contains the code biases block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

Message ID: 2323

ASCII Syntax:

E6CBIASBLOCKA ONCHANGED

Binary Syntax:

E6CBIASBLOCKAB ONCHANGED

Applicable to: UM980, UM982, UB9A0, UM981

Message Output:

[illegible]

Table 7-154 E6CBIASBLOCK Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6CBIASBLOK header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7
7	VI	Validity Interval, see Table 7-150 Validity Interval Index	SHORT	2	H+8
8	Reserved	Reserved	SHORT	2	H+10
9	Code Biases	Code bias for the m-th signal of the n-th SV, as indicated in Table 7-147 Signal Index (or in Cell Mask if available). Value "10000000000" indicates data not available. Unit: m; scale: 0.0025; values range: ± 10.2375	SHORT[256]	512	H+12
10	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+524
11	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.77 E6PBIASBLOCK – Phase Biases Block

This log contains the phase biases block information broadcast by E6 HAS and decoded by the receiver. It only supports the ONCHANGED trigger.

Message ID: 2324

ASCII Syntax:

E6PBIASBLOCKA ONCHANGED

Binary Syntax:

E6PBIASBLOCKB ONCHANGED

Applicable to: UM980, UM982, UB9A0, UM981

Table 7-155 E6PBIASBLOCK Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	E6PBIASBLOCK header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	TOH	Time Of Hour of the message information, related to GST. The absolute message applicability time can be calculated as per 7.7 in <i>Galileo HAS SIS ICD (Issue 1.0)</i> .	ULONG	4	H
3	Block Flag	Block Flag 6-Bit Bit5: Mask Flag Bit4: Orbit Correction Flag Bit3: Clock Full-Set Flag Bit2: Clock Subset Flag Bit1: Code Bias Flag Bit0: Phase Bias Flag Each flag indicates if the content block is present ("1") or not ("0").	UCHAR	1	H+4
4	Reserved	Reserved	UCHAR	1	H+5

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
5	MASK ID	ID of the Mask	UCHAR	1	H+6
6	IOD Set ID	ID of reference set of IODs	UCHAR	1	H+7
7	VI	Validity Interval, see Table 7-150 Validity Interval Index	SHORT	2	H+8
8	Reserved	Reserved	SHORT	2	H+10
Output the following contents 256 times according to the satellite data provided by the current HAS service.					
9	Phase Biases	Phase bias for the m-th signal of the n-th SV, as indicated in Table 7-147 Signal Index (or in the Cell Mask if available). Value "10000000000" indicates data not available. Unit: m; scale: 0.01; values range: ± 10.23	SHORT	2	H+12
10	PDI	Phase Discontinuity Indicator for the m-th signal of the n-th SV, as indicated in Table 7-147 Signal Index (or in the Cell Mask if available).	USHORT	2	H+14
11	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+12+4*256
12	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.78 BSLNENUHD2 – Heading2 Baseline in ENU Coordinate System

This log contains the baseline information when using Heading2 in ENU Coordinate System.

☞ For the definition of Heading2, see section 3.7.

☞ This log can be output only when Heading2 is enabled (use the command `MODE HEADING2`).

Message ID: 1316

ASCII Syntax:

BSLNENUHD2A ONCHANGED

Binary Syntax:

BSLNENUHD2B ONCHANGED

Applicable to: UM980, UM982, UB9A0

Message Output:

```
#BSLNENUHD2A,78,GPS,FINE,2298,444774000,0,0,18,466;SOL_COMPUTED,NARROW_IN
T,10722.7418,306.2500,-
16.3518,0.0134,0.0190,0.0354,"","201",51,29,29,29,3,01,03,cb*c42490b3
```

Table 7-156 BSLNENUHD2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BSLNENUHD2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, see Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, see Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	East	East component of the baseline (relative to the base position), in meters	Double	8	H+8

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
5	North	North component of the baseline (relative to the base position), in meters	Double	8	H+16
6	Up	Up component of the baseline (relative to the base position), in meters	Double	8	H+24
7	East STD	Standard deviation of the east component of the baseline, in meters	Float	4	H+32
8	North STD	Standard deviation of the north component of the baseline, in meters	Float	4	H+36
9	Up STD	Standard deviation of the up component of the baseline, in meters	Float	4	H+40
10	Rover ID	Rover receiver ID	Char[4]	4	H+44
11	Master ID	Base receiver ID	Char[4]	4	H+48
12	#SVs	Number of satellites tracked	Uchar	1	H+52
13	#solnSVs	Number of satellites used in solution	Uchar	1	H+53
14	Reserved	Reserved	Uchar	1	H+54
15	Reserved	Reserved	Uchar	1	H+55
16	Reserved	Reserved	Hex	1	H+56
17	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+57

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
18	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+58
19	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+59
20	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+60
21	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.79 BSLNXYZHD2 – Heading2 Baseline in XYZ Coordinate System

This log contains the baseline information when using Heading2 in XYZ Coordinate System.

 For the definition of Heading2, see section 3.7.

 This log can be output only when Heading2 is enabled (use the command MODE HEADING2).

Message ID: 1317

ASCII Syntax:

BSLNXYZHD2A ONCHANGED

Binary Syntax:

BSLNXYZHD2B ONCHANGED

Applicable to: UM980, UM982, UB9A0

Message Output:

```
#BSLNXYZHD2A,78,GPS,FINE,2298,444774000,0,0,18,465;SOL_COMPUTED,NARROW_IN
T,-9536.1481,-
4907.4470,223.8114,0.0212,0.0332,0.0154,"","201",51,29,29,29,3,01,03,cB*2427e31b
```

Table 7-157 BSLNXYZHD2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	BSLNXYZHD2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	sol status	Solution status, see Table 0- 5 Solution Status	Enum	4	H
3	pos type	Position type, see Table 0- 4 Position or Velocity Type	Enum	4	H+4
4	dX	X component of the baseline (relative to the base position), in meters	Double	8	H+8
5	dY	Y component of the baseline (relative to the base position), in meters	Double	8	H+16
6	dZ	Z component of the baseline (relative to the base position), in meters	Double	8	H+24
7	dX STD	Standard deviation of the X component of the baseline, in meters	Float	4	H+32
8	dY STD	Standard deviation of the Y component of the baseline, in meters	Float	4	H+36
9	dZ STD	Standard deviation of the Z component of the baseline, in meters	Float	4	H+40
10	Rover ID	Rover receiver ID	Char[4]	4	H+44
11	Master ID	Base receiver ID	Char[4]	4	H+48
12	#SVs	Number of satellites tracked	Uchar	1	H+52

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
13	#solnSVs	Number of satellites used in solution	Uchar	1	H+53
14	Reserved	Reserved	Uchar	1	H+54
15	Reserved	Reserved	Uchar	1	H+55
16	Reserved	Reserved	Hex	1	H+56
17	ext sol stat	Extended solution status, refer to Table 7-89 Extended Solution Status	Hex	1	H+57
18	Galileo&BDS3 sig mask	Galileo and BDS-3 signal mask, refer to Table 7-88 Galileo & BDS-3 Signal Mask	Hex	1	H+58
19	GPS, GLONASS and BDS2 sig mask	GPS, GLONASS and BDS-2 signal mask (see Table 7-87 GPS/GLONASS/BDS-2 Signal Mask)	Hex	1	H+59
20	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+60
21	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.80 DOPHD2 – DOP of Heading2

This log contains the dilution of precision (DOP) for satellites used in heading2 solution.

☞ For the definition of Heading2, see section 3.7.

☞ This log can be output only when Heading2 is enabled (use the command MODE HEADING2).

Message ID: 1333

ASCII Syntax:

DOPHD2A ONCHANGED

Binary Syntax:

DOPHD2B ONCHANGED

Applicable to: UM980, UM982, UB9A0

Message Output:

```
#DOPHD2A,78,GPS,FINE,2298,444774000,0,0,18,466;1.7488,1.4302,0.7034,1.2278,1.006
3,2.0,29,4,16,28,31,34,39,81,82,101,161,162,163,167,169,170,171,176,183,185,192,197,19
9,200,203,219,220,26,104,166*50cc4364
```

Table 7-158 DOPHD2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	DOPHD2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	GDOP	Geometric DOP	Float	4	H
3	PDOP	Position DOP	Float	4	H+4
4	HDOP	Horizontal DOP	Float	4	H+8
5	HTDOP	Horizontal and time DOP	Float	4	H+12
6	TDOP	Time DOP	Float	4	H+16
7	Elev mask	Elevation mask angle	Float	4	H+20
8	#sats	Number of satellites tracked	Ulong	4	H+24
9	Sats list	List of the satellites tracked, see Table 7-55 Satellite PRN Number (with Offset) in Unicore-defined Messages. This field is null before the position solution is available.	Ulong	4	H+28
10	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+32
11	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

7.3.81 L6MDCTYPE1 – Compact SSR Mask

This log outputs the QZSS MADOCA-PPP sub type 1 message, which contains the satellite mask information. It only supports the ONCHANGED trigger.

Message ID: 2325


```

UCHAR aucSigMask[2];
UCHAR ucCellMaskVali;
UCHAR aucReserved[3];
UCHAR aucCellMask[40];    //
}_PACKED_ StL6PPPMsgSysMask_t;

```

Table 7-2 Header of the L6 Correction Messages

ID	Field	Format	Description	Binary Bytes	Binary Offset
1	PRN	ULONG	PRN number	4	0
2	MsgNum	USHORT	Message number	2	4
3	SubID	USHORT	Message sub type ID	2	6
4	EpochTime	ULONG	GPS epoch time 1s	4	8
5	Interval	USHORT	SSR update interval	2	12
6	Indicator	UCHAR	Multiple message indicator	1	14
7	SSRIOD	UCHAR	IOD SSR	1	15
8	NumGNSS	UCHAR	Number of augmented GNSS	1	16
9	Reserved	UCHAR	Reserved	1	17
10	HourlyTime	USHORT	GNSS hourly epoch time 1s	2	18
11	CorNum	USHORT	Number of corrections	2	20
12	MsgValid	USHORT	Nominal validity period	2	22

Table 4.1.2-7 GNSS ID

GNSS ID	GNSS
0	GPS
1	GLONASS
2	Galileo
3	BeiDou
4	QZSS
5	SBAS
6-9	Reserved

Table 4.1.2-8 Compact SSR satellite mask

Compact SSR Satellite Mask	0	1	2	3	4	5	6	7	8	9	10	11	12	13	14
GPS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
GLONASS	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
Galileo	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
BeiDou	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
QZSS	193	194	195	196	197	198	199	200	201	202	Reserved				

Compact SSR Satellite Mask	15	16	17	18	19	20	21	22	23	24	25	26	27	28	29
GPS	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
GLONASS	16	17	18	19	20	21	22	23	24	Reserved					
Galileo	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
BeiDou	16	17	18	19	20	21	22	23	24	25	26	27	28	29	30
QZSS	Reserved														

Compact SSR Satellite Mask	30	31	32	33	34	35	36	37	38	39
GPS	31	32	33	34	35	36	37	38	39	40
GLONASS	Reserved									
Galileo	31	32	33	34	35	36	37	Reserved		
BeiDou	31	32	33	34	35	36	37	38	39	40
QZSS	Reserved									

Table 4.1.2-9 Compact SSR signal mask

Compact SSR Signal mask	GPS	GLONASS	Galileo	BeiDou	QZSS	SBAS
0	L1 C/A	G1 C/A	E1 B1/NAV OS/CS/SoL	B1 I	L1 C/A	L1 C/A
1	L1 P	G1 P	E1 C no data	B1 Q	L1 L1C(D)	L5 I
2	L1 Z-tracking	G2 C/A	E1 B+C	B1 I+Q	L1 L1C(P)	L5 Q
3	L1 L1C(D)	G2 P	E5a I F/NAV OS	B3 I	L1 L1C(D+P)	L5 I+Q
4	L1 L1C(P)	G1a(D)	E5a Q no data	B3 Q	L2 L2C(M)	
5	L1 L1C(D+P)	G1a(P)	E5a I+Q	B3 I+Q	L2 L2C(L)	
6	L2 L2C(M)	G1a(D+P)	E5b I I/NAV OS/CS/SoL	B2 I	L2 L2C(M+L)	
7	L2 L2C(L)	G2a(D)	E5b Q no data	B2 Q	L5 I	
8	L2 L2C(M+L)	G2a(P)	E5b I+Q	B2 I+Q	L5 Q	
9	L2 P	G2a(D+P)	E5 I		L5 I+Q	
10	L2 Z-tracking	G3 I	E5 Q			
11	L5 I	G3 Q	E5 I+Q			
12	L5 Q	G3 I+Q	Service specific 1			
13	L5 I+Q		Service specific 2			
14			Service specific 3			
15						

7.3.82 L6MDCTYPE2 – Compact SSR GNSS Orbit Correction

This log outputs the QZSS MADOCA-PPP sub type 2 message, which contains the GNSS orbit correction information. It only supports the ONCHANGED trigger.

Message ID: 2326

ASCII Syntax:

L6MDCTYPE2A ONCHANGED

Binary Syntax:

L6MDCTYPE2B ONCHANGED

Applicable to: UM981, UB9A0, UM980

Message Output:

```
#L6MDCTYPE2A,89,GPS,FINE,2331,121686000,16071,0,18,29;36,4073,2,0,5,0,11,0,0,288
5,68,7,172,-432,610,316,53,-132,131,-130,215,-193,235,21,62,159,-119,-105,50,-123,-
266,150,46,-7,-142,13,41,-201,532,100,57,53,-67,-6,136,-4,-27,-58,26,118,-
156,82,71,38,-36,-5,25,58,14,-166,34,11,-27,-64,94,-31,200,-60,103,-39,-132,-
104,62,117,-452,151,18,-249,215,99,109,26,-321,-54,42,191,-110,-70,15,17,281,-
16,104,91,-153,153,17,-15,124,-12,147,-188,586,-4,22,124,-89,-94,54,-43,-60,-103,59,-
95,219,-37,32,-13,-147,77,51,117,52,103,51,217,199,98,51,292,2,158,51,156,-
124,59,51,556,-534,64,51,1,-14,-11,51,444,12,24,51,196,-115,66,51,231,-72,87,51,224,-
13,-45,51,293,255,-125,51,308,307,-96,51,118,-180,-213,51,157,-209,-131,51,322,-676,-
445,51,57,-255,-11,51,81,266,-23,51,568,695,-244,51,284,-569,-50,74,160,-86,-8,73,-
8,21,23,74,156,5,17,74,112,85,17,74,79,12,37,74,108,20,40,74,101,3,-14,74,55,44,-
2,71,65,27,-45,74,206,-76,48,72,225,-67,14,74,111,90,76,74,276,-17,-39,73,115,-19,-
10,72,154,-57,6,74,242,-11,15,74,92,-47,-63,74,196,-10,19,74,91,-77,-5,70,42,-57,-
8,133,403,59,22,133,220,17,36*7d02c73e
```

Table 7-3 L6MDCTYPE2 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	L6MDCTYPE2 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H1	0
2	L6Corrheader	Header of the L6 correction messages, see Table 7-2		H2	H1
3	OrbitCorr	Orbit correction	StL6PPPMsgSat Orbit_t[CorNum]	8*CorNum	H(H1+H2)
4	Xxxx	32-bit CRC	HEX	4	H+8*CorNum
5	[CR][LF]	Sentence terminator (ASCII only)			

```
typedef struct
{
    USHORT usIODE;
```

```
SHORT sRadial;
SHORT sAlong;
SHORT sCross;      //
}_PACKED_ StL6PPPMsgSatOrbit_t;
```

7.3.83 L6MDCTYPE3 – Compact SSR GNSS Clock Correction

This log outputs the QZSS MADOCA-PPP sub type 3 message, which contains the GNSS clock correction information. It only supports the ONCHANGED trigger.

Message ID: 2327

ASCII Syntax:

L6MDCTYPE3A ONCHANGED

Binary Syntax:

L6MDCTYPE3B ONCHANGED

Applicable to: UM981, UB9A0, UM980

Message Output:

```
#L6MDCTYPE3A,89,GPS,FINE,2331,121671000,16071,0,18,29;36,4073,3,0,2,0,11,0,0,287
0,68,4,-859,684,184,-18,206,86,-349,-175,568,146,-242,349,-457,476,-1106,-895,-
934,567,389,-190,-85,-66,387,-53,-143,219,228,2666,1212,-689,-1579,492,-1751,-
73,897,2194,2403,328,1680,-813,1665,874,-88,-1193,1680,738,146,-22,-51,-199,-164,-
77,-87,327,56,-176,-292,-97,-283,180,-60,-105,-25,26,-208,-68,128,248*5413e1d3
```

Table 7-4 L6MDCTYPE3 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	L6MDCTYPE3 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H1	0
2	L6Corrheader	Header of the L6 correction messages, see Table 7-2		H2	H1
3	Clk	Clock correction	asClk[CorNum]	2*CorNum	H(H1+H2)
4	Xxxx	32-bit CRC	HEX	4	H+2*CorNum

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
5	[CR][LF]	Sentence terminator (ASCII only)			

7.3.84 L6MDCTYPE4 – Compact SSR GNSS Satellite Code Bias

This log outputs the QZSS MADOCA-PPP sub type 4 message, which contains the GNSS satellite code bias information. It only supports the ONCHANGED trigger.

Message ID: 2328

ASCII Syntax:

L6MDCTYPE4A ONCHANGED

Binary Syntax:

L6MDCTYPE4B ONCHANGED

Applicable to: UM981, UB9A0, UM980

Message Output:

```
#L6MDCTYPE4A,89,GPS,FINE,2331,121696000,16071,0,18,30;36,4073,4,0,5,0,11,0,0,289
5,68,12,204,232,336,0,0,0,0,-143,-163,-246,-235,-157,0,0,0,-13,3,10,-1,-63,0,49,38,77,80,
0,0,0,-168,-183,-293,-278,-188,0,0,63,62,111,103,0,0,0,-161,-157,-286,-265,-112,0,0,-13
8,-140,-204,-227,-25,0,0,62,47,60,109,101,19,0,76,74,120,125,0,0,0,72,69,118,0,0,0,0,39,2
6,71,64,0,0,0,88,107,146,0,0,0,0,50,35,48,86,81,-5,0,197,236,323,0,0,0,0,83,115,137,0,0,0,0,
101,133,167,0,0,0,0,54,40,52,96,89,1,0,-155,-166,-256,-255,-165,0,0,-159,-143,-282,-262,
-189,0,0,-197,-197,-313,-324,-162,0,0,-125,-122,-203,-206,-69,0,0,67,53,68,116,110,3,0,4
3,41,69,70,0,0,0,-142,-132,-241,-234,-137,0,0,85,75,135,140,0,0,0,-116,-125,-199,-190,-3
4,0,0,-100,-88,-140,-164,0,0,0,-21,-19,-35,-34,0,0,0,34,29,52,57,0,0,0,44,32,72,73,0,0,0,6,1,
2,9,0,0,0,64,48,105,107,0,0,0,51,43,86,86,0,0,0,82,79,135,137,0,0,0,-63,-68,-89,-105,0,0,0,-
57,-56,-100,-94,0,0,0,-19,-26,-26,-32,0,0,0,-30,-34,-44,-50,0,0,0,13,14,22,22,0,0,0,-41,-45,
-61,-68,0,0,0,41,56,44,67,0,0,0,-120,-117,-233,-198,0,0,0,4,4,14,6,0,0,0,68,63,122,112,0,0,
0,3,4,5,4,0,0,0,17,34,0,0,0,0,0,-39,-76,0,0,0,0,0,53,102,0,0,0,0,0,-47,-83,0,0,0,0,0,-76,-138,0,
0,0,0,0,-15,-28,0,0,0,0,0,3,9,0,0,0,0,0,198,362,0,0,0,0,0,161,292,0,0,0,0,0,-75,-137,0,0,0,0,0,-
90,-163,0,0,0,0,0,51,94,0,0,0,0,0,-26,-47,0,0,0,0,0,58,105,0,0,0,0,0,-52,-98,0,0,0,0,0,69,120,
0,0,0,0,0,-57,-108,0,0,0,0,0,56,105,0,0,0,0,0,-60,-108,0,0,0,0,0,-83,-149,0,0,0,0,0,-78,-79,-1
28,-112,0,0,0,-62,-66,-99,-111,0,0,0*54a25c17
```

Table 7-5 L6MDCTYPE4 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	L6MDCTYPE4 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H1	0
2	L6Corrheader	Header of the L6 correction messages, see Table 7-2		H2	H1
3	CodeBias	Code bias information	StL6PPPSatCodeBias[CorNum]	14*CorNum	H(H1+H2)
4	Xxxx	32-bit CRC	HEX	4	H+14*CorNum
5	[CR][LF]	Sentence terminator (ASCII only)			

```
typedef struct
{
    SHORT sCBias[7];           //
} _PACKED_ StL6PPPSatCodeBias;
```

7.3.85 L6MDCTYPE5 – Compact SSR GNSS Satellite Phase Bias

This log outputs the QZSS MADOCA-PPP sub type 5 message, which contains the GNSS satellite phase bias information. It only supports the ONCHANGED trigger.

Message ID: 2329

ASCII Syntax:

L6MDCTYPE5A ONCHANGED

Binary Syntax:

L6MDCTYPE5B ONCHANGED

Applicable to: UM981, UB9A0, UM980

Message Output:

```
#L6MDCTYPE5A,89,GPS,FINE,2331,121676000,16071,0,18,29;36,4073,5,0,5,0,11,0,0,287
5,68,20,1838,459,-16185,0,0,0,0,2,3,0,0,0,0,-343,8106,10223,-15877,-3969,0,0,0,3,2,3,0,
0,0,1593,398,8291,-14303,-1528,16002,0,0,3,1,0,0,0,0,114,28,-14343,-1538,0,0,0,1,3,3,0,0,
```

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	L6MDCTYPE5 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H1	0
2	L6Corrheader	Header of the L6 correction messages, see Table 7-2		H2	H1

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
3	PhaseBias	Phase bias information	StL6PPPSat PhaseBias[C orNum]	H+28*C orNum	H(H1+H2)
4	Xxxx	32-bit CRC	HEX	4	H+28*CorN um
5	[CR][LF]	Sentence terminator (ASCII only)			

```
typedef struct
{
    SHORT sPBias[7];           //
    USHORT usIndicator[7];    //
} _PACKED_StL6PPPSatPhaseBias;
```

7.3.86 L6MDCTYPE7 – Compact SSR GNSS URA

This log outputs the QZSS MADOCA-PPP sub type 7 message, which contains the GNSS user range accuracy (URA) information. It only supports the ONCHANGED trigger.

Message ID: 2330

ASCII Syntax:

L6MDCTYPE7A ONCHANGED

Binary Syntax:

L6MDCTYPE7B ONCHANGED

Applicable to: UM981, UB9A0, UM980

Message Output:

```
#L6MDCTYPE7A,89,GPS,FINE,2331,121691000,16071,0,18,30;36,4073,7,0,5,0,11,0,0,289
0,0,68,21,22,22,24,21,21,23,22,23,22,24,24,23,21,21,24,22,22,21,22,23,23,22,22,22,22,22,2
6,26,25,26,27,27,26,26,26,26,27,27,27,26,26,26,26,27,26,25,24,24,24,25,24,24,24,24,23,
24,25,24,25,24,24,24,24,24,33,32,0,0,0,0,0,0,0,0,0,0,0*98499c0d
```

Table 7-7 L6MDCTYPE7 Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	L6MDCTYPE7 header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H1	0
2	L6Corrheader	Header of the L6 correction messages, see Table 7-2		H2	H1
3	URA	User range accuracy	ausURA[80]	160	H(H1+H2)
4	Xxxx	32-bit CRC	HEX	4	H+160
5	[CR][LF]	Sentence terminator (ASCII only)			

7.3.87 ENVINFO – Environment Information

This log outputs the score of the environment where the base station is located so that users can evaluate whether the environment is suitable for building a base station. It can also output whether the base station has been moved or is moving.

The method of scoring the environment is as follows:

1. Set the base station to BASE mode.
2. Use the command ENVINFO to make the base station output information and save the configuration.
3. Place the base station at the position where it is to be set up and keep it there for about 30 seconds.
4. The ENVINFO log can display the score of the current environment.

Message ID: 11779

ASCII Syntax:

ENVINFOA 1

Binary Syntax:

ENVINFOB 1

Applicable to: UM980

Message Output:

```
#ENVINFOA,84,GPS,FINE,2302,466453000,0,0,18,23;88,90.00,89,92,0,0,0.118,NARROW_I  
NT,53,51,0.022,46,44,50,56,0,0,0,25751,0.0027,0.432,0.385,0,0,0.000,0.007*803048db
```

Table 7-8 ENVINFO Message Structure

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
1	ENVINFO header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure		H	0
2	Base Score	The score of the environment where the base station is located (applies to BASE mode). For more information about the score and its explanation, see Table 7-9	USHORT	2	H
3	Confidence level of solution	Confidence level of solution (applies to ROVER mode)	DOUBLE	8	H+2
4	Sat vis	Utilization ratio of visible satellites (applies to ROVER mode)	USHORT	2	H+10
5	Sat Slo	Ratio of satellites used in solution (applies to ROVER mode)	USHORT	2	H+12
6	Moved Flag	Whether the base station has been moved: 0: not moved; 1: moved (compared to the position before power off or in the process of power on); 2: N/A (not applicable due to poor environment or large deviation of the position)	CHAR	1	H+14

ID	Field Type	Data Description	Format	Binary Bytes	Binary Offset
7	Moving Flag	Whether the base station is moving: 0: static 1: moving	CHAR	1	H+15
8	Pos Diff	The distance between the current position and the fixed coordinates. If the receiver is not working in BASE mode, this field is 0.	DOUBLE	8	H+16
9	Slo Type	Solution type	ENMU	4	H+24
10	Base sat Num	Number of satellites observed by the base station	INT	4	H+28
11	Pub sat Num	Number of satellites in common view of both the base station and rover station	INT	4	H+32
12	Reserved, 78 bytes			78	H+36
13	XXXX	32-bit CRC	Hex	4	H+114
14	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

Table 7-9 Environment Score and Judgement Criteria

Environment Score	Judgement Criteria
90~100	Very good
85~90	Good
80~85	Acceptable
1~80	Not suitable for building a base station

8 Other Commands

8.1 UNLOG – Stop Message Output

This command is used to stop the serial port outputting specific messages. Both [message] and [port] can be configured. If the [port] is not specified, it will stop the current port by default. If the [message] is not specified, it will stop all message output.

Syntax of the Command:

UNLOG [port] [message]

Abbreviated ASCII Syntax:

UNLOG	Stop the current port outputting all messages
UNLOG GPGBA	Stop the current port outputting GPGBA message
UNLOG COM1	Stop COM1 outputting all messages
UNLOG COM2 GPGBA	Stop COM2 outputting GPGBA message

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 8-1 Parameters of the UNLOG Command

Header	Port	Message
UNLOG	COM1 COM2 COM3	Message to be stopped

8.2 FRESET – Clear NVM Data and Restart the Receiver

This command is used to clear all user-specified configurations, satellite ephemerides, and position information stored in the non-volatile memory (NVM), and reset the baud rate to 115200 bps. This command will force a restart of the receiver.

Syntax of the Command:

FRESET

Abbreviated ASCII Syntax:

FRESET

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 8-2 Parameter of the FRESET Command

Header	Parameter	Description
FRESET	-	Clear the saved configurations, satellite ephemerides, position information, and reset the baud rate to 115200 bps.

8.3 Reset

This command can be used to restart the receiver or reset the receiver and to clear the satellite ephemerides, position information, satellite almanacs, ionosphere parameters and UTC parameters saved in the receiver.

Syntax of the Command:

RESET [parameter]

Abbreviated ASCII Syntax:

RESET

RESET EPHEM

RESET EPHEM ALMANAC IONUTC POSITION XOPARAM

RESET ALL

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 8-3 Parameters of the RESET Command

Header	Parameter	Description
RESET	-	Restart the receiver
	EPHEM	Restart the receiver and clear the ephemeris
	IONUTC	Restart the receiver and clear the ionosphere and UTC parameters
	ALMANAC	Restart the receiver and clear the almanac
	POSITION	Restart the receiver and clear the position
	XOPARAM or CLOCKDRIFT	Restart the receiver and clear the crystal oscillator information

Header	Parameter	Description
	ALL	Restart the receiver and clear all the information above, except XOPARAM or CLOCKDRIFT

- ☞ When the signal is switched from simulator to real application scenario, it is recommended to clear the ephemeris (EPHEM), almanac (ALMANAC), ionosphere and UTC parameters (IONUTC), and the position (POSITION) of the receiver; otherwise, there might be no fix or the fix might be abnormal.
- ☞ If the antenna and RF link are normal, but the module cannot fix the position for a long time, you can use the XOPARAM or CLOCKDRIFT command to clear the crystal oscillator information to make the receiver compute solution again.

8.4 SAVECONFIG – Save Configuration into NVM

This command saves the current configuration into non-volatile memory (NVM), including LOG messages (except those triggered by ONCE), port configuration, etc.

Syntax of the Command:

SAVECONFIG

Abbreviated ASCII Syntax:

SAVECONFIG

Applicable to: UM960, UM960L, UM980, UB9A0, UM982

Table 8-4 Parameter of the SAVECONFIG Command

Header	Parameter	Description
SAVECONFIG	-	Save the current configuration into non-volatile memory (NVM)

Appendix 1: 32-bit CRC

The ASCII and binary format log messages all contain a 32-bit CRC to ensure the validity of data reception and transmission. The following example shows the C programming language that generates CRC:

```
const ULONG aulCrcTable[256] =
{
    0x00000000UL, 0x77073096UL, 0xee0e612cUL, 0x990951baUL, 0x076dc419UL,
    0x706af48fUL,
    0xe963a535UL, 0x9e6495a3UL, 0x0edb8832UL, 0x79dcb8a4UL, 0xe0d5e91eUL,
    0x97d2d988UL,
    0x09b64c2bUL, 0x7eb17cbdUL, 0xe7b82d07UL, 0x90bf1d91UL, 0x1db71064UL,
    0x6ab020f2UL,
    0xf3b97148UL, 0x84be41deUL, 0x1adad47dUL, 0x6ddde4ebUL, 0xf4d4b551UL,
    0x83d385c7UL,
    0x136c9856UL, 0x646ba8c0UL, 0xfd62f97aUL, 0x8a65c9ecUL, 0x14015c4fUL,
    0x63066cd9UL,
    0xfa0f3d63UL, 0x8d080df5UL, 0x3b6e20c8UL, 0x4c69105eUL, 0xd56041e4UL,
    0xa2677172UL,
    0x3c03e4d1UL, 0x4b04d447UL, 0xd20d85fdUL, 0xa50ab56bUL, 0x35b5a8faUL,
    0x42b2986cUL,
    0xdbbbc9d6UL, 0xacbcf940UL, 0x32d86ce3UL, 0x45df5c75UL, 0xdcd60dcfUL,
    0xabd13d59UL,
    0x26d930acUL, 0x51de003aUL, 0xc8d75180UL, 0xbf1d0611UL, 0x21b4f4b5UL,
    0x56b3c423UL,
    0xcfba9599UL, 0xb8bda50fUL, 0x2802b89eUL, 0x5f058808UL, 0xc60cd9b2UL,
    0xb10be924UL,
    0x2f6f7c87UL, 0x58684c11UL, 0xc1611dabUL, 0xb6662d3dUL, 0x76dc4190UL,
    0x01db7106UL,
    0x98d220bcUL, 0xefd5102aUL, 0x71b18589UL, 0x06b6b51fUL, 0x9fbfe4a5UL,
    0xe8b8d433UL,
    0x7807c9a2UL, 0x0f00f934UL, 0x9609a88eUL, 0xe10e9818UL, 0x7f6a0dbbUL,
    0x086d3d2dUL,
    0x91646c97UL, 0xe6635c01UL, 0xb6b6b51fUL, 0xc6c6162UL, 0x856530d8UL,
```

N4 Products Commands and Logs Reference Book

0xf262004eUL,
0x6c0695edUL, 0x1b01a57bUL, 0x8208f4c1UL, 0xf50fc457UL, 0x65b0d9c6UL,
0x12b7e950UL,
0x8bbeb8eaUL, 0xfcb9887cUL, 0x62dd1ddfUL, 0x15da2d49UL, 0x8cd37cf3UL,
0xfbd44c65UL,
0x4db26158UL, 0x3ab551ceUL, 0xa3bc0074UL, 0xd4bb30e2UL, 0xadfa541UL,
0x3dd895d7UL,
0xa4d1c46dUL, 0xd3d6f4fbUL, 0x4369e96aUL, 0x346ed9fcUL, 0xad678846UL,
0xda60b8d0UL,
0x44042d73UL, 0x33031de5UL, 0xaa0a4c5fUL, 0xdd0d7cc9UL, 0x5005713cUL,
0x270241aaUL,
0xbe0b1010UL, 0xc90c2086UL, 0x5768b525UL, 0x206f85b3UL, 0xb966d409UL,
0xce61e49fUL,
0x5edef90eUL, 0x29d9c998UL, 0xb0d09822UL, 0xc7d7a8b4UL, 0x59b33d17UL,
0x2eb40d81UL,
0xb7bd5c3bUL, 0xc0ba6cadUL, 0xedb88320UL, 0x9abfb3b6UL, 0x03b6e20cUL,
0x74b1d29aUL,
0xead54739UL, 0x9dd277afUL, 0x04db2615UL, 0x73dc1683UL, 0xe3630b12UL,
0x94643b84UL,
0x0d6d6a3eUL, 0x7a6a5aa8UL, 0xe40ecf0bUL, 0x9309ff9dUL, 0x0a00ae27UL,
0x7d079eb1UL,
0xf00f9344UL, 0x8708a3d2UL, 0x1e01f268UL, 0x6906c2feUL, 0xf762575dUL,
0x806567cbUL,
0x196c3671UL, 0x6e6b06e7UL, 0xfed41b76UL, 0x89d32be0UL, 0x10da7a5aUL,
0x67dd4accUL,
0xf9b9df6fUL, 0x8ebeff9UL, 0x17b7be43UL, 0x60b08ed5UL, 0xd6d6a3e8UL,
0xa1d1937eUL,
0x38d8c2c4UL, 0x4dff252UL, 0xd1bb67f1UL, 0xa6bc5767UL, 0x3fb506ddUL,
0x48b2364bUL,
0xd80d2bdaUL, 0xaf0a1b4cUL, 0x36034af6UL, 0x41047a60UL, 0xdf60efc3UL,
0xa867df55UL,
0x316e8eefUL, 0x4669be79UL, 0xcb61b38cUL, 0xbc66831aUL, 0x256fd2a0UL,
0x5268e236UL,
0xcc0c7795UL, 0xbb0b4703UL, 0x220216b9UL, 0x5505262fUL, 0xc5ba3bbeUL,
0xb2bd0b28UL,
0x2bb45a92UL, 0x5cb36a04UL, 0xc2d7ffa7UL, 0xb5d0cf31UL, 0x2cd99e8bUL,
0x5bdeae1dUL,

```

0x9b64c2b0UL, 0xec63f226UL, 0x756aa39cUL, 0x026d930aUL, 0x9c0906a9UL,
0xeb0e363fUL,
0x72076785UL, 0x05005713UL, 0x95bf4a82UL, 0xe2b87a14UL, 0x7bb12baeUL,
0x0cb61b38UL,
0x92d28e9bUL, 0xe5d5be0dUL, 0x7cdcefb7UL, 0x0bdbdf21UL, 0x86d3d2d4UL,
0xf1d4e242UL,
0x68ddb3f8UL, 0x1fda836eUL, 0x81be16cdUL, 0xf6b9265bUL, 0x6fb077e1UL,
0x18b74777UL,
0x88085ae6UL, 0xff0f6a70UL, 0x66063bcaUL, 0x11010b5cUL, 0x8f659effUL,
0xf862ae69UL,
0x616bffd3UL, 0x166ccf45UL, 0xa00ae278UL, 0xd70dd2eeUL, 0x4e048354UL,
0x3903b3c2UL,
0xa7672661UL, 0xd06016f7UL, 0x4969474dUL, 0x3e6e77dbUL, 0xaed16a4aUL,
0xd9d65adcUL,
0x40df0b66UL, 0x37d83bf0UL, 0xa9bcae53UL, 0xdeb9ec5UL, 0x47b2cf7fUL,
0x30b5ffe9UL,
0xbdbdf21cUL, 0xcabac28aUL, 0x53b39330UL, 0x24b4a3a6UL, 0xbad03605UL,
0xcdd70693UL,
0x54de5729UL, 0x23d967bfUL, 0xb3667a2eUL, 0xc4614ab8UL, 0x5d681b02UL,
0x2a6f2b94UL,
0xb40bbe37UL, 0xc30c8ea1UL, 0x5a05df1bUL, 0x2d02ef8dUL
};

```

// Calculate and return the CRC for usA binary buffer

ULONG CalculateCRC32(uchar *szBuf, int iSize)

```

{
    int    iIndex;
    ULONG  ulCRC = 0;
    for (iIndex=0; iIndex<iSize; iIndex++)
    {
        ulCRC = aulCrcTable[(ulCRC ^ szBuf[iIndex]) & 0xff] ^ (ulCRC >> 8);
    }
    return ulCRC;
}

```

Appendix 2: RTCM V3 Differential Corrections

The RTCM recommended standards for differential GNSS (Global Navigation Satellite Systems) services - Version 3. Information in Version 3.0 and 3.2 is partly supported in this protocol. For more details, please refer to <http://www.rtcn.org/overview.php>.

This chapter complies with RTCM standard format, including 1004, 1006, 1007, 1012, 1019, 1033, and 1104, which are defined as RTCM1004, RTCM1006, RTCM1007, RTCM1012, RTCM1019, RTCM1033, and RTCM1104.

Syntax of the Command:

RTCM [message ID] [output rate]

Example:

```
RTCM1005 1    // Output RTCM1005 at the rate of 1 Hz
RTCM1033 1    // Output RTCM1033 at the rate of 1 Hz
RTCM1019 60   // Output RTCM1019 every 60 s
RTCM1074 0.2  // Output RTCM1074 at the rate of 5 Hz
```

Supported RTCM V3 messages:

Group 1 – Observables:

RTCM1001 GPS RTK L1 observables
RTCM1002 GPS RTK L1 observables, extended
RTCM1003 GPS RTK L1 and L2 observables
RTCM1004 GPS RTK L1 and L2 observables, extended

RTCM1009 GLONASS RTK L1 observables
RTCM1010 GLONASS RTK L1 observables, extended
RTCM1011 GLONASS RTK L1 and L2 observables
RTCM1012 GLONASS RTK L1 and L2 observables, extended

RTCM1074 GPS MSM4 (Full GPS Pseudoranges and PhaseRanges plus CNR)
RTCM1075 GPS MSM5 (Full GPS Pseudoranges, PhaseRanges, PhaseRangeRate and CNR)

RTCM1084 GLONASS MSM4 (Full GLONASS Pseudoranges and PhaseRanges plus CNR)
RTCM1085 GLONASS MSM5 (Full GLONASS Pseudoranges, PhaseRanges,

PhaseRangeRate and CNR)

RTCM1123 BDS MSM3 (Compact BeiDou Pseudoranges and PhaseRanges)

RTCM1124 BDS MSM4 (Full BeiDou Pseudoranges and PhaseRanges plus CNR)

RTCM1125 BDS MSM5 (Full BeiDou Pseudoranges, PhaseRanges, PhaseRangeRate and CNR)

RTCM1126 BDS MSM6 (Full BeiDou Pseudoranges and PhaseRanges plus CNR (high resolution))

RTCM1127 BDS MSM7 (Full BeiDou Pseudoranges, PhaseRanges, PhaseRangeRate and CNR (high resolution))

RTCM1104 BDS RTK observables (Defined by the industry in China, which should not be mixed with other definitions such as SBAS)

Group 2 – Base station coordinates:

RTCM1005 RTK base station antenna reference point (ARP) coordinates

RTCM1006 RTK base station ARP coordinates with antenna height

Group 3 – Base station antenna description:

RTCM1007 Antenna description and installation information (only coding is supported currently)

Group 4 – Auxiliary information:

RTCM63 BDS ephemerides (testing message)

RTCM1042 BDS ephemerides

RTCM1019 GPS ephemerides

RTCM1020 GLONASS ephemerides

RTCM1045 GALILEO F/NAV ephemerides

RTCM1046 GALILEO I/NAV ephemerides

RTCM1033 Receiver and antenna descriptors

RTCM1105 Internal heading application: the heading receiver transmits heading information to the rover receiver (Unicore-defined)

Appendix 3: Event Output

1 EVENTFLAG – EVENT Position Information

This log outputs the absolute time and relative time when the EVENT happens, supporting ASCII/ABBASCII/Binary format and the ONCE/ONCHANGED trigger. It must be used in conjunction with the GGA output.

Message ID: 312

Syntax of the Command:

EVENTFLAG [parameter]

Abbreviated ASCII Syntax:

EVENTFLAGB ONCHANGED

EVENTFLAGA ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

#EVENTFLAGA,97,GPS,FINE,2227,210352000,0,0,18,0;2,43,0,0,2227,210351,999532091,0,-1,-1*405dd7fe

Table 0- 1 EVENTFLAG Data Structure

ID	Field	Description	Format	Binary Bytes	Binary Offset
1	EVENTFLAG header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure Note: The time in the header is obtained by rounding the time of the event.		H	0
2	eventID	Event ID (Event 1 or Event 2)	UCHAR	1	H
3	Status*	Status of the module, see Table 0- 2 STATUS Bit Description	UCHAR	1	H+1
4	Reserved	Reserved	UCHAR	1	H+2

ID	Field	Description	Format	Binary Bytes	Binary Offset
5	Reserved	Reserved	UCHAR	1	H+3
6	week	Week	UINT	4	H+4
7	second	Second	UINT	4	H+8
8	subSecond	Nanosecond	UINT	4	H+12
9	Reserved	Reserved		4	H+16
10	offset_second	Based on the output rate of GGA, this value refers to the offset between the time of EVENT and its closest absolute time output by GGA (second). If this value is invalid, the output is -1.	INT	4	H+20
11	offset_SubSecond	Based on the output rate of GGA, this value refers to the offset between the time of EVENT and its closest absolute time output by GGA (nanosecond). If this value is invalid, the output is -1.	INT	4	H+24
12	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+28
13	[CR][LF]	Sentence terminator (ASCII only)	-	-	-

* Field 3 (status) is applicable to UM982 Build9669 and later versions.

Table 0- 2 STATUS Bit Description

Bit	Description
Bit0	Validity flag of seconds of week: 0=invalid; 1=valid
Bit1	Validity flag of PPS: 0=invalid; 1=valid
Bit2	Reserved
Bit3	Validity flag of week: 0=invalid; 1=valid
Bit4	Reserved

2 EVENTSLN – EVENT Position and Time Information

This log outputs the time, position, velocity and solution status when the EVENT happens. The EVENTSLN command must be used in conjunction with the GGA output.

Message ID: 311

Syntax of the Command:

EVENTSLN [parameter]

Abbreviated ASCII Syntax:

EVENTSLNB ONCHANGED

EVENTSLNA ONCHANGED

Applicable to: UM980, UB9A0, UM982

Message Output:

```
#EVENTSLNA,97,GPS,FINE,2227,210381000,0,0,18,0;2,43,0,0,2227,210380,999532081,0,-1,-1,SOL_COMPUTED,SINGLE,40.07896911523,116.23651480774,67.0271,-8.4925,WGS84,1.7728,1.6873,4.7070,48,0.000,0.000,50,28,0,0,-0.009,-0.004,-0.116*8f231ab8
```

Table 0- 3 EVENTSLN Data Structure

ID	Field	Description	Format	Binary Bytes	Binary Offset
1	eventsln header	Log header, see Table 7-50 Binary Header Structure and Table 7-51 ASCII Header Structure Note: The time in the header is obtained by rounding the time of the event.		H	0
2	eventID	Event ID (Event 1 or Event 2)—only Event 1 is supported currently	UCHAR	1	H
3	Status*	Status of the module, see Table 0- 2 STATUS Bit Description	UCHAR	1	H+1
4	Reserved	Reserved	UCHAR	1	H+2
5	Reserved	Reserved	UCHAR	1	H+3
6	week	Week	UINT	4	H+4
7	second	Second	UINT	4	H+8
8	subSecond	Nanosecond	UINT	4	H+12
9	reserved2	Reserved		4	H+16
10	offset_second	Based on the output rate of GGA, this value refers to the offset between the time of EVENT and its closest absolute time output by GGA (second). If this value is invalid, the output is -1.	INT	4	H+20

N4 Products Commands and Logs Reference Book

ID	Field	Description	Format	Binary Bytes	Binary Offset
11	offset_subSecond	Based on the output rate of GGA, this value refers to the offset between the time of EVENT and its closest absolute time output by GGA (nanosecond). If this value is invalid, the output is -1.	INT	4	H+24
12	sol status	Solution status, see Table 0- 5 Solution Status	Enum	4	H+28
13	pos type	Position type, see Table 0- 4 Position or Velocity Type	Enum	4	H+32
14	lat	Latitude, deg	Double	8	H+36
15	lon	Longitude, deg	Double	8	H+44
16	hgt	Height above mean sea level, m	Double	8	H+52
17	undulation	Undulation—the distance between the geoid and the WGS84 ellipsoid, m	Float	4	H+60
18	datum id#	Datum ID, only WGS84 is supported currently	Enum	4	H+64
19	lat σ	Latitude standard deviation, m	Float	4	H+68
20	lon σ	Longitude standard deviation, m	Float	4	H+72
21	hgt σ	Height standard deviation, m	Float	4	H+76
22	stn id	Base station ID	Char[4]	4	H+80
23	diff_age	Differential data age, s	Float	4	H+84
24	sol_age	Solution age, s	Float	4	H+88
25	#SVs	Number of satellites tracked	Uchar	1	H+92

ID	Field	Description	Format	Binary Bytes	Binary Offset
26	#solnSVs	Number of satellites used in solution	Uchar	1	H+93
27	reserved	Reserved	Uchar	1	H+94
28	reserved	Reserved	Uchar	1	H+95
29	EastVel	East velocity in Geographic Coordinate System, accurate to three decimal places, km/h (null if no value)	Float	4	H+96
30	northVel	North velocity in Geographic Coordinate System, accurate to three decimal places, km/h (null if no value)	Float	4	H+100
31	upVel	Vertical velocity in Geographic Coordinate System, accurate to three decimal places, km/h (null if no value)	Float	4	H+104
32	xxxx	32-bit CRC (ASCII and binary only)	Hex	4	H+108
33	[CR][LF]	Sentence terminator (ASCII only)			

* Field 3 (status) is applicable to UM982 Build9669 and later versions.

Table 0- 4 Position or Velocity Type

Decimal	ASCII	Description
0	NONE	No solution
1	FIXEDPOS	Position fixed by the FIX POSITION command
2	FIXEDHEIGHT	Not supported currently

Decimal	ASCII	Description
8	DOPPLER_VELOCITY	Velocity computed using instantaneous Doppler
16	SINGLE	Single point positioning
17	PSRDIFF	Pseudorange differential solution
18	SBAS	SBAS positioning
32	L1_FLOAT	L1 float solution
33	IONOFREE_FLOAT	Ionosphere-free float solution
34	NARROW_FLOAT	Narrow-lane float solution
48	L1_INT	L1 fixed solution
49	WIDE_INT	Wide-lane fixed solution
50	NARROW_INT	Narrow-lane fixed solution
52	INS	Inertial navigation solution
53	INS_PSRSP	Integrated solution of INS and single point positioning
54	INS_PSRDIFF	Integrated solution of INS and pseudorange differential positioning
55	INS_RTKFLOAT	Integrated solution of INS and RTK float
56	INS_RTKFIXED	Integrated solution of INS and RTK fix
68	PPP_CONVERGING	PPP solution converging
69	PPP	Precise Point Positioning

Table 0- 5 Solution Status

Solution Status		Description
0	SOL_COMPUTED	Solution computed
1	INSUFFICIENT_OBS	Insufficient observation
2	NO_CONVERGENCE	No convergence, invalid solution

Solution Status		Description
4	COV_TRACE	Covariance matrix trace exceeds maximum (trace > 1000 m)

和芯星通科技 (北京) 有限公司
Unicore Communications, Inc.

北京市海淀区丰贤东路 7 号北斗星通大厦三层
F3, No.7, Fengxian East Road, Haidian, Beijing, P.R.China,
100094
www.unicore.com

Phone: 86-10-69939800

Fax: 86-10-69939888

info@unicorecomm.com



www.unicore.com