



Project: _____

Fixture Type: _____

Location: _____

Contact/Phone: _____

6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

PRODUCT DESCRIPTION

IC Air-Loc® Remodel Housing • Energy efficient, sealed housing
 • IC Remodel Housing for remodel application where back side of ceiling is not accessible • Installs through an opening in the ceiling from below • Secured in place by factory installed remodel springs
 • Can be completely covered with insulation • When used with Air-Loc Gasket, stops infiltration and exfiltration of air, reducing heating and cooling costs • Trims shown with Air-Loc symbol **AIR-LOC** do not require gasket.

PRODUCT SPECIFICATIONS

Lamp Lamp ratings based on trim selected—see page 2.

Socket Medium base porcelain with nickel-plated copper screw shell
 • Drop socket with spring to accommodate certain trim installation.

Trims Trim selection shown on page 2.

Labels UL listed for through-branch wiring, damp locations and IP
 • Product thermally protected against improper use of lamps • Union made • UL Listed/CSA certified • Trims 239, 241 and 242 are wet location approved for covered ceiling applications • Trims 28, 29 are wet location approved for covered ceiling applications, **when used with outdoor rated lamps**.

Testing All reports are based on published industry procedures; field performance may differ from laboratory performance.



Note: Specifications subject to change without notice.

INSTALLATION

Junction Box Pre-wired junction box, UL listed/CSA certified for through-branch wiring maximum 4 No. 12 AWG 90° C branch circuit conductors (2 in, 2 out) • Junction box provided with removable access plate, (5) ½" knockouts, (4) Non-metallic sheathed cable connectors and ground wire • Knockouts equipped with pryout slots.

Housing IC housing, .032" aluminum sealed for Air-Loc Compliance • Double stack adjustable feature enables remodel spring to accommodate up to 1¾" ceiling thickness.

DIMENSIONS

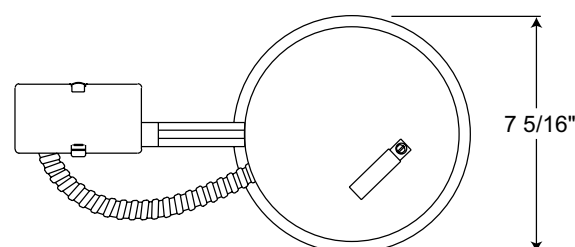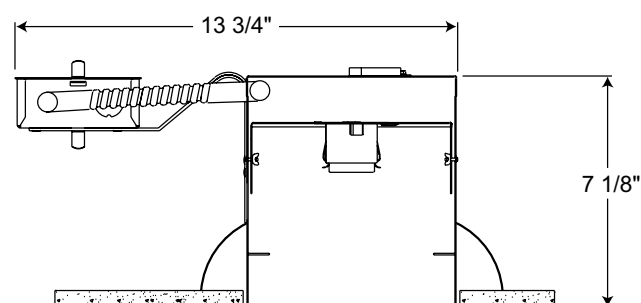

6 3/4" CEILING CUTOUT

Accessories

Catalog Number	Description
ALG6R	Air-Loc Gasket

To order, specify catalog number.

PRODUCT CODES

Catalog Number	Input Voltage	Lamp Rating
IC22R 6" Incandescent Remodel IC Housing	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating)
IC22R W 6" Incandescent Remodel IC Housing with push-in electrical connectors for fast, secure installation	120V	A19/BR30/BR40/PAR16/PAR20/PAR30/PAR30L/PAR38/R20 (See page 2 for max. trim rating)

Housing and trim can be ordered together or separate, but will always ship separately.



















6" ECONOMY UNIVERSAL IC REMODEL HOUSING

INCANDESCENT LAMPS

IC22R

TRIMS/LAMPS

	Catalog Number	Description	Max. Lamp Rating
	24 BWH	Black Baffle, White Trim Ring	50W PAR30,
	24 BSC	Black Baffle, Satin Chrome Trim Ring	75W PAR30L,
	24 BBRZ	Black Baffle, Classic Aged Bronze Trim Ring	65W BR30
	24 BBL	Black Baffle, Black Trim Ring	
	24 WWH	White Baffle, White Trim Ring	
	25 BWH	Black Baffle, White Trim Ring	50W PAR30,
	25 BSC	Black Baffle, Satin Chrome Trim Ring	65W BR30
	25 BBRZ	Black Baffle, Bronze Trim Ring	
	25 BBL	Black Baffle, Black Trim Ring	
	25 WWH	White Baffle, White Trim Ring	
	28 BWH ♦♦	Black Baffle, White Trim Ring	60W A19, 65W BR30,
	28 WWH ♦♦	White Baffle, White Trim Ring	75W PAR30/30L,
			90W PAR38, 90W BR40
	29 CWH ♦♦	Clear Cone, White Trim Ring	60W A19, 65W BR30,
	29 WWH ♦♦	White Cone, White Trim Ring	75W PAR30/30L,
			90W PAR38, 90W BR40
	27 CWH	Clear Alzak® Cone, White Trim Ring	50W PAR30,
	27 GWH	Gold Cone, White Trim Ring	75W PAR30L,
	27 BWH	Black Cone, White Trim Ring	65W BR30
	27 PTSC	Pewter Cone, Satin Chrome Trim Ring	
	27 WWH	White Cone, White Trim Ring	
	27 HZWH	Haze Cone, White Trim Ring	
	27 WHZWH	Wheat Haze Cone, White Trim Ring	
	27 WHZBRZ	Wheat Haze Cone, Bronze Trim Ring	
	244S BWH	Black Baffle, White Trim Ring	75W PAR30L,
	244S WWH	White Baffle, White Trim Ring	60W PAR30,
			65W BR30
	247S CWH	Clear Alzak® Cone, White Trim Ring	75W PAR30L,
	247S BWH	Black Alzak® Cone, White Trim Ring	65W BR30,
	247S HZWH	Haze Cone, White Trim Ring	75W PAR30
	247S WHZWH	Wheat Haze Cone, White Trim Ring	
	250 WH	Open Frame, White	65W BR30
	250 BRZ	Open Frame, Bronze	
	226 WWH	Cylinder Spotlight, White Baffle, White Trim Ring	
	229 WH	Regressed Eyeball, White	75W PAR30L,
	229 SC	Regressed Eyeball, Satin Chrome	65W BR30
	229 BRZ	Regressed Eyeball, Bronze	
	229 BL	Regressed Eyeball, Black	
	249 BWH	Regressed Eyeball, Black Baffle, White Trim Ring	75W PAR30L,
	249 WWH	Regressed Eyeball, White Baffle, White Trim Ring	65W BR30
	264 WWH	Adjustable, White Baffle, White Trim Ring	
	267 CWH	Clear Alzak® Cone, White Trim Ring	50W PAR30
	267 HZWH	Haze Cone, White Trim Ring	
	267 WHZWH	Wheat Haze Cone, White Trim Ring	
	239 WH ♦	Frosted Lens, White	40W A19
	241 WH ♦	Drop Opal w/Reflector, White	40W A19
	241 PW ♦	Drop Opal w/Reflector, Plastic White	
	242 WH ♦	Frosted Lens w/Clear Center, White	45W PAR38
	242 SC ♦	Satin Chrome	
	242 BRZ ♦	Bronze	

Trim Size: 7 $\frac{5}{8}$ " O.D. (except Cat. Nos. 228, 229, 241, - 8" O.D.).
Alzak is a registered trademark of Alcoa Corp.
Note: In Canada when insulation is present, Type IC fixtures must be used.

AIR-LOC JUNO IC housings meet IECC Energy Code requirements per ASTM E283.

Air-Loc® rated trims are pre-gasketed for minimum air leakage with IC housings.

♦ UL Listed for use in wet location.

♦♦ UL Listed for use in wet location with outdoor rated lamp.

* * NOTE: TR6 Trim Ring compatible with 24, 25, 27, 244S, 247S, 264, 267 trims.

Housing and trim can be ordered together or separate, but will always ship separately.