

TOP-E5124

The product features



- ◆ Supports Alder Lake U/P 12th Gen Intel® Core™ i5 i7 processors
- ◆ Display HDMI/DP/Type-c support synchronous. Asynchronous triple display
- ◆ Support TPM2.0
- ◆ Support HDMI 2.0 output + JAE 80PIN HDMI 2.0 output
- ◆ Support dual-channel SO-DIMM DDR4 memory and M.2 SSD storage
- ◆ Support JAE 80PIN connection interface

Specifications



| | | | |
|------------------------|----------------------------|--|--------------------------------|
| Standard parameters | CPU | 12th Gen Intel ® Core ™ Processor | |
| | Memory | 2 x SO-DIMM DDR4 3200MHz 4GB Memory | |
| | Storage | 1*M.2 2280 interface supports NVMe and SATA dual protocols (need to switch manually) 1* 2.5" SATA HDD/SDD | |
| | GPU | Intel® Iris® Xe Graphics | |
| | Integrated graphics output | HDMI/DP/Type-c support synchronous. Asynchronous triple display | |
| I/O | Network | LAN | Intel I226-LM Gigabit Ethernet |
| | | WIFI | 1*M.2 2230 for Wifi+BT(WIFI6) |
| | Front interface | 1*HDMI2.0 out 1*DP1.4 out 2*USB3.2 Gen 2 2*USB2.0 1* RJ45 1*Power 1* Reset 1*Line out 1*Mic in 1*Type-C(USB3.2 Gen 2+video transmission) | |
| | Rear interface | 1*JAE 80PIN: HDMI2.0 out(4K/60Hz) | |
| Power | DC In | 19V4.7A | |
| Size | Overall size (mm) | Bare metal: 118*180*30 | Box size: 282*257*79mm |
| | Weight (kg) | Net weight≈1 Kg | Gross weight≈1.4Kg |
| Temperature & Humidity | Operating temperature | 0°C~ 45°C | |
| | Storage temperature | -40°C~ 80°C | |
| | Working humidity | 10% - 95% @40°C No condensation | |
| OS | Operating systems | Windows 8/10/11, Linux | |

Ordering Information

| | |
|----------------------------|----------|
| Laptop 12th Gen processors | I5-1250P |
| DDR4/RAM | 8G |
| Hard disk/SSD | 256G |


TOP-E5124

The product features

- ◆ Supports Alder Lake U/P 12th Gen Intel® Core™ i5 i7 processors
- ◆ Display HDMI/DP/Type-c support synchronous. Asynchronous triple display
- ◆ Support TPM2.0
- ◆ Support HDMI 2.0 output + JAE 80PIN HDMI 2.0 output
- ◆ Support dual-channel SO-DIMM DDR4 memory and M.2 SSD storage
- ◆ Support JAE 80PIN connection interface



Dimensions

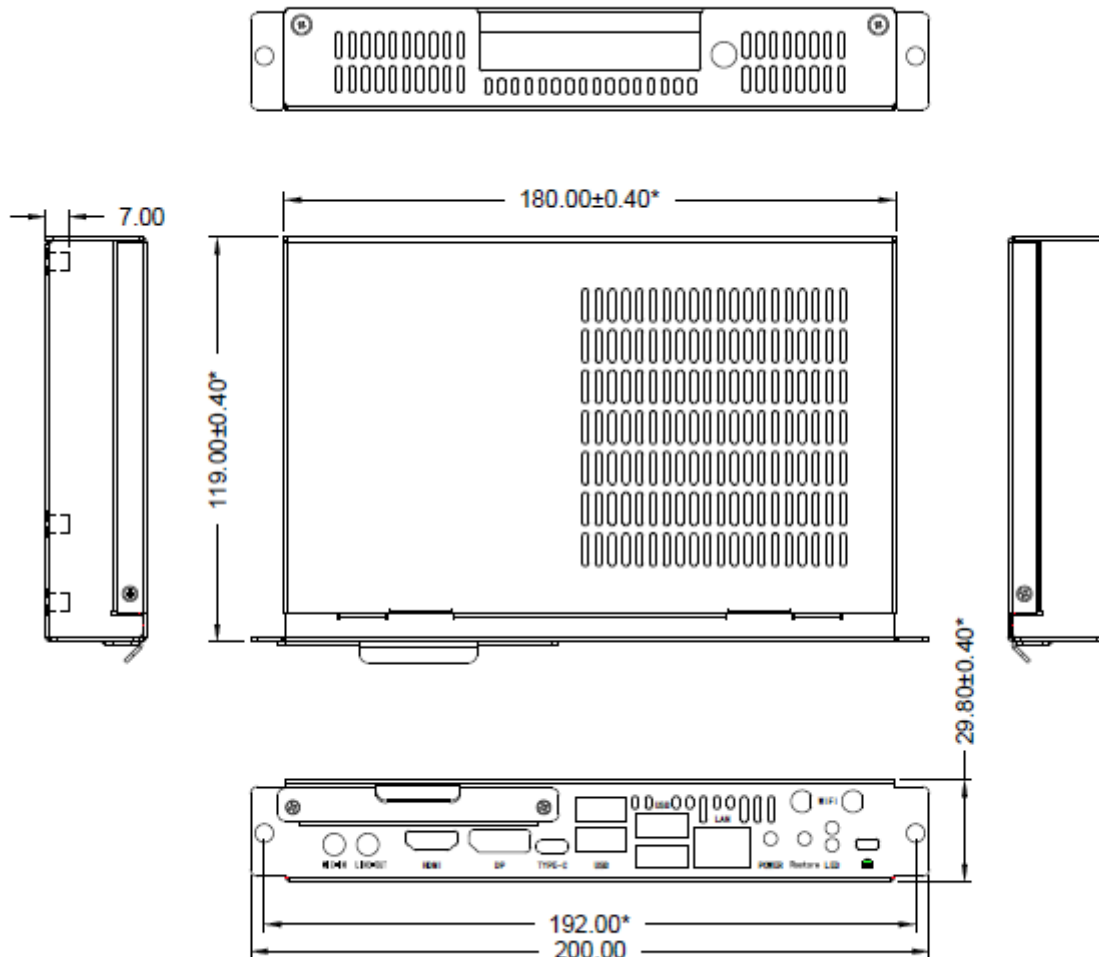

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.