Woodpeckers® MULTI-ROUTER MACHINE STAND

OWNER'S MANUAL

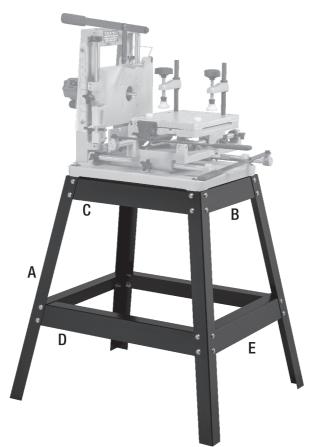



DIAGRAM (QTY) PART NAME

- A (4) Leg
- B (2) Short Top Stretcher
- C (2) Long Top Stretcher
- C (E) Long top out out the
- D (2) Short Bottom Stretcher
- E (2) Long Bottom Stretcher


HARDWARE BAG

- (32) Carriage Bolt 5/16"-18 x 3/4"
- (32) Washer 5/16" USS
- (32) Hex Nut 5/16"-18
- (4) Hex Head Bolt 1/2"-13 x 2-1/2"
- (8) Washer 1/2" USS Washer
- (4) Lock Washer 1/2"
- (4) Hex Nut 1/2"-13

If you think you're missing anything, email us at mailroom@woodpeck.com. You can also call us at 800-752-0725 from 9:00 a.m. to 5:00 p.m. EST Monday - Friday.

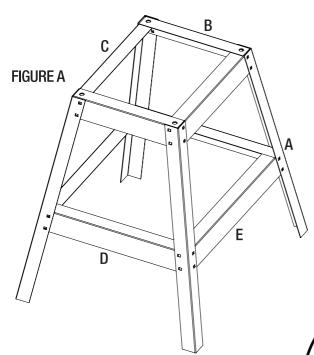

- 1. Align the (A) Legs and (B,C,D,E) Stretchers as shown, the Legs will be on the outside of the assembly. The Short Stretchers overlap the Long Stretchers on both the top and bottom sets. *Figure A.*
- 2. From the outside, install 5/16"-18 x 3/4" Carriage Bolts through all holes. Place an 5/16" USS Washer and 5/16"-18 Hex Nut on each Carriage Bolt, *finger tight only. Figure B.*
- 3. Place the Multi-Router on the Machine Stand and from the top attach with the 1/2"-13 x 2-1/2" Hex Head Bolts and USS Washer 1/2". On the under-side, use a USS Washer and a 1/2" Lock Washer, secure with 1/2"-13 Hex Nut. *Figure C.*
- 4. Adjust Legs so that they are even and flat on the ground. Tighten the Nuts on all Leg/Stretcher joints.



FIGURE

Woodpeckers®

PRECISION WOODWORKING TOOLS Woodpeckers, LLC Strongsville, Ohio · **woodpeck.com**

© 2022 Woodpeckers, LLC

