
Covers 12-1/2 Sq Ft.

- Intended for starter, undercourse, or shimming.
- Not recommended for roofing or siding applications.



Installation tips

- Use two corrosion-resistant #5 nails or stainless steel staples per shingle. Fasteners should be one inch from each end to limit splitting and 8-12 in. from the thickest end.
- Shingles will weather to an attractive silvery gray. To retain color, shingles may be stained or painted. Follow all coating manufacturer's instructions.

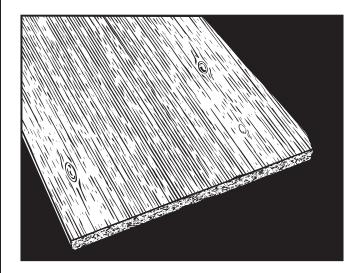

© 2024 UFP Retail Solutions, LLC. Distributed by Affiliates of UFP Industries, Inc. Grand Rapids, MI 49525 www.ufpi.com

24145 6/24