



HOSHIZAKI

2021 PRICE GUIDE



EFFECTIVE: Aug 1, 2021 | REVISED: September 13, 2021

ICE EQUIPMENT

REFRIGERATION

ICE MACHINE MODEL CODE & USAGE GUIDE 3

TYPES OF ICE 4

CUBER SERIES 5

Undercounter Cubers with Built-In Bins	6-7
KMEdge X Crescent Cubers	8-9
KMEdge Crescent Cubers	10-14
KMEdge Crescent Cubers for Dispensers	14-15
KMEdge Low Profile Crescent Cubers	16
KMEdge Crescent Cubers - Serenity Series	17-18
IM Square Cubers (Specialty Ice)	19-20

FLAKER / CUBELET SERIES 21

Undercounter Flakers with Built-In Bins	21-22
Flakers	22-23
Undercounter Cubelet with Built-In Bins	24
Cubelet Ice Machines	24-26
Cubelets - Serenity Series	27

DISPENSER SERIES 28

DCM Series	28-29
DB/DKM Hotel/Motel Dispensers	31
DM/DWM Dispensers	32

ICE STORAGE BINS 33-34

DISPENSER STANDS 35

HCD ICE BAGGING SYSTEM 35

TOP KIT MATRIX 36

REMOTE CONDENSERS & MATRIX 37-39

WATER FILTRATION 40

OZONE DEVICE & REMOTE MONITORING 41

STEELHEART FEATURES & BENEFITS 42

REFRIGERATION MODEL CODE 43

STEELHEART SERIES 44

Upright Refrigerators & Freezers	45-48
Dual Temps	48
Pass Thrus	49-50
Roll Ins	51
Roll Thrus	52
Compact Undercounter Refrigerator	53
Undercounter Refrigerators & Freezers	54-56
Undercounter Refrigerators & Freezers with Drawers	57-58
Worktop Refrigerators & Freezers	59-60
Worktop Refrigerators & Freezers with Drawers	61-62
Drawer / Door Combination Refrigerators	63
Prep Tables - Sandwich Top Refrigerators	64-65
Prep Tables - Sandwich Top Refrigerators with Drawers	66
Prep Tables - Mega Top Refrigerators	67-68
Prep Tables - Mega Top Refrigerators with Drawers	69-70
Prep Tables - Pizza Refrigerators	71
Prep Tables - Pizza Refrigerators with Drawers	72
Prep Tables - Pizza Refrigerators Drawer / Door Combos	73
Refrigerated Equipment Stands	74

SUSHI CASES 75

GLASS DOOR MERCHANDISERS 76

BACK BAR REFRIGERATION 77-80

ECONOMY SERIES 81-83

REFRIGERATION ACCESSORIES 85-89

Terms and Conditions
Specifications are subject to change without notice.
All rights reserved by HOSHIZAKI AMERICA, INC.

HOSHIZAKI. BEYOND STRONG.

It's the promise of reliability... and the peace of mind that comes with it. It's performing beyond expectations...with relentless durability and sustainability. It's knowing that we've already thought about your future and can endure at the next level.



HEADQUARTERS FOR THE AMERICAS

HOSHIZAKI AMERICA, INC., with corporate headquarters in Peachtree City, Georgia, and a second manufacturing facility in Griffin, Georgia, operates some of the most automated production facilities in the industry. Certified as Georgia Made, HOSHIZAKI is proud to inform domestic and international consumers that many of their products have received the certification confirming they are manufactured in the state of Georgia. Using state-of-the-art technology, every HOSHIZAKI unit is run-tested at each factory, and undergoes rigorous quality performance tests. HOSHIZAKI offers advanced training seminars at our headquarters and basic training programs across the country for both service representatives and customers.



DID YOU KNOW?

- **HOSHIZAKI** is the world's largest manufacturer of commercial ice equipment, employing over 13,180 people.
- **HOSHIZAKI** is the world's largest manufacturer of commercial refrigerated food service equipment with sales of over \$2.5 billion serving customers in 60 nations.
- **HOSHIZAKI** operates plants worldwide including two in the USA, three in Japan, one each in England and China.
- In expansion to a full-service kitchen equipment company, **HOSHIZAKI** acquired Lancer Corporation in 2006, GRAM Commercial A/S in 2008, and both Jackson and Macom in 2013.
- **HOSHIZAKI** is certified in ISO-9001 and ISO-14001
 - being the first and only food service equipment manufacturer to achieve ISO-14001.
- **HOSHIZAKI** was awarded "Partner Of The Year - Sustained Excellence" by ENERGY STAR®.





WARRANTY

EFFECTIVE: August 1, 2021

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS: Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS: Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore, it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

KMEdge Series Cubers, DKM Ice Machine & Dispenser and DB/DM Hotel/Motel Dispensers

3-Year - Parts & Labor on entire machine & DB/DM Dispenser

5-Year - Parts & Labor on Evaporator, Parts on Compressor, Air-Cooled Condenser Coil

AM-50 Series Cubers & C-80 Flakers

2-Year - Parts & Labor on Entire Machine

DWM MODwater Water Dispensers

3-Year - Parts & Labor on Entire Machine

IM Series Cubers (Specialty Ice)

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Flakers and Cubelet Ice Machines, DCM Ice & Water Dispensers

3-Year - Parts & Labor on Entire Machine

5-Year - Parts on Compressor and Air-Cooled Condenser Coil

Bins & Water Dispensers

3-Year - Parts & Labor on Slope Front Bins

5-Year - Parts & Labor on Large Upright Bin Models

Countertop Refrigerated Display Cases

1-Year - Parts & Labor on Entire Machine

2-Year - Parts & Labor on Compressor, Evaporator, Air-Cooled Condenser

5-Year - Parts on Compressor, Air-Cooled Condenser

Accessories

90 Day - Parts only

1-Year - HS-5061 Drain Pump (Beckett Brand) - Parts & Labor

1-Year - Water Filter System & Replaceable Elements

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact factory for warranty in other countries. Refer to manufacturer's full warranty for complete details. Suggested list prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.


AGENCY LISTINGS and MARKS



CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE
VERIFIE



ICE MACHINE MODEL NUMBER IDENTIFICATION CODE

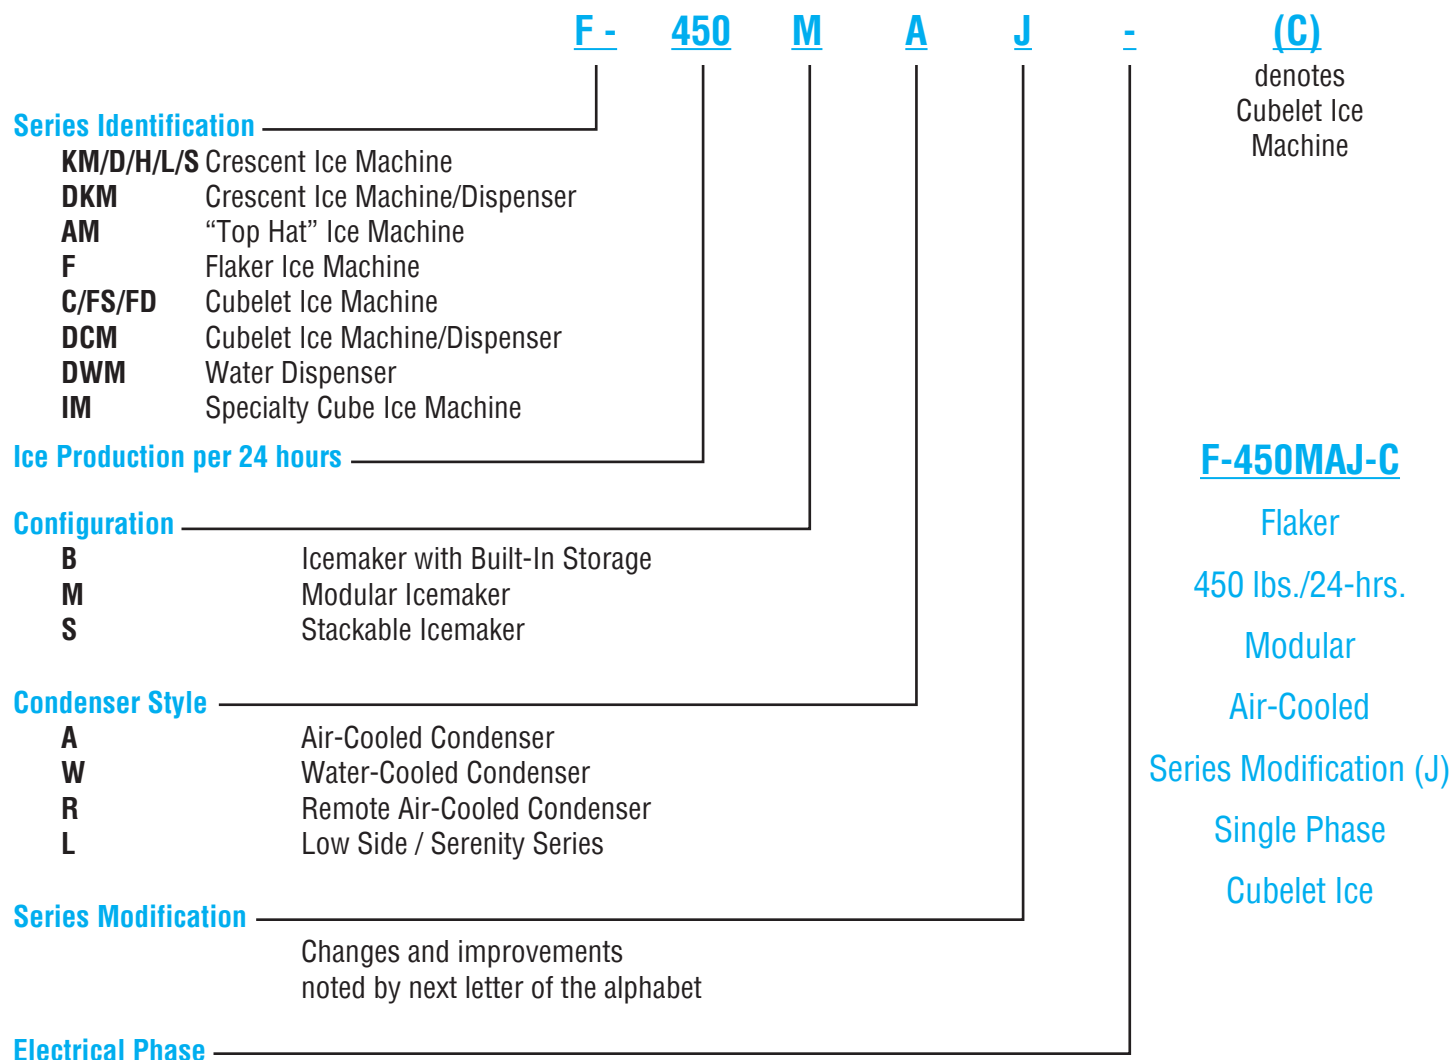

CHOOSING THE RIGHT ICE MAKER



HOW MUCH ICE DO YOU NEED?

Before choosing an ice maker, take a look at how many customers you serve and what type of ice you will need



Restaurants
use an average
of **2 lbs.** of ice per
customer per day

**Schools and university
cafeterias** average about
1.5 lbs. of ice per
student per day



Hospital cafeterias
use about **1 lbs.** of ice
per person per day and
an average of **10 lbs.**
for every bed

**Bars and cocktail
lounges** use
about **3 lbs.** of
ice per seat



Hotels use
about **5 lbs.** of ice
per room per day

Pounds of ice used

X **Number of
customers served**

= **The size of ice
maker you need**

**Your menu should dictate your machine
—not the other way around**




TYPES OF ICE



Crescent Cube - Individual, hard, clear, crescent shape

Ice Equipment:

KM KMD
KML KMS
KMH DKM models




KM Edge Cube



“Top Hat” Cube - Individual, hard, clear, round shape

Ice Equipment:


AM models



Cubelet - Chewable, soft, light, small nugget shape

Ice Equipment:

C FS-C
FD-C DCM models
F-C

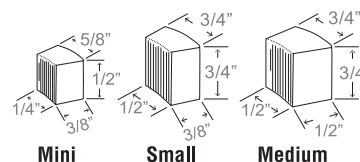

Mini

Small


Medium



Flaked - Soft, light, chewable, various shapes

Ice Equipment:

F models




SPECIALTY ICE

Ice Equipment: IM models





Sphere

1.8" in diameter,
clear and solid



Square Cube


Individual, hard, clear, square
shape



CUBER SERIES




Features & Benefits of the AM Cuber



- Attractive stainless steel finish
- Individual top-hat style cubes eliminates clumping and allow for easy filling of glass
- **AM Series Cubers** were designed with fewer moving parts, which contribute to its long life and dependability
- Compact size (less than 15 inches wide), undercounter design, swing style reversible door, and UL approval for outdoor use, expand the possibilities where this machine can be installed
- Front-in and front-out airflow allows unit to be built into cabinetry without additional ventilation
- Ice-making compartment can be easily disassembled for cleaning
- Door system is designed to accommodate custom cabinetry
- ADA Compliant models available




Features & Benefits of the KM Cuber



KM||EDGE DESIGN

- Benefits include increased productivity and energy savings, even in harsh water conditions
- The **KMEdge Cuber Series** features an attractive stainless steel finish with the simplest ice making system in the industry
- The exclusive dual-sided stainless steel evaporator has oval-shaped copper refrigerant tubing for the most efficient heat exchange
- HOSHIZAKI's evaporator design freezes the purest water, washing most of the minerals and impurities down the drain; resulting in individual, crystal clear crescent cubes
- Not affected by caustic water, therefore no plating to peel or flake and no plastic to crack
- CycleSaver™ design allows production of the same amount of ice in half the cycles of other ice machines. Fewer moving parts and cycles means dependability, longer machine life and energy savings!
- EverCheck™ control board sounds an audible warning when service is needed
- Contains H-GUARD Plus® Antimicrobial Agent

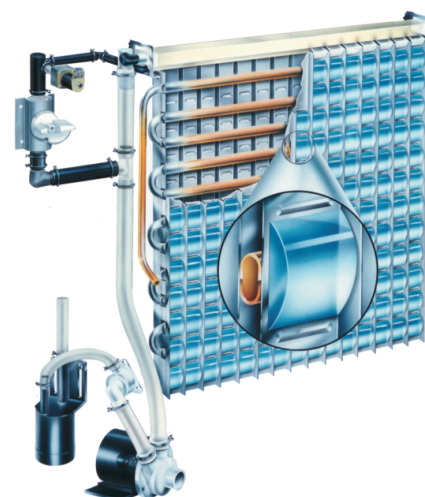



CUBER Self-Contained

AM-50BAJ



Undercounter AM Cubers with Built-In Bins

Dimensions: 14 7/8"W X 22 5/8"D X 33 1/2"H
The ADA compliant machine dimensions are 14 7/8"W x 22 5/8"D x 31 1/2" H

**Self-Contained Bin Storage
Capacity Up to 22 Lbs.**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
AM-50BAJ	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	\$4,330
AM-50BAJ-DS†	Air-Cooled	35	51	115V/60/1	10.4	97 Lbs.	\$4,490
AM-50BAJ-AD*	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	\$4,590
AM-50BAJ-ADDS††	Air-Cooled	34	55	115V/60/1	9.9	99 Lbs.	\$4,720

Accessories: HS-0229 DS Door Reversal Part (*Order as a Service Part*)
HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$740
HS-0182 Side Trim Kit \$280
HS-2133 2" Top Spacer Kit available \$210
H9320-51 Recommended Water Filtration - Single Configuration \$440



-DS shown with
Custom Cabinetry



UL approved for outdoor use

†DS Models - Wood Door System (Designed to accommodate custom cabinetry)

*ADA compliant

KM-81BAJ



Undercounter KMEdge Cuber with Built-In Bin

Dimensions: 17 3/4"W X 24"D X 39"H (6" Legs Included)

**Self-Contained Bin Storage
Capacity Up to 38 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-81BAJ*	Air-Cooled	52	78	115V/60/1	8.45	125 Lbs.	\$3,880

Accessories: HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$740
H9320-51 Recommended Water Filtration - Single Configuration \$440



†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

*ENERGY STAR qualified

KM-116BAJ



Undercounter KMEdge Cuber with Built-In Bin

Dimensions: 23 3/4"W X 24"D X 39"H (6" Legs Included)

**Self-Contained Bin Storage
Capacity Up to 53 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-116BAJ*	Air-Cooled	100	125	115V/60/1	8.1	146 Lbs.	\$4,370

Accessories: HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor (*Order as Accessory*) \$740
H9320-51 Recommended Water Filtration - Single Configuration \$440



†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

*ENERGY STAR qualified

CUBER Self-Contained



KM-161B_J



Undercounter **KMEdge Cuber** with Built-In Bin

Dimensions: 23 3/4"W X 28 1/4"D X 39"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 78 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-161BAJ	Air-Cooled	123	163	115V/60/1	8.6	159 Lbs.	\$4,800
KM-161BWJ	Water-Cooled	135	153	115V/60/1	6.5	163 Lbs.	\$5,080

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



Intertek

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

KM-231BAJ



Undercounter **KMEdge Cuber** with Built-In Bin

Dimensions: 24"W X 28"D X 39"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 80 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-231BAJ	Air-Cooled	147	213	115V/60/1	8.4	165 Lbs.	\$5,200

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



Intertek

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

KM-301B_J



Undercounter **KMEdge Cuber** with Built-In Bin

Dimensions: 30"W X 28"D X 39"H (6" Legs Included)

Self-Contained Bin Storage Capacity Up to 100 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-301BAJ	Air-Cooled	212	290	115V/60/1	7.1	206 Lbs.	\$6,070
KM-301BWJ	Water-Cooled	237	285	115V/60/1	4.90	189 Lbs.	\$6,130

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



Intertek


†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



CUBER

KMEDGE^X ICE MACHINE SERIES

- **Reliable operation** with stronger, more durable construction, less service parts, and increased ice production.
- **Easier installation** with a more compact footprint and factory installed ultrasonic bin control.
- **Simple maintenance** with new CleanAssist technology and redesigned float switch for one-hour cleaning.

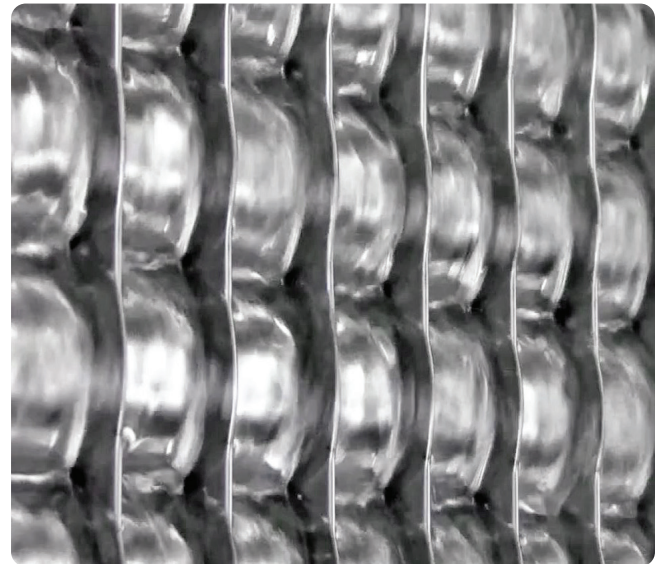

KM-350M_J



KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-350MAJ*	Air-Cooled	393	489	115V/60/1	5.4	175 Lbs.	\$6,180
KM-350MWJ	Water-Cooled	383	414	115V/60/1	4.9	175 Lbs.	\$6,200

Accessories:	H9320-51 Recommended Water Filtration - Single Configuration	\$440
HS-5426	Tamper Proof Kit - Air-Cooled Units	\$490
HS-5427	Tamper Proof Kit - Water/Remote Units	\$490



*ENERGY STAR qualified



22 x 32 1/2 x 74




30 x 32 1/2 x 74



44 x 32 1/2 x 74



48 x 32 1/2 x 74



52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBER



KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-520MAJ*	Air-Cooled	480	556	115V/60/1	4.7	175 Lbs.	\$6,730
KM-520MWJ	Water-Cooled	444	474	115V/60/1	4.7	175 Lbs.	\$6,730
KM-520MRJ*	Remote A-C	495	547	115V/60/1	4.8	175 Lbs.	\$6,620

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-520MAJ-E*	Air-Cooled	197	238	220-240V/50/1	4.9	68 Kg.	\$6,780

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440
 HS-5426 Tamper Proof Kit - Air-Cooled Units \$490
 HS-5427 Tamper Proof Kit - Water/Remote Units \$490

†Use URC-5F Condenser for Remote Air-Cooled Unit

“E” suffix designates 50 hertz model see spec sheet for certifications

*ENERGY STAR qualified

22 x 32 1/2 x 74 30 x 32 1/2 x 74 44 x 32 1/2 x 74 48 x 32 1/2 x 74 52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KMEdge X Series Cubers

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-660MAJ	Air-Cooled	617	665	115V/60/1	5.1	180 Lbs.	\$7,810
KM-660MWJ	Water-Cooled	668	669	115V/60/1	4.3	180 Lbs.	\$7,920
KM-660MRJ	Remote A-C	602	646	115V/60/1	5.6	180 Lbs.	\$7,710

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-660MAJ-E	Air-Cooled	262	280	220-240V/50/1	4.9	68 Kg.	\$7,880

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440
 HS-5426 Tamper Proof Kit - Air-Cooled Units \$490
 HS-5427 Tamper Proof Kit - Water/Remote Units \$490

Use URC-5F Condenser for Remote Air-Cooled Unit

“E” suffix designates 50 hertz model see spec sheet for certifications


22 x 32 1/2 x 74 30 x 32 1/2 x 74 44 x 32 1/2 x 74 48 x 32 1/2 x 74 52 x 32 1/2 x 74

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-901M_J




KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 32 ^{1/2}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-901MAJ	Air-Cooled	753	905	208-230V/60/1	5.0	260 Lbs.	\$10,120
KM-901MWJ	Water-Cooled	870	950	208-230V/60/1	3.6	250 Lbs.	\$10,350
KM-901MRJ*	Remote A-C	853	904	208-230V/60/1	4.5	250 Lbs.	\$10,000
KM-901MRJ3*	Remote A-C	830	927	208-230V/60/3	4.4	250 Lbs.	\$10,350
Accessories: H9320-52 Recommended Water Filtration - Twin Configuration HS-5245 Tamper Proof Kit - Air-Cooled Units HS-5246 Tamper Proof Kit - Water/Remote Units							\$740 \$560 \$560



Use URC-14F Condenser for Remote Air-Cooled Unit

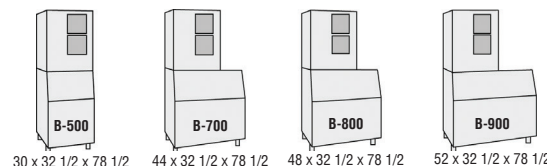

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1100M_J



KMEdge Cubers


Ice Machine Dimensions: 30"W X 27 ^{3/8}"D X 32 ^{1/2}"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ	Air-Cooled	935	1087	208-230V/60/1	4.9	290 Lbs.	\$11,680
KM-1100MWJ	Water-Cooled	1006	1073	208-230V/60/1	4.0	280 Lbs.	\$11,800
KM-1100MRJ	Remote A-C	1030	1156	208-230V/60/1	4.5	272 Lbs.	\$11,680
Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-1100MAJ50	Air-Cooled	356	464	220-240V/50/1	5.7	136 Kg.	\$11,910
Accessories: H9320-52 Recommended Water Filtration - Twin Configuration HS-5245 Tamper Proof Kit - Air-Cooled Units HS-5246 Tamper Proof Kit - Water/Remote Units							\$740 \$560 \$560



Use URC-14F Condenser for Remote Air-Cooled Unit


"E" suffix designates 50 hertz model
see spec sheet for certifications

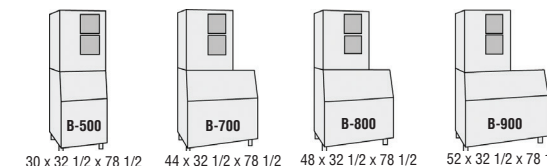


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBER











KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 ³/₈"D X 27 ³/₈"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ	Air-Cooled	1301	1365	208-230V/60/1	4.27	338 Lbs.	\$13,120
KM-1301SWJ	Water-Cooled	1230	1247	208-230V/60/1	3.76	335 Lbs.	\$13,230
KM-1301SRJ	Remote A-C	1260	1400	208-230V/60/1	4.28	339 Lbs.	\$13,010
KM-1301SAJ3*	Air-Cooled	1350	1427	208-230V/60/3	3.95	338 Lbs.	\$13,230
KM-1301SWJ3	Water-Cooled	1355	1360	208-230V/60/3	3.25	335 Lbs.	\$13,350
KM-1301SRJ3*	Remote A-C	1330	1433	208-230V/60/3	3.83	339 Lbs.	\$13,120

Model Number	Condenser	Kgs. of Ice per 24 hours 32°A / 21°W	Kgs. of Ice per 24 hours 21°A / 10°W	Electrical	kWh per 45 Kgs.	Shipping Weight	List F.O.B. Griffin
KM-1301SAJ-E	Air-Cooled	501	624	220-240/50/1	4.5	154 Kgs.	\$13,840





Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$1,030
HS-5252 Tamper Proof Kit - Air-Cooled Units \$620
HS-5253 Tamper Proof Kit - Water/Remote Units \$620

Use URC-14F Condenser for Remote Air-Cooled Unit


"E" suffix designates 50 hertz model
see spec for certifications


***ENERGY STAR qualified**

48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.









KMEdge Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 41 ¹/₂"H





Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1340MAJ	Air-Cooled	1089	1275	208-230V/60/1**	4.81	315 Lbs.	\$13,350
KM-1340MWJ	Water-Cooled	1280	1323	208-230V/60/1**	3.6	315 Lbs.	\$13,460
KM-1340MRJ	Remote A-C	1177	1371	208-230V/60/1**	4.54	289 Lbs.	\$13,230
KM-1340MRJ3*	Remote A-C	1266	1428	208-230V/60/3	4.16	289 Lbs.	\$13,460

Accessories: ****HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$200
H9320-53 Recommended Water Filtration - Triple Configuration \$1,030

Use URC-14F Condenser for Remote Air-Cooled Unit

***ENERGY STAR qualified**


30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.



CUBER

KM-1601MRJ








KMEdge Cubers





Ice Machine Dimensions: 30"W X 27 ³/₈"D X 41 ⁵/₈"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601MRJ	Remote A-C	1550	1594	208-230V/60/1	4.35	316 Lbs.	\$15,700
KM-1601MRJ3	Remote A-C	1550	1653	208-230V/60/3	4.09	316 Lbs.	\$16,050

Accessories: **HS-5030 Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$200
H9320-53 Recommended Water Filtration - Triple Configuration \$1,030




Use URC-22F Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 87 1/2 44 x 32 1/2 x 87 1/2 48 x 32 1/2 x 87 1/2 52 x 32 1/2 x 87 1/2

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KM-1601S_J









KMEdge Cubers

Ice Machine Dimensions: 48"W X 27 ³/₈"D X 27 ³/₈"H





Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1601SAJ	Air-Cooled	1433	1513	208-230V/60/1	4.24	345 Lbs.	\$15,540
KM-1601SWJ	Water-Cooled	1650	1660	208-230V/60/1	3.30	335 Lbs.	\$15,580
KM-1601SRJ*	Remote A-C	1600	1640	208-230V/60/1	3.96	315 Lbs.	\$15,450
KM-1601SAJ3	Air-Cooled	1414	1513	208-230V/60/3	4.40	350 Lbs.	\$15,650
KM-1601SWJ3	Water-Cooled	1660	1671	208-230V/60/3	3.32	345 Lbs.	\$15,680
KM-1601SRJ3	Remote A-C	1600	1635	208-230V/60/3	4.14	355 Lbs.	\$15,580

Accessories: HS-5030 Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$200
H9320-53 Recommended Water Filtration - Triple Configuration \$1,030
HS-5252 Tamper Proof Kit - Air-Cooled Units \$620
HS-5253 Tamper Proof Kit - Water/Remote Units \$620



Use URC-22F Condenser for Remote Air-Cooled Unit

*ENERGY STAR qualified





48 x 32 1/2 x 73 3/8 48 x 32 1/2 x 101 3/4 52 x 32 1/2 x 73 3/8 52 x 32 1/2 x 101 3/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBER











KMEdge Cubers





Ice Machine Dimensions: 48"W X 27 ³/₈"D X 36 ⁷/₁₆"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-1900SAJ*	Air-Cooled	1675	1875	208-230V/60/1	3.9	415 Lbs.	\$16,830
KM-1900SWJ	Water-Cooled	1875	1880	208-230V/60/1	3.2	415 Lbs.	\$16,940
KM-1900SRJ*	Remote A-C	1700	1933	208-230V/60/1	3.9	415 Lbs.	\$16,720
KM-1900SAJ3*	Air-Cooled	1675	1865	208-230V/60/3	3.9	415 Lbs.	\$16,940
KM-1900SWJ3	Water-Cooled	1875	1880	208-230V/60/3	3.2	415 Lbs.	\$17,060
KM-1900SRJ3*	Remote A-C	1700	1933	208-230V/60/3	3.9	415 Lbs.	\$16,830

Accessories: **HS-5030** Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral) \$200
H9320-53 Recommended Water Filtration - Triple Configuration \$1,030





Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**



48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.









KMEdge Cubers





Ice Machine Dimensions: 48"W X 27 ³/₈"D X 36 ⁷/₁₆"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KM-2200SWJ3	Water-Cooled	2200	2221	208-230V/60/3	3.11	400 Lbs.	\$21,210
KM-2200SRJ3*	Remote A-C	2075	2206	208-230V/60/3	3.75	400 Lbs.	\$21,210

Accessories: **H9320-53** Recommended Water Filtration - Triple Configuration \$1,030



Use URC-22F Condenser for Remote Air-Cooled Unit
***ENERGY STAR qualified**



48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.











13







40067C-2021CatalogPriceGuide-20210823.indd 13








9/13/21 5:45 PM



CUBER








		KMEdge Cubers							
		Ice Machine Dimensions: 48"W X 27 3/8"D X 36 7/16"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		KM-2600SWJ3	Water-Cooled	2480	2482	208-230V/60/3	3.6	440 Lbs.	\$24,010
		KM-2600SRJ3*	Remote A-C	2580	2617	208-230V/60/3	3.61	440 Lbs.	\$23,030
Accessories: H9320-53 Recommended Water Filtration - Triple Configuration								\$1,030	
					   				
Use URC-26J Condenser for Remote Air-Cooled Unit					48 x 32 1/2 x 82 7/16 48 x 32 1/2 x 119 7/8 52 x 32 1/2 x 82 7/16 52 x 32 1/2 x 119 7/8				
*ENERGY STAR qualified					Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.				








		KMEdge Cubers							
		Ice Machine Dimensions: 36"W X 40"D X 36 7/16"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		KMH-2100SWJ3	Water-Cooled	2000	2060	208-230V/60/3	2.92	415 Lbs.	\$19,970
		KMH-2100SRJ*	Remote A-C	1850	2034	208-230V/60/1	3.75	415 Lbs.	\$20,080
KMH-2100SRJ3*	Remote A-C	1925	2026	208-230V/60/3	3.67	415 Lbs.	\$20,200		
Accessories: HS-5030 Transformer Kit - 4 wire to 3 wire (eliminates need for dedicated neutral)								\$200	
H9320-53 Recommended Water Filtration - Triple Configuration								\$1,030	
									
Use URC-22F Condenser for Remote Air-Cooled Unit									
*ENERGY STAR qualified									









		KMEdge Cubers							
		Ice Machine Dimensions: 22"W X 24"D X 24"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		KMD-410MAJ	Air-Cooled	351	418	115-120V/60/1	5.7	161 Lbs.	\$6,340
		KMD-410MWJ	Water-Cooled	382	440	115-120V/60/1	4.3	163 Lbs.	\$6,620
Accessories: H9320-51 Recommended Water Filtration - Single Configuration								\$440	
				 					
					22 x 30 1/2 x 35 3/8 22 x 32 1/2 x 68 1/8				
					Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.				

CUBER Dispenser



<div>KMD-460M_J</div> 		KMEdge Cubers						
		Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H						
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight
KMD-460MAJ	Air-Cooled	400	440	115-120V/60/1	5.5	170 Lbs.	\$6,660	
KMD-460MWJ	Water-Cooled	472	487	115-120V/60/1	4.1	170 Lbs.	\$6,770	
Accessories: H9320-51 Recommended Water Filtration - Single Configuration							\$440	
  								
		22 x 30 1/2 x 34		30 x 32 1/2 x 68 1/8				
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.								

<div>KMD-530M_J</div> 		KMEdge Cubers						
		Ice Machine Dimensions: 30"W X 24 1/4"D X 22 1/8"H						
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight
KMD-530MAJ	Air-Cooled	442	501	115V/60/1	5.7	170 Lbs.	\$6,980	
KMD-530MWJ	Water-Cooled	500	515	115V/60/1	4.7	170 Lbs.	\$7,080	
KMD-530MRJ	Remote A-C	440	498	115V/60/1	6.1	170 Lbs.	\$6,850	
Accessories: H9320-51 Recommended Water Filtration - Single Configuration							\$440	
  								
		22 x 30 1/2 x 34		30 x 32 1/2 x 68 1/8				
Use URC-5F Condenser for Remote Air-Cooled Unit								
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.								

<div>KMD-860M_J</div> 		KMEdge Cubers						
		Ice Machine Dimensions: 30"W X 24 5/8"D X 28"H						
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight
KMD-860MAJ	Air-Cooled	665	855	208-230V/60/1	5.16	248 Lbs.	\$9,980	
KMD-860MWJ	Water-Cooled	862	940	208-230V/60/1	3.90	258 Lbs.	\$10,090	
KMD-860MRJ	Remote A-C	850	967	208-230V/60/1	5.05	256 Lbs.	\$9,860	
Accessories: H9320-52 Recommended Water Filtration - Twin Configuration							\$740	
  								
		30 x 30 1/2 x 39 5/8		30 x 32 1/2 x 68 1/8		48 x 32 1/2 x 74		
Use URC-9F Condenser for Remote Air-Cooled Unit								
Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.								



CUBER Low Profile

KML-325M_J



Low Profile **KMEdge** Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-325MAJ	Air-Cooled	300	380	115V/60/1	5.72	185 Lbs.	\$5,710
KML-325MWJ	Water-Cooled	355	385	115V/60/1	4.51	185 Lbs.	\$5,830

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



30 x 32 1/2 x 55 3/8



30 x 32 1/2 x 68



30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KML-500M_J



Low Profile **KMEdge** Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-500MAJ	Air-Cooled	400	442	115V/60/1	5.55	185 Lbs.	\$6,600
KML-500MWJ	Water-Cooled	515	543	115V/60/1	4.33	185 Lbs.	\$6,720

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



30 x 32 1/2 x 55 3/8



30 x 32 1/2 x 68



30 x 30 x 75

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

KML-700M_J



Low Profile **KMEdge** Cubers

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KML-700MAJ*	Air-Cooled	572	658	115V/60/1	4.90	204 Lbs.	\$8,080
KML-700MWJ	Water-Cooled	730	756	115V/60/1	3.79	202 Lbs.	\$8,180
KML-700MRJ*	Remote A-C	643	742	115V/60/1	4.90	200 Lbs.	\$7,960

Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



Use URC-9F Condenser for Remote Air-Cooled Unit

***ENERGY STAR** qualified



30 x 32 1/2 x 59 3/8



30 x 32 1/2 x 72



30 x 30 x 79


Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.


CUBER

Serenity Series



KMS-822MLJ








KMEdge Cuber

Ice Machine Dimensions: 22"W X 24 ⁵/₈"D X 28"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-822MLJ using 1 Phase Remote Condenser	Remote A-C	770	851	115V/60/1 *	5.3	150 Lbs.	\$9,000

Accessories: **HS-5062** Extension bracket for Freestyle application \$170
H9320-52 Recommended Water Filtration - Twin Configuration \$740




Designed for use on beverage dispensers
Use SRK-10J Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser


IBD 4500 22"
22 x 30 1/2 x 35 3/8



See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMS-1122MLJ








KMEdge Cuber

Ice Machine Dimensions: 22"W X 18 ¹/₈"D X 31 ¹/₄"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-1122MLJ using 1 Phase Remote Condenser	Remote A-C	1075	1151	115V/60/1 *	4.2	152 Lbs.	\$9,580
KMS-1122MLJ using 3 Phase Remote Condenser	Remote A-C	1100	1151	115V/60/3 *	4.05	152 Lbs.	\$9,580

Accessories: **H9320-52** Recommended Water Filtration - Twin Configuration \$740



Designed for use on beverage dispensers
Use SRK-12J or SRK-12J3 Condenser for Remote Air-Cooled Unit (sold separately)
*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

Lancer FS22
22 x 30 1/2 x 40 1/4





CUBER Serenity Series

KMS-1402MLJ



KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 28"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-1402MLJ using 1 Phase Remote Condenser	Remote A-C	1400	1501	115V/60/1 *	4.3	178 Lbs.	\$9,600
KMS-1402MLJ using 3 Phase Remote Condenser	Remote A-C	1325	1474	115V/60/3 *	4.55	178 Lbs.	\$9,600

Accessories: H9320-52 Recommended Water Filtration - Twin Configuration

\$740




Designed for use on beverage dispensers.

Use SRK-15J or SRK-15J3 Condenser for Remote Air-Cooled Unit (sold separately)


*115V supply for the KMS Ice maker is supplied from the SRK remote condenser

Lancer FS30
30 x 30 1/2 x 39 5/8



See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

KMS-2000MLJ



KMEdge Cuber

Ice Machine Dimensions: 30"W X 24"D X 32 7/8"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
KMS-2000MLJ using 1 Phase Remote Condenser	Remote A-C	1850	1926	208-230V/60/1 *	4.50	206 Lbs.	\$11,880
KMS-2000MLJ using 3 Phase Remote Condenser	Remote A-C	1900	1938	208-230V/60/3 *	4.30	206 Lbs.	\$11,880

Accessories: H9320-53 Recommended Water Filtration - Triple Configuration

\$1,030



Designed for use on beverage dispensers.

Use SRK-20J or SRK-20J3 Condenser for Remote Air-Cooled Unit (sold separately)

*208-230V supply for the KMS Ice maker is supplied from the SRK remote condenser

Lancer FS30
30 x 30 1/2 x 39 5/8




See TOP KIT MATRIX (pg 35) for top kit options based on bin size.

SPECIALTY ICE




Features & Benefits of the IM Square Cuber



- **HOSHIZAKI IM Square Cubers** utilize an ice making system that has an automatic rinse cycle, which means each ice cycle is made with fresh water protecting the integrity and flavor of the drink
- A closed water circuit offers the ultimate contamination protection, by reducing the number of points at which impurities can enter the ice making process
- A stainless steel exterior with integrated door handles provides a hygienic and high quality finish (Self-contained unit only)
- Removable door gaskets prevent any heat and contamination from entering the bin making the product easy to clean and maintain. (Self-contained unit only)
- Easily cleanable air filter extends the life of the ice machine
- **HOSHIZAKI IM Square Cubers** are electronically controlled for consistent quality of ice
- Natural foaming agent insulates the bin and preserves the quality and consistency of the ice produced longer than any other machine available - saving energy and money

IM-200BAC



IM Square Cuber with Built-In Bin

Dimensions: 39 1/2"W X 23 5/8"D X 33 1/2"H (including 6" legs)

Self-Contained Bin Storage Capacity Up to 75 Lbs.*

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
IM-200BAC	Air-Cooled	150	188	115V/60/1	8.4	212 lbs.	\$7,140


Accessories: H9320-51 Recommended Water Filtration - Single Configuration

\$440



*Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

IM-500SAB



IM Square Cuber

Ice Machine Dimensions: 44"W X 27 5/8"D X 21 3/4"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
IM-500SAB	Air-Cooled	414	489	115V/60/1	5.8	234 Lbs.	\$9,030

Accessories: HS-5530 Stacking Kit (Order as Accessory)

\$610

H9320-51 Recommended Water Filtration - Single Configuration

\$440

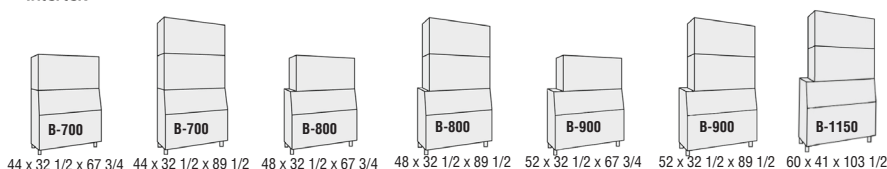

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.











SPECIALTY ICE

Features & Benefits of the Sphere Ice and the Large 2" Square Cube Machines

- **Spheres** are 1.8" in diameter, clear and solid
- **2by2 Cubes** are 1.9" x 1.9" x 2.3", clear and solid
- Cubes have superior chilling ability and beautiful appearance
- Small footprint can easily fit under bar counter
- Up to 50 lbs. of ice production per 24 hours
- Built-in storage bin with 36 lbs. (sphere), 22 lbs. (2by2) capacity
- Durable stainless steel exterior
- Easy to clean air filter
- Foam injected polyurethane for insulation (HFC free)
- Closed water circuit offers the ultimate contamination protection
- Ice scoop included
- 6.5' power cord with NEMA 5-15P plug



IM-50BAA-Q		Sphere Ice Machine with Built-In Bin						
			Dimensions: 24 3/4" W X 20 3/4" D X 39 1/2" H (6" Legs Included)				Self-Contained Bin Storage Capacity Up to 50 Lbs.†	
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	IM-50BAA-Q	Air-Cooled	45	50	115V/60/1	15.7	150 Lbs.	\$10,900
<div><p>Removable/cleanable air filter Panels easily removed and all components accessible for service.</p></div> <div><p>Sphere Ice Dimensions</p></div> <p>†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.</p>								

IM-50BAA-LM		Large 2" Square Cube Machine with Built-In Bin						
			Dimensions: 19 3/4" W X 17 3/4" D X 39 1/2" H (6" Legs Included)				Self-Contained Bin Storage Capacity Up to 50 Lbs.†	
	Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
	IM-50BAA-LM	Air-Cooled	45	50	115V/60/1	15.7	137 Lbs.	\$10,500
<div><p>Removable/cleanable air filter Panels easily removed and all components accessible for service.</p></div> <div><p>Square Cube Dimensions</p></div> <p>†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.</p>								

FLAKER Self-Contained



Features & Benefits of the Flaker / Cubelet Series




- Attractive stainless steel exterior
- Most models are available in both flaked and cubelet (nugget-style) ice
- The internal auger design produces the highest quality ice with fewer repairs and less down time
- The freezing cylinder is made from cast stainless steel
- The industry's only greaseless bearing design improves life of the machine
- **HOSHIZAKI Flaker and Cubelet** ice machines have electric water inlet valves and an automatic purge of water from the reservoir for cleaner operation and longer bearing life
- Advanced CleanCycle24™ design - 2 second rinse every hour
- Infrared bin control is standard and factory installed


ADVANCED
CleanCycle²⁴

FLAKED ICE USAGE GUIDE

Establishment	Approximate Daily Usage
Restaurant	1.5 lbs. ice per seat
Salad Bar/Seafood Display	30 lbs. ice per ft ³
Hospital	
Patient Care	10 lbs. ice per bed
Cafeteria	1 lb. ice per seat
Nursing Home	6 lbs. per bed

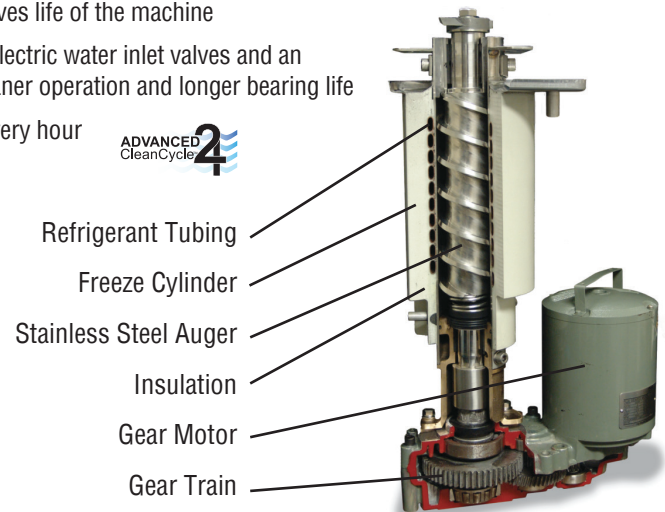

F-300BAJ



Undercounter **FLAKER** with Built-In Bin

Dimensions: 36"W X 24 1/4"D X 39 1/4"H (6" Legs Included)

Self-Contained Bin Storage
Capacity Up to 110 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-300BAJ	Air-Cooled	247	353	115V/60/1	6.14	221 Lbs.	\$9,300


Accessories: LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$250
H9320-51 Recommended Water Filtration - Single Configuration \$440



Four 6" Legs Package (LP-6P LEG) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-330BAJ



Undercounter **FLAKER** with Built-In Bin

Dimensions: 24"W X 26"D X 39"H (6" Legs Included)

Self-Contained Bin Storage
Capacity Up to 80 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-330BAJ	Air-Cooled	243	332	115V/60/1	5.91	178 Lbs.	\$8,860

Accessories: LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$250
H9320-51 Recommended Water Filtration - Single Configuration \$440




Four 6" Legs Package (LP-6P LEG) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



FLAKER

F-500BAJ



Undercounter **FLAKER** with Built-In Bin

Dimensions: 38"W X 29"D X 42"H (6" Legs Included)

**Self-Contained Bin Storage
Capacity Up to 170 Lbs.†**

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-500BAJ	Air-Cooled	420	536	115V/60/1	5.05	265 Lbs.	\$10,990


Accessories: **LP-6 LEG** Four 6" Stainless Steel Legs Package available (optional) \$250
H9320-51 Recommended Water Filtration - Single Configuration \$440



Four 6" Legs Package (**LP-6P LEG**) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-450MAJ



FLAKER

Ice Machine Dimensions: 22"W X 27 ^{3/8}" D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-450MAJ*	Air-Cooled	395	492	115V/60/1	4.94	170 Lbs.	\$7,980

Accessories: **H9320-51** Recommended Water Filtration - Single Configuration \$440




B-250
30 x 32 1/2 x 55 3/8




B-300
22 x 32 1/2 x 68




B-500
30 x 32 1/2 x 68



B-700
44 x 32 1/2 x 68




B-800
48 x 32 1/2 x 68



B-900
52 x 32 1/2 x 68

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

F-801M_J



FLAKERS

Ice Machine Dimensions: 22"W X 27 ^{3/8}" D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ*	Air-Cooled	566	751	115V/60/1	4.5	205 Lbs.	\$10,200
F-801MWJ	Water-Cooled	605	680	115V/60/1	3.9	205 Lbs.	\$10,320


Accessories: **HS-2120** Cutter head for finer flaked ice \$220
H9320-51 Recommended Water Filtration - Single Configuration \$440



*ENERGY STAR qualified




B-250
30 x 32 1/2 x 59 3/8




B-300
22 x 32 1/2 x 72




B-500
30 x 32 1/2 x 72



B-700
44 x 32 1/2 x 72



B-800
48 x 32 1/2 x 72




















B-900
52 x 32 1/2 x 72









Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

FLAKER



F-1002M_J		FLAKERS							
		Ice Machine Dimensions: 22"W X 27 3/8"D X 26"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		F-1002MAJ	Air-Cooled	758	980	115V/60/1	4.36	210 Lbs.	\$12,560
		F-1002MWJ	Water-Cooled	833	955	115V/60/1	3.57	205 Lbs.	\$12,680
		F-1002MRJ	Remote A-C	744	864	115V/60/1	5.1	210 Lbs.	\$12,450
		F-1002MLJ	N/A	797	1028	115V/60/1	1.51	205 Lbs.	\$12,330
		Accessories: HS-2120 Cutter head for finer flaked ice \$220 H9320-51 Recommended Water Filtration - Single Configuration \$440							
		  		    					
		Use URC-5F Condenser for Remote Air-Cooled Unit		22 x 32 1/2x71 15/16 30 x 32 1/2x71 15/16 44 x 32 1/2x71 15/16 48 x 32 1/2x71 15/16 52 x 32 1/2x71 15/16 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.					

F-1501M_J		FLAKERS							
		Ice Machine Dimensions: 30"W X 27 3/8"D X 34 7/16"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		F-1501MAJ	Air-Cooled	1154	1543	208-230V/60/1	4.0	325 Lbs.	\$15,970
		F-1501MWJ	Water-Cooled	1250	1431	208-230V/60/1	3.55	350 Lbs.	\$16,090
		F-1501MRJ	Remote A-C	1140	1496	208-230V/60/1	4.40	325 Lbs.	\$15,860
				Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440					
		  		   					
		Use URC-14F Condenser for Remote Air-Cooled Unit		30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.					

F-2001M_J		FLAKERS							
		Ice Machine Dimensions: 30"W X 27 1/2"D X 34 7/16"H							
		Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
		F-2001MWJ	Water-Cooled	1840	2043	208-230V/60/1	3.19	342 Lbs.	\$21,790
		F-2001MRJ	Remote A-C	1660	2073	208-230V/60/1	3.81	360 Lbs.	\$21,670
		F-2001MRJ3	Remote A-C	1675	2098	208-230V/60/3	3.90	360 Lbs.	\$21,790
		F-2001MLJ	N/A	1733	2280	115V/60/1	0.6	250 Lbs.	\$20,200
		Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440							
		  		   					
		Use URC-22F Condenser for Remote Air-Cooled Unit		30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4 Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.					



CUBELET Self-Contained

C-80BAJ



-DS shown with Custom Cabinetry



Mini

Undercounter CUBELET with Built-In Bin

Dimensions: 14 7/8"W X 22 5/8"D X 33 1/2"H
The ADA compliant machine dimensions are 14 7/8"W x 22 5/8"D x 31 1/2"H

Self-Contained Bin Storage
Capacity Up to 22 Lbs.

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
C-80BAJ	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,470
C-80BAJ-DS†	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,650
C-80BAJ-AD*	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,480
C-80BAJ-ADDS*†	Air-Cooled	45	80	115V/60/1	17.3	135 Lbs.	\$6,800

Accessories: HS-0229 -DS Door Reversal Part (Available as a Service Part)
HS-5061 Drain Pump (Beckett Brand) 1 Year Warranty - Parts & labor \$740
HS-0182 Side Trim Kit \$280
HS-2133 2" Top Spacer Kit available \$210
H9320-51 Recommended Water Filtration - Single Configuration \$440



UL approved for outdoor use

†-DS Models - Wood Door System (Designed to accommodate custom cabinetry)

*ADA compliant

F-330BAJ-C



Mini

Undercounter CUBELET with Built-In Bin

Dimensions: 24"W X 26"D X 39"H (6" Legs Included)

Self-Contained Bin Storage
Capacity Up to 80 Lbs.†

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-330BAJ-C	Air-Cooled	214	288	115V/60/1	7.3	178 Lbs.	\$8,980

Accessories: LP-6 LEG Four 6" Stainless Steel Legs Package available (optional) \$250
H9320-51 Recommended Water Filtration - Single Configuration \$440



Four 6" Legs Package (LP-6P LEG) included

†Rated in accordance with AHRI Standard 820(I-P). Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

F-450MAJ-C



Mini

CUBELET


Ice Machine Dimensions: 22"W X 27 3/8"D X 22"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-450MAJ-C*	Air-Cooled	316	412	115V/60/1	6.10	170 Lbs.	\$8,160

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440



*Not recommended for dispensing applications

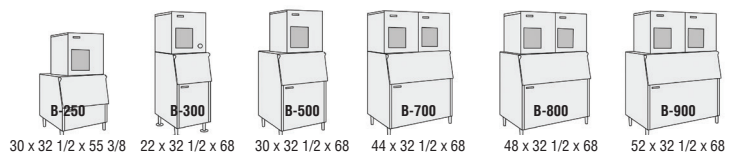

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBELET



CUBELET

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-801MAJ-C*	Air-Cooled	532	690	115V/60/1	5.00	205 Lbs.	\$10,760
F-801MWJ-C	Water-Cooled	580	632	115V/60/1	4.13	205 Lbs.	\$10,660

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440

*ENERGY STAR qualified

30 x 32 1/2 x 59 3/8 22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBELET

Ice Machine Dimensions: 22"W X 27 ³/₈"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1002MAJ-C	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	\$12,560
F-1002MWJ-C	Water-Cooled	878	770	115V/60/1	3.8	205 Lbs.	\$12,680
F-1002MRJ-C	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	\$13,000

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440

Use URC-5F Condenser for Remote Air-Cooled Unit

22 x 32 1/2 x 72 30 x 32 1/2 x 72 44 x 32 1/2 x 72 48 x 32 1/2 x 72 52 x 32 1/2 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBELET

Ice Machine Dimensions: 30"W X 27 ³/₈"D X 34 ⁷/₁₆"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-1501MAJ-C	Air-Cooled	1020	1327	208-230V/60/1	4.61	325 Lbs.	\$16,290
F-1501MWJ-C	Water-Cooled	1218	1376	208-230V/60/1	3.76	330 Lbs.	\$16,390
F-1501MRJ-C	Remote A-C	1125	1335	208-230V/60/1	4.35	325 Lbs.	\$16,160

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440

Use URC-14F Condenser for Remote Air-Cooled Unit


30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.




CUBELET

F-2001MRJ-C



Medium






CUBELET





Ice Machine Dimensions: 30"W x 27 1/2"D x 34 7/16"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
F-2001MRJ-C	Remote A-C	1500	1832	208-230V/60/1	4.35	345 Lbs.	\$22,200

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440




Use URC-22F Condenser for Remote Air-Cooled Unit




30 x 32 1/2 x 79 1/4 44 x 32 1/2 x 79 1/4 48 x 32 1/2 x 79 1/4 52 x 32 1/2 x 79 1/4

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

FD-650M_J-C



Small







CUBELET

Ice Machine Dimensions: 22"W X 24"D X 26"H



Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
FD-650MAJ-C	Air-Cooled	495	634	115V/60/1	5.5	185 Lbs.	\$9,850
FD-650MWJ-C	Water-Cooled	520	622	115V/60/1	4.02	185 Lbs.	\$9,970
FD-650MRJ-C*	Remote A-C	470	588	115V/60/1	4.95	185 Lbs.	\$9,740

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440



Use URC-5F Condenser for Remote Air-Cooled Unit


*ENERGY STAR qualified




30 x 31 x 37 1/4 22 x 24 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

FD-1002M_J-C



Small






CUBELET



Ice Machine Dimensions: 22"W X 24"D X 26"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
FD-1002MAJ-C	Air-Cooled	726	890	115V/60/1	4.57	210 Lbs.	\$13,110
FD-1002MRJ-C	Remote A-C	680	821	115V/60/1	4.94	210 Lbs.	\$13,120

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440



Use URC-5F Condenser for Remote Air-Cooled Unit





30 x 31 x 37 1/4 22 x 24 x 72

Dimensions shown in W x D x H include Bins. See TOP KIT MATRIX (pg 36) for top kit options based on bin size.

CUBELET Serenity Series






FS-1001MLJ-C



Small



CUBELET
Ice Machine Dimensions: 30"W X 11"D X 26"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1001MLJ-C	Remote A-C	720 851	115V/60/1	5.07 4.29	166 Lbs.	\$11,750

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440


Use SRC-10J Condenser for Remote Air-Cooled Unit






FS-1022MLJ-C



Small



CUBELET
Ice Machine Dimensions: 22"W X 16 1/2"D X 26"H


Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1022MLJ-C	Remote A-C	730 889	115V/60/1	5.10 3.93	150 Lbs.	\$13,350

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440


Use SRC-10J Condenser for Remote Air-Cooled Unit






FS-1501MLJ-C



Medium


CUBELET
Ice Machine Dimensions: 30"W X 16 1/2"D X 34 1/4"H

Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W 70°A / 50°W	Electrical	kWh per 100 Lbs. 90°A / 70°W 70°A / 50°W	Shipping Weight	List F.O.B. Griffin
FS-1501MLJ-C	Remote A-C	1125 1386	115V/60/1	4.75 3.67	229 Lbs.	\$14,330

Accessories: H9320-51 Recommended Water Filtration - Single Configuration \$440


Use SRC-14J Condenser for Remote Air-Cooled Unit







DISPENSER

Features & Benefits of HOSHIZAKI Dispensers

- Attractive stainless steel exterior provides long life and easy maintenance
- **KMEdge** dispensers feature a built-in insulated storage bin
- Three dimensional agitation prevents clumping and assists in delivering ice conveniently
- **DKM Hotel Dispenser** features the industry's only one-piece design and is 35% quieter than other hotel dispensers
- **DB Series** accommodates **KMEdge** Series Cubers
- **DCM Series** dispenses easy to chew cubelet ice and water
- **DWM Water Dispenser** offers four water choices in a small footprint
- HOSHIZAKI's **DCM Opti-Serve™ Series** offers hands-free dispensing and helps eliminate the possibility of cross-contamination
- All dispensers feature built-in ice storage capacity





DCM-271BAH







CUBELET Ice & Water Dispenser

Ice Machine/Dispenser Dimensions: 16 5/8" W X 24 1/4" D X 31 3/4" H (4" Legs Included)						Ice Bin Storage Capacity Up to 10 Lbs. [†]	
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-271BAH	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$8,600
Accessories:							
LP-4 LEG	Four 4" Stainless Steel Legs Package available (optional)						\$230
SD-271	Equipment Stand						\$1,450
HS-2070	Seismic Wall Mount Kit						\$210
HS-2104	Wall Mount Kit						\$940
H9320-51	Recommended Water Filtration - Single Configuration						\$440
HS-5554	Small Square Anti-Microbial Cover (30 mm x 30 mm)						\$40





Floor Model with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H





Counter-Top with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H

Four 4" Legs included
[†]Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

NOTE: DCM-271BAH is made to pair with SD-271 stand.
Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.




DCM-300BAH







CUBELET Ice & Water Dispenser

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H						Ice Bin Storage Capacity Up to 40 Lbs. [†]	
Model Number	Condenser	Lbs. of Ice per 24 hours 90°A / 70°W	Lbs. of Ice per 24 hours 70°A / 50°W	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-300BAH	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$11,110
Accessories:							
LP-6P LEG	Four 6" Painted Legs Package available						\$240
LP-6 LEG	Four 6" Stainless Steel Legs Package available						\$250
SD-500	Equipment Stand						\$1,570
Leg Kits:	HS-2066	Seismic Wall Mount Kit				\$220	
	HS-2071	Leg Seismic Kit				\$550	
H9320-51	Recommended Water Filtration - Single Configuration						\$440
HS-5559	Round Anti-Microbial Cover (25 mm diameter)						\$60






Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs
[†]Rated in accordance with AHRI Standard 820(I-P).
Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DISPENSER



DCM-500B_H



Small



CUBELET Ice & Water Dispensers

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Ice Bin Storage Capacity
Up to 40 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH	Air-Cooled	450	618	115V/60/1	5.62	255 Lbs.	\$14,110
DCM-500BWH	Water-Cooled	512	590	115V/60/1	4.48	255 Lbs.	\$14,230

Accessories: LP-6P LEG Four 6" Painted Legs Package available \$240
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$250
 SD-500 Equipment Stand \$1,570
 Leg Kits: HS-2066 Seismic Wall Mount Kit \$220
 HS-2071 Leg Seismic Kit \$550
 H9320-51 Recommended Water Filtration - Single Configuration \$440
 HS-5559 Round Anti-Microbial Cover (25 mm diameter) \$60



Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs

[†]Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-75_B_H



Small



CUBELET Ice & Water Dispensers

Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H

Ice Bin Storage Capacity
Up to 95 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	\$18,460
DCM-751BWH	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	\$18,460

Accessories: LP-6P LEG Four 6" Painted Legs Package available \$240
 LP-6 LEG Four 6" Stainless Steel Legs Package available \$250
 SD-750 Equipment Stand \$1,980
 Leg Kits: HS-2067 Seismic Wall Mount Kit \$270
 HS-2072 Leg Seismic Kit \$500
 H9320-51 Recommended Water Filtration - Single Configuration \$440
 HS-5559 Round Anti-Microbial Cover (25 mm diameter) \$60



Counter-Top
34 1/16 x 28 1/2 x 48 1/16
W x D x H



Counter-Top
with Optional 6" Legs
34 1/16 x 28 1/2 x 54 1/16
W x D x H



Floor Model
with Optional Stand
34 1/16 x 28 1/2 x 80 1/2
W x D x H

Unit supplied without legs

[†]Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-271BAH-OS



Mini



CUBELET Ice & Water Dispenser

TOUCHLESS ICE & WATER

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 16 5/8" W X 24 1/4" D X 31 3/4" H
(4" Legs Included)


Ice Bin Storage Capacity
Up to 10 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-271BAH-OS	Air-Cooled	196	257	115V/60/1	6.9	154 Lbs.	\$8,700

Accessories: LP-4 LEG Four 4" Stainless Steel Legs Package available \$230
 SD-271 Equipment Stand \$1,450
 HS-2070 Seismic Wall Mount Kit \$210
 HS-2104 Wall Mount Kit \$940
 H9320-51 Recommended Water Filtration - Single Configuration \$440



Floor Model
with Optional Stand
16 9/16 x 24 1/8 x 66 7/8
W x D x H



Counter-Top
with 4" Legs
16 9/16 x 24 1/8 x 31 11/16
W x D x H

Four 4" Legs included

[†]Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.



DISPENSER

DCM-300BAH-OS



CUBELET Ice & Water TOUCHLESS ICE & WATER Dispenser

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Ice Bin Storage Capacity
Up to 40 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-300BAH-OS	Air-Cooled	232	321	115V/60/1	6.84	240 Lbs.	\$11,210

Accessories: **LP-6P LEG** Four 6" Painted Legs Package available
LP-6 LEG Four 6" Stainless Steel Legs Package available
SD-500 Equipment Stand
Leg Kits: **HS-2066** Seismic Wall Mount Kit
HS-2071 Leg Seismic Kit
H9320-51 Recommended Water Filtration - Single Configuration

\$240
\$250
\$1,570
\$220
\$550
\$440



On a counter without legs
or on a stand



Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs

[†]Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-500B_H-OS



CUBELET Ice & Water TOUCHLESS ICE & WATER Dispensers

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 26"W X 22 1/2"D X 40"H

Ice Bin Storage Capacity
Up to 40 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-500BAH-OS	Air-Cooled	450	618	115V/60/1	5.62	276 Lbs.	\$14,230
DCM-500BWH-OS	Water-Cooled	512	590	115V/60/1	4.48	255 Lbs.	\$14,330

Accessories: **LP-6P LEG** Four 6" Painted Legs Package available
LP-6 LEG Four 6" Stainless Steel Legs Package available
SD-500 Equipment Stand
Leg Kits: **HS-2066** Seismic Wall Mount Kit
HS-2071 Leg Seismic Kit
H9320-51 Recommended Water Filtration - Single Configuration

\$240
\$250
\$1,570
\$220
\$550
\$440



On a counter without legs
or on a stand



Counter-Top
26 x 22 1/2 x 40
W x D x H



Counter-Top
with Optional 6" Legs
26 x 22 1/2 x 46
W x D x H



Floor Model
with Optional Stand
26 x 22 1/2 x 72 1/2
W x D x H

Unit supplied without legs

[†]Rated in accordance with AHRI Standard 820(I-P).

Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DCM-75_B_H-OS



CUBELET Ice & Water TOUCHLESS ICE & WATER Dispensers

Hands-free sensor designed for use with opaque containers. Not intended for outdoor use - avoid placement in direct sunlight.

Ice Machine/Dispenser Dimensions: 34 1/16"W X 28 1/2"D X 48 1/16"H

Ice Bin Storage Capacity
Up to 95 Lbs.[†]

Model Number	Condenser	Lbs. of Ice per 24 hours 90°F / 70°F	Lbs. of Ice per 24 hours 70°F / 50°F	Electrical	kWh per 100 Lbs.	Shipping Weight	List F.O.B. Griffin
DCM-752BAH-OS	Air-Cooled	576	782	115V/60/1	5.10	345 Lbs.	\$18,570
DCM-751BWH-OS	Water-Cooled	678	782	115V/60/1	4.76	345 Lbs.	\$18,570

Accessories: **LP-6P LEG** Four 6" Painted Legs Package available
LP-6 LEG Four 6" Stainless Steel Legs Package available
SD-750 Equipment Stand
Leg Kits: **HS-2067** Seismic Wall Mount Kit
HS-2072 Leg Seismic Kit
H9320-51 Recommended Water Filtration - Single Configuration

\$240
\$250
\$1,980
\$270
\$500
\$440



On a counter without legs
or on a stand



Counter-Top
34 1/16 x 28 1/2 x 48 1/16
W x D x H



Counter-Top
with Optional 6" Legs
34 1/16 x 28 1/2 x 54 1/16
W x D x H



Floor Model
with Optional Stand
34 1/16 x 28 1/2 x 80 1/2
W x D x H





Unit supplied without legs





[†]Rated in accordance with AHRI Standard 820(I-P).







Capacity based on 100% of total volume x 30 lb/ft³ average density of ice.

DISPENSER



DB-130H		KMEdge DB Dispenser						
		Dispenser Dimensions: 22"W X 30"D X 53"H (6" Legs Included)						
		Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
		DB-130H	130 Lbs.	20 lbs. / min.	115V/60/1	N/A	195 Lbs.	\$6,170
		Accessories: LP-6 FLANGE LEG Four 6" Stainless Steel Legs Package available \$300 HS-2109 Chute & grill replacement kit \$370						
		  		 22 x 30 x 53 W x D x H  KM-350/520/660M Cuber sold separately 22 x 30 x 81 W x D x H			Four Painted 6" Flange Legs included Note: 90 Day Warranty on accessory parts Ice dispensing area is ADA compliant Only dispenses crescent ice	

DB-200H		KMEdge DB Dispenser						
		Dispenser Dimensions: 30"W X 30"D X 53"H (6" Legs Included)						
		Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
		DB-200H	200 Lbs.	13 lbs. / min.	115V/60/1	N/A	220 Lbs.	\$7,080
		Accessories: HS-2036 Top Kit for KM-350M, KM-520M or KM-660M \$230 LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2109 Chute & grill replacement kit \$370						
		  		 30 x 30 x 53 W x D x H  KML-325/500 Cuber sold separately 30 x 30 x 75 W x D x H  KML-700 Cuber sold separately 30 x 30 x 79 W x D x H			Four Painted 6" Legs included Note: 90 Day Warranty on accessory parts Ice dispensing area is ADA compliant Only dispenses crescent ice	

DKM-500B_J		KMEdge DKM Dispenser							
		Ice Machine/Dispenser Dimensions: 30"W X 28"D X 77"H (6" Legs Included)							
		Model Number	Lbs. of Ice per 24 hours 70°F / 50°F	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
		DKM-500BAJ* DKM-500BWJ	545 Lbs. 540 Lbs.	200 Lbs. 200 Lbs.	13 lbs. / min. 13 lbs. / min.	115V/60/1 115V/60/1	5.56 4.79	300 Lbs. 310 Lbs.	\$14,130 \$14,250
		Accessories: HS-3586 6" Casters - Set of 4 \$520 H9320-51 Recommended Water Filtration - Single Configuration \$440							
		    		 30 x 30 x 53 W x D x H  KML-325/500 Cuber sold separately 30 x 30 x 75 W x D x H  KML-700 Cuber sold separately 30 x 30 x 79 W x D x H			Four Painted 6" Flange Legs included DKM-500B - Ice dispensing area is ADA compliant *ENERGY STAR qualified		



DISPENSER

DM-200B



KMEdge Ice & Water Dispenser

Dispenser Dimensions: 30"W X 28"D X 36 ³/₈"H

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DM-200B	200 lbs.	7.5 lbs. / min.	115-120V/60/1	N/A	N/A	210 Lbs.	\$7,290


Accessories: HS-2036 Top Kit for KM-350M, KM-520M or KM-660M \$230
DM Legs Four 4" Black Die Cast Legs Kit \$200
SD-200 Equipment Stand \$1,960



Unit supplied without legs
Only dispenses crescent ice



Counter-Top
30 x 28 x 36 ³/₈
W x D x H



Counter-Top
with optional 4" legs
30 x 28 x 40 ³/₈
W x D x H

DM-4420N



CUBELET Ice & Water Dispenser

Dimensions: 22"W X 30 ¹/₂"D X 40"H

Model Number	Application Ice Storage Capacity	Dispensing Rate	Electrical	Icemaker Production per 24 hrs.	Icemaker kWh per 100 lbs.	Shipping Weight	List F.O.B. Griffin
DM-4420N	200 lbs.	N/A	115-120V/60/1	N/A	N/A	235 Lbs.	\$7,440

Accessories: HS-5329 Top Kit for for FS-1022MLJ-C \$160
HS-5330 Top Kit for for FD-650M_J-C & FD-1002M_J-C \$450



CANADIAN ENERGY
PERFORMANCE VERIFIED
RENDEMENT ENERGETIQUE VERIFIED

DWM-20A



MODwater Water Dispenser

Dimensions: 14 ⁷/₈"W x 21 ³/₈"D x 16 ⁵/₈"H

Model Number	Max Draw of Chilled Water (Chilled or Sparkling)	Max Flow Rate (Chilled)	Heat Rejection	Refrigerant Type/Charge	Max. Fuse Size or HACR Circuit Breaker	Max Amps	Voltage	Shipping Weight	List F.O.B. Griffin
DWM-20A	20 gal/hour	0.9 gal/min	450W	R-134a/ 4.23 oz	15A	9A	120V/60/1	90 Lbs.	\$6,500

Accessories: HS-5441 Replacement All-in-One Filter Cartridge, HS-5441 (pack of 2) \$340
HS-5442 Replacement Alkaline Chamber \$350
HS-5504 6-Month Replacement Kit: Filters (2 ea.) alkaline chamber, air filter, nozzle tip w/aerator \$700
HS-5542 DWM Top Kit for SD-271 \$190
HS-5560 Large Square Anti-Microbial Cover (50 mm x 50 mm) \$50

Installation kit included
CO₂ tank must be sourced from other vendor



TYPES OF WATER DISPENSED




Chilled	Temp.	34°-36°F
Sparkling	Carbonation	3.7 Vol.
Alkaline	pH (avg.)	8.0-9.0
Hot	Factory set	185°F

ICE STORAGE BINS








HOSHIZAKI Ice Storage Bins are available with stainless steel (or vinyl clad for B-250PF) exterior for easy cleaning and long-lasting attractive appearance. Sturdy construction for side-by-side or stacked installations and non-corrosive bin liner provide safe, sanitary storage of cubed or flaked ice. Foamed-in-place polyurethane insulation in all bin walls and bottom provides dependable ice storage. H-GUARD Plus® Antimicrobial Agent adds extra protection to the ice scoop (included).



B-250SF		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
		B-250SF	Vinyl Clad	250 Lbs.	30" x 32 ^{1/2} " x 33 ^{3/8} "	110 Lbs.	\$2,020
		Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$250 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					
B-300SF BD-300SF**		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
		B-300SF	Stainless Steel	300 Lbs.	22" x 32 ^{1/2} " x 46"	125 Lbs.	\$2,090
		Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$300 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Flanged Legs included Refer to Top Kit Matrix for necessary configurations					
		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
		BD-300SF	Stainless Steel	300 Lbs.	22" x 32 ^{1/2} " x 46"	135 Lbs.	\$2,130
		Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available \$300 SP-5429 Bin Door Catch \$51.21 For use with KMD-410M, KMS-822M, FD-650M-C, FD-1001M-C **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension					
B-500SF BD-500SF**		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
		B-500SF	Stainless Steel	500 Lbs.	30" x 32 ^{1/2} " x 46"	140 Lbs.	\$2,330
		Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2033 Order 8" Top Kit to accommodate 22"W ice machines \$250 HS-2129 Top Kit: KMD application \$300 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					
		Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
		BD-500SF	Stainless Steel	500 Lbs.	30" x 32 ^{1/2} " x 46"	155 Lbs.	\$2,390
		Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 For use with KMD-460M, KMD-530M, KMD-860M **BD Bins fit 24" to 24 1/2" deep Ice Machines without Top Kit extension Four 6" Painted Legs included					




ICE STORAGE BINS

B-700SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-700SF	Stainless Steel	700 Lbs.	44" x 32 ¹ / ₂ " x 46"	175 Lbs.	\$2,980
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2035 Order 22" Top Kit to accommodate 22"W ice machines \$270 HS-2034 Order 14" Top Kit to accommodate 30"W ice machines \$250 HS-2130 Top Kit: KMD application \$350 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					
B-800SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-800SF	Stainless Steel	800 Lbs.	48" x 32 ¹ / ₂ " x 46"	185 Lbs.	\$3,220
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2035 22" Top Kit & HS-2032 - 4" Top Kit to accommodate 22"W ice machines \$500 HS-2032 4" Top Kit to accommodate (2) 22"W ice machines \$230 HS-2034 Order 14" Top Kit & HS-2032 - 4" Top Kit to accommodate 30"W machines \$480 HS-2131 Top Kit: KMD application \$420 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					
B-900SF	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-900SF	Stainless Steel	900 Lbs.	52" x 32 ¹ / ₂ " x 46"	195 Lbs.	\$3,440
	Accessories LP-6 LEG Four 6" Stainless Steel Legs Package available \$250 HS-2035 Order 22" Top Kit to accommodate 30"W ice machines \$270 HS-2035 22" Top Kit & HS-2033 - 8" Top Kit to accommodate 22"W ice machines \$520 HS-2033 8" Top Kit to accommodate (2) 22"W machines \$250 HS-2032 4" Top Kit to accommodate 48"W ice machines \$230 HS-2132 Top Kit: KMD application \$510 SP-5429 Bin Door Catch \$51.21 Four 6" Painted Legs included Refer to Top Kit Matrix for necessary configurations					
B-1150SS / B-1300SS	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-1150SS B-1300SS	Stainless Steel Stainless Steel	1148 Lbs. 1304 Lbs.	48" x 41" x 60" 48" x 41" x 66"	315 Lbs. 330 Lbs.	\$6,830 \$7,060
	Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail					
B-1500SS / B-1650SS	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	B-1500SS B-1650SS	Stainless Steel Stainless Steel	1500 Lbs. 1605 Lbs.	60" x 41" x 62" 60" x 41" x 66"	360 Lbs. 375 Lbs.	\$7,850 \$8,120
	Four 6" Die-cast Legs included, baffle design increases ice accessibility by 30% Universal top included - Check Top Kit Application Guide for detail					

DISPENSER STANDS



SD STANDS DM and DCM Series Dispensers	Model Number	Use with Ice Machine / Dispenser Model	Dimensions W x D x H (Height includes 6" legs)	Shipping Weight	List F.O.B. Griffin
	SD-200	DM-200B	30" x 28" x 32 ^{13/16"}	105 lbs.	\$1,960
	SD-271	DCM-271 (-OS)	16 ^{1/2"} x 24" x 35 ^{3/16"}	85 lbs.	\$1,450
	SD-500	DCM-300 (-OS) / DCM-500 (-OS)	25 ^{7/8"} x 22" x 32 ^{3/4"}	90 lbs.	\$1,570
	SD-750	DCM-751 (-OS) / DCM-752 (-OS)	34" x 28" x 32 ^{3/4"}	110 lbs.	\$1,980
Accessories LP-6 FLANGE LEG Four 6" Stainless Steel Flange Legs Package available (optional) \$300 Leg Kits: HS-2066 Seismic Kit for SD 500 Stands \$220 HS-2071 Leg Seismic Kit SD 500 Stands \$550 Four 6" Painted Legs included NOTE: DCM-271BAH is made to pair with SD-271 stand. Placing a DCM-271BAH on SD-270 stand will require a new drain hole to be cut.					

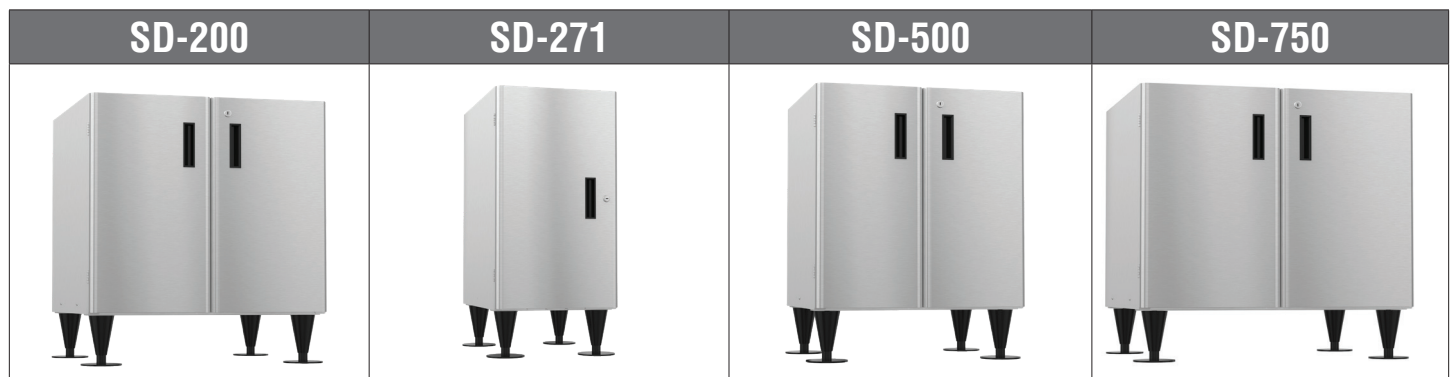

- Heavy duty stands for floor model ice machines/dispensers
- Easy cleaning and maintenance

- Attractive stainless steel exterior
- Locking doors standard



HCD ICE BAGGING SYSTEM SERIES	Model Number	Exterior Finish	Application Ice Storage Capacity	Dimensions W x D x H	Shipping Weight	List F.O.B. Kloppenberg
	HCD-500B	Stainless Steel	647 Lbs.	30" x 36" x 71"	510 Lbs.	\$27,570
	HCD-1000B	Stainless Steel	1078 Lbs.	48" x 36" x 71"	590 Lbs.	\$31,290
48" heavy duty ice paddle included						





TOP KIT MATRIX

	22" Width KM-350M KM-520M KM-660M F-450M F-801M F-1002M	22" Width KMD-410M† KMS-822M FD-650M-C† FD-1002M-C	30" Width KM-901M KM-1340M KM-1601M KML Series F-1501M F-2001	30" Width KMD-460M‡ KMD-530M‡ KMD-860M‡ KMS-1402M* KMS-2000M*	44" Width 2 KM-350M 2 KM-520M 2 KM-660M IM-500S 2 F-450M 2 F-801M 2 F-1002M	44" Width 2 KMD-410M 2 FD-650M-C 2 FD-1002M-C	48" Width KM-1301S KM-1400S KM-1601S KM-1900S KM-2200S KM-2600S	60" Width 2 KM-901M 2 KM-1100M 2 KM-1340M 2 KM-1601M 2 KML Series 2 F-1501/2001M 2 KMD Series**
22" Width B-300SF DB-130H	— (DB-130H - KMD only)	HS-5424 HS-2153 (KMD-410 on B-300 only)	N/A	N/A	N/A	N/A	N/A	N/A
BD-300SF†	N/A	—	N/A	N/A	N/A	N/A	N/A	N/A
30" Width B-250SF B-500SF	HS-2033	HS-2033 & HS-2129	—	HS-2129	N/A	N/A	N/A	N/A
BD-500SF†	N/A	N/A	N/A	— (Only fits KMD Units)	N/A	N/A	N/A	N/A
44" Width B-700SF	HS-2035	HS-2035 & HS-2130	HS-2034	HS-2130 & HS-2034	—	HS-2130 (KMD-410M does not apply.)	N/A	N/A
48" Width B-800SF	HS-2035 & HS-2032	HS-2035, HS-2032 & HS-2131	HS-2034 & HS-2032	HS-2131, HS-2034 & HS-2032	HS-2032	HS-2032 & HS-2131	—	N/A
48" Width B-1150SS B-1300SS	UNIVERSAL TOP KIT INCLUDED	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED & HS-2147	IM & F UNITS ONLY (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	N/A
52" Width B-900SF	HS-2035 & HS-2033	HS-2035 & HS-2033/2132	HS-2035	HS-2132 & HS-2035	HS-2033	HS-2033 & HS-2132	HS-2032	N/A
60" Width B-1500SS B-1650SS	N/A	N/A	UNIVERSAL TOP KIT INCLUDED & HS-2111	N/A	UNIVERSAL TOP KIT INCLUDED (HS-5397 for IM-500)	N/A	UNIVERSAL TOP KIT INCLUDED	UNIVERSAL TOP KIT INCLUDED
30" Width DB-200H DM-200B	HS-2036 (Only fits KM Units)	N/A	— (Only fits KML Units)	N/A	N/A	N/A	N/A	N/A

*Except KMD-410M (See 22" Wide), †BD Bins Fit 24" to 24 1/2" Deep Ice makers w/o Top Kit, ‡HS-5065 Req'd for Air Cooled KMD-460/530MAJ

KMS[§], KMD, or FD on Bin Need Top Kit Extension:

Model Number	For Use With	List F.O.B. Griffin
HS-2129	B-500 Bins	\$300
HS-2130	B-700 Bins	\$350
HS-2131	B-800 Bins	\$420
HS-2132	B-800 & B-900 Bins	\$510
HS-2147	B-1150 & 1300 Bins	\$270
HS-2153	B-300 Bins	\$200
HS-5424	KMD on DB-130	\$90

§Except KMS-1122MLJ

36" Width - KMH-2100S - Fit Kloppenberg Bins Only (Sold Separately)





Model Number	Description	List F.O.B. Griffin
HS-2032	4" ABS Top Kit	\$230
HS-2033	8" ABS Top Kit	\$250
HS-2034	14" ABS Top Kit	\$250
HS-2035	22" ABS Top Kit	\$270
HS-2036	(2) 4" ABS Top Kits for KM on DB-200H	\$230
HS-2111	11.3" x 26.2" Stainless Cover/Separator	FREE
HS-2148	30" x 3.1" Stainless Cover	\$220
HS-5065	Front Panel Filter Kit for KMD-460/530M	\$640
HS-5397	Bin Control Kit for IM-500 on B-1150/1300/1500/1650	\$230

REMOTE CONDENSER



AIR-COOLED REMOTE CONDENSERS - URC / SRC / SRK

An Ice Machine with a **Remote Air Condenser** provides quiet operation at the icemaker location, improves efficiency, and saves energy with cooler operation. Sturdy construction and weather-resistant cabinet finish provides long life operation. Remote condensers may be installed outdoors up to 55 feet from the icemaker. For installations exceeding 55 feet, contact a Factory Technical Service Representative at 800-233-1940.

URC-5F, URC-9F, URC-14F	SRK-10J, SRK-12J, SRK-12J3 SRK-15J, SRK-15J3, SRK-20J, SRK-20J3	SRC-10J SRC-14J	URC-22F URC-26J
			

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-5F	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	115/60/1	21 ^{15/16} " x 14 ^{1/8} " x 32 ^{13/16} "	60 Lbs.	\$1,750
Accessories					
Tubing Kit: R404-2046-2 - 20' Pre-charged R-404A					\$460
R404-3546-2 - 35' Pre-charged R-404A					\$600
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$240

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-9F	KML-700MRJ, KMD-860MRJ	115/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	95 Lbs.	\$2,000
Accessories					
Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A					\$460
R404-3568-2 - 35' Pre-charged R-404A					\$600
R404-5568-2 - 55' Pre-charged R-404A					\$760
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$240

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	230/60/1	38" x 29" x 37"	270 Lbs.	\$4,360
Accessories					
Tubing Kit: HS-5299 - 25' Brazing Required R-404A					\$460
HS-5300 - 35' Brazing Required R-404A					\$590
HS-5301 - 55' Brazing Required R-404A					\$740

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-10J	KMS-822MLJ	230/60/1**	38" x 29" x 37"	226 Lbs.	\$5,050
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$460
HS-0251 - 35' Brazing Required R-404A					\$590
HS-0252 - 55' Brazing Required R-404A					\$740
**3 wire with neutral for 115V					



REMOTE CONDENSER

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-12J	KMS-1122MLJ	230/60/1**	50" x 19 ^{1/2} " x 43"	273 Lbs.	\$5,610
SRK-12J3	KMS-1122MLJ	230/60/3	50" x 19 ^{1/2} " x 43"	273 Lbs.	\$5,830
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$460
HS-0251 - 35' Brazing Required R-404A					\$590
HS-0252 - 55' Brazing Required R-404A					\$740
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRC-14J	FS-1501MLJ-C	230/60/1	37 ^{3/4} " x 26 ^{5/8} " x 37"	235 Lbs.	\$5,400
Accessories					
Tubing Kit: HS-5323 - 25' Brazing Required R-404A					\$460
HS-5324 - 35' Brazing Required R-404A					\$590
HS-5325 - 55' Brazing Required R-404A					\$740

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-15J	KMS-1402MLJ	230/60/1**	50" x 19 ^{1/2} " x 43"	275 Lbs.	\$6,230
SRK-15J3	KMS-1402MLJ	230/60/3	50" x 19 ^{1/2} " x 43"	275 Lbs.	\$6,340
Accessories					
Tubing Kit: HS-0250 - 25' Brazing Required R-404A					\$460
HS-0251 - 35' Brazing Required R-404A					\$590
HS-0252 - 55' Brazing Required R-404A					\$740
**3 wire with neutral for 115V					

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-14F	KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C)	115/60/1	35 ^{11/16} " x 14 ^{1/16} " x 36 ^{1/2} "	110 Lbs.	\$2,080
Accessories					
Tubing Kit: R404-2068-2 - 20' Pre-charged R-404A					\$460
R404-3568-2 - 35' Pre-charged R-404A					\$600
R404-5568-2 - 55' Pre-charged R-404A					\$760
HS-2150 - Quick-Connect Kit (not required if line set is ordered)					\$240
HS-5102 - Hail Guard Kit					\$290

REMOTE CONDENSER



Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
SRK-20J SRK-20J3	KMS-2000MLJ KMS-2000MLJ	230/60/1 ** 230/60/3	59 ^{9/16"} x 19 ^{1/2"} x 45" 59 ^{9/16"} x 19 ^{1/2"} x 45"	325 Lbs. 325 Lbs.	\$11,220 \$11,340
Accessories Tubing Kit: HS-0243 - 25' Brazing Required R-404A HS-0244 - 35' Brazing Required R-404A HS-0245 - 55' Brazing Required R-404A **3 wire with neutral for 115V					\$460 \$590 \$780

Model Number	For Use With	Electrical	Dimensions W x D x H (Height includes legs)	Shipping Weight	List F.O.B. Griffin
URC-22F	KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ3(-C)	115/60/1	46 ^{3/8"} x 14 ^{1/16"} x 40 ^{1/2"}	165 Lbs.	\$3,020
URC-26J	KM-2600SRJ3	115/60/1	46 ^{3/8"} x 14 ^{1/16"} x 40 ^{1/2"}	273 Lbs.	\$3,920
Accessories Tubing Kit: R404-20610 - 20' Pre-charged R-404A R404-35610 - 35' Pre-charged R-404A R404-55610 - 55' Pre-charged R-404A HS-2150 - Quick-Connect Kit (not required if line set is ordered) HS-5095 - Hail Guard Kit					\$460 \$600 \$810 \$240 \$210

REMOTE CONDENSER MATRIX

Line Sets - PRE-CHARGED					
Remote Condenser	Ice Machines	Shipping Weight	20' Length	35' Length	55' Length
URC-5F	KM-520MRJ, KMD-530MRJ, KM-660MRJ, FD-650MRJ-C, FD-1002MRJ-C, F-1002MRJ(-C)	60 Lbs.	R404-2046-2	R404-3546-2	N/A
URC-9F	KML-700MRJ, KMD-860MRJ	95 Lbs.	R404-2068-2	R404-3568-2	R404-5568-2
URC-14F	KM-901MRJ(3), KM-1100MRJ, KM-1301SRJ(3), KM-1340MRJ(3), F-1501MRJ(-C)	110 Lbs.	R404-2068-2	R404-3568-2	R404-5568-2
URC-22F	KM-1601MRJ(3), KM-1601SRJ(3), KM-1900SRJ(3), KM-2200SRJ3, KMH-2100SRJ(3), F-2001MRJ3(-C)	165 Lbs.	R404-20610	R404-35610	R404-55610
URC-26J	KM-2600SRJ3	273 Lbs.	R404-20610	R404-35610	R404-55610

Line Sets - BRAZING REQUIRED					
Remote Condenser	Ice Machines	Shipping Weight	25' Length	35' Length	55' Length
SRC-10J	FS-1001MLJ-C, FS-1022MLJ-C	200 Lbs.	HS-5299*	HS-5300*	HS-5301*
SRK-10J	KMS-822MLJ	230 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-12J SRK-12J3	KMS-1122MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRC-14J	FS-1501MLJ-C	220 Lbs.	HS-5323*	HS-5324*	HS-5325*
SRK-15J SRK-15J3	KMS-1402MLJ	275 Lbs.	HS-0250*	HS-0251*	HS-0252*
SRK-20J SRK-20J3	KMS-2000MLJ	345 Lbs.	HS-0243*	HS-0244*	HS-0245*

*Line sets require refrigerant



WATER FILTRATION

Model Number	Description	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
H9320-51 Use E-10 10" Prefilter	Single	AM-50, KM-81, 116, 161 KM-231, 301	KM-350, 520, 660 KML-325, 500, 700 KMD-410, 460, 530 DKM-500	IM-200,500 IM-50BAA-LM	All Models	All Models
H9320-52 Use E-20 20" Prefilter	Twin	N/A	KM-901, 1100, KMD-860 KMS-822, 1122, 1402	IM-50BAA-Q	N/A	N/A
H9320-53 Use E-20 20" Prefilter	Triple	N/A	KM-1301, 1340, 1601, 1900, KM-2200, 2600 KMH-2100 KMS-2000	N/A	N/A	N/A
H9655-11	Replacement Cartridge (1) One each					

Recommended water filter configurations based on average ice machine usage and regular filter replacement. If your operation has challenging water conditions or higher usage, then it may be necessary to use an additional filter or prefilter.

Water Filters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
H9320-51	Single	18.4" H	\$440
H9320-52	Twin	19.11" H	\$740
H9320-53	Triple	19.15" H	\$1,030
H9655-11	Replacement Cartridge each		\$180
H9655-06	Replacement Cartridge (6 pk)		\$830

Prefilters	Description	Height of System (Manifold + Cartridge)	List F.O.B. Griffin
9534-26	E-20 Replacement Cartridges (6 pk)		\$200
9534-12	E-10 Replacement Cartridges (12 pk)		\$210
9534-20	E-20 Replacement Cartridges (20 pk)		\$430
9534-40	E-10 Replacement Cartridges (40 pk)		\$410
9795-80	E-10 Prefilter (10")		\$250
9795-90	E-20 Prefilter (20")		\$330



Triple Configuration Shown
(Single and Twin Configurations Available)

ICE MACHINE ACCESSORIES



Model Number	Description Flow Rate (Gal. per min.)	Undercounter KMs	KM Cubers	IM Cubers	Flakers / Cubelet	DCMs
HS-5282	Low Flow (.34 GPM)	AM-51B, KM-81B, KM-161B	N/A	N/A	All Models	N/A
HS-5283	Standard Flow (1.3 GPM)	KM-231B, KM-301B	KM-350M, KML-325M, 500M, KMD-410M, DKM-500B	IM-200BAB IM-500SAA IM-50BAA	N/A	N/A
HS-5284	Fast Flow (4.2 GPM)	N/A	KM - 520M, 660M, 901M, 1100M, 1301S, 1340M, 1601M, 1601S, 1900S, 2200S, 2600S KMD - 460M, 530M, 860M, 901M, KML-700M KMS - 822M, 830M, 1122M, 1402M, 2000M KMH-2100S	N/A	N/A	N/A
HS-5285	Replacement Cartridge (1) One each					

Model Number	Description	Overall Dimensions Model W x D x H	List F.O.B. Griffin
HS-5282	Low Flow (.34 GPM)	3.8" x 3.6" x 8.0"	\$990
HS-5283	Standard Flow (1.3 GPM)	3.8" x 3.6" x 8.0"	\$990
HS-5284	Fast Flow (4.2 GPM)	5.98" x 3.6" x 9.28"	\$990
HS-5285	Replacement Cartridge each		\$580



HS-5282
EcO₃Ice Low Flow
Ozone System

HS-5283
EcO₃Ice Standard
Flow Ozone System

HS-5284
EcO₃Ice Fast Flow
Ozone System


HS-5285
EcO₃Ice Ozone
System
Replacement
Cartridge

EcO₃Ice™




Remote Monitoring System For use on Hoshizaki KM Cuber ice machines

Model Number	For use with	Shipping Length	Shipping Width	Shipping Height	Shipping Weight	List F.O.B. Griffin
HS-5562	KM Cuber ice machines	8"	8"	3"	1 lb.	\$730

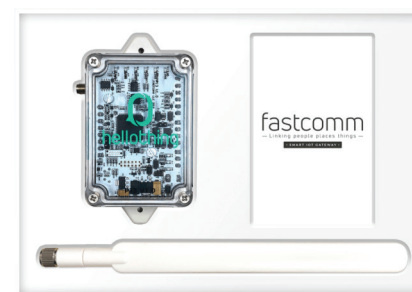

- Performance dashboard for status, historical data
- Alert notification by email or text
- Remotely diagnose machines
- Control functions: ON/OFF, Reset, Lock-down

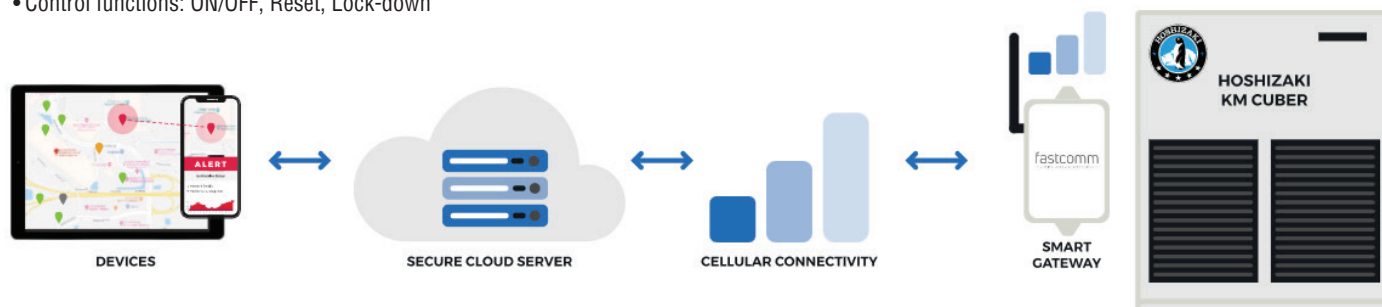



STEELHEART



HOSHIZAKI'S Steelheart Series is a commercial line engineered for durability, performance and efficiency. As anyone that runs a commercial kitchen knows, only the strong survive. Just like our legendary ice makers, we've designed our new refrigeration series to survive conditions that would send lesser equipment to the scrap yard. Without compromising performance, Hoshizaki seeks natural solutions such as sustainable materials and hydrocarbon refrigerants for a clean and healthy environment. Combined with Hoshizaki's unique ducted airflow technology, food products remain fresh, nutritious, and safe as a result of uniform temperatures and quick recovery.

- Hoshizaki Steelheart products comply with the Buy American Act
- All Stainless construction - inside and out
- Durable and easy to clean
- Designed to be reliable
- Fewer parts and non-critical features means less service calls
- Top mount refrigeration is easier to clean and creates more interior and exterior storage space
- Uprights accommodate full-size tray pans and roll through standard entryways with casters
- Uses environmentally friendly R290 hydrocarbon refrigerant
- Endlessly configurable to meet workflow needs
- Maintains NSF safe temperatures in 100° environments
- Air circulates evenly, even when over-stuffed



www.hoshizakiamerica.com/steelheart

REFRIGERATION MODEL NUMBER IDENTIFICATION CODE

STEELHEART



HORIZONTAL REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

S R 48 A - 18MD2

Series Identification

- U** Undercounter
- W** Worktop
- S** Sandwich Prep/Mega Top
- P** Pizza Prep
- C** Chef Base

Model Identification

- R** Refrigerator
- F** Freezer

Unit Width

- ##** In Inches

Series Modification

- A** Alphabetically increases per model revisions

Options Configuration

- LP / -D** Low Profile / Drawers
- # / -#D#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Sandwich Prep
- #M/ -#MD#** Number of 1/6 Sized Pan Capacity / Number of 1/6 Sized Pan Capacity with Number of Drawers in Mega Top
- 01** Unit with Cylinder Lock

SR48A-18MD2

Mega Top Prep Table,
Refrigerator,
48" Wide,
Revision A*,

(18) 1/6 Sized Pan Capacity in Rail,
Door and 2 Drawers*

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.



UPRIGHT REFRIGERATION | MODEL NUMBER IDENTIFICATION CODE

R 1 A - FS - FS

PT & RT ONLY

Model Identification

- R** Refrigerator
- F** Freezer
- DT** Dual Temp
- PT** Pass Thru
- RN** Roll In
- RT** Roll Thru

Number of Sections

- 1 / 2 / 3** One, Two, or Three Sections

Series Modification

- A** Alphabetically increases per model revisions

Door Configuration

- FS / -HS** Full Height or Half Height Stainless Door
- FG / -HG** Full Height or Half Height Glass Door
- FSL / -HSL** Full Height or Half Height Stainless Door, Left-Hand Hinge

RIA-FS

Upright Refrigerator,
One Section
Revision A*,

Full Stainless Door

*The series modification letter can be generally ignored when talking about the unit, this letter is important if you are getting Tech Support or ordering service parts.





STEELHEART

WARRANTY

EFFECTIVE: August 1, 2021

Supersedes all previous price lists

TERMS and CONDITIONS

Prices are F.O.B. Factory. All prices and specifications are subject to change without notice. HOSHIZAKI reserves the right to determine point of shipment.

TERMS:

Terms are such as the Company may extend to the purchaser.

LOST OR DAMAGED SHIPMENTS:

Whenever seller shall deliver or cause to be delivered to a common carrier any goods ordered by consignee, whether the particular common carrier shall have been designated in the shipping instructions of the consignee or not, seller shall not be responsible for any delays or damage in shipment and the common carrier to which seller shall deliver goods shipped to the consignee is hereby declared to the agent of the consignee. Therefore it is the responsibility of the consignee to file claim with the carrier for lost or damaged shipments.

WARRANTY

All units to be free from manufacturing defects, covered by:

Steelheart Series Refrigerators & Freezers

3-Year - Parts & Labor on entire machine
5-Year - Parts on Compressor

Compact Undercounter Refrigerators - HR24 & HR15

3-Year - Parts & Labor on entire machine

Back Bar Refrigerators & Glass Door Merchandisers

3-Year - Parts & Labor on entire machine
5-Year - Parts on Compressor

Economy Refrigeration Series

2 Year - Parts and Labor on entire machine
5 Year - Parts on Compressor

Warranty

Warranty valid in United States, Canada, Puerto Rico, & U.S. Territories only. Contact Factory for Warranty in other Countries. Refer to manufacturer's full warranty for complete details. Suggested List Prices are intended only as a guide. This does not restrict the price seller may establish due to market conditions.

AGENCY LISTINGS and MARKS



UPRIGHT REFRIGERATORS

STEELHEART



- Stainless steel interior and exterior front, sides and top
- Unique ducted air distribution system, maintains uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	R1A-FS (L) - Left-Hand hinge	R1A-HS (L) - Left-Hand hinge	R2A-FS	R2A-HS	R3A-FS	R3A-HS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	80.71 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.10 ft ³	23.10 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6 x 22.9"	21.25" x 26" (C) 6 x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	811 lbs.	811 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	4.3	4.3	7.1	7.1	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.25	1.25	3.47	3.47	4.39	4.39
Heat Rejection (BTU / hr)*	317	317	513	513	703	703
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$7,200	\$8,580	\$9,580	\$11,630	\$16,690	\$19,070

*Based on 100°F ambient cycling at set point

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

UPRIGHT REFRIGERATORS



R1A-FG



R1A-HG



R2A-FG



R2A-HG



R3A-FG
ENERGY STAR
Qualified



R3A-HG
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- Energy efficient thermostatic expansion valve/self contained refrigeration system
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- 4" Heavy duty stem casters standard
- Center shelves for added storage capacity

Model Number	R1A-FG	R1A-HG	R2A-FG	R2A-HG	R3A-FG	R3A-HG
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	74.3 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"	82.5" x 34.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	57"	57"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Center Shelves (C)	N/A	N/A	3	3	6	6
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	350 lbs.	350 lbs.	570 lbs.	570 lbs.	826 lbs.	826 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	5	5	8	8	9.5	9.5
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.47	2.47	5.05	5.05	6.5	6.5
Heat Rejection (BTU / hr)*	639	639	978	978	1255	1255
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F	31° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,930	\$10,540	\$12,250	\$13,740	\$23,670	\$25,210

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



UPRIGHT FREEZERS

STEELHEART



F1A-FS(L)

F1A-HS(L)

F2A-FS

F2A-HS

F3A-FS

F3A-HS

- Stainless steel interior and exterior front, sides and top
- 4" Heavy duty stem casters standard
- Unique ducted air distribution system, maintains a uniform cabinet temperatures even when full
- Energy efficient thermostatic expansion valve
- Self-closing stainless steel doors with spring assist hinges, stay open feature and locks

Model Number	F1A-FS (L) - Left-Hand hinge	F1A-HS (L) - Left-Hand hinge	F2A-FS	F2A-HS	F3A-FS	F3A-HS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	80.71 ft ³	80.71 ft ³
Interior Storage Capacity (AHAM)	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	79.03 ft ³	79.03 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 33.5" x 79.5"	27.5" x 33.5" x 79.5"	55" x 33.5" x 79.5"	55" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"	82.5" x 33.5" x 79.5"
Depth with Doors Open at 90°	59.25"	59.25"	59.25"	59.25"	59.25"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6	9	9
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 22.9"	21.25" x 26" (C) 6" x 22.9"
Crated Shipping Weight	345 lbs.	345 lbs.	562 lbs.	562 lbs.	830 lbs.	830 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 37.5" x 81"	31.5" x 37.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	86" x 37.5" x 81"	86" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	230V/60/1	230V/60/1
Amperage (AMP)	8.46	8.46	8.7	8.7	11	11
HACR Breaker (AMP)	15	15	15	15	20	20
Energy Consumption (kWh / day) ASHRAE	6.25	6.25	12.16	12.16	17.02	17.02
Heat Rejection (BTU / hr)*	1178	1178	1820	1820	1643	1643
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	208 - 254	208 - 254
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,990	\$10,220	\$12,600	\$14,380	\$18,700	\$20,750

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

UPRIGHT FREEZERS /DUAL TEMP



F1A-FG



F1A-HG



F2A-FG



F2A-HG



DT1A-HS



DT2A-FS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Dual temperature cabinets for space efficiency
- 4" Heavy duty stem casters standard even when full

Model Number	F1A-FG	F1A-HG	F2A-FG	F2A-HG	DT1A-HS	DT2A-FS
Nominal Storage Capacity	23.61 ft ³	23.61 ft ³	52.16 ft ³	52.16 ft ³	10.05 ft ³	47.22 ft ³
Interior Storage Capacity (AHAM) - Refrigerator Freezer	23.1 ft ³	23.1 ft ³	50.37 ft ³	50.37 ft ³	10.19 ft ³ 10.19 ft ³	23.10 ft ³ 23.10 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 34.5" x 79.5"	27.5" x 34.5" x 79.5"	55" x 34.5" x 79.5"	55" x 34.5" x 79.5"	27.5" x 35" x 79.5"	55" x 33.5" x 79.5"
Depth with Doors Open at 90°	57"	57"	57"	57"	61.75"	59.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each	27.75" each	59.25"
Adjustable Shelves	3	3	6	6	3	3
Center Shelves (C)	N/A	N/A	3	3	N/A	N/A
Shelf Dimensions (W x D)	21.25" x 26"	21.25" x 26"	(L/R) 21.25" x 26" (C) 6" x 17.8"	(L/R) 21.25" x 26" (C) 6" x 17.8"	21.25" x 26"	21.25" x 26"
Crated Shipping Weight	365 lbs.	365 lbs.	602 lbs.	602 lbs.	415 lbs.	634 lbs.
Crated Shipping Dimensions (L x W x H)	37.5" x 31.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"	58" x 37.5" x 81"	37.5" x 31.5" x 81"	58" x 37.5" x 81"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	8.5	8.5	9.1	9.1	5.5	14
HACR Breaker (AMP)	15	15	15	15	15	20
Energy Consumption (kWh / day) ASHRAE	7.73	7.73	16.3	16.3	4.49	8.59
Heat Rejection (BTU / hr)*	806	806	1694	1694	168 439	376 1401
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104-126
Ambient Temp. Range	45° - 80°F	45° - 100°F	45° - 80°F	45° - 100°F	45° - 100°F	45° to 100°F
Control Set Point Range - Refrigerator Freezer	-10° - +12°F	-10° - +12°F	-10° - +12°F	-10° - +12°F	33° to 52°F - 10° to 10°F	33° to 52°F - 10° to 10°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$13,230	\$13,570	\$18,700	\$19,540	\$16,220	\$21,320

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices

PASS THRU REFRIGERATORS

STEELHEART



PT1A-FS-FS
(Shown with door open)
ENERGY STAR
Qualified



PT1A-HS-HS
ENERGY STAR
Qualified



PT2A-FS-FS



PT2A-HS-HS

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FS-FS	PT1A-HS-HS	PT2A-FS-FS	PT2A-HS-HS
Interior Storage Capacity (AHAM)	24.2 ft ³	24.2 ft ³	52.50 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 35.75" x 79.5"	27.5" x 35.75" x 79.5"	55" x 35.75" x 79.5"	55" x 35.75" x 79.5"
Depth with Doors Open at 90°	87.25"	87.25"	87.25"	87.25"
Interior Door Opening Width	21.75"	21.75"	21.75"	21.75"
Interior Door Opening Height	59.25"	27.75" each	59.25"	27.75" each
Adjustable Shelves	3	3	6	6
Center Shelves (C)	N/A	N/A	6	6
Shelf Dimensions (W x D)	21.25" x 30.75"	21.25" x 30.75"	21.25" x 26" (C) 6" x 17.8"	21.25" x 26" (C) 6" x 17.8"
Crated Shipping Weight	357 lbs	357 lbs	592 lbs	592 lbs
Crated Shipping Dimensions (L x W x H)	38.5" x 31.5" x 81"	38.5" x 31.5" x 81"	58" x 38.5" x 81"	58" x 38.5" x 81"
Voltage	115/60/1	115/60/1	115/60/1	115/60/1
Amperage (AMP)	5	5	8	8
HACR Breaker (AMP)	15.0 Amps	15.0 Amps	15.0 Amps	15.0 Amps
Energy Consumption (kWh / day) ASHRAE	1.31	1.31	3.24	3.24
Heat Rejection (BTU / hr)*	348	348	581	581
Voltage Range	104-126	104-126	104-126	104-126
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	31° to 52°F	31° to 52°F	31° to 52°F	31° to 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$15,140	\$17,490	\$20,400	\$24,070

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

PASS THRU REFRIGERATORS



PT1A-FG-FG



PT2A-FG-FG

- Stainless steel interior and exterior front, sides and top
- Lockable doors are energy efficient multi pane, argon filled
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- 4" Heavy duty stem casters standard, two with brakes

Model Number	PT1A-FG-FG	PT2A-FG-FG
Interior Storage Capacity (AHAM)	24.2 ft ³	52.50 ft ³
Overall Dimensions (W x D x H including 4" casters)	27.5" x 37.75" x 79.5"	55" x 37.75" x 79.5"
Depth with Doors Open at 90°	82.5"	82.5"
Interior Door Opening Width	21.75"	21.75"
Interior Door Opening Height	59.25"	59.25"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.75" x 30.75"	21.25" x 26"
Crated Shipping Weight	367 lbs.	681 lbs.
Crated Shipping Dimensions (L x W x H)	41.25" x 31.5" x 81"	58" x 41.25" x 81"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	5	8
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.68	6
Heat Rejection (BTU / hr)*	653	1429
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Control Set Point Range	31° to 52°F	31° to 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$18,170	\$25,560

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



ROLL IN REFRIGERATORS

STEELHEART



RN1A-FS



RN2A-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Roll in racks up to 72" tall (supplied by others) roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RN1A-FS	RN2A-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 38.9" x 87.5"	68" x 38.9" x 87.5"
Depth with Doors Open at 90°	65.25"	65.25"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	429 lbs	676 lbs
Crated Shipping Dimensions (L x W x H)	40.5" x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$13,360	\$19,330

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



STEELHEART

ROLL THRU REFRIGERATORS



RT1A-FS-FS



RT2A-FS-FS

- Stainless steel interior and exterior front, sides and top
- Environmentally friendly R290 hydrocarbon refrigerant
- All models come with energy efficient vertical LED lights
- Unique ducted air distribution system, maintains a uniform cabinet temperatures
- Reinforced stainless steel ramp and floor accommodate roll in racks up to 72" tall (supplied by others)
- Made to order

Model Number	RT1A-FS-FS	RT2A-FS-FS
Interior Storage Capacity (AHAM)	38.13 ft ³	78.35 ft ³
Overall Dimensions (W x D x H including 4" casters)	35" x 45.5" x 87.5"	68" x 45.5" x 87.5"
Depth with Doors Open at 90°	98.5"	98.5"
Interior Door Opening Width	29.25"	29.25"
Interior Door Opening Height	72.75"	72.75"
Crated Shipping Weight	459 lbs	737 lbs
Crated Shipping Dimensions (L x W x H)	40.5 x 39" x 93.5"	72" x 40.5" x 93.75"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	6.4	8.2
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	3.186	5.06
Heat Rejection (BTU / hr)*	774	1376
Voltage Range	104-126	104-126
Ambient Temp. Range	45° to 100°	45° to 100°
Control Set Point Range	31° - 52°F	31° - 52°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$17,240	\$24,950

*Based on 100°F ambient cycling at set point
See Refrigeration Accessories on pages 84-89 for options and prices



COMPACT UNDERCOUNTER REFRIGERATORS

STEELHEART



HR15A
ENERGY STAR
Qualified



HR15A-G
ENERGY STAR
Qualified



HR24C
ENERGY STAR
Qualified



HR24C-G
ENERGY STAR
Qualified

- Stainless steel interior and exterior
- UL approval for outdoor use
- ADA Compliant 
- Lockable stainless steel door is field reversible
- Ducted air flow for even air distribution throughout cabinet
- Interior LED lighting

Model Number	HR15A	HR15A-G	HR24C	HR24C-G
Interior Storage Capacity (AHAM)	2.54 ft ³	2.54 ft ³	4.0 ft ³	3.87 ft ³
Overall Dimensions (W x D x H including legs)	14.8" x 25.75" x 31.5"	14.8" x 25.75" x 31.5"	23.4" x 24.7" x 31.5"	23.4" x 24.7" x 31.5"
Depth with Doors Open at 90°	37.25"	37.25"	46.7"	46.7"
Interior Door Opening Width	25.75"	24.7"	24.7"	24.7"
Adjustable Shelves	2	2	3	3
Shelves (#) / Dimensions(W x D)	(2) / 10" x 20" adjustable slide out shelf	(2) 10" x 20"	(1) / 18.5" x 17" (2) / 18.5" x 12"	(1) / 18.5" x 17" (2) / 18.5" x 12"
Crated Shipping Weight	115 lbs	115 lbs	115 lbs	115 lbs
Crated Shipping Dimensions (L x W x H)	30.6" x 18.75" x 37"	30.6" x 18.75" x 37"	26" x 30" x 37"	26" x 30" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	.9	.9	1	.9
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.54	0.54	0.64	0.655
Heat Rejection (BTU/hr)	145	145	648	648
Voltage Range	104 - 127	104-127	115 - 127	115 - 127
Ambient Temp. Range	45° - 90°F	45° - 90°F	45° - 100°F	45° - 100°F
Control Set Point Range	33° - 41°F	28° - 40°F	34° - 52°F	34° - 52°F
Refrigerant	R600a	R600a	R600a	R600a
List F.O.B. Griffin	\$2,440	\$4,400	\$3,130	\$5,650



STEELHEART

UNDERCOUNTER REFRIGERATORS



UR27B(-01)
ENERGY STAR
Qualified



UR27B-LP
ENERGY STAR
Qualified



UR36B(-01)
ENERGY STAR
Qualified



UR48A(-01)
ENERGY STAR
Qualified



UR60A(-01)
ENERGY STAR
Qualified



UR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Electronic controls

Model Number	UR27B UR27B-01** (01 Cylinder Door Lock)	UR27B-LP Low Profile unit meets ADA requirements	UR36B UR36B-01** (01 Cylinder Door Lock)	UR48A UR48A-01** (01 Cylinder Door Lock)	UR60A UR60A-01** (01 Cylinder Door Lock)	UR72A UR72A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	7.21 ft ³	9.9 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	6.21 ft ³	8.64 ft ³	12 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	36" x 30" x 33.75"	48" x 30" x 33.63"	60" x 30" x 33.63"	72" x 30" x 33.63"
Depth with Doors Open at 90°	55.5"	55.5"	58.5"	52.5"	58.5"	51.5"
Interior Door Opening Width	22.75"	22.75"	25.5"	19.5"	25.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	1	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	31" x 16"	21.5" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	173 lbs.	173 lbs.	204 lbs.	250 lbs.	295 lbs.	340 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	40.5" x 34" x 36.5"	51" x 32" x 36"	62" x 34" x 36"	74" x 34" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.7	2.5	2.6	3.1	3.0
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.65	0.69	0.8	0.89	1.3
Heat Rejection (BTU / hr)	193	193	184	215	291	263.5
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,310 **\$4,590	\$4,310	\$5,830 **\$6,120	\$6,410 **\$6,960	\$7,110 **\$7,660	\$8,150 **\$8,990

****SPECIAL ORDER** - Please contact your local HOSHIZAKI Sales Representative for availability.
See Refrigeration Accessories on pages 84-89 for options and prices

UNDERCOUNTER GLASS DOOR REFRIGERATORS & FREEZER

STEELHEART



UR27B-GLP01
ENERGY STAR
Qualified



UR48A-GLP01
ENERGY STAR
Qualified



UF27B-GLP01
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Standard 2.25" casters (2 with brakes)
- Glass doors with locks are energy efficient multi pane, argon filled
- Energy efficient LED interior lights with on/off switch
- Meets ADA requirements 
- Field reversible glass doors

Model Number	UR27B-GLP01	UR48A-GLP01	UF27B-GLP01
Nominal Storage Capacity	7.21 ft³	13.66 ft³	7.21 ft³
Interior Storage Capacity (AHAM)	6.21 ft³	11.95 ft³	6.21 ft³
Overall Dimensions W x D x H including (2.25" casters)	27" x 31.5" x 31.9"	48" x 31.5" x 31.9"	27" x 31.5" x 31.9"
Depth with Doors Open at 90°	55.5"	52"	55.5"
Interior Door Opening Width	22.75"	19.5"	22.75"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	1	1
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	265 lbs.	189 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 35.5"	52.5" x 36" x 35.5"	36" x 31.5" x 35.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	2.6	3
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.15	1.15	4.32
Heat Rejection (BTU / hr)	263	465	468
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 80°F
Temperature Range	32° - 52°F	32° - 52°F	-10° - 10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$6,230	\$9,100	\$6,790

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

UNDERCOUNTER FREEZERS



UF27B(-01)



UF27B-LP



UF48A(-01)



UF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 4" Stem casters standard (2.25" casters - LP model)
- Enamel coated evaporator coil

Model Number	UF27B UF27B-01** (01 Cylinder Door Lock)	UF27B-LP Low Profile unit meets ADA requirements	UF48A UF48A-01** (01 Cylinder Door Lock)	UF60A UF60A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	7.21 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	6.21 ft ³	12 ft ³	15.38 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	27" x 30" x 31.9"	48" x 30" x 33.63"	60" x 30" x 33.63"
Depth with Doors Open at 90°	55.5"	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	22" x 16"	21.5" x 16"	27.25" x 16"
Crated Shipping Weight	175 lbs.	175 lbs.	270 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	34" x 31.5" x 35.5"	51" x 32" x 36"	62" x 34" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.4	5.9	5.6
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	2.4	3.64	4.22
Heat Rejection (BTU / hr)	489	509	656	804.2
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$5,040 **\$5,310	\$5,230	\$7,430 **\$7,980	\$9,250 **\$9,800

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices

UNDERCOUNTER REFRIGERATORS with DRAWERS

STEELHEART



UR27B-D2



UR48A-D4



UR60A-D4



UR72A-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Enamel coated evaporator coil

Model Number	UR27B-D2	UR48A-D4	UR60A-D4	UR72A-D6
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.63"	60" x 30" x 33.63"	72" x 30" x 33.63"
Depth with Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	203 lbs.	315 lbs.	365 lbs.	445 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	51" x 32" x 36"	62" x 34" x 36"	74" x 34" x 36"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.6	3.3	3.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.4	2.6	2.8
Heat Rejection (BTU / hr)	152	203	370	398
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,680	\$11,110	\$12,440	\$16,180

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

UNDERCOUNTER FREEZERS with DRAWERS



UF27B-D2



UF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient

- Heavy duty drawers with removeable gaskets
- 4" Stem casters standard
- Electronic controls

Model Number	UF27B-D2	UF48A-D4
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 30" x 33.75"	48" x 30" x 33.63
Depth with Drawer Fully Open	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	207 lbs.	330 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 36.5"	52.5" x 34" x 36.5"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	5.9
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	6.08
Heat Rejection (BTU / hr)	489	864
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$7,940	\$12,100

See Refrigeration Accessories on pages 84-89 for options and prices

WORKTOP REFRIGERATORS

STEELHEART



WR27B(-01)
ENERGY STAR
Qualified



WR36B(-01)
ENERGY STAR
Qualified



WR48A(-01)
ENERGY STAR
Qualified



WR60A(-01)
ENERGY STAR
Qualified



WR72A(-01)
ENERGY STAR
Qualified

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed in place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Enamel coated evaporator coil
- 6" Stem casters standard

Model Number	WR27B WR27B-01** (01 Cylinder Door Lock)	WR36B WR36B-01** (01 Cylinder Door Lock)	WR48A WR48A-01** (01 Cylinder Door Lock)	WR60A WR60A-01** (01 Cylinder Door Lock)	WR72A WR72A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	9.9 ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	8.64 ft ³	12 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	36" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Doors Open at 90°	55.5"	58.5"	52.5"	58.5"	52.5"
Interior Door Opening Width x Height	22.75" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Adjustable Shelves	1	1	2	2	3
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.38" x 16"	27.25" x 16"	22" x 16"
Crated Shipping Weight	183 lbs.	216 lbs.	260 lbs.	305 lbs.	350 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	40.5" x 34" x 40.5"	51" x 32" x 40.25"	62" x 34" x 40.25"	74" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.7	2.5	2.6	3.1	4.2
HACR Breaker (AMP)	15	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	0.69	0.80	0.89	1.3
Heat Rejection (BTU / hr)	193	184	215	291	263.5
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,510 **\$4,780	\$6,160 **\$6,430	\$6,710 **\$7,260	\$7,460 **\$8,010	\$8,540 **\$9,370

****SPECIAL ORDER - Please contact your local HOSHIZAKI Sales Representative for availability.**
See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

WORKTOP FREEZERS



WF27B(-01)



WF48A(-01)



WF60A(-01)

- Stainless steel interior and exterior front, sides and top
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Field reversible doors
- Electronic controls
- 6" Stem casters standard

Model Number	WF27B WF27B-01** (01 Cylinder Door Lock)	WF48A WF48A-01** (01 Cylinder Door Lock)	WF60A WF60A-01** (01 Cylinder Door Lock)
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	17.55 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.38 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"
Depth with Doors Open at 90°	55.5"	52.5"	58.5"
Interior Door Opening Width	22.75"	19.5"	25.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	1	2	2
Shelf Dimensions (W x D)	22" x 16"	21.38" x 16"	27.25" x 16"
Crated Shipping Weight	185 lbs.	285 lbs.	320 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	51" x 34" x 40.25"	62" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	5.9	5.6
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	3.64	4.22
Heat Rejection (BTU / hr)	489	656	804.2
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$5,290 **\$5,570	\$7,770 **\$8,320	\$9,610 **\$10,160

****SPECIAL ORDER** - Please contact your local HOSHIZAKI Sales Representative for availability.
See Refrigeration Accessories on pages 84-89 for options and prices



WORKTOP REFRIGERATORS with DRAWERS

STEELHEART



WR27B-D2



WR48A-D4



WR60A-D4



WR72A-D6

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Heavy duty drawers with removeable gaskets
- 6" Stem casters standard
- Electronic controls

Model Number	WR27B-D2	WR48A-D4	WR60A-D4	WR72A-D6
Nominal Storage Capacity	7.21ft ³	13.66 ft ³	17.55 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	12 ft ³	15.38 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"	60" x 30" x 40"	72" x 30" x 40"
Depth with Drawer Fully Open	51"	51"	51"	51"
Drawer Opening Width x Height	22.75" x 23"	19.5" x 23"	25.5" x 23"	19.5" x 23"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Crated Shipping Weight	214 lbs.	325 lbs.	380 lbs.	450 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	51" x 34" x 40.25"	62" x 34" x 40.25"	74" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3	2.6	3.3	3.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.65	1.4	2.6	2.8
Heat Rejection (BTU / hr)	152	203	370	398
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,820	\$11,290	\$12,700	\$16,740

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

WORKTOP FREEZERS with DRAWERS



WF27B-D2



WF48A-D4

- Stainless steel interior and exterior front, sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 6" Stem casters standard
- Heavy duty drawers with removeable gaskets
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Electronic controls

Model Number	WF27B-D2	WF48A-D4
Nominal Storage Capacity	7.21 ft³	13.66 ft³
Interior Storage Capacity (AHAM)	6.21 ft³	12 ft³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 40"	48" x 30" x 40"
Depth with Drawer Fully Open	51"	51"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 Size and (1) 1/3 Size, 6" deep
Crated Shipping Weight	218 lbs.	285 lbs.
Crated Shipping Dimensions (L x W x H)	34" x 31.5" x 40.5"	51" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3	5.9
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	2.4	6.08
Heat Rejection (BTU / hr)	489	864
Voltage Range	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F
Temperature Range	-10° - +10°F	-10° - +10°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$8,280	\$12,470

See Refrigeration Accessories on pages 84-89 for options and prices

DRAWER / DOOR COMBINATION REFRIGERATORS

STEELHEART



UR48A-D2



UR60A-D2



WR48A-D2



WR60A-D2

- Stainless steel interior and exterior front sides and top
- Door/Drawer configuration can be located in any cabinet section
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Enamel coated evaporator coil
- Field reversible doors

Model Number	UR48A-D2	UR60A-D2	WR48A-D2	WR60A-D2
Nominal Storage Capacity	13.66 ft³	17.55 ft³	13.66 ft³	17.55 ft³
Interior Storage Capacity (AHAM)	12 ft³	15.38 ft³	12 ft³	15.38 ft³
Overall Dimensions (L x W x H)	48" x 30" x 33.63" (including 4" casters)	60" x 30" x 33.63" (including 4" casters)	48" x 30" x 40" (including 6" casters)	60" x 30" x 40" (including 6" casters)
Depth With Door Open At 90°	51.5"	58.5"	51.5"	58.5"
Depth With Drawer Fully Open	51"	51"	51"	51"
Door Opening Width x Height	19.5" x 23"	25.5" x 23"	19.5" x 23"	25.5" x 23"
Shelves (#) / Dimensions(W x D)	(1) / 21.38" x 16"	(1) / 27.25" x 16"	(1) / 21.38" x 16"	(1) / 27.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep	(1) 1/2 and (1) 1/3 size pans, 6" deep	(1) full size pan, 6" deep
Crated Shipping Weight	285 lbs.	288 lbs.	295 lbs.	340 lbs.
Crated Shipping Dimensions (L x W x H)	51" x 32" x 36"	62.5" x 34" x 36.5"	51" x 32" x 40.25"	62" x 34" x 40.25"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.6	3.3	2.6	3.3
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	1.4	2.6	1.4	2.6
Heat Rejection (BTU / hr)	203	370	203	370
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$8,810	\$9,540	\$9,040	\$9,790

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable. See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.





STEELHEART

PREP TABLES SANDWICH TOP REFRIGERATORS



SR27B-8



SR36B-10



SR48A-8



SR48A-12

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR27B-8	SR36B-10	SR48A-8	SR48A-12
Nominal Storage Capacity	7.21 ft ³	9.9 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.21 ft ³	8.7 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	36" x 30" x 44.25"	48" x 30" x 44.25"	48" x 30" x 44.25"
Depth with Cutting Board installed	30.5"	30.5"	30.7"	30.7"
Depth with Doors Open at 90°	55.5"	57.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	10	8	12
Crated Shipping Weight	202 lbs.	245 lbs.	300 lbs.	300 lbs.
Crated Shipping Dimensions (L x W x H)	32" x 31.5" x 46.5"	40.5" x 32" x 46.5"	52.5" x 32" x 45.75"	52.5" x 32" x 45.75"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.7	2.5	2.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	2.6	3.2	3.2
Heat Rejection (BTU / hr)	361	364.1	452.3	452.3
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$4,900	\$6,950	\$6,860	\$7,720

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES SANDWICH TOP REFRIGERATORS

STEELHEART



- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient.
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- Field reversible doors

Model Number	SR60A-8	SR60A-12	SR60A-16	SR72A-12	SR72A-16	SR72A-18
Nominal Storage Capacity	17.55 ft ³	17.55 ft ³	17.55 ft ³	21.25 ft ³	21.25 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	15.38 ft ³	15.38 ft ³	15.38 ft ³	18.63 ft ³	18.63 ft ³	18.63 ft ³
Overall Dimensions (W x D x H including 6" casters)	60" x 30" x 44.25"	60" x 30" x 44.25"	60" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"	72" x 30" x 44.25"
Depth with Cutting Board installed	30.7"	30.7"	30.7"	30.7"	30.7"	30.7"
Depth with Doors Open at 90°	58.5"	58.5"	58.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	8	12	16	12	16	18
Crated Shipping Weight	350 lbs.	350 lbs.	350 lbs.	405 lbs.	410 lbs.	420 lbs.
Crated Shipping Dimensions (L x W x H)	62" x 34" x 46"	62" x 34" x 46"	62" x 34" x 46"	74" x 34" x 46"	74" x 34" x 46"	74" x 34" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6	6.3	6.3	6.3
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.3	4.3	4.3	6.2	6.2	6.2
Heat Rejection (BTU / hr)	613	613	613	876	876	876
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$8,360	\$8,500	\$8,050	\$9,850	\$9,930	\$9,460

See Refrigeration Accessories on pages 84-89 for options and prices



STEELHEART

PREP TABLES - SANDWICH TOP REFRIGERATORS with DRAWERS



SR27B-8D2



SR48A-12D4



SR48A-12D2**

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board standard
- 6" Stem casters standard

Model Number	SR27B-8D2	SR48A-12D4	SR48A-12D2
Nominal Storage Capacity	7.21 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 30" x 44.25"	48" x 30" x 44.25"	48" x 30" x 44.25"
Depth With Cutting Board Installed	30.5"	30.7"	30.7"
Depth With Door Open At 90°	N/A	N/A	52.5"
Depth With Drawer Fully Open	52"	52"	52"
Door/Drawer Opening Width	19.5"	19.5"	19.5"
Adjustable Shelves / Shelf Dimensions (WxD)	N/A	N/A	(1) 21.25" x 16"
Drawer Pan Capacity (pans by others)	(1) 12 x 20 full size pan and (2) ¼ size pans. Bottom drawer will accommodate (1) full size pan.	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pans 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	8 (6" max. pan depth)	12 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	242 lbs	335 lbs.	335 lbs.
Crated Shipping Dimensions (L x W x H)	32"x 31.5" x 46.5"	52.5" x 32" x 46.5"	52.5" x 32" x 46.5"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.5	2.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	2.54	3.2	3.2
Heat Rejection (BTU / hr)	361	452.3	452.3
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° -100°F
Temperature Range	32° -52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$7,680	\$12,290	\$10,430

**Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable.
See Refrigeration Accessories on pages 84-89 for options and prices

PREP TABLES MEGA TOP REFRIGERATORS

STEELHEART



SR27B-12M



SR36B-15M



SR48A-12M



SR48A-18M

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27B-12M	SR36B-15M	SR48A-12M	SR48A-18M
Nominal Storage Capacity	7.21 ft ³	9.9 ft ³	13.66 ft ³	13.66 ft ³
Interior Storage Capacity (AHAM)	6.22 ft ³	8.7 ft ³	11.95 ft ³	11.95 ft ³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	36" x 34" x 44.25"	48" x 34" x 44.25"	48" x 34" x 44.25"
Depth with Cutting Board installed	36.5"	36.5"	37.3"	37.3"
Depth with Doors Open at 90°	52.5"	58.5"	52.5"	52.5"
Interior Door Opening Width	22.75"	25.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"
Adjustable Shelves	1	1	2	2
Shelf Dimensions (W x D)	22" x 16"	31" x 16"	21.25" x 16"	21.25" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	15	12	18
Crated Shipping Weight	217 lbs.	258 lbs.	305 lbs.	315 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 31.5" x 46.5"	40.5" x 36" x 46.5"	51" x 36" x 46"	51" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.3	2.3	2.5	2.5
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	2.54	1.82	3.2	3.2
Heat Rejection (BTU / hr)	261	258	452.3	452.3
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$5,880	\$7,560	\$8,930	\$8,550

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

PREP TABLES MEGA TOP REFRIGERATORS



SR60A-12M



SR60A-18M



SR60A-24M



SR72A-18M



SR72A-24M



SR72A-30M

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and doors are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR60A-12M	SR60A-18M	SR60A-24M	SR72A-18M	SR72A-24M	SR72A-30M
Nominal Storage Capacity	17.55 ft³	17.55 ft³	17.55 ft³	21.25 ft³	21.25 ft³	21.25 ft³
Interior Storage Capacity (AHAM)	15.38 ft³	15.38 ft³	15.38 ft³	18.63 ft³	18.63 ft³	18.63 ft³
Overall Dimensions (W x D x H including 6" casters)	60" x 34" x 44.25"	60" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	37.3"	37.3"	37.3"	37.3"	37.3"
Depth With Doors Open At 90°	57.5"	57.5"	57.5"	52.5"	52.5"	52.5"
Interior Door Opening Width	25.5"	25.5"	25.5"	19.5"	19.5"	19.5"
Interior Door Opening Height	23"	23"	23"	23"	23"	23"
Adjustable Shelves	2	2	2	2	2	2
Shelf Dimensions (W x D)	27.25" x 16"	27.25" x 16"	27.25" x 16"	22" x 16"	22" x 16"	22" x 16"
Pan Capacity (# of 1/6 size x 4" deep)	12	18	24	18	24	30
Crated Shipping Weight	365 lbs.	375 lbs.	383 lbs.	420 lbs.	435 lbs.	440 lbs.
Crated Shipping Dimensions (L x W x H)	61.75" x 36" x 46"	61.75" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6.0	6.0	6.0	6.1	6.1	6.1
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	4.3	4.3	4.3	6.1	6.1	6.1
Heat Rejection (BTU / hr)	613	613	613	874	874	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$9,850	\$9,960	\$9,580	\$11,350	\$11,540	\$10,950

See Refrigeration Accessories on pages 84-89 for options and prices



PREP TABLES - MEGA TOP REFRIGERATORS with DRAWERS

STEELHEART



SR27B-12MD2



SR48A-18MD4



SR60A-24MD4



SR72A-30MD6

- Stainless steel interior and exterior front, sides and top
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 10" Cutting board with extended top for greater stability
- 6" Stem casters standard

Model Number	SR27B-12MD2	SR48A-18MD4	SR60A-24MD4	SR72A-30MD6
Nominal Storage Capacity	7.21 ft³	13.66 ft³	17.55 ft³	21.25 ft³
Interior Storage Capacity (AHAM)	6.22 ft³	11.95 ft³	15.4 ft³	18.63 ft³
Overall Dimensions (W x D x H including 6" casters)	27" x 34" x 44.25"	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"
Depth With Cutting Board Installed	37.3"	37.3"	37.3"	37.3"
Depth With Drawer Fully Open	52"	52"	52"	52"
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 12" x 20" x 6" deep pan per drawer	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	12 (6" max. pan depth)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	250 lbs.	380 lbs.	460 lbs.	540 lbs.
Crated Shipping Dimensions (L x W x H)	36" x 29" x 46"	51" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.4	2.5	6	6.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	1.9	3.2	4.3	6.1
Heat Rejection (BTU / hr)	270	452.3	613	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$9,340	\$13,260	\$15,970	\$19,530

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

PREP TABLES - MEGA TOP DRAWER / DOOR COMBINATIONS



SR48A-18MD2



SR60A-24MD2



SR72A-30MD2



SR72A-30MD4

- Stainless steel interior and exterior front sides and top
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Provided with full complement of polycarbonate plastic 1/6th size pans 4" deep
- Door/Drawer configuration can be located in any cabinet section
- Field reversible doors

Model Number	SR48A-18MD2	SR60A-24MD2	SR72A-30MD2	SR72A-30MD4
Nominal Storage Capacity	13.66 ft ³	17.55 ft ³	21.25 ft ³	21.25 ft ³
Interior Storage Capacity (AHAM)	11.95 ft ³	15.38 ft ³	19.7 ft ³	19.7 ft ³
Overall Dimensions (W x D x H including 6" casters)	48" x 34" x 44.25"	60" x 34" x 44.25"	72" x 34" x 44.25"	72" x 34" x 44.25"
Depth with Cutting Board installed	37.3"	37.3"	37.3"	37.3"
Depth with Door Open at 90°	51"	51"	51"	51"
Depth With Drawer Fully Open	51"	51"	51"	51"
Shelves (#) / Dimensions (WxD)	(1) / 21.25" x 16"	(1) / 27.25" x 16"	(2) / 22" x 16"	(1) / 22" x 16"
Drawer Pan Capacity (pans by others)	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) full size pan 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep	(1) 1/2 and (1) 1/3 size pan per drawer, 6" deep
Pan Capacity (# of 1/6 size x 4" deep)	18 (6" max. pan depth)	24 (6" max. pan depth)	30 (6" max. pan depth)	30 (6" max. pan depth)
Crated Shipping Weight	345 lbs.	420 lbs.	475 lbs.	510 lbs.
Crated Shipping Dimensions (L x W x H)	51" x 36" x 46"	61.75" x 36" x 46"	73.75" x 36" x 46"	73.75" x 36" x 46"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	6.0	6.1	6.1
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) NSF	3.2	4.3	6.1	6.1
Heat Rejection (BTU / hr)	452.3	613	874	874
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F	45° -100°F
Temperature Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$11,580	\$14,340	\$15,680	\$17,520

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable.
See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.

PREP TABLES - PIZZA REFRIGERATORS

STEELHEART



PR46A



PR67A



PR93A

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Full complement of 1/3rd size pans are standard
- 1/2" x 19" Cutting board standard

Model Number	PR46A	PR67A	PR93A
Nominal Storage Capacity	11 ft³	19.9 ft³	30 ft³
Overall Dimensions (W x D x H including 6" casters)	46" x 32.25" x 43.5"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36"	35"	35"
Depth with Doors Open at 90°	59.5"	56.75"	56.75"
Interior Door Opening Width	22.5"	22.5"	22.5"
Interior Door Opening Height	23"	23"	23"
Adjustable Shelves	2	4	6
Shelf Dimensions (W X D)	22" x 16"	24.75" x 25.5"	24.75" x 25.5"
Pan Capacity (# of 1/3 size x 4" deep)	6 (6" max. pan depth)	9 (6" max. pan depth)	12 (6" max. pan depth)
Crated Shipping Weight	312 lbs.	420 lbs.	577 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	4.8	5.4	6.2
Heat Rejection (BTU / hr)	688	767	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$9,610	\$13,310	\$17,800

See Refrigeration Accessories on pages 84-89 for options and prices





STEELHEART

PREP TABLES - PIZZA REFRIGERATORS with DRAWERS



PR46A-D2



PR67A-D4



PR93A-D6

- Stainless steel interior and exterior front, sides and top
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Adjustable ducted air distribution for rail/cabinet
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- 1/2" x 19" Cutting board standard

Model Number	PR46A-D2	PR67A-D4	PR93A-D6
Nominal Storage Capacity	11 ft ³	19.9 ft ³	30 ft ³
Overall Dimensions (W x D x H including casters)	46" x 32.25" x 43.5"	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	36"	36"	36"
Depth with Drawer Fully Open	56.5"	56.5"	56.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	6	9	12
Crated Shipping Weight	365 lbs.	505 lbs.	693 lbs.
Crated Shipping Dimensions (L x W x H)	48.75" x 34.75" x 45"	69" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	4.8	5.4	6.2
Heat Rejection (BTU / hr)	688	767	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Control Set Point Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$12,190	\$18,940	\$26,170

See Refrigeration Accessories on pages 84-89 for options and prices

PREP TABLES - PIZZA DRAWER / DOOR COMBINATIONS

STEELHEART



PR67A-D2



PR93A-D2



PR93A-D4

- Stainless steel interior and exterior front sides and top
- Provided with full complement of polycarbonate plastic 1/3rd size pans 4" deep
- Enamel coated evaporator coil
- Engineered to maintain NSF-7 temperatures in 100°F ambient
- Cabinet and drawers are insulated with 2" foamed-in-place polyurethane
- Door/Drawer configuration can be located in any cabinet section
- Adjustable ducted air distribution for rail/cabinet

Model Number	PR67A-D2	PR93A-D2	PR93A-D4
Interior Storage Capacity (AHAM)	19.9 ft ³	30 ft ³	30 ft ³
Overall Dimensions (W x D x H including 6" casters)	67" x 32.25" x 43.5"	93" x 32.25" x 43.5"	93" x 32.25" x 43.5"
Depth with Cutting Board installed	35"	35"	35"
Depth with Door Open at 90°	56.75"	56.75"	56.75"
Depth with Drawer Fully Open	56.5"	56.5"	56.5"
Door Opening Width	22.5"	22.5"	22.5"
Door Opening Height	23"	23"	23"
Shelves (#) / Dimensions (WxD)	(2) / 24.75" x 25.5"	(4) / 24.75" x 25.5"	(2) / 24.75" x 25.5"
Drawer Pan Capacity (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans
Pan Capacity (# of 1/3 size x 4" deep)	9	12	12
Crated Shipping Weight	465 lbs.	616 lbs.	654 lbs.
Crated Shipping Dimensions (L x W x H)	70" x 36" x 45"	95" x 34.75" x 45"	95" x 34.75" x 45"
Voltage	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	6	6.5	6.5
HACR Breaker (AMP)	15	15	15
Energy Consumption (kWh / day) NSF	5.4	6.2	6.2
Heat Rejection (BTU / hr)	767	877	877
Voltage Range	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° -100°F	45° -100°F	45° -100°F
Temperature Range	14° - 45°F	14° - 45°F	14° - 45°F
Refrigerant	R290	R290	R290
List F.O.B. Griffin	\$16,300	\$20,870	\$23,660

Made to order: Allow 4-6 week lead time. Door and drawer configuration is customizable.
See Refrigeration Accessories on pages 84-89 for options and prices

Please check with your distributor for availability.





REFRIGERATED EQUIPMENT STANDS



CR36A



CR49A



CR60A



CR72A



CR85A



CR98A



CR110A

- Stainless steel interior and exterior front, sides and top
- 16 gauge stainless steel top with marine edge front and rear and 1" turn-up at each end
- Solid state digital controller with temperature alarms and LED display (Fahrenheit or Celsius)
- Top is provided with an exclusive, built in, ceramic heat shield
- Standard with (4-8) 4" casters all with brakes
- Electronic controls

Model Number	CR36A	CR49A	CR60A	CR72A	CR85A	CR98A	CR110A
Overall Dimensions (W x D x H including 4" casters)	36.5" x 32.25" x 26"	49" x 32.25" x 26"	60.5" x 32.25" x 26"	72.52" x 32.25" x 26"	85" x 32.25" x 26"	98" x 32.25" x 26"	110.5" x 32.25" x 26"
Depth with Drawer Fully Open	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"	55.75"
Maximum Pan Depth	6"	6"	6"	6"	6"	6"	6"
Worktop Maximum Load Capacity	700 lbs	700 lbs	700 lbs	1200 lbs	1200 lbs	1500 lbs	1500 lbs
Drawer Pan Capacity (pans by others)	(1) 12" x 20" x 6" deep pans and (1) 1/2 long pan 6" deep (pans by others)	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	(2) 12" x 20" x 6" deep pans	Left drawers: (3) 12" x 20" x 6" deep pans Right drawers: (2) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans	(3) 12" x 20" x 6" deep pans
Pan Capacity (12" x 20")	2	2.5	2.5	8	10	12	12
Crated Shipping Weight	295 lbs.	327 lbs.	370 lbs.	500 lbs.	567 lbs.	640 lbs.	595 lbs.
Crated Shipping Dimensions (L x W x H)	38" x 34.5" x 30.5"	51" x 35.5" x 30.5"	62" x 35.5" x 30.5"	74" x 34.5" x 30.5"	87.25" x 34.5" x 30.5"	100" x 34.5" x 30.5"	112.5" x 34.5" x 30.5"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.2	2.7	2.7	3.0	3.0	3.0	3.0
HACR Breaker (AMP)	15	15	15	15	15	15	15
Energy Consumption (kWh / day) NSF	1.6	2.1	2.1	2.78	2.9	3.69	3.69
Heat Rejection (BTU / hr) @ NSF	223	303	303	395	415	525	525
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F	45° - 100°F
Control Set Point Range	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F	32° - 52°F
Refrigerant	R290	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$13,350	\$14,560	\$15,100	\$17,340	\$20,210	\$22,500	\$23,190

See Refrigeration Accessories on pages 84-89 for options and prices

SUSHI CASES




Features & Benefits of HOSHIZAKI Sushi Cases

- Energy efficient LED lights with on/off switch
- Elegant curved front glass design enhances product on display
- Condenser airflow comes in the back and out the side
- Large diameter 1" drain at front, vinyl hose included
- NSF approved thermometer
- Easy to clean ceiling
- Plate space on top of unit, 5.6 inches
- Larger front to back interior, 11 inches
- Interior floor has a radius at all four sides
- Self-contained refrigeration unit - easy to install
- Large diameter upper evaporator with tin plating
- Slightly taller doors with plastic seal at end, opposite of the handle
- Solid food plates with radius groove to fit sushi foods
- Energy-efficient and environmentally friendly R600a refrigerant




Model Number	Condenser	Refrigeration Unit Location (Front View)	Dimensions W x D x H	Shipping Dimensions W x D x H	Electrical	Shipping Weight	List F.O.B. Griffin
HNC-120BA-R-SLH	Air-Cooled	Right Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	92 Lbs.	\$5,160
HNC-120BA-L-SLH	Air-Cooled	Left Side	47.2" x 13.6" x 11"	51.5" x 16.5" x 20.5"	115V/60/1	94 Lbs.	\$5,160
HNC-150BA-R-SLH	Air-Cooled	Right Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	\$5,570
HNC-150BA-L-SLH	Air-Cooled	Left Side	59.1" x 13.6" x 11"	62.25" x 16.5" x 20.5"	115V/60/1	115 Lbs.	\$5,570
HNC-180BA-R-SLH	Air-Cooled	Right Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	\$6,230
HNC-180BA-L-SLH	Air-Cooled	Left Side	70.9" x 13.6" x 11"	74" x 16.5" x 20.5"	115V/60/1	130 Lbs.	\$6,230
HNC-210BA-R-SLH	Air-Cooled	Right Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	\$6,890
HNC-210BA-L-SLH	Air-Cooled	Left Side	82.7" x 13.6" x 11"	85.75" x 16.5" x 20.5"	115V/60/1	145 Lbs.	\$6,890


"R" - Condensing Unit is on RIGHT from front view
"L" - Condensing Unit is on LEFT from front view
Not intended for overnight storage. NSF Standard 7

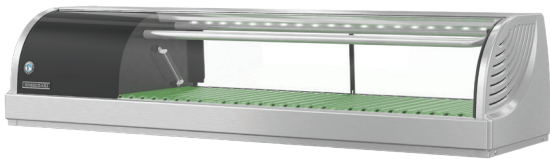


HNC-120BA-L-SLH

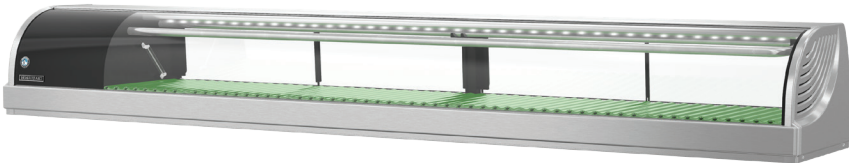

HNC-210BA-L-SLH

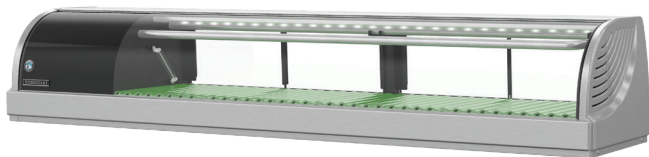

HNC-150BA-L-SLH

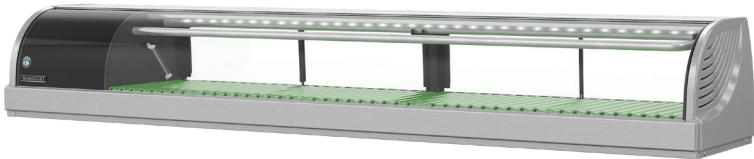

HNC-180BA-L-SLH



GLASS DOOR MERCHANDISERS



RM-7-HC

RM-10-HC
ENERGY STAR
Qualified

RM-26-HC
ENERGY STAR
Qualified

RM-45-SD-HC
(Sliding doors)

RM-49-HC

RM-65-HC

- Environmentally friendly R290 hydrocarbon refrigerant
- Forced air evaporator for quick temperature pull down
- Large glass door(s) is energy efficient low-E multi pane glass

- Doors mounted on heavy duty hinges with self-closing mechanism
- Three year parts and labor warranty & Five year compressor warranty
- Locks on doors are standard (accept for RM-7-HC)

Model Number	RM-7-HC	RM-10-HC	RM-26-HC	RM-45-SD-HC	RM-49-HC	RM-65-HC
Nominal Storage Capacity	5.97 ft ³	8.74 ft ³	26 ft ³	38.26 ft ³	42.61 ft ³	56.04 ft ³
Capacity	20 oz. bottles: 102 12 oz. cans: 217	20 oz. bottles: 168 12 oz. cans: 384	20 oz. bottles: 360 12 oz. cans: 900	20 oz. bottles: 560 12 oz. cans: 1260	20 oz. bottles: 630 12 oz. cans: 1440	20 oz. bottles: 830 12 oz. cans: 1926
Overall Dimensions (W x D x H Including Leveling Feet)	21.25" x 25" x 37.75"	25" x 22.75" x 54.5"	30" x 29.75" x 78"	51" x 30.25" x 78.25"	60" x 29.75" x 78"	78" x 29.75" x 78"
Adjustable Shelves	2 adjustable, 1 floor shelf	3	5	5 per section	5 per section	5 per section
Shelf Dimensions (W x D)	17.75" x 20.75" 18" x 9.25" (Floor)	21" x 17.5"	25.75" x 24"	23" x 20.5"	27" x 21.75"	(C) 27.3" x 21.7" (L/R) 22.4" x 21.7"
Crated Shipping Weight	180 lbs.	230 lbs.	331 lbs.	520 lbs.	610 lbs.	800 lbs.
Crated Shipping Dimensions (L x W x H)	28" x 25" x 44"	30" x 30" x 60"	34" x 34" x 82"	54" x 32.25" x 84"	63" x 32.5" x 86"	81" x 32.25" x 84"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	3.2	1.8	3.2	6.5	7.6	8.2
HACR Breaker (AMP)	15	15	15	15	15	15
Energy Consumption (kWh / day) ENERGY STAR / DOE	1.38	1.1	1.81	4.55	4.37	5.67
Approx. Nominal Compres BTU/HR (HP)	1/8HP	1/5HP	1/3HP	1/2HP	1/2HP	(L) 1/3HP (R) 1/3HP
Voltage Range	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126	104 - 126
Ambient Temp. Range	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F	60° - 86°F
Control Set Point Range	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F	28° - 40°F
Refrigerant	R290	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,090	\$4,510	\$5,740	\$8,480	\$8,840	\$11,800

See Refrigeration Accessories on pages 84-89 for options and prices

BACK BAR REFRIGERATORS



BB59



BB69



BB80



BB95

- Stainless steel interior with LED lights
- Heavy duty 18-gauge stainless steel top
- Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Doors come with a stainless steel interior liner are self-closing and include locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59(-S*)	BB69(-S*)	BB80(-S*)	BB95(-S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.16 ft³	21.8 ft³	28.74 ft³	32.53 ft³
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	315 lbs.	350 lbs.	375 lbs.	450 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,010 *\$7,150	\$6,570 *\$7,880	\$7,580 *\$9,800	\$7,720 *\$9,940

***(-S) Stainless Steel Exterior option available - Made to order.**
See Refrigeration Accessories on pages 84-89 for options and prices





BACK BAR REFRIGERATORS with GLASS DOORS



BB59-G



BB69-G



BB80-G



BB95-G

- Stainless steel interior with LED lights
 - Heavy duty 18-gauge stainless steel top
 - Maximum product storage capacity with the ability to store tall boys three high per section
- Black vinyl coated or stainless steel exterior front, sides, and rear
 - Energy efficient Low-E Multi pane glass self-closing doors come standard with barrel locks
 - Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	BB59-G(-S*)	BB69-G(-S*)	BB80-G(-S*)	BB95-G(S*)
Cabinet Dimensions W x D x H	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	18.45 ft ³	21.80 ft ³	26.74 ft ³	32.53 ft ³
Capacity 12oz. cans	852	1014	1092	1302
Door(s)	2	2	3	3
Shelves	4	4	6	6
Capacity 1/2 Barrels	3	3	4	5
HP	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.5	2.5	2.5	2.5
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	62.5" x 31.25" x 42.75"	72.5" x 31.25" x 42.75"	82.5" x 31.25" x 42.75"	98.5" x 31.25" x 42.75"
Shipping Weight	310 lbs.	345 lbs.	370 lbs.	435 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$6,290 *\$7,260	\$7,110 *\$8,260	\$8,390 *\$10,070	\$8,540 *\$10,540

***(-S) Stainless Steel Exterior option available - Made to order.**
See Refrigeration Accessories on pages 84-89 for options and prices



SLIDE TOP BOTTLE COOLERS



CC50



CC65



CC80



CC95

- Stainless steel interior
- Heavy duty 18-gauge stainless steel top
- Front breathing, side mount refrigeration is easily accessible by sliding out front for cleaning and service
- Black vinyl coated or stainless steel exterior front, sides, and rear
- Durable stainless steel slide top lids including locks
- Engineered to maintain NSF-7 temperatures in 100°F ambient

Model Number	CC50(-S*)	CC65(-S*)	CC80(-S*)	CC95(-S*)
Cabinet Dimensions† W x D x H	50.5" x 31.25" x 39"	65.5" x 26.5" x 33.38"	80" x 26.5" x 33.38"	95" x 26.5" x 33.38"
Capacity (AHAM) cu ft	14.4 ft³	19.6 ft³	24.67 ft³	27.98 ft³
Capacity 12oz. / 20oz. Cans	704 / 286	890 / 360	1150 / 547	1408 / 672
Lids	2	2	3	3
Bin Dividers	3	4	6	7
HP	1/4	1/3	1/3	1/2
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	2.0	2.0	2.0	2.0
NEMA Plug	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P	8 ft. 5-15P
Shipping Dimensions W x D x H	53.5" x 31.25" x 39"	69.5" x 33" x 39"	84" x 33" x 39"	101" x 33" x 39"
Shipping Weight	235 lbs.	275 lbs.	315 lbs.	355 lbs.
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$5,090 *\$6,090	\$5,660 *\$6,620	\$7,140 *\$8,170	\$7,540 *\$8,660

*(-S) Stainless Steel Exterior option available - Made to order.
† Does not include 1" rear cabinet bumper or bottle cap catcher depth
See Refrigeration Accessories on pages 84-89 for options and prices





DIRECT DRAW REFRIGERATORS



DD24




DD59



DD69



DD80

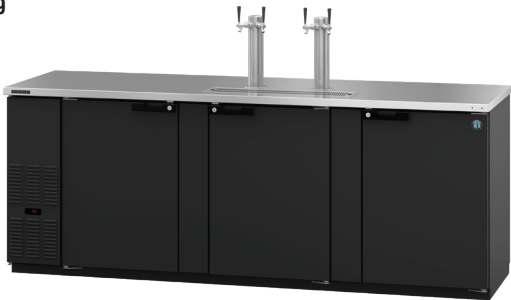

DD95

- Stainless steel interior
 - Heavy duty 18-gauge stainless steel top
 - Polished stainless-steel insulated towers with plated brass faucet
- Black vinyl coated or stainless steel exterior front, sides, and rear
 - Stainless steel threshold protects door frame from damage when loading and unloading
 - Keg cushions standard to protect floor and increase air flow around kegs

Model Number	DD24(-S*)	DD59(-S*)	DD69(-S*)	DD80(-S*)	DD95(-S*)
Cabinet Dimensions W x D x H	24.88" x 30" x 39.38"	59.5" x 29" x 36.88"	69.5" x 29" x 36.88"	80" x 29" x 36.88"	95.5" x 29" x 36.88"
Capacity (AHAM) cu ft	7.46 ft ³	18.45 ft ³	21.8 ft ³	26.79 ft ³	32.53 ft ³
Door(s)	1	2	2	3	3
Tower(s)	1	2	2	2	2
Tap(s)	1	3	3	4	4
Capacity 1/2 Barrels	1	2	3	4	5
HP	1/6	1/3	1/3	1/3	1/3
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	2.5	2.5	2.5	2.5
NEMA Plug	5-15P	5-15P	5-15P	5-15P	5-15P
Shipping Dimensions W x D x H	34.5" x 29" x 45.5"	62.5" x 31.25" x 42.5"	72.5" x 31.25" x 42.5"	82.5" x 31.25" x 42.5"	98.5" x 31.25" x 42.5"
Shipping Weight	175 lbs.	345 lbs.	360 lbs.	385 lbs.	430 lbs.
Refrigerant	R290	R290	R290	R290	R290
List F.O.B. Griffin	\$4,380 *\$5,570	\$7,320 *\$8,650	\$8,050 *\$10,140	\$8,580 *\$10,420	\$8,720 *\$10,580

***(-S) Stainless Steel Exterior option available - Made to order.**
See Refrigeration Accessories on pages 84-89 for options and prices

ECONOMY REFRIGERATORS



ER1A-FS
ENERGY STAR
Qualified



ER2A-FS
ENERGY STAR
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
 - Stainless steel exterior door(s) come standard with lock(s)
 - Energy efficient interior LED light
- Time initiated automatic defrost
 - Energy efficient heated condensate removal
 - Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	ER1A-FS	ER2A-FS
Interior Storage Capacity (AHAM)	17.8 ft³	38.61 ft³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	2	4.3
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	1.06	2.1
Heat Rejection (BTU / hr)	1960(1/5HP)	4291(1/3HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$3,860	\$6,000

See Refrigeration Accessories on page 89 for options and prices




EF1A-FS

EF2A-FS

- Stainless steel interior floor with aluminum sides, rear, and top
- Stainless steel exterior door(s) come standard with lock(s)
- Energy efficient interior LED light

- Time initiated automatic defrost
- Energy efficient heated condensate removal
- Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity

Model Number	EF1A-FS	EF2A-FS
Interior Storage Capacity (AHAM)	17.74 ft ³	38.54 ft ³
Overall Dimensions (W x D x H including 4" casters)	27" x 29.63" x 81.63"	54.38" x 29.63" x 81.63"
Depth with Doors Open at 90°	55.38"	55.38"
Interior Door Opening Width	22.25"	22.9"
Interior Door Opening Height	52.1"	52.1"
Adjustable Shelves	3	6
Shelf Dimensions (W x D)	21.5" x 23.1"	24.3" x 21.7"
Crated Shipping Weight	279 lbs.	523 lbs.
Crated Shipping Dimensions (L x W x H)	31.5" x 28.75" x 84"	58" x 31.5" x 84"
Voltage	115V/60/1	115V/60/1
Amperage (AMP)	3.2	4.7
HACR Breaker (AMP)	15	15
Energy Consumption (kWh / day) ASHRAE	4.62	8.8
Heat Rejection (BTU / hr)	1399(1/3HP)	2074(1/2HP)
Voltage Range	103 - 127	103 - 127
Ambient Temp. Range	45° to 100°F	45° to 100°F
Control Set Point Range	-5° to 5°F	-5° to 5°F
Refrigerant	R290	R290
List F.O.B. Griffin	\$4,660	\$6,990

See Refrigeration Accessories on page 89 for options and prices

UNDERCOUNTER ECONOMY REFRIGERATORS & FREEZERS



EUR27A
ENERGY STAR
Qualified



EUR48A
ENERGY STAR
Qualified



EUF27A
ENERGY STAR
Qualified



EUF48A
ENERGY STAR
Qualified

- Stainless steel interior floor with aluminum sides, rear, and top
 - Stainless steel exterior door(s) come standard with lock(s)
 - Energy efficient interior LED light
- Time initiated automatic defrost
 - Energy efficient heated condensate removal
 - Heavy duty grey epoxy coated shelves are adjustable in 1/2" increments; 3 per section. 105 lbs. capacity


Model Number	EUR27A	EUR48A	EUF27A	EUF48A
Interior Storage Capacity (AHAM)	6.33 ft³	12.09 ft³	6.33 ft³	12.09 ft³
Overall Dimensions (W x D x H including 4"casters)	27" x 30" x 33.75"	47.75" x 30" x 33.75"	27" x 30" x 33.75"	47.75" x 30" x 33.75"
Depth with Doors Open at 90°	54.5"	51.5"	55.75"	52.75"
Interior Door Opening Width	22.6"	19.5"	22.6"	19.5"
Interior Door Opening Height	22.75"	22.75"	22.75"	22.75"
Adjustable Shelves	1	2	1	2
Shelf Dimensions (W x D)	22" x 16"	21.25" x 16"	22" x 16"	21.25" x 16"
Crated Shipping Weight	200 lbs.	290 lbs.	200 lbs.	290 lbs.
Crated Shipping Dimensions (L x W x H)	33" x 29" x 37"	52" x 33" x 37"	33" x 29" x 37"	52" x 33" x 37"
Voltage	115V/60/1	115V/60/1	115V/60/1	115V/60/1
Amperage (AMP)	1.5	1.8	1.2	1.7
HACR Breaker (AMP)	15	15	15	15
Energy Consumption (kWh / day) ASHRAE	0.95	1.21	1.92	3.44
Heat Rejection (BTU / hr)	1289(1/6HP)	1709(1/6HP)	993(1/6HP)	1468(1/6HP)
Voltage Range	115-127	115-127	115-127	115-127
Ambient Temp. Range	45° to 100°F	45° to 100°F	45° to 100°F	45° to 100°F
Control Set Point Range	33° to 39°F	33° to 39°F	33° to 39°F	33° to 39°F
Refrigerant	R290	R290	R290	R290
List F.O.B. Griffin	\$3,160	\$4,280	\$3,540	\$4,760

See Refrigeration Accessories on page 89 for options and prices







REFRIGERATION ACCESSORIES




CASTERS



**FOOT PEDAL
DOOR OPENER**



SHELVES



TRAY / PAN SLIDES

CASTERS & LEGS

Model Number	Description	List F.O.B. Griffin
HS-3546	4" Casters - Set of four, two with brakes (1/2 Section Uprights)	\$440
HS-3547	4" Casters - Set of six, three with brakes (3 Section Uprights)	\$670
HS-5035	4" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$110
HS-5036	6" Casters - Set of four, two with brakes (1, 2 & 3 Section Horizontal Units)	\$160
HS-5037	2 1/4" Casters - Set of four, two with brakes (1 & 2 Section Undercounters) for ADA Compliant dimensions	\$120
HS-5320	3 3/8" Casters - Set of four, two with brakes (for pizza prep tables) for ADA Compliant dimensions	\$110
HS-5321	3 3/8" Casters - Set of six, three with brakes (for pizza prep tables) for ADA Compliant dimensions	\$170
LP-6 LEG	6" Stainless Steel Legs, set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$250
LP-6P LEG	6" Painted Leg (grey), set of 4 (1, 2 & 3 Section Upright Models [3 section needs 2 sets])	\$240

FOOT PEDALS

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5378	One Door Foot Pedal	Left Hinge upright, solid door Steelheart models	\$310
HS-5379	One Door Foot Pedal	Right Hinge upright, solid door Steelheart models	\$310
HS-5380	Two Door Foot Pedal	n/a	\$530
HS-5555	Left-Hinged Door Foot Pedal (right foot pedal)	Solid door undercounter, worktop and sandwich prep table models	\$310
HS-5556	Right-Hinged Door Foot Pedal (left foot pedal)	Solid door undercounter, worktop and sandwich prep table models	\$310

DOOR REVERSAL KIT

Model Number	Description	List F.O.B. Griffin
HS-5258	Door Reversal Kit - Undercounter Glass Door Models (Right Hinge to Left Hinge)	\$210
HS-5259	Door Reversal Kit - Undercounter Glass Door Models (Left Hinge to Right Hinge)	\$210

SHELVES

Model Number	Description	For Use With Steelheart Models	List F.O.B. Griffin
HS-5052	Industrial Strength Epoxy Coated Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$210
HS-5053	Industrial Strength Epoxy Coated Shelf, 3 each, Includes 12 Pilaster Clips	1,2,3 Section Uprights	\$310
HS-5054	Industrial Strength Stainless Steel Shelf, Includes 4 Pilaster Clips	1,2,3 Section Uprights	\$320
HS-3504	Industrial Strength Stainless Steel Center Shelf	2 Section Uprights	\$300
HS-3505	Industrial Strength Stainless Steel Center Shelf, 3 each	2 Section Uprights	\$470



SHELVES...CONTINUED

HS-3509	Industrial Strength Epoxy Coated Shelf Center Shelf	2 Section Uprights	\$230
HS-3510	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	2 Section Uprights	\$360
HS-3550	Pass-Thru Epoxy Shelf, 3 pack	1 & 2 Section Models	\$300
HS-3551	Pass-Thru Epoxy Shelf, 1 pack	1 & 2 Section Models	\$250
HS-3552	Pass-Thru Stainless Steel Shelf, 3 Pack	1 & 2 Section Models	\$890
HS-3553	Pass-Thru Stainless Steel Shelf, 1 Pack	1 & 2 Section Models	\$430
HS-5388	Industrial Strength Epoxy Coated Shelf Center Shelf, 1 each	3 Section Uprights	\$230
HS-5389	Industrial Strength Epoxy Coated Shelf Center Shelf, 3 each	3 Section Uprights	\$540
HS-5057	Tempered Glass Shelves, 3 each	For use with HR24C-G	\$230
HS-5058	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	\$100
HS-5235	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 36" Undercounters, Worktops and Prep Tables	\$170
HS-5059	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	\$100
HS-5108	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	\$120
HS-5116	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 27" and 72" Undercounters, Worktops and Prep Tables	\$250
HS-5117	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 48" Undercounters, Worktops and Prep Tables	\$300
HS-5118	Stainless Steel Shelf, Includes 4 Pilaster Clips	All 60" Undercounters, Worktops and Prep Tables	\$350
HS-5151	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR67/93A	\$210
HS-5152	Epoxy Coated Wire Shelf, Includes 4 Pilaster Clips	PR46A	\$210
HS-5153	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR67/93A	\$360
HS-5154	Stainless Steel Shelf, Includes 4 Pilaster Clips	PR46A	\$370
HS-5161	Lower Epoxy Coated Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Prep Tables	\$180
HS-5169	Lower Stainless Steel Shelf, 4 Pilaster Clips	All 27" Undercounters, Worktops, and Prep Tables	\$200

OVERSHELVES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5172[†]	Single Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	\$690
HS-5237[†]	Single Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	\$760
HS-5173[†]	Single Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	\$790
HS-5174[†]	Single Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	\$970
HS-5175[†]	Single Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,150
HS-5163[†]	Double Overshelf for 27" Cabinet	27" Undercounters, Worktops, Sandwich Top & Mega Top	\$850
HS-5236[†]	Double Overshelf for 36" Cabinet	36" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,030
HS-5164[†]	Double Overshelf for 48" Cabinet	48" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,230
HS-5165[†]	Double Overshelf for 60" Cabinet	60" Undercounters, Worktops, Sandwich Top & Mega Top	\$1,750
HS-5166[†]	Double Overshelf for 72" Cabinet	72" Undercounters, Worktops, Sandwich Top & Mega Top	\$2,260
HS-5229**	Single Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5229 Single Overshelves	\$860
HS-5231[‡]	Single Overshelf for 67" Cabinet	67" Pizza Prep Tables	\$1,030
HS-5228**	Double Overshelf for 46" / 93" Cabinet	46" / 93" Pizza Prep Tables 93" cabinets can accommodate (2) HS-5228 Double Overshelves	\$1,310
HS-5230[‡]	Double Overshelf for 67" Cabinet	67" Pizza Prep Tables	\$1,710

[†]Compatible with models manufactured since March 2016. (Serial # FXXXXXC and after)

[‡]Compatible with models manufactured since January 2017. (Serial # GXXXXXA and after)

* 93" cabinets can accommodate (2) HS-5229 Single Overshelves or (2) HS-5228 Double Overshelves.





TRAY / PAN SLIDES

(16) Sets on 3" Centers per section is the recommended maximum capacity for Uprights. Units can hold as many as (24) sets on 2" Centers per section.

Model Number	Description	List F.O.B. Griffin
HS-3557	Stainless Steel Bottom Support Universal Pan Slides (1 Set), Includes 4 Pilaster Clips	\$200
HS-3558	Stainless Steel Bottom Support Universal Pan Slides (4 Sets), Includes 16 Pilaster Clips	\$630
HS-5092	Stainless Steel Bottom Support Wire Tray Slides (1 Set) for 18x26 Baker Pan Only, Includes 4 Pilaster Clips	\$150
HS-5093	Stainless Steel Bottom Support Wire Tray Slides (4 Sets) for 18x26 Baker Pan Only, Includes 16 Pilaster Clips	\$460

PIZZ PREP TABLES - PAN SLIDES

Model Number	Description	List F.O.B. Griffin
HS-5514	Removable Tray Pan Rack For Pizza Preps- Accommodates (6) 18" x 26" Sheet Pans With 3" Spacing	\$490

FLAT LIFT OFF COVERS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5070	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening	SR27B-12M, SR48A-12M, SR60A-12M *SR60A-24M, *SR72A-24M, SR27B-12MD *SR60A-24MD4 (*2 of each cover required per model)	\$310
HS-5279	Flat Lift-Off Stainless Steel Cover - 15 pan Mega Top opening	SR36B-15M	\$310
HS-5071	Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR48A-18M, SR60A-18M, SR72A-18M SR48A-18MD4	\$310
HS-5072	Flat Lift-Off Stainless Steel Cover - SR27A-8	SR27B-8, SR27B-8D	\$310
HS-5073	Flat Lift-Off Stainless Steel Cover - SR48A-8	SR48A-8, SR60A-8	\$310
HS-5278	Flat Lift-Off Stainless Steel Cover - 10 pan Sandwich Top opening	SR36B-10	\$310
HS-5074	Flat Lift-Off Stainless Steel Cover - 12 pan Sandwich Top opening	SR48A-12, SR48A-12MD4, SR60A-12, SR72A-12	\$310
HS-5106	Flat Lift-Off Stainless Steel Cover - SR60A-16, SR72A-16	SR60A-16, SR72A-16	\$400
HS-5107	Flat Lift-Off Stainless Steel Cover - SR72A-18	SR72A-18	\$400
HS-5070 + HS-5071	Flat Lift-Off Stainless Steel Cover - 12 pan Mega Top opening Flat Lift-Off Stainless Steel Cover - 18 pan Mega Top opening	SR72A-30M, SR72A-30M6 (1 of each cover required per model)	\$310 (Each Cover)

COMPOSITE CUTTING BOARDS

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5265	10" x 27" x 1/2" Composite Cutting Board	27" Sandwich Top & Mega Top	\$300
HS-5266	10" x 36" x 1/2" Composite Cutting Board	36" Sandwich Top & Mega Top	\$400
HS-5267	10" x 48" x 1/2" Composite Cutting Board	48" Sandwich Top & Mega Top	\$530
HS-5268	10" x 60" x 1/2" Composite Cutting Board	60" Sandwich Top & Mega Top	\$660
HS-5269	10" x 72" x 1/2" Composite Cutting Board	72" Sandwich Top & Mega Top	\$790
HS-5270	19" x 46" x 1/2" Composite Cutting Board	46" Pizza Prep Tables	\$970
HS-5271	19" x 67" x 1/2" Composite Cutting Board	67" Pizza Prep Table	\$1,460
HS-5272	19" x 93" x 1/2" Composite Cutting Board	93" Pizza Prep Table	\$2,040

GLASS DOOR MERCHANDISER ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5446	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-10-HC	\$170
HS-5291	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-26-HC	\$180
HS-5293	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-45-SD-HC	\$180
HS-5295	Organizer Shelf With Tracks, Includes 4 Pilaster Clips	RM-49-HC	\$180
HS-5290	Price Tag Holder	RM-10-HC	\$20



GLASS DOOR MERCHANDISER ACCESSORIES - CONTINUED

HS-5292	Price Tag Holder	RM-26-HC	\$20
HS-5294	Price Tag Holder	RM-45-SD-HC	\$20
HS-5296	Price Tag Holder	RM-49-HC	\$20
HS-5447	Epoxy Shelf, Includes 4 Pilaster Clips	RM-10-HC	\$110
HS-5317	Epoxy Shelf, Includes 4 Pilaster Clips	RM-26-HC	\$160
HS-5318	Epoxy Shelf, Includes 4 Pilaster Clips	RM-45-SD-HC	\$160
HS-5319	Epoxy Shelf, Includes 4 Pilaster Clips	RM-49-HC	\$160
HS-5343	Epoxy Shelf, Includes 4 Pilaster Clips	RM-7-HC	\$70
HS-5344	Epoxy Floor Shelf	RM-7-HC	\$50
HS-5288	4" Casters-Set Of Four, Two With Brakes	RM-10-HC, RM-26-HC, RM-45-SD-HC, RM-49-HC	\$120
HS-5460	Flat Epoxy coated shelf, RM-65-HC Middle Section	RM-65-HC	\$160
HS-5461	Flat Epoxy coated shelf, RM-65-HC Right & Left Section	RM-65-HC	\$160
HS-5465	Organizer Shelf with Tracks, Middle Section	RM-65-HC	\$180
HS-5466	Organizer Shelf with Tracks, Right & Left Section	RM-65-HC	\$180

BACK BAR ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5410	Complete Door Assembly-Solid, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$290
HS-5411	Complete Door Assembly-Solid, Left Hinge	All Back Bar and Direct Draw Models except DD24, BB80, BB80-G, DD80	\$290
HS-5412	Complete Door Left Section Assembly-Solid, Left Hinge 80"	BB80, BB80-G, DD80	\$290
HS-5413	Complete Door Assembly-Glass, Right Hinge	All Back Bar and Direct Draw Models except DD24	\$580
HS-5414	Complete Door Assembly-Glass, Left Hinge	BB59, BB69, BB95, BB59-G, BB69-G, DD59, DD69, DD95	\$580
HS-5415	Complete Door Left Section Assembly-Glass, Left Hinge 80"	BB80, BB80-G, DD80	\$580
HS-5417	Flat Shelf, 59"& Right 80" Cabinets, 21.25" x 21.4", Includes 4 SS pilaster clips	BB59, BB59-G, DD59, (Right Section) BB80, BB80-G, DD80	\$110
HS-5418	Flat Shelf, 69"& 95" Cabinets, 26" x 21.4", Includes 4 SS pilaster clips	BB69, BB69-G, BB95, DD69, DD95, BB95-G	\$110
HS-5419	Flat Shelf Center, 80" Cabinets, 23.1" x 21.4", Includes 4 SS pilaster clips	(Center) BB80, BB80-G, DD80	\$110
HS-5420	Flat Shelf Left, 80" Cabinets, 18" x 21.4", Includes 4 SS pilaster clips	(Left Section) BB80, BB80-G, DD80	\$110
HS-5421	Set of 4 Pilasters 20.2"	All Back Bar and Direct Draw Models	\$110
HS-5515	Bottle Dividers for Back Bar Shelves, 6 Pack with 12 clips	All Back Bar	\$140

MISCELLANEOUS ACCESSORIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-4007	Drawer Assembly Divider Bar (Accommodates 1/2, 1/3 and 1/6 Size Pans)	Undercounters, Worktops, Prep Tables, Equipment Stands	\$40
HS-4009	12" Rail Divider Bar	Prep Tables	\$30
HS-5069	Sandwich Top Rail Adapter Bar - 12.6" x 1.0" (front to back)	Sandwich Top & Mega Top Prep Tables	\$30
HS-5280	Full Size Pan Adapter Bar for UR27B-8 Rail	Sandwich Top Prep Tables	\$40
HS-5281	Full Size Pan Adapter Bar for SR36B-10 Rail	Sandwich Top Prep Tables	\$40
HS-5476	Black kickplate for HR15A, HR15A-G	HR15A, HR15A-G	\$30
HS-5075	Stainless Back - 27" Horizontal Models (factory installed only)	Refrigerator & Prep	\$440

MISCELLANEOUS ACCESSORIES - CONTINUED

HS-5171	Stainless Back - 27" Horizontal Models (factory installed only)	Freezer	\$450
HS-5277	Stainless Back - 36" Horizontal Models (factory installed only)	Refrigerator, Freezer	\$500
HS-5076	Stainless Back - 48" Horizontal Models (factory installed only)	Refrigerator	\$560
HS-5527	Stainless Back - 48" Horizontal Models (factory installed only)	Freezer & Prep	\$560
HS-5085	Stainless Back - 60" Horizontal Models (factory installed only)	Refrigerator	\$630
HS-5170	Stainless Back - 60" Horizontal Models (factory installed only)	Freezer & Prep	\$630
HS-5086	Stainless Back - 72" Horizontal Models (factory installed only)	Prep	\$740
HS-5528	Stainless Back - 72" Horizontal Models (factory installed only)	Refrigerator	\$740
HS-5112	Stacking Kit - UR27B & UF27B	Undercounters	\$460
HS-5184	All Mega Top divider front to back	Mega Top Prep Tables	\$40
HS-5185	All Mega Top & Sandwich Prep 27-8 divider side to side (outer)	Sandwich Top & Mega Top Prep Tables	\$30
HS-5186	Mega Top 18M & 30M divider side to side (center)	Mega Top Prep Tables	\$30
HS-5187	Sandwich Prep 27-8 divider front to back	Sandwich Top Prep Tables	\$30
HS-5188	Sandwich Prep 48-8 and 12, 16, 18 pan openings divider front to back	Sandwich Top Prep Tables	\$30
HS-5189	Sandwich Prep 48-8 and 12, 16, 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$30
HS-5190	Sandwich Prep 12 & 16 pan openings side to side (center)	Sandwich Top Prep Tables	\$30
HS-5191	Sandwich Prep 18 pan openings side to side (outer)	Sandwich Top Prep Tables	\$40
HS-5192	Sandwich Prep 18 pan openings side to side (center)	Sandwich Top Prep Tables	\$40
HS-5453	Heated Condensate Pan Kit	≥46" Undercounter, Worktop and Prep Tables	\$450
HS-5462	Heated Condensate Pan	Steelheart Uprights	\$470
HS-5526	Stainless Steel Rear Panel for 1 Section Upright, (factory installed only)	Steelheart Uprights	\$900
HS-5525	Stainless Steel Rear Panel for 2 Section Upright, (factory installed only)	Steelheart Uprights	\$1,730
HS-5496	Stainless Steel Rear Panel for DT1A (factory installed only)	Steelheart Uprights	\$900
HS-5497	Stainless Steel Rear Panel for DT2A (factory installed only)	Steelheart Uprights	\$1,730

ECONOMY SERIES

Model Number	Description	For Use With	List F.O.B. Griffin
HS-5511	Flat Shelf Economy Series 1 Section Uprights with clips	Refrigerator, Freezer	\$250
HS-5512	Flat Shelf Economy Series 2 Section Uprights with clips	Refrigerator, Freezer	\$260



OUR COMMITMENT TO OUR CUSTOMERS

Our commitment to quality continues after the sale.
To ensure your HOSHIZAKI equipment operates at its optimum, we provide the following:

Customer Service

800-438-6087

For assistance with orders or finding a local distributor

- ▶ Established Field Service Network - hoshizakiamerica.com/locate-service-rep
- ▶ QR Code on the back of each unit for easy access to warranty and service information.
- ▶ Toll-Free Technical Support 24 hours/day (including holidays)
- ▶ Basic and Advanced training
- ▶ User-Friendly Website
 - Product Information
 - FAQ
 - Library of literature
 - Videos
 - Manuals
 - Tech tips/guides
 - Warranty information

**Toll-Free Technical
Support Line 24 hours**

7 days a week, (including holidays)

800-233-1940





HOSHIZAKI. BEYOND STRONG.

HOSHIZAKI AMERICA, INC.

618 Hwy. 74, South, Peachtree City, GA 30269

TEL 800-438-6087 | FAX 800-345-1325

hoshizakiamerica.com

Item #40067 | 09-13-21

