

6" Ultra-Slim Baffle Downlight


Elevate the ambiance of any room with our 6 " Selectable Slim Light with Baffle Trim. Customize the color temperature feature using the slider switch and select from 5 options (2700K, 3000K, 3500K, 4000K, 5000K) for the perfect fit.

MODELS

DL_SLBF6-14W-27K_5K



Illuminance Cone Diagram

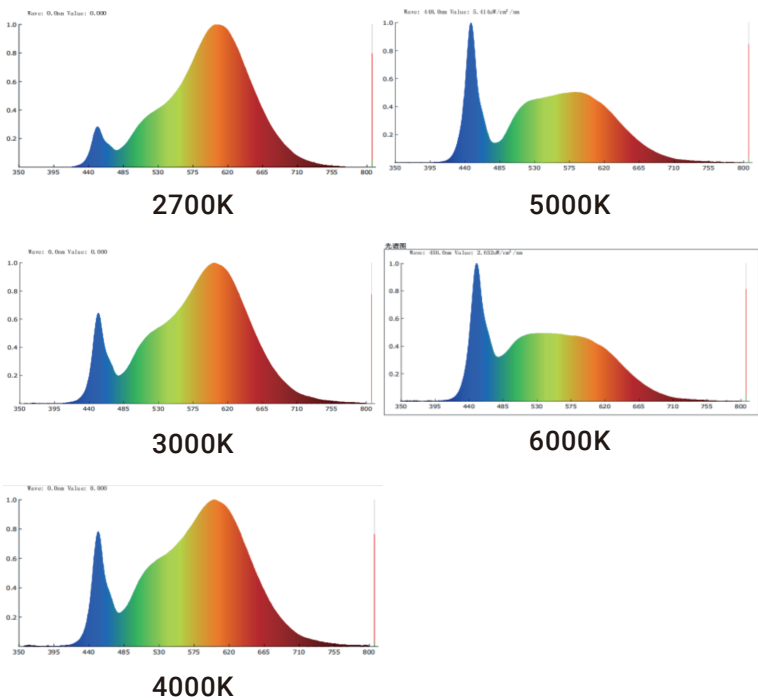

CERTIFICATIONS



SPECIFICATIONS

Voltage	120 V
Wattage	14 W
Power Factor	0.9

LIGHTING PERFORMANCE

Lumens	1200 lm
CRI	80+
Beam Angle	120°
Dimmable	YES
Efficacy	86 lm/W

SELECTABLE CCT

SLBF6-14W	2700 k, 3000 k, 4000 k, 5000 k, 6000 k
-----------	--

ENVIRONMENT

Operating Temperature	-4 °F to 113 °F
Moisture Rating	Damp

LIFETIME

Average Lifetime	50,000 hours
Warranty	7 Years

6"LED Recessed Slim Downlight

Dimmer Compatibility Guide

This compatibility list is based on testing conducted by the manufacturer in a lab simulated environment. Actual results may vary.

MODELS

- | | | | |
|--------------|----------------|--------------|---------------|
| • DL_SL6-14W | • DL_SL6_HO | • DL_SG6 | • DL_XSL6 |
| • DL_SL6-BK | • DL_SL6_MO | • DL_BS6_NL | • DL_SL6_MJBX |
| • DL_SL6-NL | • DL_SLBF6-14W | • DL_G6-14W | • DL_SL6_PR |
| • CL_SL6_NL | • CL_SLIJ6-14W | • DL_EG6_INL | • DL_FBF6_NL |

BRAND	MODEL
LEVITON	6672-1LW
LEVITON	6674-10W
LEVITON	D26HD-2RW
LEVITON	DDMX1-BLZ
LEVITON	DSL06-1LZ
LEVITON	IPL06-10Z
LEVITON	RDL06-10Z
LEVITON	RNL06-10Z
LEVITON	TGCL-153PH-WH
LEVITON	TSM10-1LW
LUTRON	AYCL-153P-WH
LUTRON	CTCL-153PDH-WH
LUTRON	DVCL-153PR-WH
LUTRON	LGLC-153PLH
LUTRON	MACL-153MH-WH

We highly recommend using a Triac (forward-phase) dimmer that is compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

May experience "pop-on" or "dropout" behavior if the dimmer's low-end trim is not adjusted to match the driver. To resolve this issues, adjust the low or high-end trim on the dimmer to maximize the dimming range. If needed, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as desired.

6"LED Recessed Slim Downlight

Dimmer Compatibility Guide

This compatibility list is based on testing conducted by the manufacturer in a lab simulated environment. Actual results may vary.

MODELS

BRAND	MODEL
LUTRON	MSCL-OP153M
LUTRON	PD-6WCL-WH
LUTRON	P-PKG1W-WH
LUTRON	SCL-153P-WH
LUTRON	STCL-153PH-WH
LUTRON	TGCL-153PH-WH
LUTRON	TTCL-100H-BR
GE	93120079
LEGRAND	HCL453PMM
LEGRAND	RHCL453PW
CLOUDY BAY	CBLD001WHA
KASA SMART	HS220
KASA SMART	HS220P3
EATON	AL06-C1
EATON	SAL06P-W

We highly recommend using a Triac (forward-phase) dimmer that is compatible with LED lights. Buzzing or flickering is typically an indication that the dimmer and lights used are not compatible. Please consult dimmer manufacturer for maximum wattage capacity.

May experience "pop-on" or "dropout" behavior if the dimmer's low-end trim is not adjusted to match the driver. To resolve this issues, adjust the low or high-end trim on the dimmer to maximize the dimming range. If needed, first raise the slider switch above the minimum level to turn the lights on, then dim to a lower light level as desired.