

Looking ahead,
going beyond expectations

Ahead > Beyond



UK EVMS 1-90 - Vertical Multistage pumps

Product Catalogue





www.ebaraeurope.com

Looking ahead,
going beyond expectations
Ahead > Beyond

Built like a Katana

A Katana is a Japanese product, it's made with a traditional know-how started in 300 a.C.. Katana is manufactured with care and precision of details. Only years of experience can give the necessary capacity to build a masterpiece.

This is what we do with our pumps. Our 100 years of Japanese experience in pumps manufacturing are the base to project and realize pumps with high quality performance, reliability and cutting-edge mechanical parts.

We look forward not forgetting the past.

EBARA new vertical multistage pumps named "EVMS" are manufactured with the highest standards of quality, to achieve reliable operating performance by means of strict technical evaluation criteria and control programs that involve the whole manufacturing process.

We listen to the market. Our design is unique. EVMS can offer the exceptional values through the cutting-edge solutions that best suits your needs.







Shurricane®

Innovative hydraulic solutions

Any motor, anywhere.

- **Commercial motors** can be fitted to all of the pump models without any modifications thanks to low pump axial thrust load
- **Long life of the motor bearing**
- **High pump efficiency** classified in MEI > 0.7 as the most efficient models
- **Patent Pending**

Smart plug solutions



Air ventilation
plug



Water filling
& sensor plug



Commercial
sensor fitting



Measurements
for suction
and discharge
pressure / drain



Two priming plugs are on both sides
of motor brackets for **EVMS32-90**.
A ventilation plug is integrated with
one priming plug



Stainless steel tie rods

Tie rods in EN 1.4057 (AISI 431) as standard.



Piping connection options

- The various pipe connections are available depending on the application requirements
- The external dimensions can be adjusted to the replacement of the existing pump in the wide majority

| Material | Round flange DIN (incl. ANSI depending on models) | Loose Flange DIN (incl. ANSI depending on models) | Oval Flange | Victaulic® | Clamp |
|------------------------|---|---|---|---|---|
| AISI304/ AISI316L |  |  |  |  |  |
| ASTM CF8/ ASTM CF8M |  |  | | | |
| Cast Iron |  | |  | | |



Shaft seal solutions

- Shaft seal material:
 - B: Resin impregnated carbon graphite
 - Q: Sintered silicon carbide
 - Q_g: Silicon carbide with carbon graphite
 - Carbon or graphite inclusions with silicon carbide can be used as **dry lubricant to reduce friction**.
- It's conforming to EN12756 (ex DIN 24960)



Easy maintenance

- The **cartridge shaft seal** enables **the plug in replacement** of the shaft seal without disassembling the motor bracket
- The **spacer coupling** allows easy maintenance without having to remove heavy motors over 5.5 kW.

ETM
MOTORS



EBARA standard motor solutions

- IE3 efficiency for both 50 and 60 Hz* operation, according IEC 60034-30 standard.
- ETM motors are available from 0.75 up to 11 kW for both 50 and 60 Hz**
- PTC sensors (thermistors) are standard from 1.5 kW upwards for motor protection at 150°C
- Unloosable screws and sealing are standard for terminal box fixing from 0.75 kW upwards
- Stable inverter mounting on fan covers made of pressed steel

* IE3 for 60Hz is depending on motor size and voltage.

** All other sizes including single phase motors are available with commercial IEC standard motors



Reliability is made by numbers

1
Million

2
Times

3
Times


Cycles of the endurance test*

Higher test criteria than nominal operating conditions*

Much less axial thrust load than common pumps



Solve axial thrust load

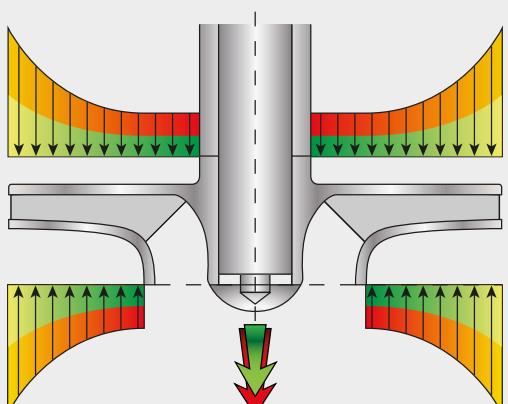

 Shurricane impeller

 Normal impeller

The pump axial thrust load is caused by the unbalance of the static pressure between a front shroud and a back shroud of an impeller. That always causes the reduction of the bearing life of the motor.

General methods to work with the axial thrust load are as below.

- Increasing the size of motor bearing or using enhanced motor bearings.
- Mounting additional ball bearings on the pump bracket. These measurements are historically known to cause complicated mechanical structures.

EBARA new designed impeller "Shurricane" can reduce the pump axial thrust load with high pump efficiency by means of the innovative hydraulic design method.

EVMS can accept the commercial motors without any modifications and improve the maintenance cycles of motor bearing.

Any motor, anywhere.

* for main components



Fields of applications



INDUSTRY

- **Water treatment**
Reverse osmosis
Ultra-filtration
Water purification
Micro-filtration
Softening, ionizing, and demineralising systems
Swimming pools
Separators
- **Boiler feeding**
Steam systems
Condensate systems
- **Wash and clean**
Vehicle washing systems
Industrial part washing
Laundry systems
Supply of liquids with acids and bases
Supply of chemical liquids
- **Chilling**
Handling of refrigerants for cooling
Thermal control systems
Industrial cooling
Laser cooling
- **Machine tooling**
Cooling lubricant supply for tooling machines
- **Pressure boosting**
Pressure boosting for industrial use
- **Food & beverage**
Food washing systems
Bottle wash systems
- **Pharmaceutical industries**
- **Marine applications**
Freshwater, deckwash, high fog and fire fighting on ships



BUILDING SERVICE

- **Pressure boosting**
Pressure boosting for buildings
Pressure boosting for high rise buildings/hotels
- **Sprinkler systems**
- **Fire fighting systems**
Jockey pump
- **District heating**
- **Heat exchangers / fan heaters**
- **Air conditioning systems**
- **Heating systems**



WATER SUPPLY

- **Water treatment**
Water treatment plants filtration
Water treatment plants transfer
- **Pressure boosting**
Transfer from water treatment plants (mains)
- **Irrigation**
Golf course / sport fields irrigation
- **Agriculture**
Sprinkler irrigation
Drip irrigation




EBARA worldwide service points




please see the contact list on page 17

Performance Range

50Hz

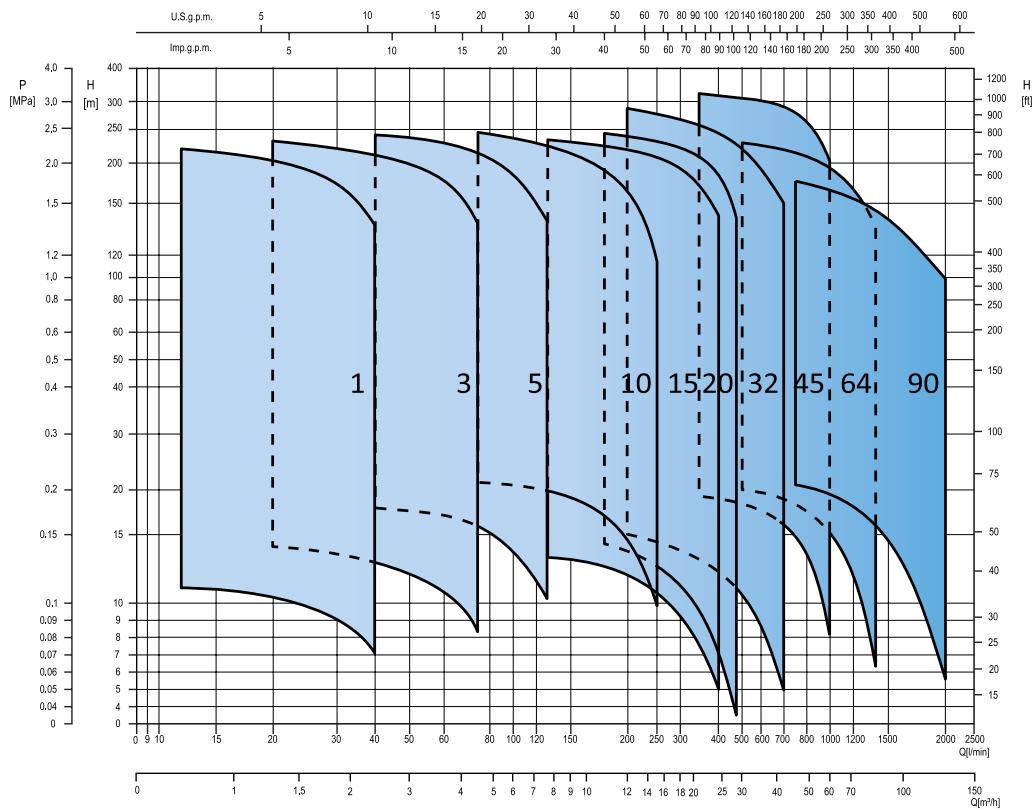

60Hz

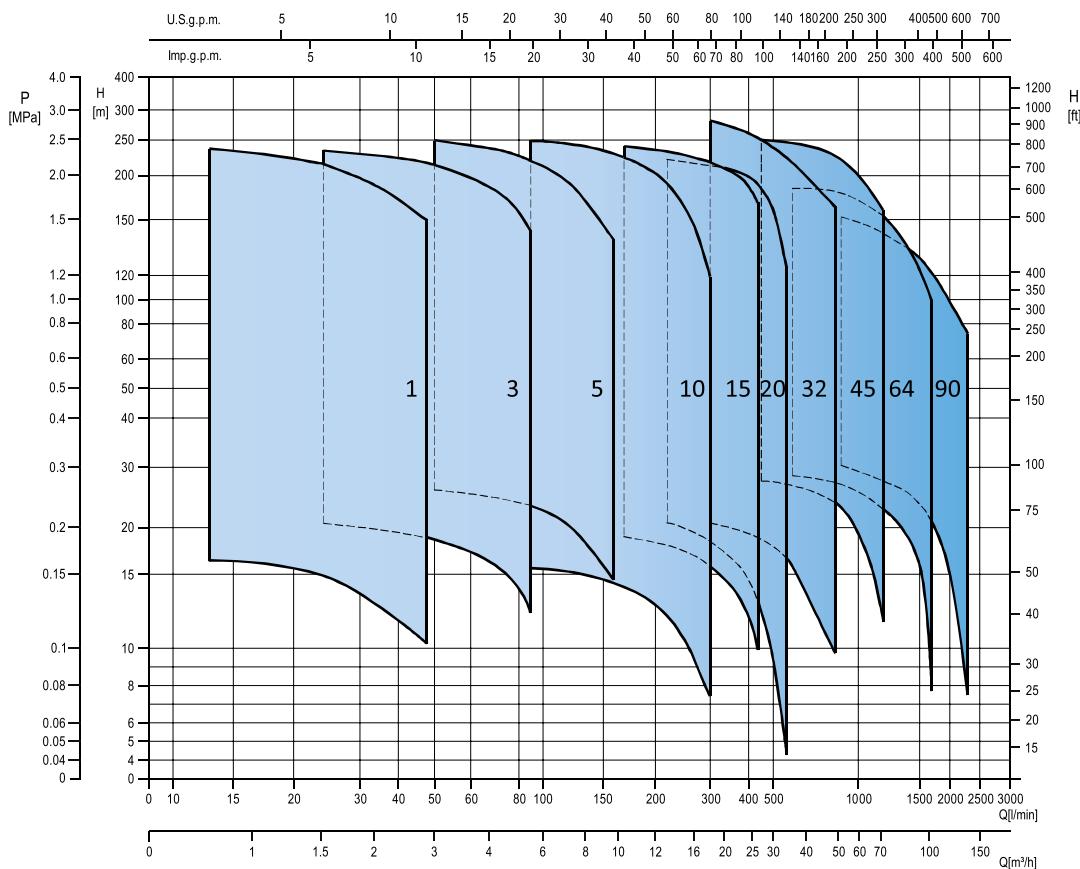

General information



Minimum efficiency index (MEI)

Pump type MEI

| | |
|-----------|--------|
| EVMS(.)1 | > 0.70 |
| EVMS(.)3 | > 0.70 |
| EVMS(.)5 | > 0.70 |
| EVMS(.)10 | > 0.70 |
| EVMS(.)15 | > 0.70 |
| EVMS(.)20 | > 0.70 |
| EVMS(.)32 | > 0.60 |
| EVMS(.)45 | > 0.70 |
| EVMS(.)64 | > 0.40 |
| EVMS(.)90 | > 0.60 |

| Version | | EVMS (AISI 304), EVMSL(AISI 316L), EVMMSG (Cast Iron/AISI 304) | | | | | |
|-----------------|------------------------------|--|--|--|--|--|--|
| Operating range | Nominal flow rate | 1, 3, 5, 10, 15, 20, 32, 45, 64, 90 m³/h | | | | | |
| | Max working pressure | 1.6, 2.5, 3.0, 3.5 MPa (16, 25, 30, 35 bar) | | | | | |
| | Max liquid temperature range | -30°C to 140°C | | | | | |
| Power source | Frequency | 50 Hz | | 60 Hz | | | |
| | Phase | Single phase | Three phase | Three phase | | | |
| | Nominal rotation speed | ~ 2900 min -1 | | ~ 3500 min -1 | | | |
| | Power rating | 0.37 ÷ 2.2 kW | 0.37 ÷ 45 kW | 0.37 ÷ 45 kW | | | |
| | Voltage | 230V±10% | 230/400V±10% (up to 4kW) 400/690V±10% (above 5.5kW) | 460V±10% (up to 4kW) 220/380V+10%/-5% (up to 4kW) | 460V±10% (above 5.5kW) 380/660V+10%/-5% (above 5.5kW) | | |
| Motor type | Type | Electric - TEFC | | | | | |
| | Efficiency class | IE2 (from 0.37 to 2.2) | IE2/IE3 (above 0.75 kW) | IE2/IE3 (above 0.75 kW) | | | |
| | Nº of poles | 2 | | | | | |
| | Protection degree | IP55 (up to 11kW), IP56 (above 15kW) | | | | | |
| | Insulation class | F | F (temperature rise class B) | | | | |
| | Thermal protection | - | PTC as standard for the above 1.5 kW | | | | |
| | Flange mount (IEC motor) | IM B14 (up to 4 kW), IM B5 (above 5.5 kW) | | | | | |

| | DM174/2004 * | Drinking water approval | | | | PZH no HK/W/0394/01/2017 | Atmospheres explosives approval ATEX 2014/34/UE |
|-----------------|-----------------|-------------------------|--|-----------------|--|-----------------------------|--|
| | | ACS | KTW-BWGL | WRAS | | | |
| Mechanical seal | SiC/Carbon_EPDM | SiC/Carbon_EPDM | All variations with EPDM on page 14-15 | SiC/Carbon_EPDM | All variations with EPDM on page 14-15 | | All variations on page 14-15 |
| EVMSG | ● | - | - | - | - | | ● |
| EVMS | ● | ● | ● | ● | ● | | ● |
| EVMSL | ● | ● | ● | ● | ● | | ● |


Note: * Available only for EVMS 1-20

** DVGW W270 is certified for elastomers. Reg. Nr. DW-5253CR0217

KTW is certified for organic components.

Construction

EVMS 1-3-5-10-15-20

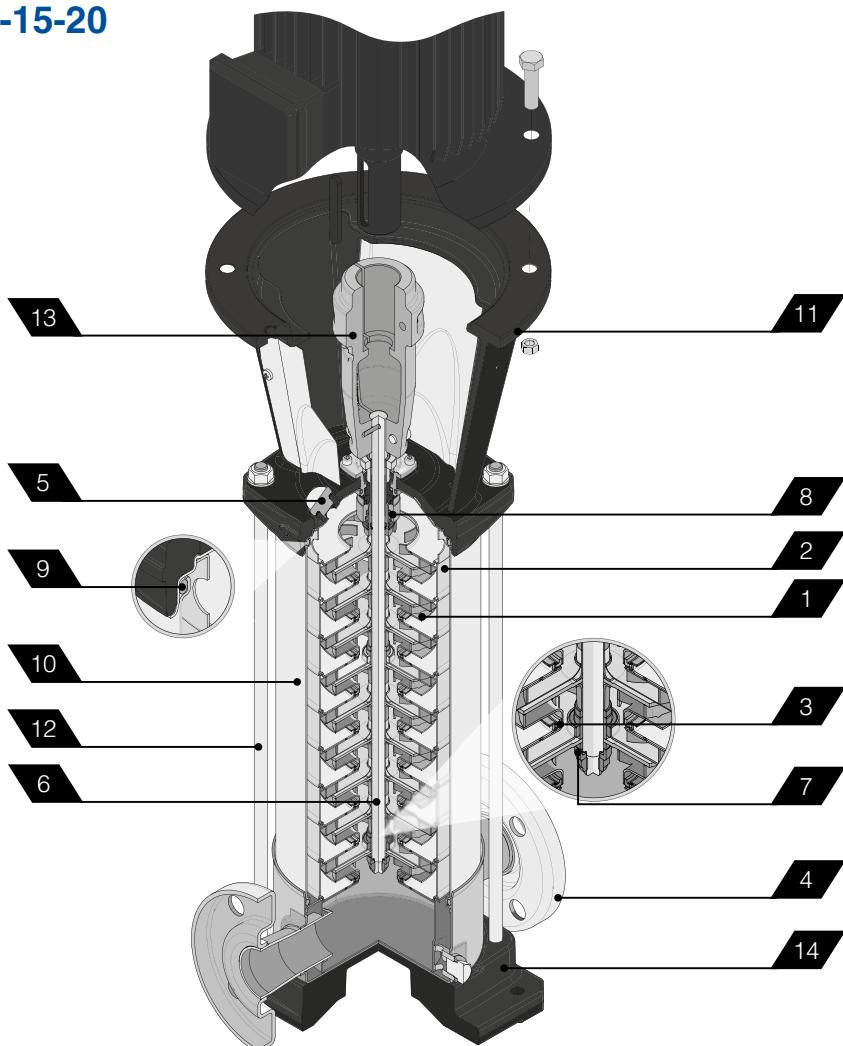


| | Version | EVMSG | EVMS | EVMSL |
|--------------------------|--|--|--|--|
| Key Components Materials | 1. Impeller | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 2. Intermediate casing | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 3. Liner ring | EN 1.4301 (AISI 304) + PPS | | EN 1.4404 (AISI 316L) + PPS |
| | 4. Bottom casing | Cast iron ENGJL-250 EN1551 | EN 1.4301 (AISI 304) | EN 1.4404 (AISI 316L) |
| | 5. Casing cover | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 6. Shaft | EN 1.4301 (AISI 304) EN 1.4404 (AISI 316L) EN 1.4460 (AISI 329A) | EVMSG 1-3-10 EVMSG 5-15-20 (depend on models) | EVMSL 1-3-10 EVMSL 5-15-20 (depend on models) |
| | 7. Shaft sleeve bearing | | Tungsten carbide | |
| | 8. Shaft seal | | SiC/Carbon/EPDM or FPM SiC graphite/SiC/EPDM or FPM | |
| | 9. O ring | EPDM FPM | ● ● | ● ● |
| | 10. Outer casing | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 11. Motor bracket | | Cast iron ENGJL-200 EN1561 | |
| | 12. Tie rod | | EN 1.4057 (AISI 431) | |
| | 13. Coupling | up to 4 kW from 5.5 kW | Die cast Aluminium EN AB-AISI11 Cu2 (Fe) Cast Iron | |
| | 14. Base | Cast iron ENGJL-250 EN1551 | Die cast Aluminium EN AB-AISI11 Cu2 (Fe) | |
| Pipe Connection | Oval flange | up to 16 bar | ● | ● |
| | Round flange DIN (EVMS(L)1-3-5 DIN/ANSI) | up to 16 bar from 16 bar to 25 bar | ● ● | ● ● |
| | Loose Flange DIN (EVMS(L)1-3-5 DIN/ANSI) | up to 16 bar from 16 bar to 25 bar | ● ● | ● ● |
| | Victaulic® | up to 25 bar | ● | ● |
| | Clamp | up to 25 bar | ● | ● |

Legend: ● Available

Construction

EVMS 32-45-64-90

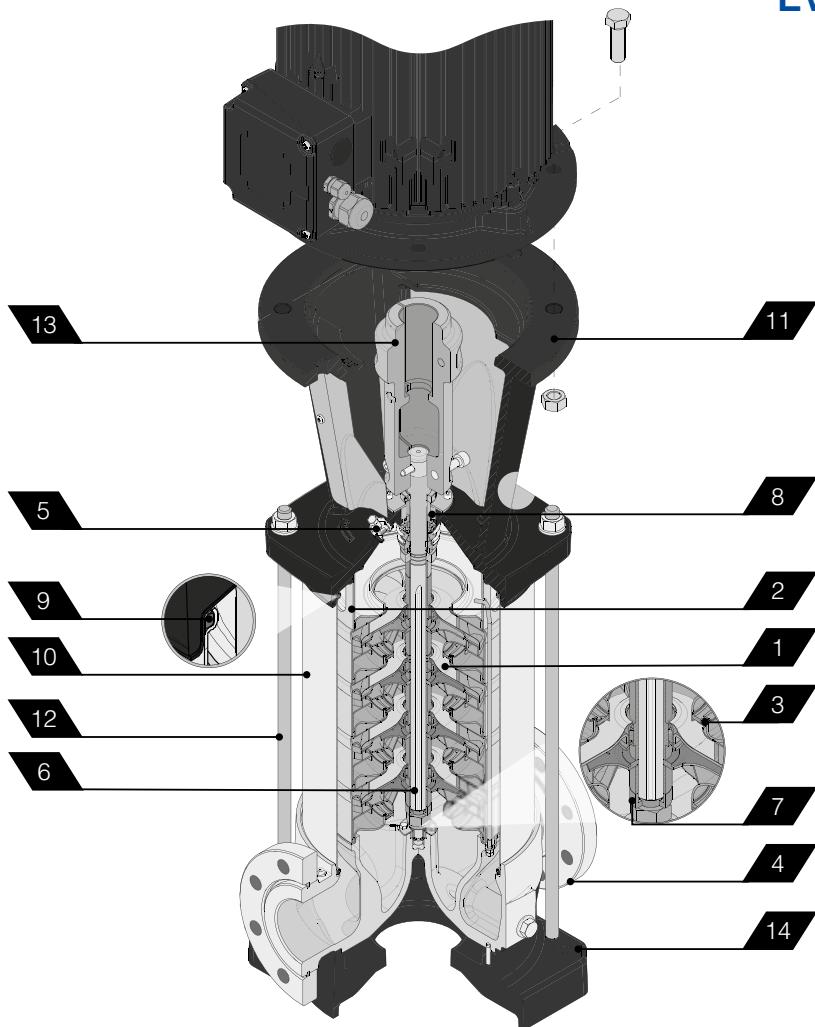

| | Version | EVMSG | EVMS | EVMSL |
|--------------------------|-------------------------|---|--|-----------------------------|
| Key Components Materials | 1. Impeller | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 2. Intermediate casing | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 3. Liner ring | EN 1.4301 (AISI 304) + PPS | | EN 1.4404 (AISI 316L) + PPS |
| | 4. Bottom casing | Cast Iron EN GJL-250 EN 1561 (for EVMSG32 and EVMSG45-90 up to 16 bar) Cast Iron EN GJS 400-15 EN 1563 (for EVMSG45-90 above 16 bar) | EN 1.4308 (ASTM CF8) | EN 1.4408 (ASTM CF8M) |
| | 5. Casing cover | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 6. Shaft | EN 1.4404 (AISI 316L) EN 1.4460 (AISI 329A) | EVMSG / EVMS 32-45-64-90 (depend on models) EVMSL 32-45-64 (depend on models) EVMSG / EVMS / EVMSL 45-64-90 (depend on models) | |
| | 7. Shaft sleeve bearing | | Tungsten carbide | |
| | 8. Shaft seal | | SiC/Carbon/EPDM or FPM SiC graphite/SiC/EPDM or FPM | |
| | 9. O ring | EPDM FPM | ● ● | ● ● |
| | 10. Outer casing | EN 1.4301 (AISI 304) | | EN 1.4404 (AISI 316L) |
| | 11. Motor bracket | | Cast Iron EN GJL200 EN1561 | |
| | 12. Tie rod | | EN 1.4057 (AISI 431) | |
| | 13. Coupling | up to 4.0 kW from 5.5 kW to 30 kW above 37 kW | Die cast Aluminium EN AB-AISI11 Cu2 (Fe) Cast Iron EN GJL250 EN 1561 Carbon steel | |
| | 14. Base | | Cast iron EN GJL200 EN 1561 | |
| Pipe connection | Round flange DIN/ANSI | ● | | |
| | Loose flange DIN/ANSI | | ● | ● |

Legend: ● Available

Everything you need in just one click!

visit our website www.ebaraeurope.com



Data book

The complete technical documentation where find all pumps data



Instruction Manual

The technical manual where find all information to install our pumps properly



Kensaku

The system to select the spare parts



Ez-finder

The software to find and select the suitable pump for any requirement
<https://ezfinder.ebara.com>



Service

An expert team at disposal to suggest the right product and supporting for aftersales matters

EBARA sales network

EUROPE

EBARA Pumps Europe S.p.A.

Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Phone +39 0444 706811
Fax +39 0444 405811
www.ebaraeurope.com

Italian Sales (for orders only):

e-mail: ordini.ape@ebara.com

Export Sales (for orders only):

e-mail: exportsales.ape@ebara.com

Technical Customer Service (TCS):

e-mail: tcs.ape@ebara.com

Phone +39 0444 706869/902/923/833

EBARA Pumps Europe S.p.A. GERMANY

Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Phone +49 (0) 6106-660 99-0
Fax +49 (0) 6106-660 99-45
e-mail: info.epde@ebara.com

EBARA Pumps Europe S.p.A. UNITED KINGDOM

Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Phone +44 1895 439027 - Fax +44 1235 815770
e-mail: marketing.epuk@ebara.com

EBARA Pumps Europe S.p.A. FRANCE

122, Rue Pasteur
69780 Toussieu, France
Phone +33 04 72 76 94 82
Fax +33 08 05 10 10 71
e-mail: mktg.efr@ebara.com

EBARA POMPY POLSKA Sp. z o.o.

ul. Działkowa 115 A
02-234 Warszawa, Poland
Phone +48 22 3909920
Fax +48 22 3909929
e-mail: marketing.epl@ebara.com

EBARA Pumps RUS Ltd.

Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Phone +7 499 6830133
e-mail: mktg.epr@ebara.com

EBARA PUMPS IBERIA, S.A.

Polígono Ind. La Estación
C/Cormoranes 6-8
28320 Pinto (Madrid), Spain
Phone +34 916.923.630
Fax +34 916.910.818
e-mail: marketing.ebara.es

EBARA Pumps Europe Nordic

Gustav III Boulevard 34,
169 73 Solna, Sweden
e-mail: info.eopen@ebara.com

Vansan Makina Montaj ve Pazarlama A.Ş.

Ataturk OSB, 10039 Sokak No: 28
Cigli, Izmir / TURKIYE
Phone +90 232 376 76 50
Fax +90 232 328 01 68
e-mail: info@vansan.com.tr

ASIA & SOUTHEAST ASIA

EBARA Corporation

11-1, Haneda Asahi-cho, Ohta-ku,
Tokyo 144-8510, Japan
Phone +81 3 3743 6111
Fax +81 3 5736 3100
www.ebara.co.jp

EBARA Corporation Fujisawa plant

4-2-1, Hon-Fujisawa, Fujisawa-shi.
Kanagawa 251-8502, Japan
Phone +81 466 83 8111
Fax +81 466 81 2164

EBARA Machinery (CHINA) CO.,Ltd.

Room No.303, Beijing Fortune Plaza,
No.7 Dongsanhuang Zhong Road, Chaoyang
District
Beijing, 100020 P. R. China
Phone 86 10 65309996
Fax 86 10 6530 8968
e-mail: emc@ebara.cn
www.ebara.cn

EBARA Densan (Qingdao) Technology Co., Ltd.

No.216, Shuangyuan Road, Chengyang,
Qingdao,
Shandong Province, P.R.China
Phone 86 532 8965 3369
Fax 86 532 8965 3379
www.edq-ebara.com

EBARA-Densan Taiwan Manufacturing Co., Ltd.

No.7-2, Nanyuan 2nd Road, Zhongli Dist.,
Taoyuan City 320, Taiwan (R.O.C.)
Phone 886 3 451-5881
Fax 886 3 452 7904
www.ebara.com.tw

EBARA Thailand Limited

3 Flr, ACME Bldg., 125 Petchburi Road,
Thungphayathai, Rajthevee, Bangkok, 10400,
Thailand
Phone 02 612 0322 30
Fax 02 612 0331
e-mail: info.etl@ebara.com
www.ebara.co.th

EBARA Fluid Machinery Korea Co., Ltd.

803, 91, Yangsan-ro, Yeongdeungpo-gu, Seoul,
07261, Korea
Phone 82 2 2135 6111
Fax 82 70 8230 2030
e-mail: sales.efmk@ebara.com
www.ebara.kr

EBARA Pumps Philippines, Inc.

Canlubang Industrial Estate,
Cabuyao 4025, Laguna, Philippines
Phone 0063 49 549 1806
Fax 0063 49 549 1915
e-mail: marketing.eppi@ebara.com
www.ebaraphilippines.com.ph

P.T. EBARA Indonesia

Jl. Raya Jakarta - Bogor Km. 32
Desa Curug, Cimanggis-Depok
Jawa Barat, 16953 Indonesia
Phone (62-21) 874 0852-53
Fax (62-21) 874 0033
e-mail: marketing.ptei@ebara.com
www.ebaraindonesia.com



EBARA sales network

AMERICA

EBARA PUMPS AMERICAS CORPORATION

1651 Cedar Line Drive
Rockhill, South Carolina, 29730 U.S.A.
Phone 803 327 5005
Fax 803 327 5097
e-mail: info@pumpsebara.com
www.pumpsebara.com

EBARA HG ULC

5 Brigden Gate Halton Hills, ON L7G 0A3,
Canada
Phone +1 877 781 5729
www.ebarahg.com

EBARA Bombas América do Sul Ltda

Rua Joaquim Marques de Figueiredo, 2-31,
Distrito Industrial, CEP 17034-290, Bauru, SP,
Brazil
Phone +55 14 4009 0000
Fax +55 14 4009 0044
e-mail: assistencia@ebara.com.br
www.ebara.com.br

EBARA Bombas Colombia S.A.S.

Calle 98 # 70 - 91, Oficina 1016,
Centro Empresarial Pontevedra, Bogotá -
Colombia
Phone (+571) 8269865
e-mail: ventas.ebcо@ebara.com
www.ebaracolombia.com

EBARA Pumps Mexico, S.A. de C.V.

Av.Central Número 230 Interior 146, en la
Congregación de San Sebastián de los Lermas
en Guadalupe, Nuevo León, 67188 México
Phone +52 81 2474 4090
e-mail: ventas.epmx@ebara.com
www.pumpsebaramexico.com

ASANVIL S.A.

Cno. al Paso Escobar s/n esq. Aquino Ruta 101
Km 27.800, Barros Blancos, Canelones, Uruguay

MIDDLE EAST

EBARA Pumps Middle East FZE

P.O.BOX 61383
Jebel Ali, Dubai, UAE
Phone +971 4 8838889
Fax +971 4 8835307
e-mail: info@ebarame.ae

EBARA PUMPS SAUDI ARABIA LLC

St. 98, Dammam Second Industrial City, P.O.Box.
9210, Dammam 34333, Kingdom of Saudi Arabia
Phone 966-138300932

AFRICA

EBARA PUMPS SOUTH AFRICA (PTY) LTD

26 Kyalami Boulevard,Kyalami Business Park,
1684, Midrand, Gauteng
South Africa
Phone +27 11 466 1844
Fax: +27 11 466 1933
e-mail: ebara.epsa@ebara.com

EBARA PUMPS EAST AFRICA

Sunflag Industrial Park, Unit 5, Mombasa Road,
18851-00100, Nairobi
Kenya
Phone.: +254(0)709491900
e-mail: info.epea@ebara.com
www.ebaraeurope.co.ke

OCEANIA

EBARA Pumps Australia Pty. Ltd.

1 Jackstaff Court Bayswater North Victoria,
3153, Australia
Phone 0061 3 97613033
Fax 0061 3 97613044
e-mail: b.mark@ebara.com
sales@ebara.com.au
www.ebara.com.au



479705598F

09/25

EBARA Pumps Europe S.p.A.
Via Torri di Confine 2/1 int. C
36053 Gambellara (Vicenza), Italy
Tel. +39 0444 706811
ebarapumps.epe@ebara.com
www.ebaraeurope.com

EBARA Pumps Europe S.p.A. GERMANY
Elisabeth-Selbert-Straße 2
63110 Rodgau, Germany
Tel. +49 (0) 6106-660 99-10
info.epde@ebara.com

EBARA Pumps South Africa (PTY) LTD
26 Kyalami Boulevard,
Kyalami Business Park, 1684, Midrand,
Gauteng, South Africa
Tel. +27 11 466 1844
ebara.epsa@ebara.com

EBARA Pumps Europe S.p.A. UK
Unit A, Park 34
Collett Way - Didcot
Oxfordshire - OX11 7WB, United Kingdom
Tel. +44 1895 439027
marketing.epuk@ebara.com

EBARA Pumps Europe S.p.A. FRANCE
122, Rue Pasteur
69780 Toussieu, France
Tel.: +33 04 72 76 94 82
mktg.efr@ebara.com

EBARA Pumps East Africa
Sunflag Industrial Park, Unit 5, Mombasa Road,
P.O BOX 18851-00100, Nairobi, Kenya
Tel. +254709491900
info.epea@ebara.com
www.ebaraeurope.co.ke

EBARA POMPY POLSKA Sp. z o.o.
ul. Działkowa 115 A
02-234 Warszawa, Poland
Tel. +48 22 3909920
marketing.epl@ebara.com

EBARA Pumps RUS Ltd.
Prospekt Andropov 18, building 7, floor 11
115432 Moscow
Tel. +7 499 6830133
mktg.epr@ebara.com

EBARA West Africa Limited
ewasales.epe@ebara.com