

Tell Free(US): 3235971109

Website: www.mcombo.com Amazon sold by: MCombo

Warranty Claim: sales@mcombo.com


Sales & Technical Questions: sales@mcombo.com sales@exacme.com

CONGRATULATIONS!

Mcombo Recliner TV Chair - a name synonymous with classic design and the carrier of value and quality. Our products are directly from factory and eliminated the cost of middlemen. The Recliner TV Chair is a high-quality shading solution to enhance comfortable feelings as you try to enjoy the nice day.

WARRANTY

- All warranties are to the original purchaser from MCOMBO ONLY
- MCOMBO [®] will replace the defective parts or send replacement item provided that the warranty parts have not been subjected to misuse, abuse or improper service by the consumer, for example, damaged wire arising in consequence of negligence or improper operation.
- MCOMBO [®] All of recliners come with a 30-day return/replace policy. During this time, we will cover the shipping cost of return and replacement for defective and damaged item, through provide pre-paid return label or pick up service for customer's convenience.

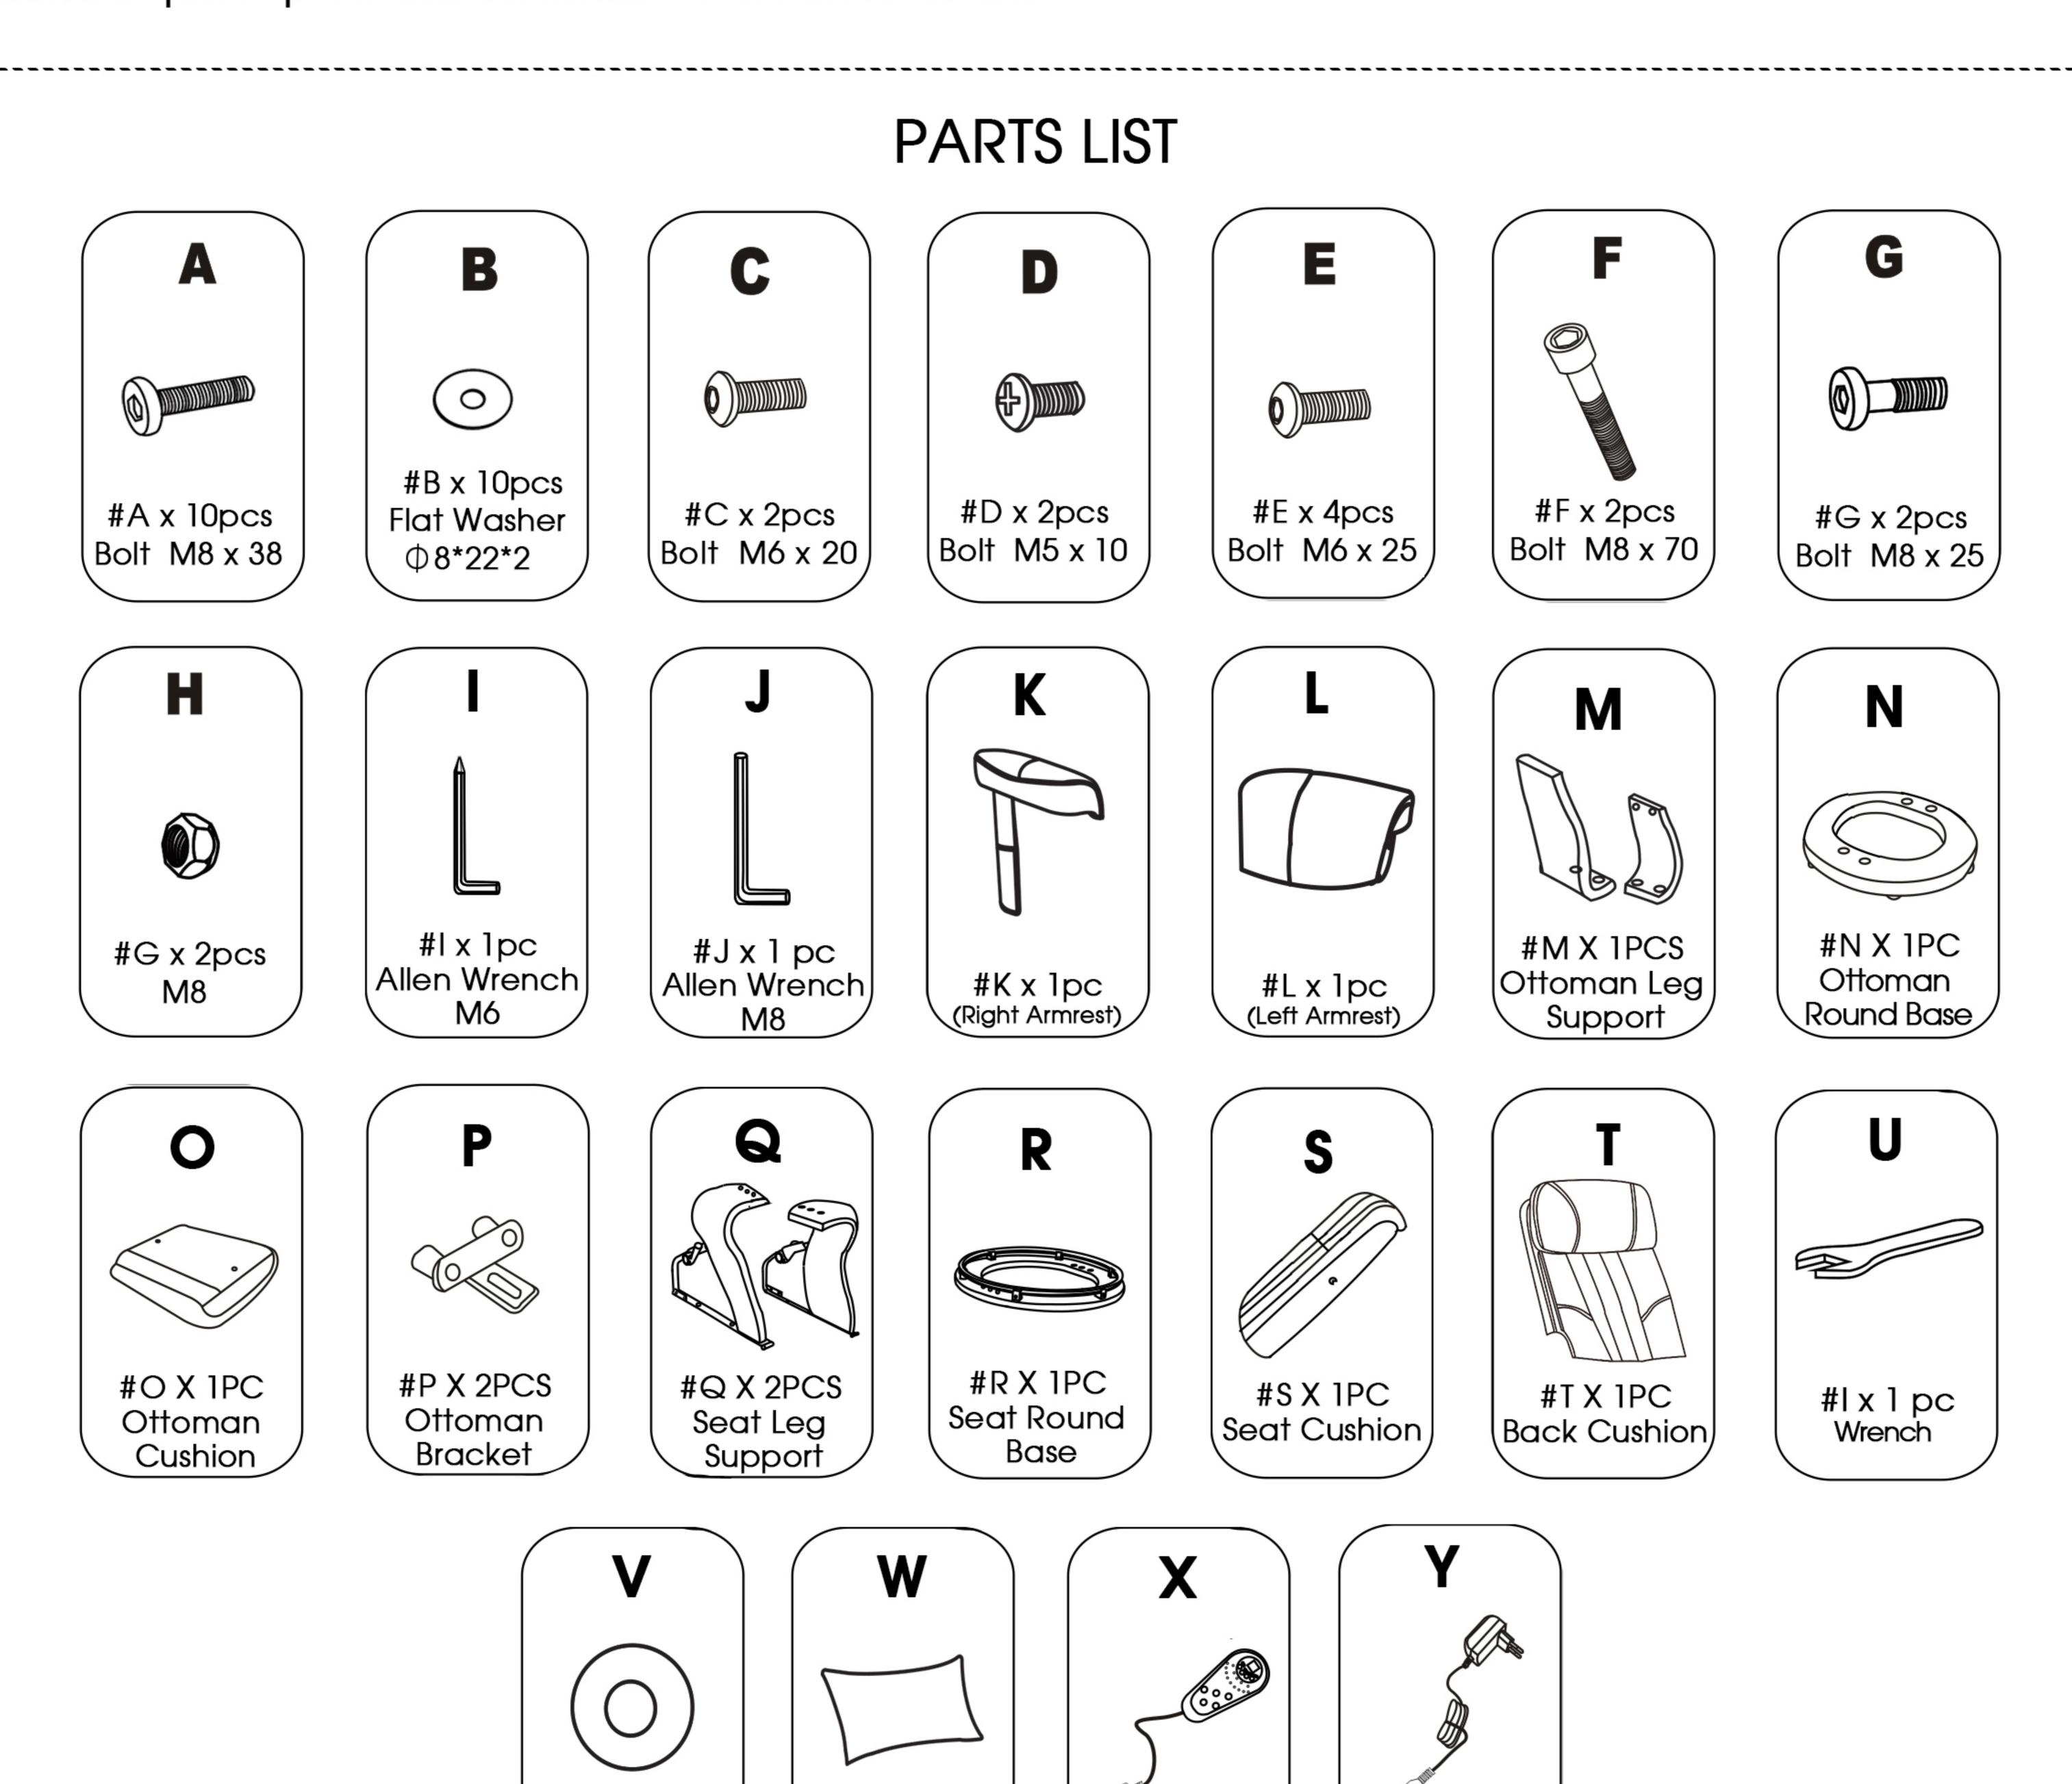

#Wxlpc

Lumbar Pillow)

#XX1PC


Remote Control

#YX1PC

Adapter

#Vx2pc


Washer

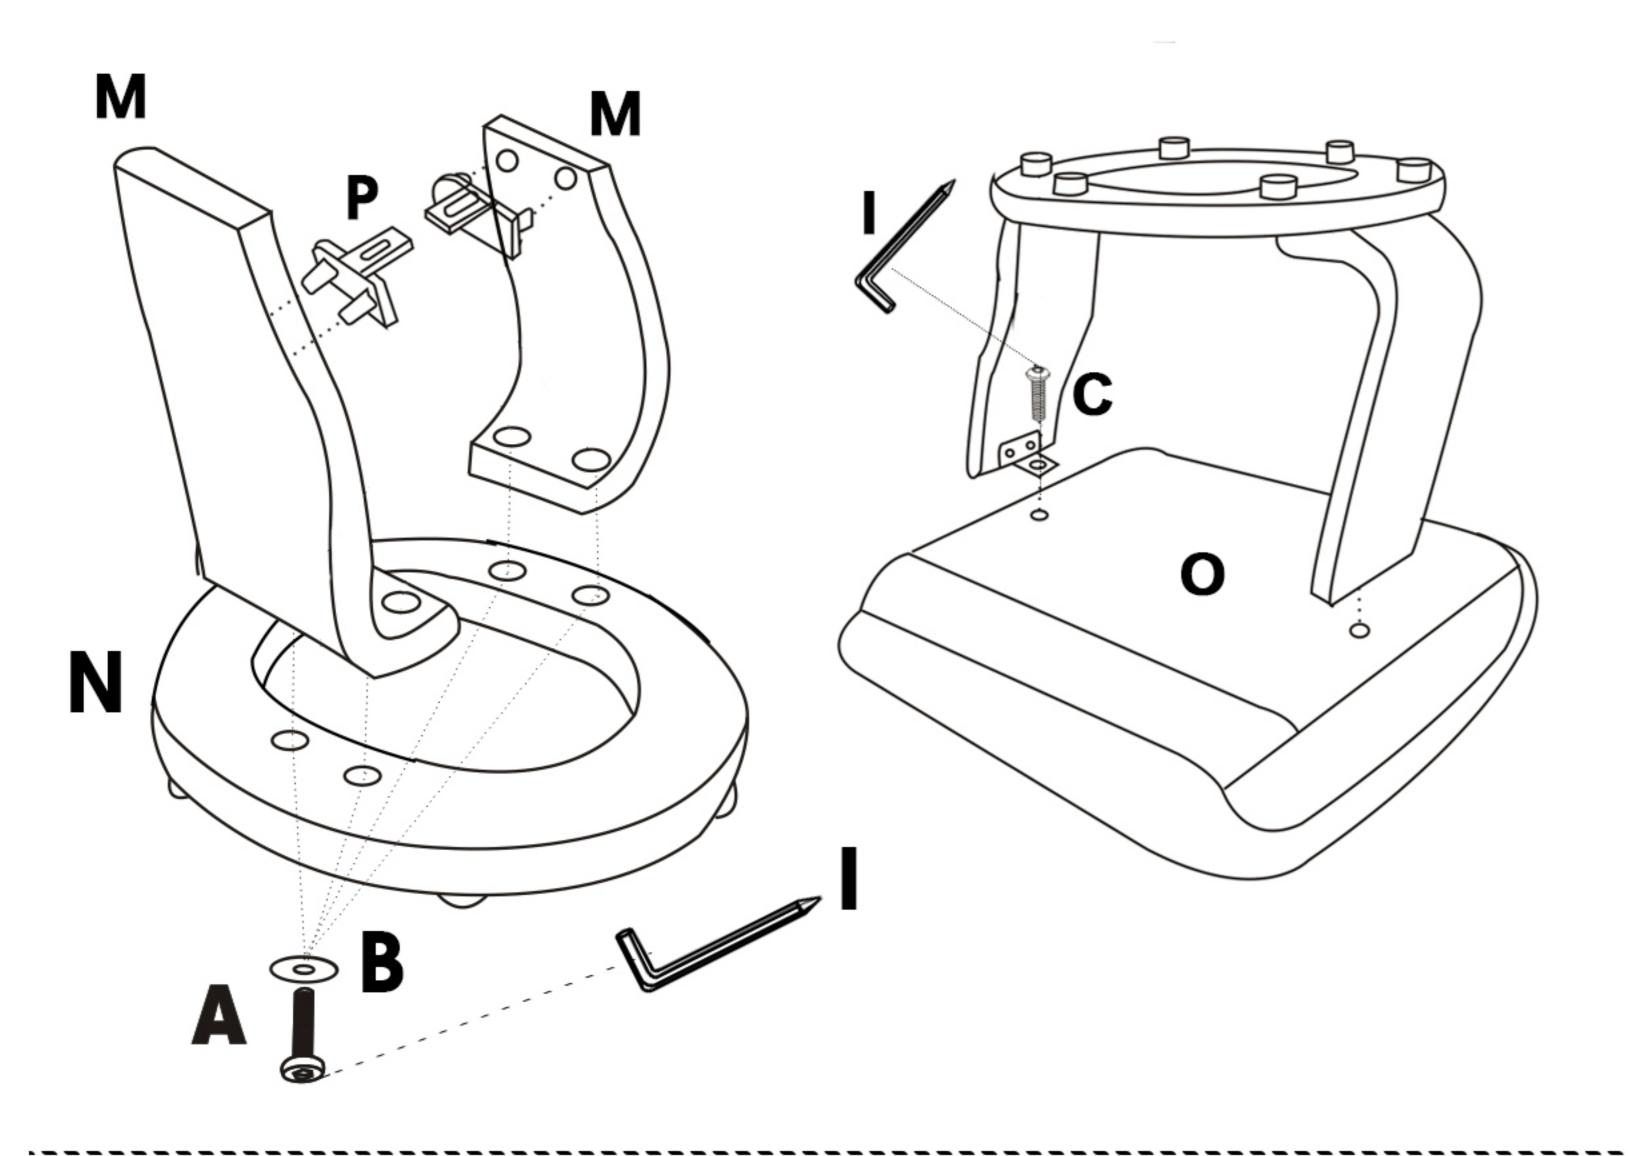

Step 1


Use Allen Wrench (#I) to fix the Ottoman leg supports (#M) with bolts (#A&B) on Ottoman base (#N).

Install the bracket (**#P**) on the Ottoman leg support (**#M**), and then fix the Ottoman cushion (**#O**) to the ottoman base with bolts (**#C**).

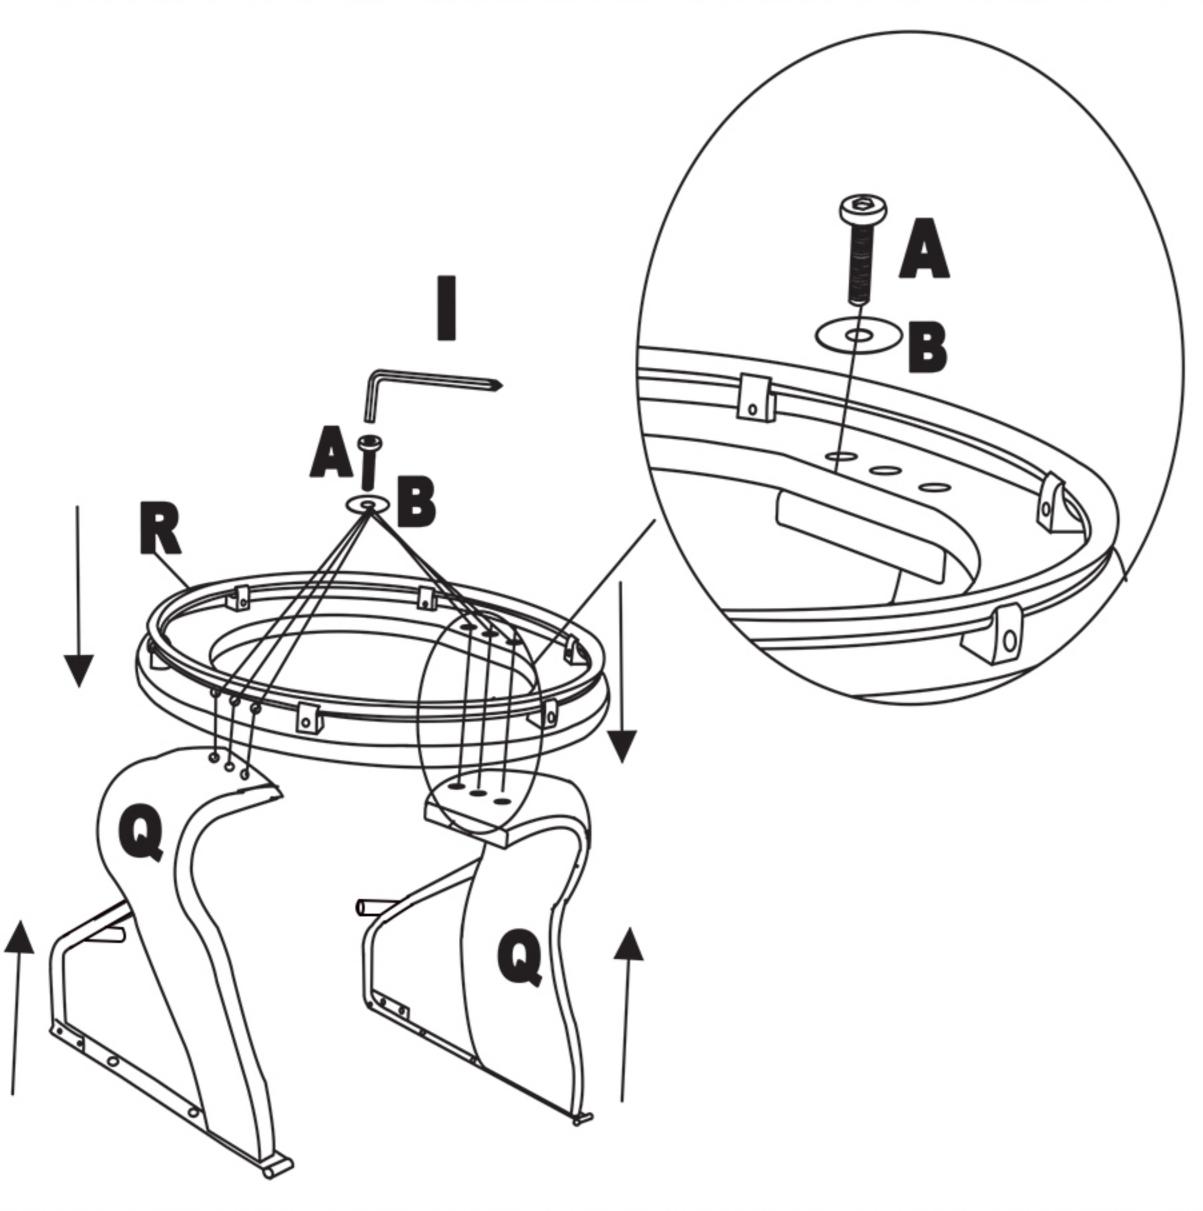

Step 2

- 1 : Fix the seat leg support (#Q) to the seat base (#R) with bolts (#A&B) through pre-drilled holes
- 2 : Secure the leg and base with the bolts (#A&B), then tighten with allen wrench (#I).

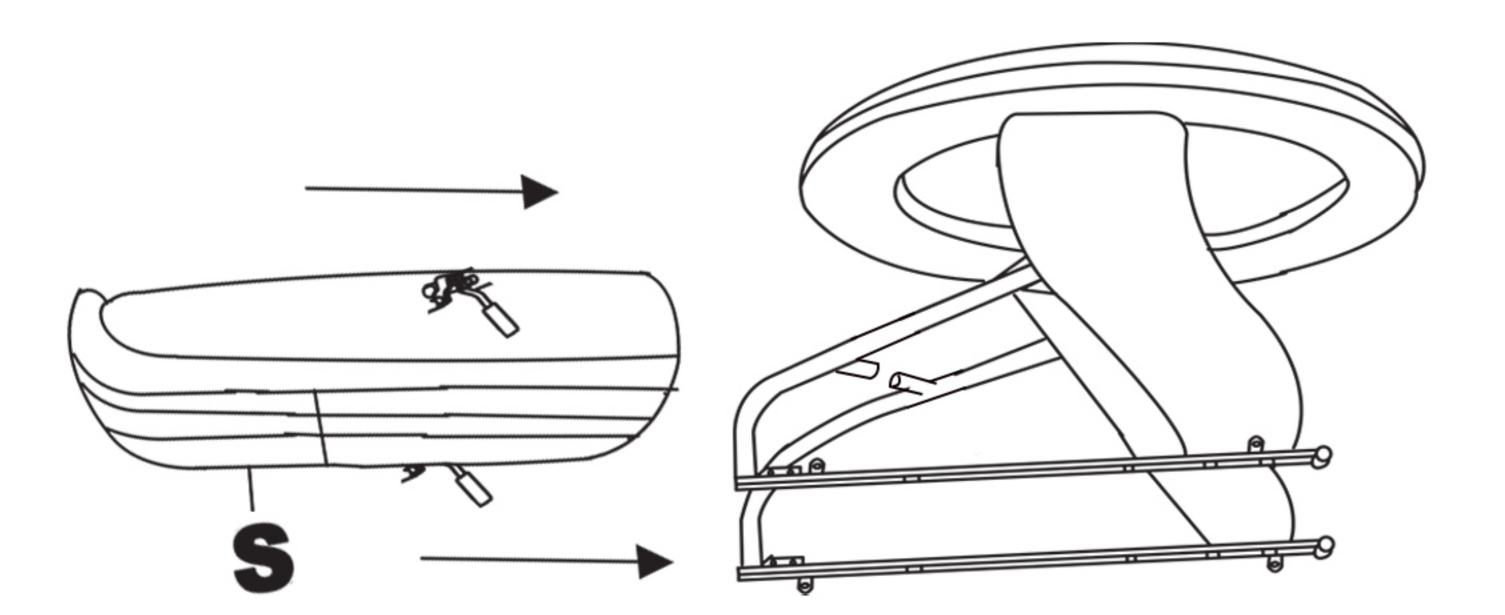


Step 3


Install the seat cushion (**#S**) on the chair frame, and align the adjusting levers on both sides of the cushion with the corresponding holes on the armrest frame of the chair.

Tip: Turn the chair frame and base upside down, and then turn the seat cushion over and install it on the chair frame. It may be easier to operate.

Step 4

- 1 : First insert the washer **(#V)** between the adjusting lever and the armrest rod, and align them.
- 2: Then use screw (#D) to fix the armrest frame and the adjusting lever with wrench (#I).

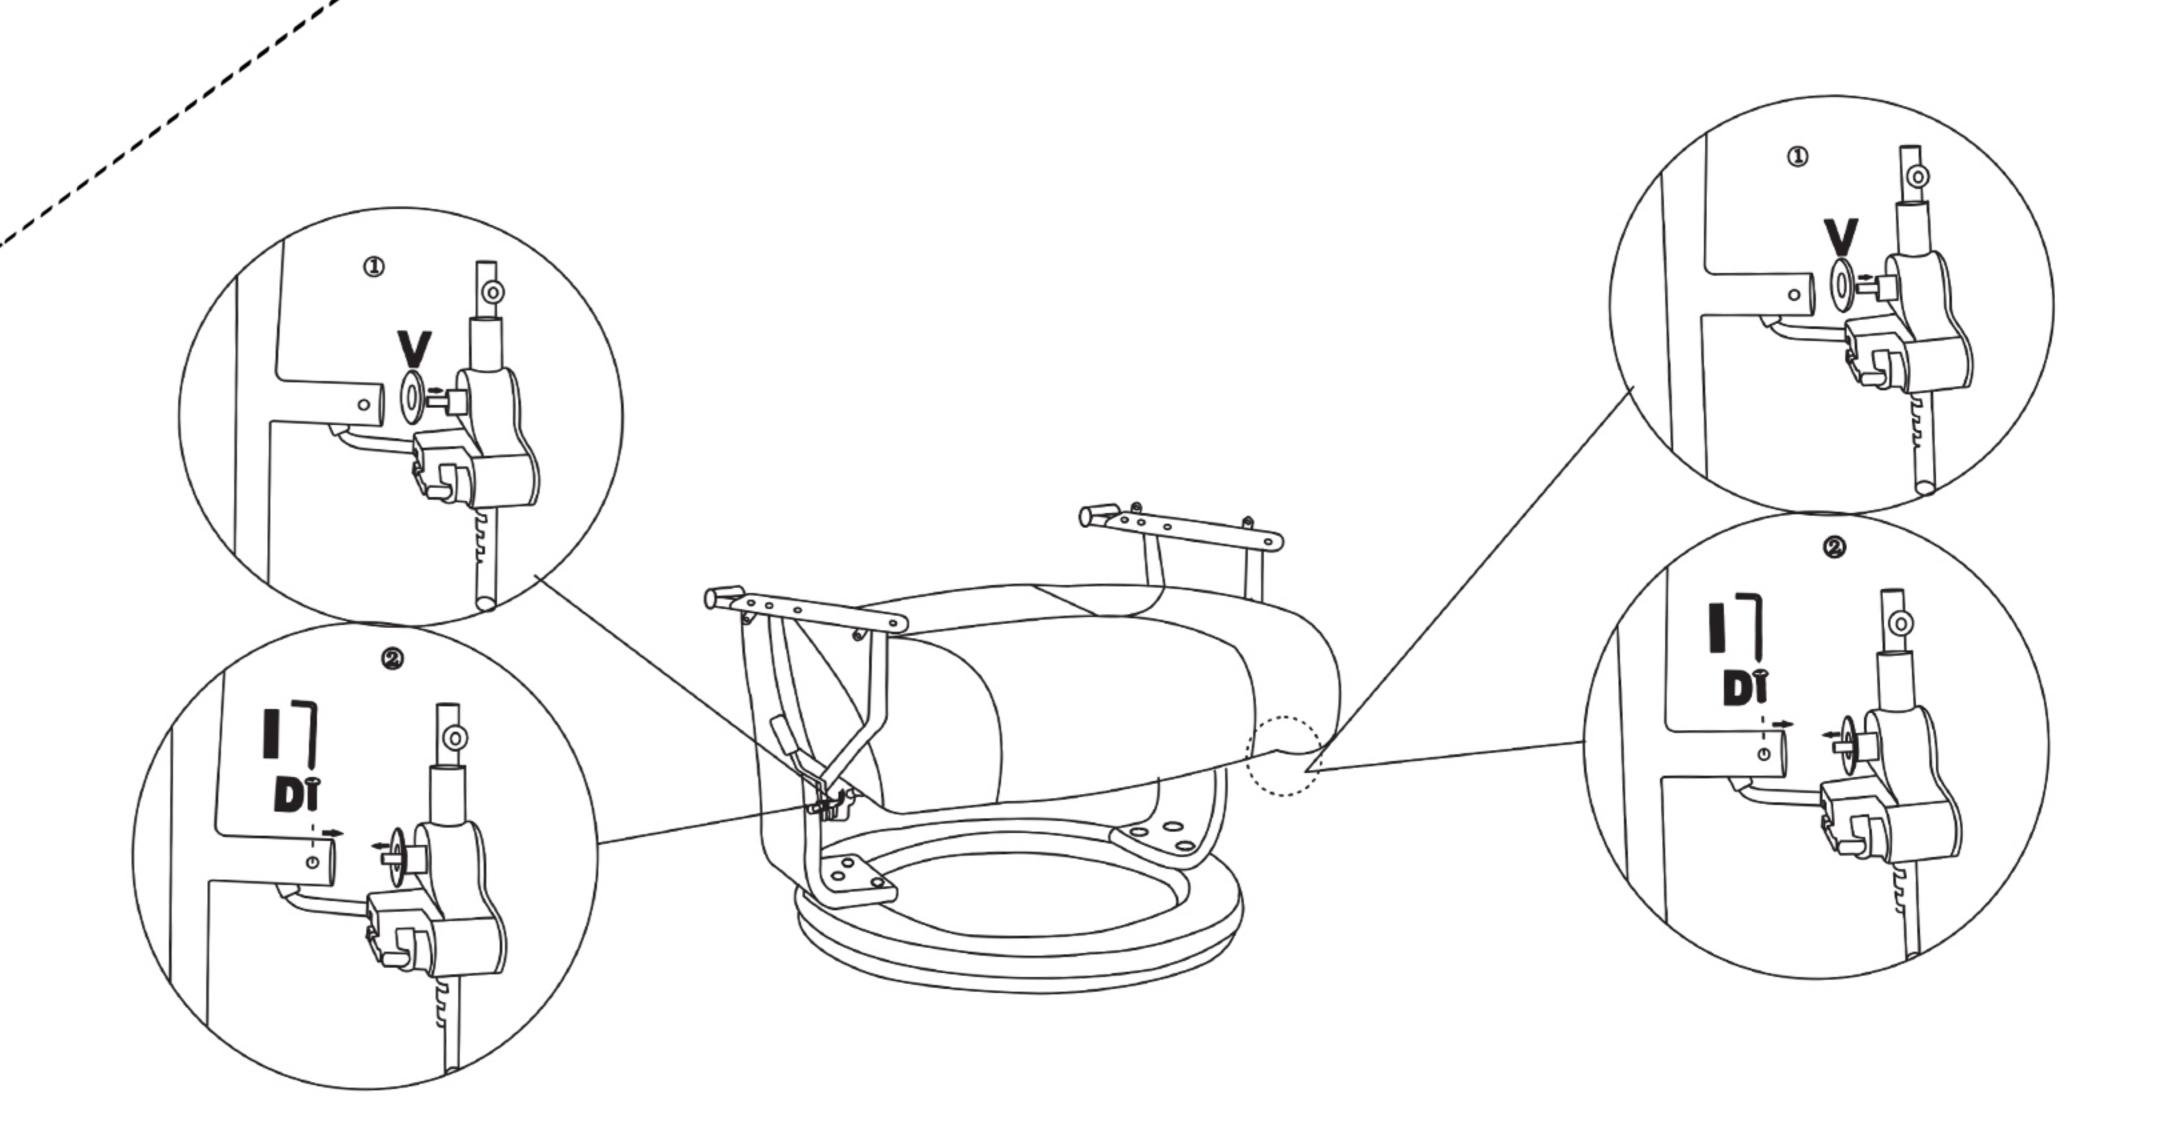

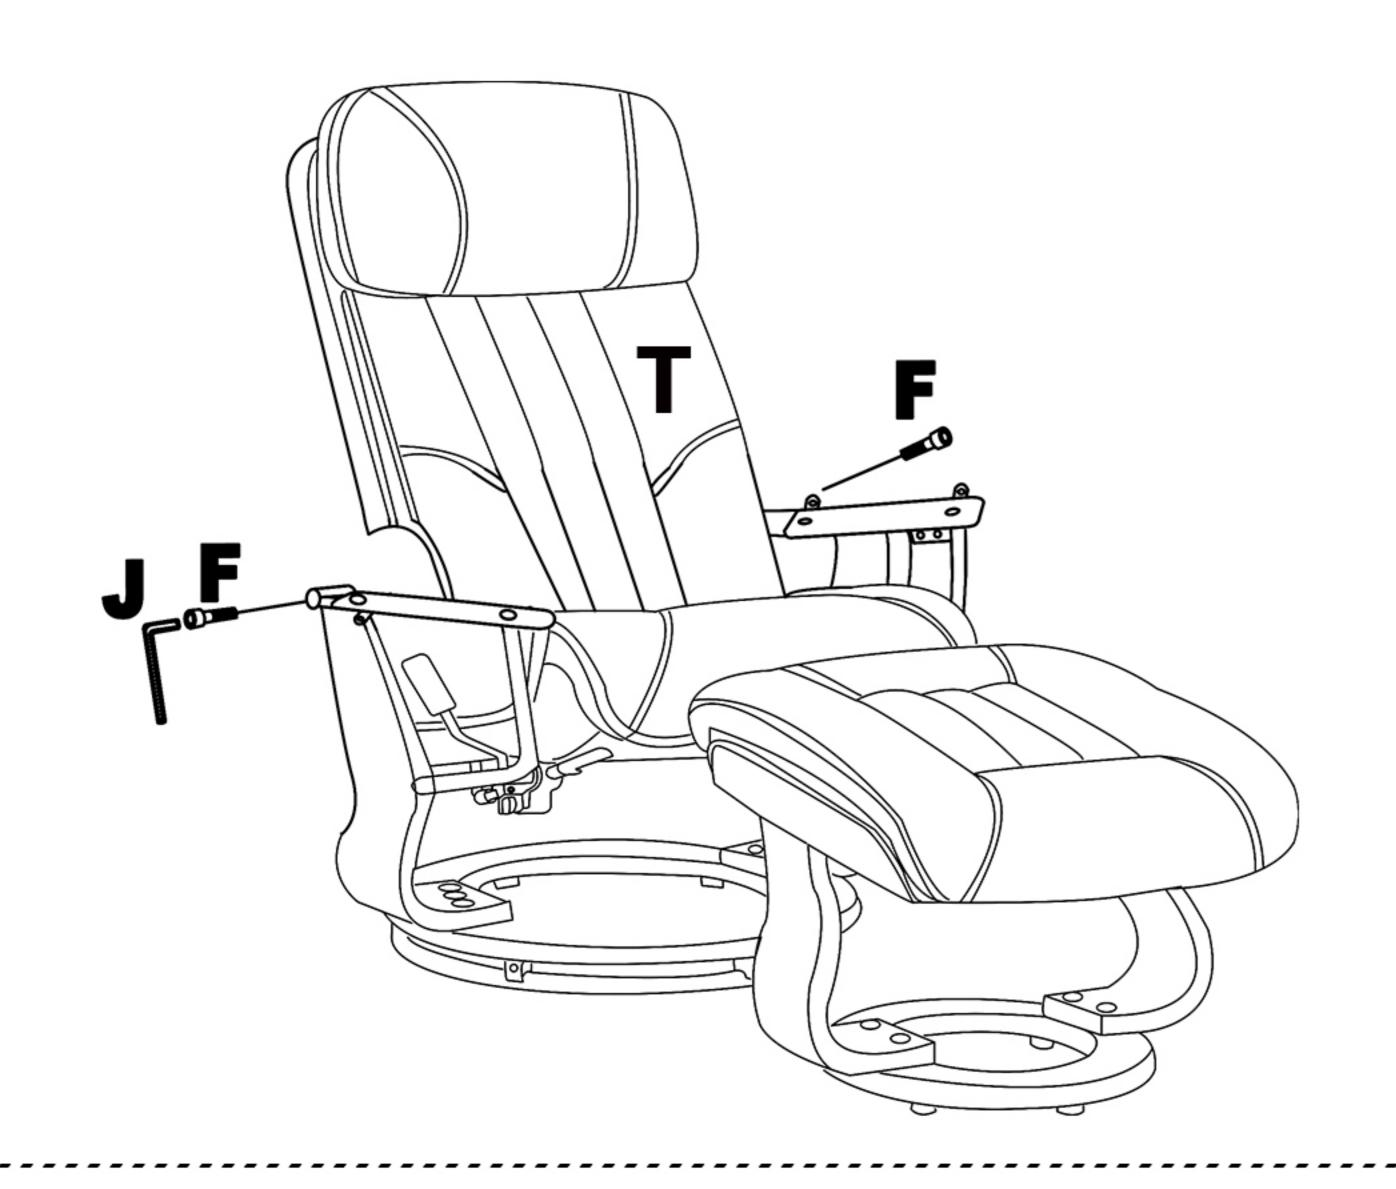


Step 5

Put the back cushion (#T) on the seat cushion first, align the screw holes on the armrest frame with the screw holes on the side of the back cushion, and tighten the screws (#F) with a wrench (#J).

Step 6

Align the small iron plate holes on the back of the backrest with the seat cushion, and fix the screws (#G & #H) with a wrench (#I & #U).

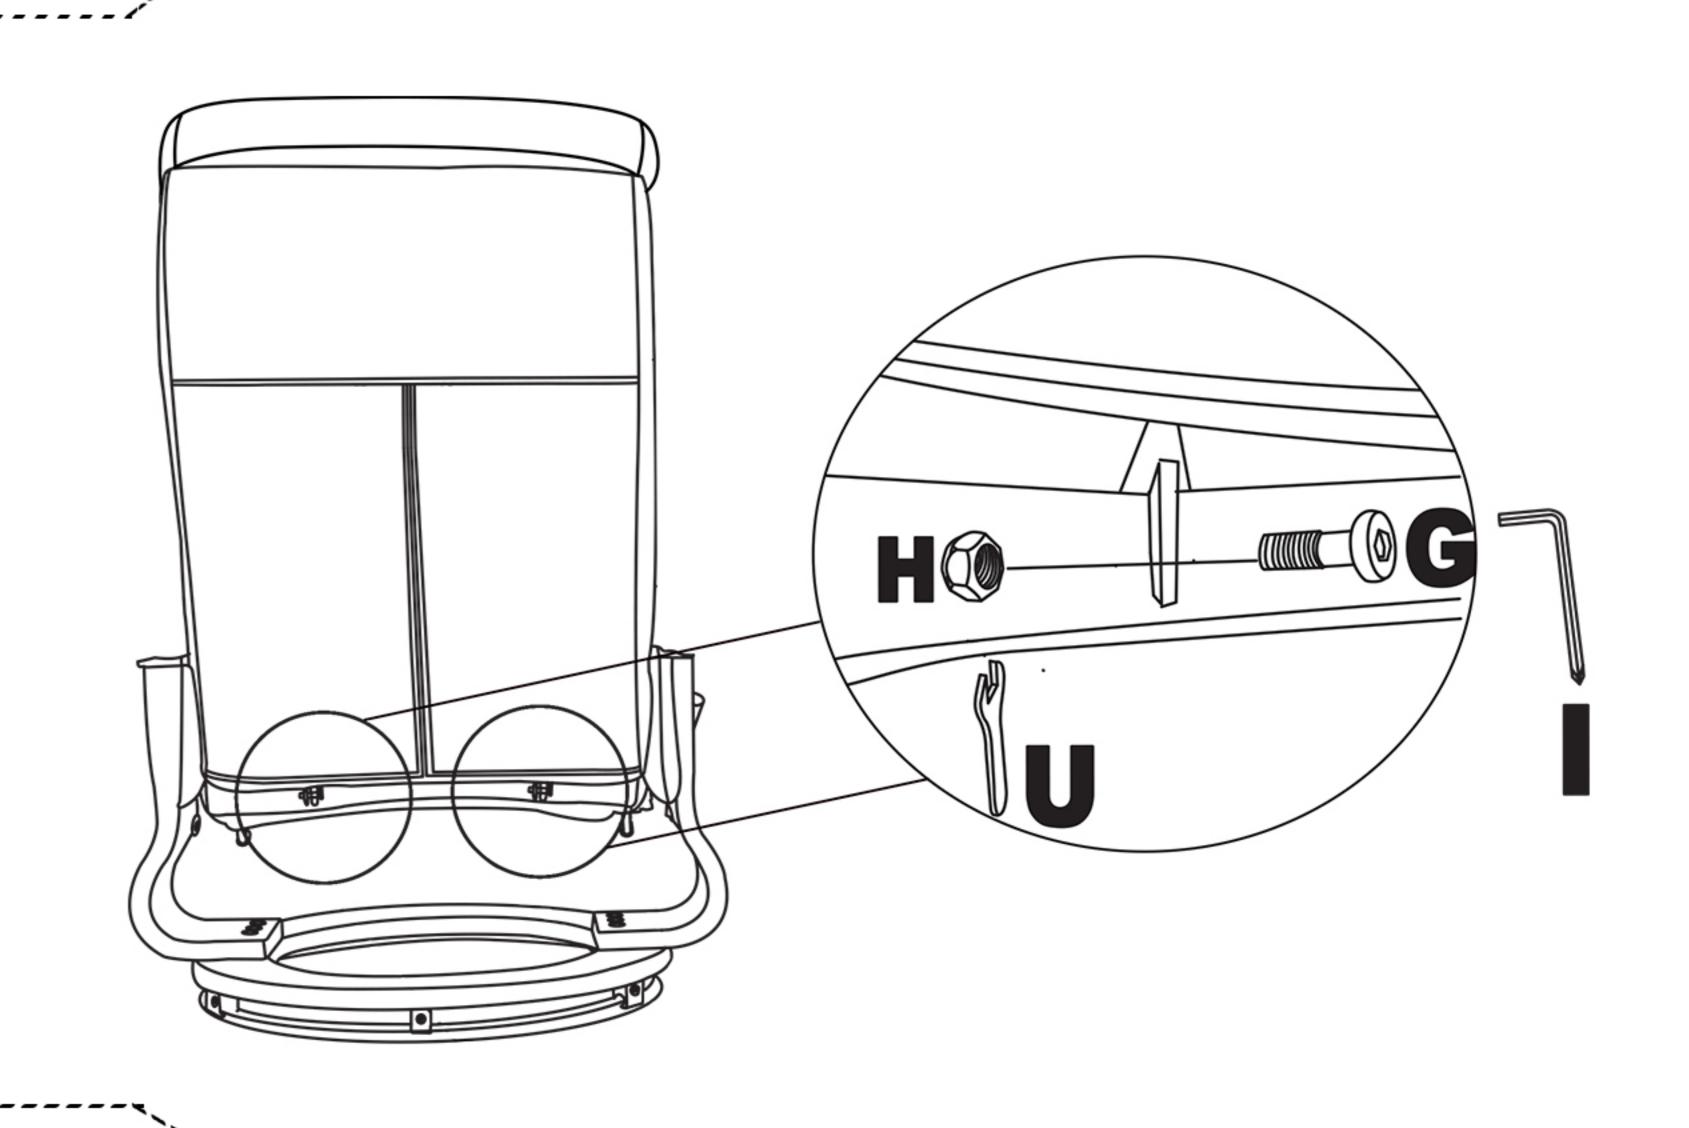

E E

Step 7

Use screws (**#E**) to install the left armrest (**#L**) and right armrest (**#K**) to the armrest frame and fix with wrench (**#I**).

Step 8

Connect three wires,

- 1 : Adapter **(#S)**: Connect to the small black connector of the chair.
- 2 : Romote Control (#T):Connect two large black connectors.
- 3. Vibrating Power Cord: Connect two small white connectors.

