


Manrose Weatherproof Louvre Grilles

CONCRETE/TIMBER/BRICK
USE APPROPRIATE FIXING

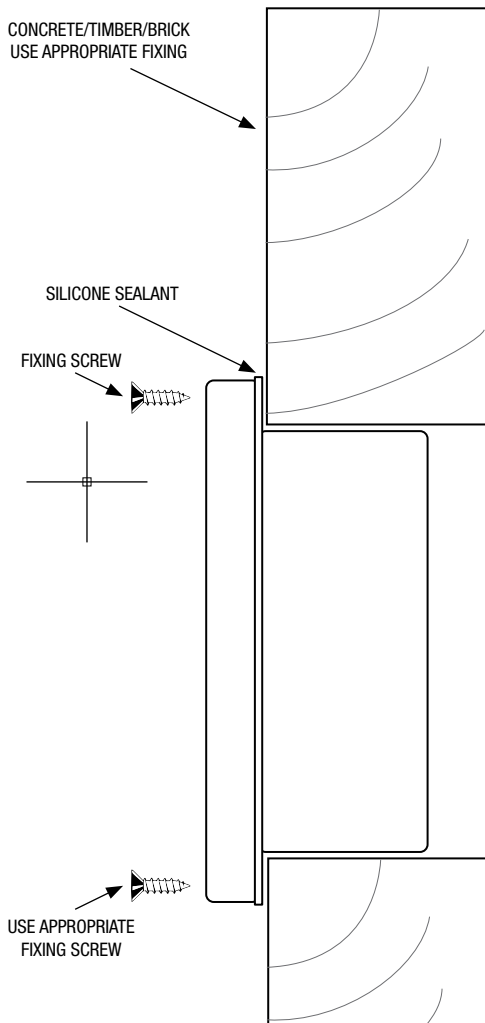

Applies to the following products:

DCT3709

DCT4069

DCT4070

1. This weatherproof louvre grille is supplied complete with perimeter frame and four fixing screws.
2. Ensure that the supplied fixing screws are suitable for the application and for the substrate that the grille is being affixed to. Alternative fixings should be manufactured from stainless steel.
3. The external frame surrounding the grille must be waterproof with a suitable silicone sealant to ensure weathertightness.
4. Once all four corners to the substrate are fixed using the supplied screws or suitable alternative fixings and the appropriate silicone sealant has been applied around all 4 sides of the perimeter frame a visual inspection must be made to confirm weathertightness.

Due to the many building variables and different available cladding systems, we recommend that this product be installed by a licensed building practitioner. The information contained herein should be used strictly as a guideline only.