



RTK-X57 Transmitter™ Module



Poly TC8
Poly Provided



Poly Expansion Mic

RCC-M006-2.0M
USB-A to USB-B Micro

RCC-H001-2.0M
HDMI Cable

SCTLink™ Cable*

Ethernet; HDMI; Audio I/O & USB
up to 100m CAT5e/CAT6

The SCTLink™ cable must always be
a single, point-to-point CAT cable with
no couplers or interconnections.

Can be used on Tx or Rx.

WPS-12 30VDC
100-240V 47-63Hz
Power Supply




RTK-X57 Receiver™ Module



*SCTLink™ Cable Specs

Integrator-Supplied CAT5e/CAT6 STP/UTP Cable
EIA568A or EIA568B (10m-100m min/max Length)

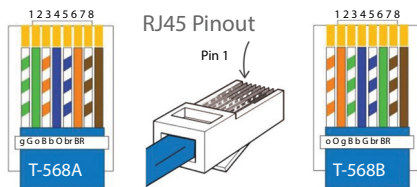

RCC-H001-1.0M
HDMI Cable


RCC-H016-1.0M
UTP Cable

RCC-M010-1.0M
Microphone Cable

RCC-M005-1.0M
USB-A to USB-C

PPC-015-1.0M
Power Cable

Poly X50 + X70

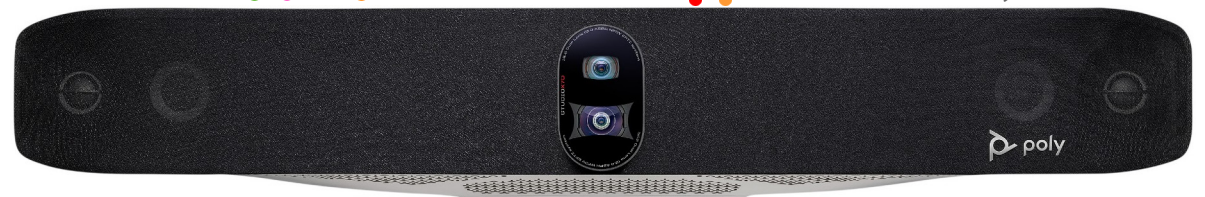

Module Dimensions

RTK-X57-TX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)

RTK-X57-RX™: H: 1.39" (35mm) x W: 10.22" (259mm) x D: 4.51" (114mm)