

The clean, contemporary shape of Glacier complements any kitchen design. Advanced features like powerful ventilation, LED lighting and sleek capacitive touch controls make operation enjoyable.

SIZE	WHITE	BLACK STAINLESS	STAINLESS	GREASE FILTERS (replacement)	NON-DUCTED FILTERS
30 in.	GLA2303WW	GLA2303BLS	GLA2303SS	HPFAMM30	HPF30
36 in.	-	GLA2363BLS	GLA2363SS	HPFAMM36	HPF36

FEATURES

Max. Blower CFM ‡	350 CFM
Control type	3-speed Soft Touch
Delay off	yes
Filter Clean Reminder	no
ADA Capable	yes
Lighting	2-level LED module (included)
Grease Filters	Micro Mesh (Qty. 2)
Installation Hardware	EZ1 Bracket
ENERGY STAR®	yes
Recirculation	Non-ducted filters sold separately

AC INPUT

120 V, 60 Hz - 0.8 AMPS
Electrical Connection: Direct Wire

OPTIONAL ACCESSORIES

7-in. Round Damper	BP87Q
ADA Wiring Kit	HAWRK5
Make-up Air Dampers	MD6TU, MD8TU and MD10TU
Power Cord Kit	HCK44

MOUNTING HEIGHT


Minimum 18 in. from cooktop to bottom of hood for electrical range
Minimum 26 in. from cooktop to bottom of hood for gas range

LIMITED WARRANTY

1-year
3-year (LED modules only)
(See installation manual for full warranty text.)

FOR INDOOR USE ONLY

‡ Max. blower CFM indicates the performance of the hood blower in open air and is not HVI certified..

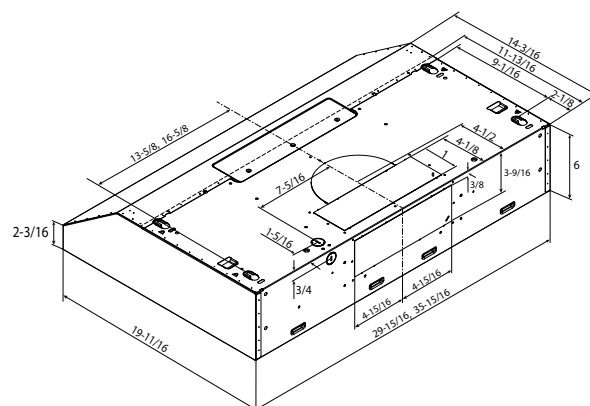


Dimensions shown in inches.



HVI PERFORMANCE									
Duct Orientation	Size	Damper	Sones			CFM			
			Low	Med	High	Low	Med	High 0.25 in. w.g.	High 0.1 in. w.g.
Vertical - Rectangular	3¼ x 10 in.	Included	1.5	4.0*	6.5	130	190*	160	240
Horizontal - Rectangular	3¼ x 10 in.	Included	2.0	4.0*	7.0	110	180*	160	240
Round - Vertical	7 in.	Sold Separately**	2.0	4.0*	6.0	150	200*	140	250

** 7 in. adaptor plate included

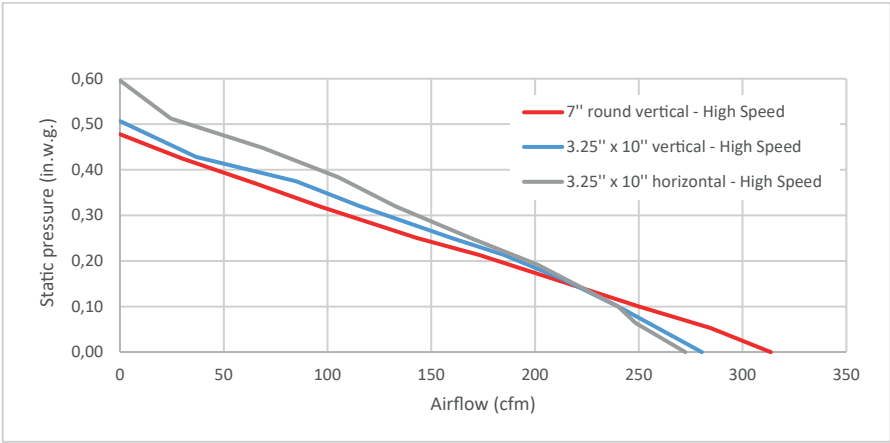

HVI-2100 CERTIFIED RATINGS comply with new testing technologies and procedures prescribed by the Home Ventilating Institute, for off-the-shelf products, as they are available to consumers. Product performance is rated at 0.1 and 0.25 in. static pressure at high speed based on tests conducted in an HVI-approved state-of-the-art test laboratory. Sones are a measure of humanly-perceived loudness, based on laboratory measurements.
* Where noted performance rating is not HVI certified.

LARGEUR	BLANC	INOX NOIR	INOX	FILTRES À GRAISSES (remplacement)	FILTRES DE RECIRCULATION
30 po	GLA2303WW	GLA2303BLS	GLA2303SS	HPFAMM30	HPF30
36 po	-	GLA2363BLS	GLA2363SS	HPFAMM36	HPF36

Puissance max. du ventilateur ±	350 pi³/min
Type de commande	Tactile capacitive à 3 vitesses
Arrêt différé	oui
Rappel d'entretien des filtres	non
Capacité ADA	oui
Éclairage	Module DEL à 2 intensités (inclus)
Filtres à graisses	À maillage fin (qté 2)
Matériel pour l'installation	Supports EZ1
ENERGY STAR®	oui
Recirculation	Filtres de recirculation vendus séparément



Connexion électrique: Câblage direct

Volet rond de 7 po	BP87Q
Ensemble de câblage ADA	HAWRK5
Dispositifs d'apport d'air	MD6TU, MD8TU et MD10TU
Ensemble cordon d'alimentation	HCK44

Minimum 18 po au-dessus de la surface de cuisson pour un four électrique
Minimum 26 po au-dessus de la surface de cuisson pour un four à gaz

1 an
3 ans (modules DEL seulement)
(Voir le manuel d'installation pour le texte complet de la garantie.)


‡ La puissance maximum du ventilateur indique la performance du ventilateur de la hotte à l'air libre et n'est pas certifiée par le HVI.

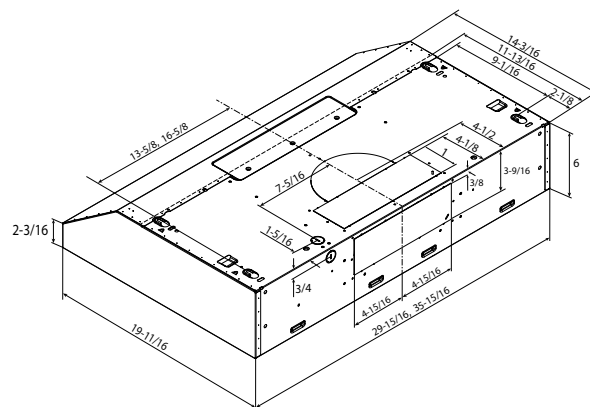

Les dimensions indiquées sont en pouces.

RENDEMENT HVI									
Orientation du conduit	Largeur	Volet	Sones			pi³/min			
			Normale	Moyenne	Haute	Normale	Moyenne	Haute 0,25 po d'eau	Haute 0,1 po d'eau
Rectangulaire vertical	3¼ po x 10 po	inclus	1,5	4,0*	6,5	130	190*	160	240
Rectangulaire horizontal	3¼ po x 10 po	inclus	2,0	4,0*	7,0	110	180*	160	240
Rond vertical	7 po	vendu séparément**	2,0	4,0*	6,0	150	200*	140	250

** Plaque de l'adaptateur 7 po incluse

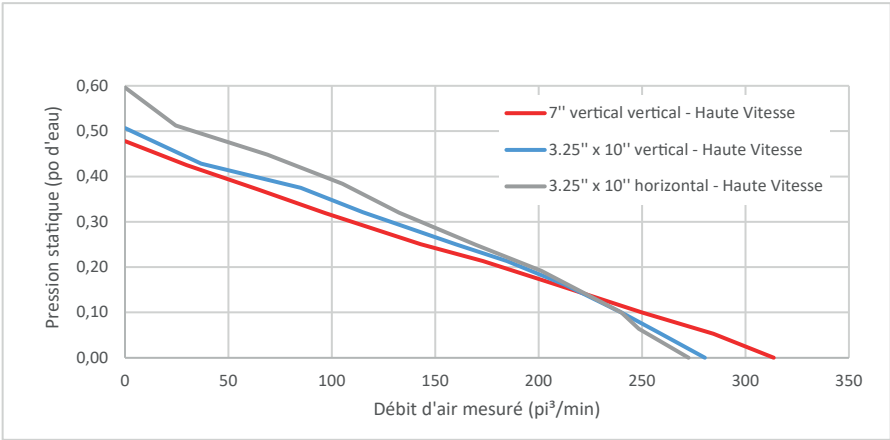

L'HOMOLOGATION HVI-2100 est conforme aux nouvelles techniques et procédures d'essai prescrites par le Home Ventilating Institute pour les produits d'emploi courant, dès leur disponibilité pour les consommateurs. Le rendement du produit est évalué à une pression statique de 0,1 po et de 0,25 po, d'après les tests effectués dans un laboratoire d'essai ultra-perfectionné approuvé par le HVI. Le sone est une mesure de la perception humaine de la puissance sonore, d'après des mesures effectuées en laboratoire.

* Signifie que la donnée n'est pas certifiée par le HVI.