



User Manual

Water Timer

SGW08WF

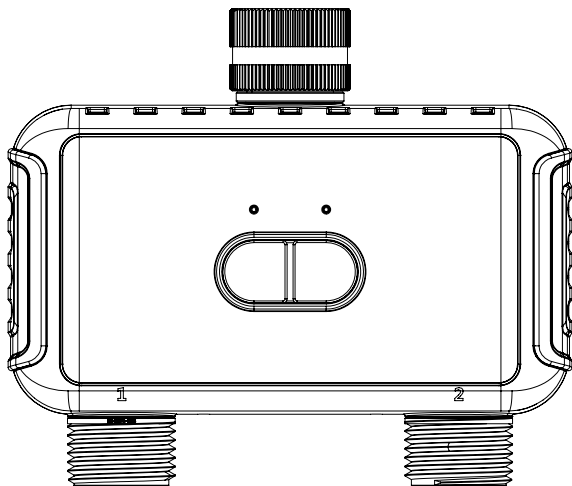

Meet the Smart Dual Water Timer

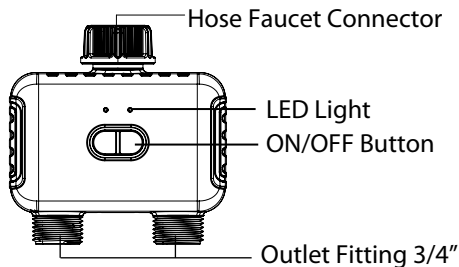

Specification:

Range	49.2ft without interference
Working Water Pressure	0.05-0.8MPa(7.25-116 psi)
Working Temperature	4.5°C-45°C (40.1°F-113°F)
Rain Delay Time	1~7days
Waterproof	IPX5
Battery	4x AA alkaline batteries

Importance


Preparation checklist



4AA alkaline battery



2.4Ghz Router



Timer



Smart Life



Mobil Phone

Note: Turn on Bluetooth on your phone.

Quick Installation Guide

- 1) Install Smart Life app and login.
- 2) Install 4 AA alkaline batteries into the timer .
- 3) Prepare the **2.4Ghz WIFI password**.
- 4) Keep connected the Phone to **2.4Ghz WIFI**.
- 5) Turn on Bluetooth on your phone.
- 6) Pair the Water Timer.


1. Smart Life App Setup

Scan the QR code and download the free Android or IOS app, then install the APP. Create an account with your email or mobile number or login with an existing account .



2. Water Timer Setup

1. Remove the cover on the back of the timer by pulling it out.
2. Install 4 new AA (1.5V) alkaline batteries and reinstall the cover back into the timer. **Do not use mix alkaline, standard (carbon-zinc), nor rechargeable batteries.**



NOTE:

Please pay attention to the positive and negative poles of the battery and place them correctly.

3. Pair the Gateway and add Water Timer

Before starting following steps, make sure the phone is connected to 2.4Ghz WIFI (Not 5Ghz WIFI) and **bluetooth** is turned on.

1) Pair the Timer


Long press the control button for 5s until the **light flashes** slowly, click the sign“+” in the upper right corner, and tap “Add Device” to add device.



(Image 1)



(Image 2)



Make sure the WIFI is 2.4Ghz,Not 5Ghz




(Image 3)

(Image 4)

Waiting for connecting to be 100%.

Tips: If failed, please power off the device, and try all steps again.

Meet the App Home Screen

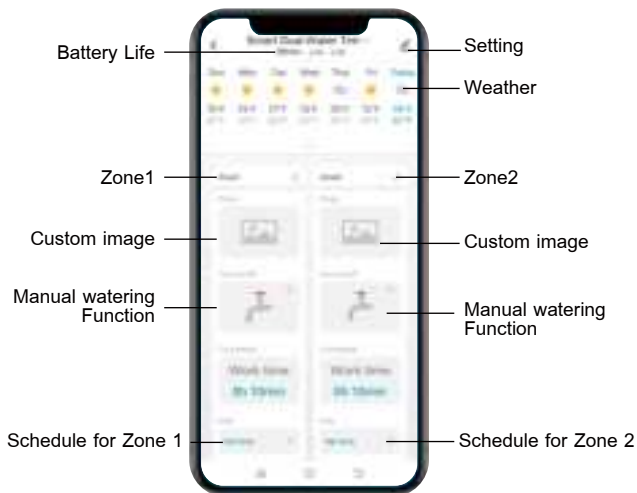



(Image 11)


4. Additional Water Timer Features

1 Manual Watering

Your timer has the ability to allow you to manually water without disturbing the programmed schedule. Manual is used to test equipment, run an extra watering cycle in an area, or to use the hose faucet without removing the timer.

Click the  button to activate manual watering. Using the app you can click  to set how long you want manual watering time to run for the "work time", also remaining watering time will be displayed.

2 Stop Watering

You can stop the flow of water at any time whether it is during manual watering, or during a programmed time. Click the  button once again to stop watering. (NOTE: icon without water droplets)

3 Rain Delay Function

The rain delay function allows you to postpone watering for 1 day and up to 7 days due to rain or when the ground is already wet.

5. Troubleshooting

Q1: Why the water timer didn't turn on/off at preset time?

A1:

- Programming is incorrect
- Water pressure is too low
- Particles of dirt or debris stuck in valve
- More than one start time is programmed with overlapping schedules
- Manual watering is on
- Faulty valve
- The batteries were low
- The faucet is off.

Q2: Why is the water valve out of little water?

A2:

If you are using a gravity feed system, such as a rain barrel system, then it won't work and will keep low water pressure. Gravity feed has no real pressure when dealing with a rain barrel. It needs pressure measuring.

6. Warm Tips

- The best range for connection and control is within 49.2ft in the open area.
- Do not use your timer when the air temperature is below 40°F(4.5°C), the timers should be removed from the hose faucet and stored indoors to avoid potential frozen damage.
- Filter can trap dirt particles, please clean filter regularly and replace if worn.
- Please replace batteries when the low battery indicator appears the display. When replacing the power unit, please make sure that the water timer is dry.
- To prevent leakage, make sure that the water timer is tightly attached to the faucet and hose, add rubber washer and thread seal tape if necessary.

Note:

(1) The water flow is reduced by half when the two zones are turned on at the same time.

(2)The water flow in two zones may be different if you turn on one zone first and then turn on the other zone.

FCC WARNING

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation.

If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

To maintain compliance with FCC's RF Exposure guidelines, This equipment should be installed and operated with minimum distance between 20cm the radiator your body: Use only the supplied antenna.