

Installation Instructions

Freedom Heated Towel Rails

Newtech recommends that a registered electrician install this product and that it is installed to the current wiring regulations and in particular to those regulations that include the installation of appliances and accessories in damp environments such as bathrooms. It must be installed in accordance with relevant Australian/New Zealand Standards (AS/NZS).

This electrical appliance is intended to warm and dry towels and therefore **hot to touch**. Young children or infirm persons should be supervised to ensure that they do not play with or misuse the appliance. The towel rail has been designed to withstand the loads expected during normal operation as a towel rail. The towel rail is not a ladder and should not be used as such.

ELECTRICAL

The towel rail must be wired by a registered electrician. An isolating switch must be positioned near the towel rail but out of reach from wet areas like baths and showers. A wall or ceiling cavity must be available to conceal the transformer. **All rails must be connected to the 12 Volt transformer in parallel** and cannot be connected directly to 240V supply. See Figure 6.0

SPECIFICATIONS AND DIMENSIONS

Vera Square (Round Edges) - Widths 432mm, 632mm, 832mm

W432mm x D100mm x H40mm, 13 Watts

Models: SR232, SR232NK, SR232B, SR232GM, SR232BB, SR232CP, SR232MW

W632mm x D100mm x H40mm, 18 Watts

Models: SR230, SR230NK, SR230B, SR230GM, SR230BB, SR230CP, SR230MW

W832mm x D100mm x H40mm, 22 Watts

Models: SR234, SR234NK, SR234B, SR234GM, SR234BB, SR234CP, SR234MW

Toro Round - Widths 432mm, 632mm, 832mm

W432mm x D100mm x H32mm, 12 Watts

Models: SR242, SR242NK, SR242B, SR242GM, SR242BB, SR242CP, SR242MW

W632mm x D100mm x H32mm, 17 Watts

Models: SR240, SR240NK, SR240B, SR240GM, SR240BB, SR240CP, SR240MW

W832mm x D100mm x H32mm, 22 Watts

Models: SR244, SR244NK, SR244B, SR244GM, SR244BB, SR244CP, SR244MW

Largo Square - Widths 432mm, 632mm, 832mm

W432mm x D100mm x H40mm, 13 Watts

Models: SR222, SR222NK, SR222B, SR222GM, SR222BB, SR222CP, SR222MW

W632mm x D100mm x H40mm, 18 Watts

Models: SR220, SR220NK, SR220B, SR220GM, SR220BB, SR220CP, SR220MW

W832mm x D100mm x H40mm, 22 Watts

Models: SR224, SR224NK, SR224B, SR224GM, SR224BB, SR224CP, SR224MW

Nova Curved - Width 700mm

W700mm x D100mm x H40mm, 16 Watts

Models: SR200

Lucia Curved - Width 700mm

W700mm x D100mm x H32mm, 15 Watts

Models: SR260

All rails use 12 Volts AC isolating transformer. Ensure the combined total wattage for freedom rails doesn't exceed the transformer rating.

Colour Code: Standard = Chrome, NK = Brushed Nickel, B = Matte Black, GM = Gunmetal, BB = Brushed Brass, CP = Brushed Copper, MW = Matte White

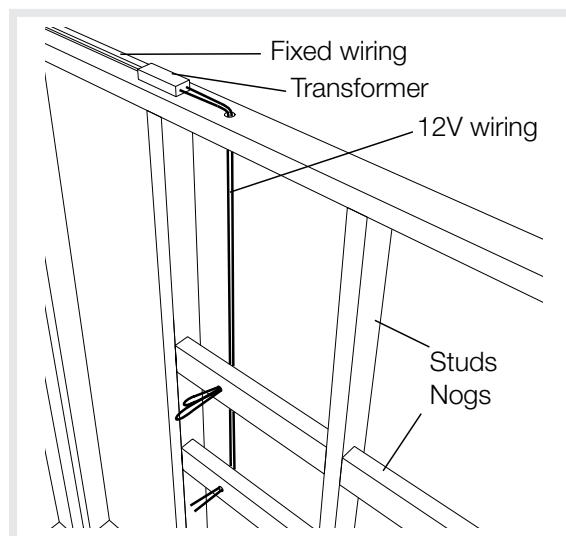


Figure 1.0



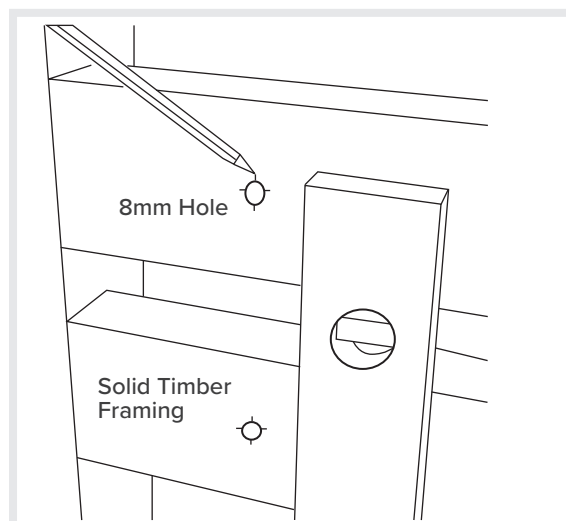


Figure 2.0

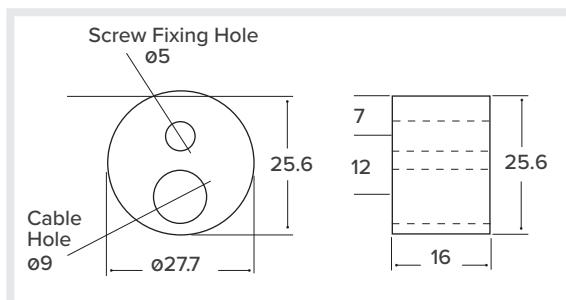

Round Mounting Block
Applies to SR242, 240, 244

Figure 3.0

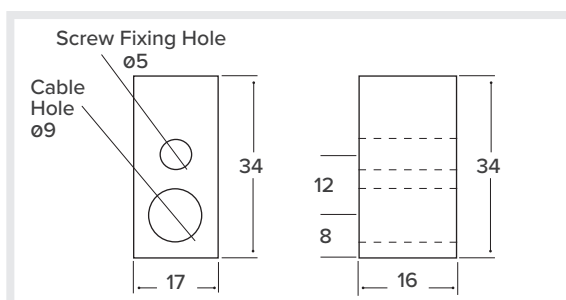

Square Mounting Block
Applies to SR222, 220, 224, 230, 232, 234

Figure 3.0

Installation Instructions

Freedom Heated Towel Rails

WARNING

These rails have a small footprint against the wall and secureness should be periodically checked. The Allen Key securing the rail may require tightening especially during the settling period. The cable holes and fixing holes must be neatly and accurately drilled. For drilling through hard surfaces eg. porcelain tiles, marble or granite etc, a diamond core drill must be used. Ensure final rail position will conceal wiring hole.

DO NOT CONNECT BOTH LEFT AND RIGHT HAND WIRES.

WALL MOUNTING

The towel rail mounting spigot must be fastened to a solid fixing point, eg. timber or brickwork. The mounting face of the towel rail **must be fitted against a solid surface** eg. tiles (not suitable directly onto gip or plasterboard). Recommended location is 600mm above floor, 300mm from any permanent fixing and 150mm between rails.

INSTALLATION

- Typical wiring for timber framed walls is shown in *Figure 1.0*
- The distance from the transformer to the furthest 12V connection should be no more than 2000mm.
- Make sure that the 12V cabling doesn't cross the 230V mains cable.
- Insulation should be removed from the vicinity of the transformer to a radius of 150mm.
- The single bar heated towel rail is designed as dual wire option (left or right hand) - connect one side only.

BEFORE LINING

- Drill 8mm diameter holes in the wall framing first.
- Use a level to make sure that these holes are plumb. See *Figure 2.0*
- The recommended vertical distance between rails is 150mm.
- Pull the supplied appliance wire through the 8mm holes as shown in *Figure 1.0* and connect to the 12V transformer (also supplied).

AFTER LINING

- Fix the top rail first and work downwards.
- Fix the mounting blocks at the cable end first. See *Figure 3.0*.
- Take care to ensure that the rail, in its final position, will fully conceal the wiring and cable hole.
- Use a level to determine the correct position for the blocks at the non-cabled end. See *Figure 4.0*
- Fix the mounting blocks at the non-cabled end.
- Connect the appliance wiring to the towel rail element using the wire nuts provided.
- Make sure that there are no white and blue wires connected as this would create a short circuit.
- **DO NOT PULL THE WIRE OUT OF THE TOWEL RAIL - THIS WIRE IS CONNECTED TO THE INTERNAL HEATING CABLE. PULLING OUT THE WIRE WILL EXTRACT THE HEATED SEGMENT.**
- Push the towel rail onto the mounting spigots until flush with the wall.
- Fix the towel rail in position using the Allen key provided.
- Continue to fit the remaining rails using the same procedure.

CARE & CLEANING

- Do not use cream cleaners, abrasive or corrosive cleaners.
- The heated towel rails are best wiped down from time to time with a damp cloth.

Disclaimer: Products in these installation instructions must by regulation be installed by a licensed and registered tradesperson. Newtech cannot be held responsible if the installation and use of the towel rails is not carried out in accordance with these instructions or for materials not supplied by Newtech. The manufacturer/distributor reserves the right to vary specifications without prior notification.

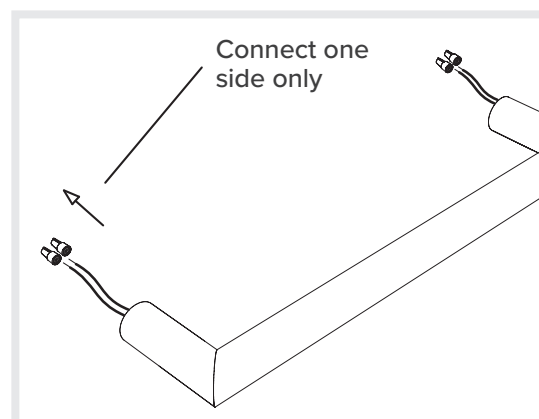


Figure 4.0

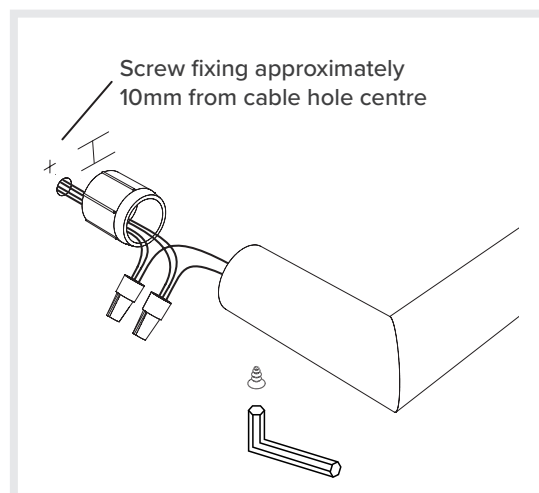


Figure 5.0

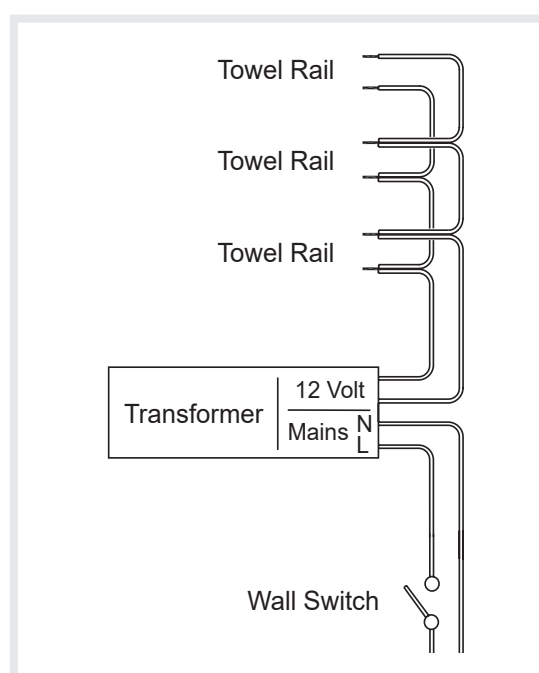


Figure 6.0