

Everyday Lighting Solutions

 **Acuity**Brands.

**What's the key element that
defines a perfect space?
The right light.**

Lighting enables you to perform tasks easily, enhances your feeling of safety and comfort, and brings out the best in your living and working spaces.

Whether you want to create ambiance, make artwork come alive or simply meet specific general and accent lighting needs, turn to Acuity Brands®. We provide comprehensive lighting solutions – including the latest technologies – for every environment.





Table of Contents

05	Decorative Indoor Lighting
29	Track Lighting
35	Recessed Lighting
49	Undercabinet Lighting
53	Indoor Utility Lighting
63	Outdoor Lighting
73	Controls
78	Tools
80	Index





Why Acuity Brands?

We have LED technology for decorative lighting.

The leading name in lighting for decades, Acuity Brands Lighting has grown LED technology to allow our designers and engineers to create countless product styles – resulting in a great looking light fixture with optimized performance. We have expanded our lighting portfolio by offering numerous options with varying color temperature, lumens, CRI and style.



Our driverless technology, delivers many advantages over “off-the-shelf” LED products:

- **Zero inrush** – creating a “buzz” in the commercial market, Zero inrush ensures that lights turn on instantly, saving time and money.
- **Easy dimming** – Acuity Brands technology allows for dimming down to 10 percent light, on a standard Triac dimmer (same as used on Incandescent lighting) – keeping costs and complexity at a minimum, and user satisfaction high. Lighting is a key element that defines a space. Use a dimmer to create the right ambiance for any environment.

Flush-mount, wall-mount, recessed or linear, all of our product categories have LED “engines” integrated right into the fixture. Not only does this allow us to provide sleek, fresh design options, but it gives our customers confidence in choosing Acuity Brands.

By using LED engines that are less than ½ inch in diameter, we are able to deliver innovative lighting with fresh design and incomparable quality.

Our innovative LED products offer a long, maintenance-free product life of 50,000 hours or more, even when working 24/7, year in and year out.

Energy-Efficient Solutions



Why Choose Energy Star?

We all want to save energy, save money and protect the environment. So look for the Energy Star™ logo on your lighting products to make sure they are certified to offer exceptional energy savings and quality, through this joint program of the US Environmental Protection Agency and the US Department of Energy. Want to learn more? Visit www.EnergyStar.gov.


Read the Lighting Facts Label

Another important US Department of Energy program, Lighting Facts® serves consumers much like nutrition facts labels on food products do. Designed to assure and improve the quality of LED lighting products, the Lighting Facts label provides the information you need to make an informed decision when shopping for LED products.

Learn more at www.LightingFacts.com.



Anatomy of the Label

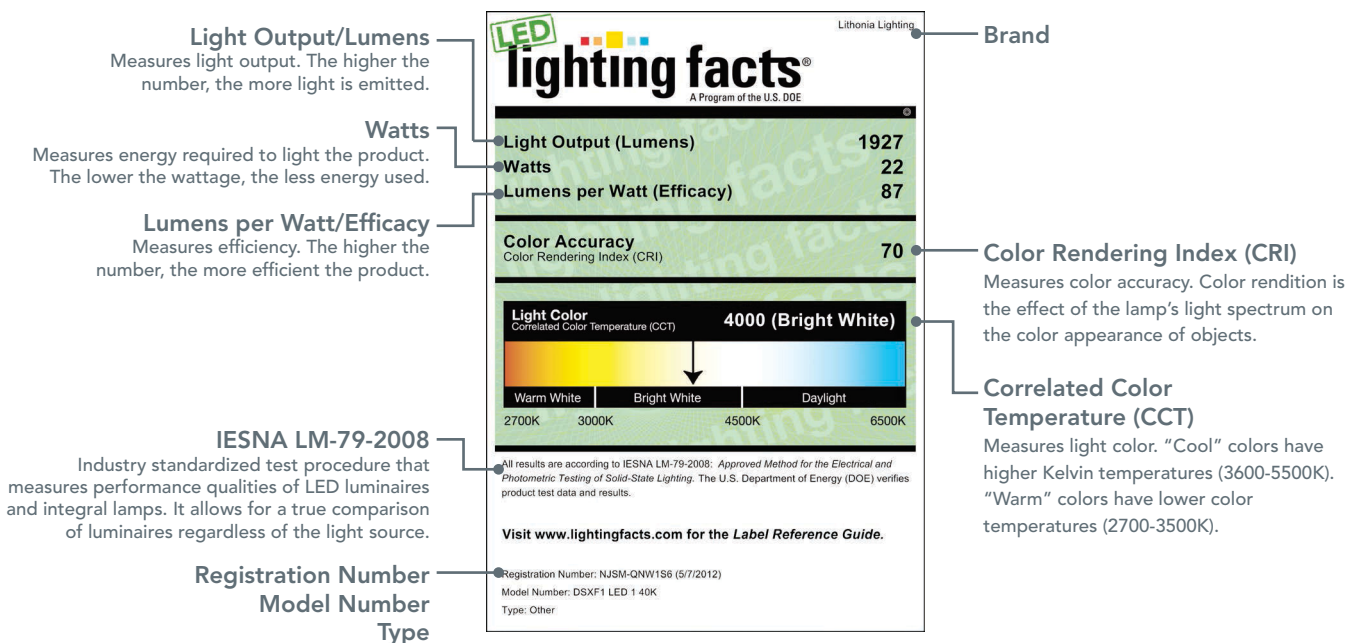

Working for you: The Designlights™ Consortium

The mission of DesignLights Consortium™ or DLC is to accelerate energy efficiency in the building industry through public policy, program strategies and education. The DLC promotes quality, performance and energy efficient lighting solutions through collaboration among its federal, regional, state, utility and energy efficiency program members; luminaire manufacturers; lighting designers and others in the industry in the US and Canada.

To find out more about DLC and which Acuity Brands products are listed, visit www.designlights.org. Be sure to check back often as we are continually adding products.



Decorative Indoor Lighting

- 06 Pendants
- 10 Wall-mounted: Sconces & Vanity
- 14 Flush Mounts
- 25 Linear Solutions



MWS and MDP Series LED mini pendants & sconces from Lithonia Lighting® offer a wide selection of interchangeable decorative shades and fitters to customize and complement your commercial or residential interior lighting designs. Advanced LED technology offers reduced energy and maintenance cost, while benefiting from improved illumination and design aesthetics.

LED Mini Pendants, Sconces & Vanities

- Versatile fitters with 3000K LEDs
- Decorative shades with standard 2-1/4" neck
- 9.5 watts, 120V
- 274 lumen output
- 86 CRI
- 50,000-hour L70 rated - virtually maintenance-free
- Dimmable down to 10% with standard triac dimmer

Fitter Style & Finish Options

Bullet and cylinder style fitters are available in bronze or brushed nickel finish. The pendant suspension cable is ultra-thin, field-adjustable and the same color as the fitter.

Fitters and shades/diffusers are ordered separately.

Bullet Style



Cylinder Style



Model No.	Description	Dimensions (W x H x EXT)	Finish
MDPB BNP M6	Bullet-Style Mini Pendant	2-3/4" x 2" (includes 78" of cable)	Polished Brushed Nickel
MDPB BZ M6			Bronze
MWSB BNP M6	Bullet-Style Sconce	5" x 5" x 6-1/4"	Polished Brushed Nickel
MWSB BZ M6			Bronze
MWVB2 BNP M4	Bullet-Style 2-Light Vanity	8-1/4" x 4-5/8" x 6-1/2"	Polished Brushed Nickel
MWVB2 BZ M4			Bronze
MWVB3 BNP M4	Bullet-Style 3-Light Vanity	19-1/2" x 4-5/8" x 6-1/2"	Polished Brushed Nickel
MDPC BNP M6	Cylinder-Style Mini Pendant	2-3/4" x 2" (includes 78" of cable)	Polished Brushed Nickel
MDPC BZ M6			Bronze
MWSC BNP M6	Cylinder-Style Sconce	5" x 5" x 6-1/4"	Polished Brushed Nickel
MWSC BZ M6			Bronze
MWVC2 BNP M4	Cylinder-Style 2-Light Vanity	8-1/4" x 4-5/8" x 6-1/2"	Polished Brushed Nickel
MWVC2 BZ M4			Bronze
MWVC3 BNP M4	Cylinder-Style 3-Light Vanity	19-1/2" x 4-5/8" x 6-1/2"	Polished Brushed Nickel
MWVC3 BZ M4			Bronze

Shade/Diffuser Style & Finish Options

Decorative shades are hand-blown glass, prismatic glass or metal. They fit both fitter styles. Shades using decorative rods/finials include rods/finials in both bronze and polished brushed nickel. *Fitters and shades/diffusers are ordered separately.*

									
DBLT 1001 M6 Opal White Bullet 4-1/2"W x 10-1/2"H	DBLT 1004 M6 Caramel Swirl Bullet 4-1/2"W x 10-1/2"H	DTCL 1001 M6 Opal White Tall Cylinder 3-3/8"W x 9-1/4"H	DTCL 1005 M6 Apple Red Tall Cylinder 3-3/8"W x 9-1/4"H	DTCL 1009 M6 Amber Twist Tall Cylinder 3-3/8"W x 9-1/4"H	DTCL 1010 M6 White Drizzle Tall Cylinder 3-3/8"W x 9-1/4"H	DZNT 1003 M6 Frosted White Zentro 3-5/8"W x 10-3/4"H	DZNT 1007 M6 Blue Zentro 3-5/8"W x 10-3/4"H	DGVW 1003 M6 Frosted White Cylinder Wave 4"W x 7-3/4"H	DGDT 1003 M6 Frosted White Cylinder Dot 4"W x 7-3/4"H
									
DCBL 1009 M6 Amber Twist Concave Bell 4-1/2"W x 6"H	DBIL 1015 M6 Rain Drop Billet 4-3/8"W x 5-1/2"H	DBEL 1001 M6 Opal White Bell 4-1/2"W x 10-1/2"H	DRBL 1001 M6 Opal White Ball 4"W x 6"H	DRBL 1008 M6 Green Melon Ball 4"W x 6"H	DGNG 1007 M6 Blue Glass In Glass 5"W x 3-3/4"H	DSCL 1001 M6 Opal White Short Cylinder 3-3/8"W x 6"H	DSCL 1005 M6 Apple Red Short Cylinder 3-3/8"W x 6"H	DSCL 1009 M6 Amber Twist Short Cylinder 3-3/8"W x 6"H	DSCL 1010 M6 White Drizzle Short Cylinder 3-3/8"W x 6"H
									
DTRB 1014 M6 Caramel Mocha Swirl Top Rib 4-3/8"W x 5-1/5"H	DSBL 1001 M6 Opal White Small Bell 4"W x 3"H	DPRG 1011 M6 Clear Ribbed Prismatic (hand cast glass) 7"W x 4-1/2"H	DCNE 1001 M6 Opal White Cone 5-5/8"W x 3"H	DCNE 1002 M6 White Melon Cone 5-5/8"W x 3"H	DCNE 1006 M6 Cobalt Blue Cone 5-5/8"W x 3"H	DCNE 1008 M6 Green Melon Cone 5-5/8"W x 3"H	DMCN BZ M6 Bronze Cone (Spun metal) 5-5/8"W x 3"H	DMCN BNP M6 Polished Brushed Nickel Cone (Spun metal) 5-5/8"W x 3"H	



Pendants

Ferros

Features tea-stained glass diffuser.



Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11538 BZA	24" x 24" x 30-5/8" (3' chain included)	Antique Bronze	(1) 70W 2C
CH36 BZA M30 (add'l chain)	36"	Antique Bronze	NA

Sheffield

Features etched glass diffuser.



Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamps Included
11786 BZ M2	22-3/4" x 22-3/4" x 21-3/8" (3' chain included)	Bronze	(3) 18W GU24 compact integrated spiral*
CH36 BZ M30 (add'l chain)	36"	Bronze	NA

*compact integrated spiral lamp includes ballast

Mini Pendants

Ferros

Features etched or tea-stained glass diffuser.



Model No.	Dimensions (L x W x H)**	Finish	2700K Fluorescent Lamp Included
11536 BZA M6	5" x 5" x 13-7/8" to 31-7/8" (includes (2) 6' and (2) 12' stem-mount sections)	Antique Bronze	(1) 13W GU24 compact integrated spiral*
11536 BN M6	5" x 5" x 13-7/8" to 31-7/8" (includes (2) 6' and (2) 12' stem-mount sections)	Polished Brushed Nickel	(1) 13W GU24 compact integrated spiral*
STMFER012 BZA M40 (add'l stem)	12"	Antique Bronze	NA
STMFER012 BN M40 (add'l stem)	12"	Polished Brushed Nickel	NA

*compact integrated spiral lamp includes ballast

**maximum cord/wire length is 72"



Acorn

Features etched glass shade



Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11994 GW M4	4-7/8" x 4-7/8" x 8" to 74"	White	(1) 13W GU24 compact integrated spiral*
11994 GA M4	4-7/8" x 4-7/8" x 8" to 74"	Amber	(1) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast



Zentro

Features clear glass shade and etched glass shade

Model No.	Dimensions (L x W x H)	Finish	3500K Fluorescent Lamp Included
11990 GW M4	4-3/4" x 4-3/4" x 11-1/2" to 72"	Milk White	(1) 13W compact quad tube
11990 GG M4	4-3/4" x 4-3/4" x 11-1/2" to 72"	Seaweed Green	(1) 13W compact quad tube





Sconces and Vanities



Aberdale LED

EXAMPLE: **FMABSL 11 7830 F20**

Series	Dimensions	CRI	Color Temperature	Finish
FMABSL	11 11" TALL	78 >80	40 4000K 30 3000K	F20 Brown F21 Tan F22 Lilac

Sheffield

Features etched glass shade.

Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11788 BZ M6	6" x 9" x 7-1/4"	Black Bronze	(1) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast

Litepuff

Features etched glass shade.

Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11881	6" x 11" x 4-1/2"	White Diffuser	(1) 13W compact twin tube 2-pin

Ferros

Features etched or tea-stained glass shade.

Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11531 BZA M6	4-1/2" x 9-3/8" x 6-1/8"	Antique Bronze	(1) 13W GU24 compact integrated spiral*
11531 BN M6	4-1/2" x 9-3/8" x 6-1/8"	Polished Brushed Nickel	(1) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast

LED Wall Sconces

DLSD Series Diffusers

Each diffuser design can be customized with a variety of finishes and materials to complement any décor. See individual spec sheets for a complete list of options. Colors and patterns may vary. Backplate and Diffusers are ordered separately.



DLSD1 MB
6-1/2"W x 10-5/8"H
x 4"EXT



DLSD2 BN P10*
9-1/2"W x 10-5/8"H
x 4"EXT



DLSD3 BN/BZ
9-1/8"W x 10-7/8"H x
3-7/8"EXT



DLSD4 CH
11-1/2"W x 11-1/4"H x 4"EXT



DLSD5 BZ
8-3/8"W x 10-5/8"H x
3-7/8"EXT




DLSD6 ANS
8-3/8"W x 11"H x
3-7/8"EXT



DLSD7 BZ F08
8-3/8"W x 11"H x
3-7/8"EXT



DLSD8 CLR P01
8-3/8"W x 11"H
x 3-7/8"EXT



DLSD9 BZ/S03*
8-3/8"W x 11"H
x 3-7/8"EXT



DLSD10 BZ/WH
8"W x 12"H x 4"EXT



DLSD12 BN
7-1/2"W x 11-3/4"H x 4"EXT



DLSD17 BN P10
7"W x 12-1/2"H
x 3-3/4"EXT



DLSD16 BZ F02
7-1/2"W x 11-3/4"H x
3-7/8"EXT



DLSD13 P12
13-7/8"W x 8-1/2"H x 4"EXT



DLSD14 F03*
13-7/8"W x 8-1/2"H x 4"EXT

**Non-stock item. Longer lead times may apply.*

SWBLED Backplate

The LED Wall Sconce Backplate provides maintenance-free, energy-efficient general purpose and/or accent lighting in residential and commercial indoor applications.

The integrated LED driver is 120V, operates at 60Hz and is dimmable down to 10% with most standard triac dimmers. 50,000 hour LED life.

LED Wall Sconce Backplate accommodates all diffusers shown above. Backplate and diffusers are ordered separately.



SWBLED M12
5-1/2"W x 5-7/8"H x
1-1/2"EXT



Vanities

Sheffield

Features etched glass shades.



Fixture	Model No.	Dimensions (W x H x EXT)	Finish	2700K Fluorescent Lamps Included
2-light	11790 BZ M4	20-3/8" x 9" x 7-3/4"	Black Bronze	(2) 13W GU24 compact integrated spiral*
3-light	11792 BZ M2	28-7/8" x 9" x 7-3/4"	Black Bronze	(3) 13W GU24 compact integrated spiral*
4-light	11794 BZ M2	37-1/4" x 9" x 7-3/4"	Black Bronze	(4) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast

Ferros

Features etched or tea-stained glass shades.



Fixture	Model No.	Dimensions (W x H x EXT)	Finish	2700K Fluorescent Lamps Included
2-light	11532 BN M4	14-1/4" x 9-7/8" x 6-1/8"	Polished Brushed Nickel	(2) 13W GU24 compact integrated spiral*
	11532 BZA M4		Antique Bronze	
3-light	11533 BN M2	24" x 9-7/8" x 6-1/8"	Polished Brushed Nickel	(3) 13W GU24 compact integrated spiral*
	11533 BZA M2		Antique Bronze	
4-light	11534 BN M2	33-3/4" x 9-7/8" x 6-1/8"	Polished Brushed Nickel	(4) 13W GU24 compact integrated spiral*
	11534 BZA M2		Antique Bronze	

*compact integrated spiral lamp includes ballast

Vanities

Wing

Features etched glass diffuser.

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	3000K Fluorescent Lamps Included
2' Vanity	10842RET5 BNP M6	22-5/8" x 6-3/8" x 3-1/4"	Polished Brushed Nickel Accents & Finials	(2) 14W T5 straight tube
3' Vanity	10843RET5 BNP M4	37-1/8" x 6-3/8" x 3-1/4"	Polished Brushed Nickel Accents & Finials	(2) 21W T5 straight tube
4' Vanity	10844RET5 BNP M2	48-7/8" x 6-3/8" x 3-1/4"	Polished Brushed Nickel Accents & Finials	(2) 28W T5 straight tube



Litepuff

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	Lamps Required (not included)
2' Vanity	11890RE	27" x 5" x 4"	White	(2) 17W T8 straight tube
3' Vanity	11891RE	39" x 5" x 4"	White	(2) 25W T8 straight tube
4' Vanity	11892RE	51" x 5" x 4"	White	(2) 32W T8 straight tube



Cylinder

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	3000K Fluorescent Lamps Included
2' Vanity	11802RET5 BN M6	23-1/8" x 2-3/4" x 3-3/8"	Brushed Nickel End Caps & Wall Bracket	(2) 14W T5 straight tube
3' Vanity	11803RET5 BN M6	35-1/4" x 2-3/4" x 3-3/8"	Brushed Nickel End Caps & Wall Bracket	(2) 21W T5 straight tube
4' Vanity	11804RET5 BN M4	47" x 2-3/4" x 3-3/8"	Brushed Nickel End Caps & Wall Bracket	(2) 28W T5 straight tube



Contemporary

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	Lamp(s) Not Included
2' Vanity	11872RE 11852RE	24" x 4-1/2" x 4-5/8"	White Steel End Caps	(1) 17W T8 straight tube (2) 17W T8 straight tube
3' Vanity	11873RE 11853RE	36" x 4-1/2" x 4-5/8"	White Steel End Caps	(1) 25W T8 straight tube (2) 25W T8 straight tube
4' Vanity	11874RE 11854RE	48" x 4-1/2" x 4-5/8"	White Steel End Caps	(1) 32W T8 straight tube (2) 32W T8 straight tube





Autry LED Collection

With a modern look and energy-saving LED technology, the Autry collection by Lithonia Lighting® gives you the most in style, performance and value. Ideal for residential and hospitality settings, the Autry collection is commercial-rated for 24/7 operation.

Mix and match from a range of shapes, hangers, lumen packages and fabrics to design the ideal lighting for your space. The dimmable LED technology allows The Autry Collection to adapt to the mood of the surrounding environment.

Fabric Selection



Chocolate



Rapids



Jute



White

Flush Mounts

Autry LED Collection



Match your favorite shape, finish, size, and hanger to create the perfect fixture for your space.



Drum
DFMADRL



Shaded Dome
DFMASDL



Square
DFMASQL
Small square not available with fabric finishes.
Standard white acrylic diffuser.



Double Drum
DFMADDL




Drop Saucer
DFMADSL



Saucer
DFMASRL
Small saucer not available with fabric finishes.
Standard white acrylic diffuser.


1. Diffuser Style

EXAMPLE: **DFMADDL 14 F23**

Series			Size (Diameter Range)		Finish	
	DFMADRL	Autry Drum Diffuser	6 ²	Small (7-1/5" to 8-3/4")	F01	White
	DFMADDL	Autry Double Drum Diffuser	11	Medium (12-1/4" to 16")		
	DFMADSL	Autry Drop Saucer Diffuser	14	Large (15" to 18")		F02 Chocolate
	DFMASDL	Autry Shaded Dome Diffuser				F23 Jute
	DFMASQL	Autry Square Diffuser ²				F24 Rapids
	DFMASRL	Autry Saucer Diffuser ²				


2. LED Pan

EXAMPLE: **FMPANL 14 20840**

Size			Module/CRI		Color Temperature	
	FMPANL 6	Small Autry LED Pan ¹	78	>80	40	4000K
	FMPANL 11	Medium Autry LED Pan	148	>80	30	3000K
	FMPANL 14	Large Autry LED Pan	208	>80		

3. Hangers³

EXAMPLE: **CAHL6 BN**

Size			Finish	
	3SHL6	6" 3-Stem Hanger	BN	Brushed Nickel
	CAHL6	6" Canopy Hanger	BZ	Bronze
	1SHL40	Single Stem Hanger (4" to 40")	WH	White
	3CHL72	3-Cable Hanger (5" to 72")	BN	Brushed Nickel
			BZ	Bronze

Notes

¹ Small LED pan can be ceiling or wall mounted.

² Small size square and saucer (only) are not available with fabric finishes. Standard white acrylic diffuser.

³ Hangers not compatible with small sizes. Surface mount only.

Flush Mounts



Aberdale LED

EXAMPLE: **FMABFL 16 20830 F20**

Series	Dimensions	CRI	Color Temperature	Finish
FMABFL	16 16" diameter	208 >80	40 4000K 30 3000K	F20 Brown F21 Tan F22 Lilac



Castleberry LED

EXAMPLE: **FMCSTL 14 20830 KR**

Series	Dimensions	CRI	Color Temperature	Finish
FMCSTL	14 14" diameter	208 >80	40 4000K 30 3000K	KR Chrome Ring



Sunbriar LED

EXAMPLE: **FMDGCL 16 20830 BN**

Series	Dimensions	CRI	Color Temperature	Finish
FMDGCL	16 17" diameter	208 >80	40 4000K 30 3000K	BN Brushed Nickel BZ Bronze

Flush Mounts

Versi Lite LED

EXAMPLE: **FMML 7 830 DDBT WL**

Series	Dimensions	CRI	Color Temperature	Finish	Option
FMML	7 7" diameter 13 13" diameter	8 >80	40 4000K 30 3000K 27 2700K	(Blank) White DDBT Textured Bronze DNA Natural Aluminum	WL Wet Location

Denon LED

EXAMPLE: **FMDDHL 14 20830 BN**

Series	Dimensions	CRI	Color Temperature	Finish
FMDDHL	14 14" diameter	208 >80	40 4000K 30 3000K	BN Brushed Nickel BZA Antique Bronze

Kamino LED

EXAMPLE: **FMKMRL 14 20830 KR**

Series	Dimensions	CRI	Color Temperature	Finish
FMKMRL FMKMSL	14 14" diameter	208 >80	40 4000K 30 3000K	KR Chrome Accents

Doko Glass LED

EXAMPLE: **FMDOKL 16 20830**

Series	Dimensions	CRI	Color Temperature	Finish
FMDOKL	16 16" diameter	208 >80	40 4000K 30 3000K	(blank) Glass

Hildon LED

EXAMPLE: **FMHDL 14 20830**

Series	Dimensions	CRI	Color Temperature	Finish
FMHDL	14 14" diameter	208 >80	40 4000K 30 3000K	(blank) White



Flush Mounts



Glenridge LED

EXAMPLE: **FMGRGL 11 14830 KR**

Series	Dimensions	CRI	Color Temperature	Finish
FMGRGL	11 11" diameter	148 >80	40 4000K 30 3000K	KR Chrome Ring
	14 14" diameter	208 >80		



Bandon LED

EXAMPLE: **FMBANL 11 14830 KR**

Series	Dimensions	CRI	Color Temperature	Finish
FMBANL	11 11" diameter	148 >80	40 4000K 30 3000K	KR Chrome Ring
	14 14" diameter	208 >80		



Fluorescent

Low Profile Round

EXAMPLE: **FMLRL 11 14840**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMLRL*	11 11" diameter	148 >80	40 4000K 30 3000K	(blank) White	LED- No bulbs required
	14 14" diameter	208 >80			
FM22 ACLR LP M4*	Small 11" x 11" x 3 1/4"			White	(1) 22W T9 circline (Included)
FMLR11 2 13DTT M4					(2) 13W DTT (Not included)
FMLR 22 M4					(1) 22W T9 circline (Not included)
FM54 ACLR LP M4*	Medium 13-3/4" x 13 3/4" x 3-1/2"			White	(1) 22W & (1) 32W T9 circline (Included)
FMLR14 2 18DTT M4					(2) 18W DTT (Not included)
FMLR 54 M4					(1) 22W & (1) 32 T9 circline (Included)
FM72 ACLR LP M4*	Large 19-1/4" x 19-1/4" x 3-5/8"			White	(1) 32W & (1) 40W T9 circline (Included)
FMLR 19 3 26DTT M4					(3) 26W DTT (Not included)
FMLR 72 M4					(1) 32W & (1) 40W T9 circline (Not included)
FMXLR 72 M2	Extra Large 24" x 24" x 4-3/4"			White	(1) 32W & (1) 40W T9 circline (Included)

*ENERGY STAR qualified

Decorative Indoor Lighting

Flush Mounts

Crenelle

EXAMPLE: **FMCRL 14 20830**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMSCNL (Square)* FMCRL (Round)*	14 14" diameter	208 >80	40 4000K 30 3000K	(blank) White	LED- No bulbs required
10512 M4 (Round)	14" x 14" x 3-1/2"		4100K	White	(1) 22W & (1) 32W T9 circine (Included)

*ENERGY STAR qualified

Lacuna

EXAMPLE: **FMLACL 14 20830 BA**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMLACL*	14 14" diameter	208 >80	40 4000K 30 3000K	BA Brushed Aluminum with smooth diffuser	LED- No bulbs required
10513 BN M4	14-1/2" x 14-1/4" x 4"		3500K	Brushed Nickel Surround with ribbed/contoured diffuser	(1) 23W & (1) 32W T9 circine (Included)

*ENERGY STAR qualified

Low Profile Square

EXAMPLE: **FMLS 11 14840**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMLS*	11 11" diameter	148 >80	40 4000K 30 3000K	(blank) White	LED- No bulbs required
	14 14" diameter	208 >80			
FM22 ACLS LP M4*	Small 12" x 12" x 3-1/4"			White	(1) 22W T9 circine (Included)
FMLS12 2 13DTT M4					(2) 13W DTT (Not included)
FMLS 22 M4					(1) 22W T9 circine (Not included)
FM54 ACLS LP M4*	Medium 14-3/4" x 14-3/4" x 3-3/8"			White	(1) 22W & (1) 32W T9 circine (Included)
FMLS15 2 18DTT M4					(2) 18W DTT (Not included)
FMLS 54 M4					(1) 22W & (1) 32 T9 circine (Not included)
FM72 ACLS LP M4*	Large 19-3/4" x 19-3/4" x 3-5/8"			White	(1) 32W & (1) 40W T9 circine (Included)
FMLS 20 3 26DTT M4					(3) 26W DTT (Not included)
FMLS 72 M4					(1) 32W & (1) 40W T9 circine (Not included)

*ENERGY STAR qualified



Flush Mounts



Pristine

Features etched glass diffuser.

EXAMPLE: **FMPRSL 16 20830 BN**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMPRSL*	16 16" Diameter	208 >80	40 4000K 30 3000K	BN Brushed Nickel	LED- No bulbs required
11734 BN M4	14" x 14" x 4-3/8" (flush) or 10-3/8" (semi flush)			Brushed Nickel	(1) 26W compact quad tube (Included)
11736 BN M4	16-1/2" x 16-1/2" x 5-1/2" (flush) or 10-3/4" (semi-flush)			Brushed Nickel	(2) 26W compact quad tube (Included)

Can be mounted flush or semi-flush, LED semi-flush kit sold separately (see p. 24), kit included on fluorescent model.

*ENERGY STAR qualified



Vela

EXAMPLE: **FMVELL 14 20830 KR**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMVELL *	14 14" diameter	208 >80	40 4000K 30 3000K	KR Polished Chrome	LED- No bulbs required
10511 KR M4	14-1/2" x 14-1/2" x 4"		4100K	Polished Chrome	(1) 22W & (1) 32W T9 circline (Included)

*ENERGY STAR qualified



Saturn

EXAMPLE: **FMSATL 16 20830 BN**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMSATL (Round)*	13 13" diameter	148 >80	40 4000K 30 3000K	BN Brushed Nickel BZA Antique Bronze	LED- No bulbs required
	16 16" diameter	208 >80			
FMSSATL (Square)*	13 13" diameter	148 >80			
11750 BZA M4 (Round)	13" x 13" x 3-1/8" (flush) or 8-3/8" (semi-flush)		3500K	BZA Antique Bronze	(1) 26W compact quad tube (Included)
11750 BN M4 (Round)				BN Brushed Nickel	
11752 BZA M4 (Round)	16" x 16" x 3-1/4" (flush) or 8-3/8" (semi-flush)				(2) 26W compact quad tube (Included)
11752 BN M4 (Round)					

Can be mounted flush or semi-flush, LED semi-flush kit sold separately (see p. 24), kit included on fluorescent model.

*ENERGY STAR qualified

Flush Mounts

Décor Round

Features etched glass diffuser.

EXAMPLE: **FMDECL 10 14830 BN**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMDECL*	10 10" diameter	148 >80	40 4000K 30 3000K	WH White	LED- No bulbs required
	14 14" diameter	208 >80		BN Brushed Nickel BZ Bronze	
11983	15" x 15" x 5-1/2"		(blank) 2700K	WH White BNP Polished Brushed Nickel BZ Bronze	(1) 55W 2C (Included)

*ENERGY STAR qualified



Globe

Features glass diffuser.

EXAMPLE: **FMGLOL 6 7840 BNP**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMGLOL	6 6" diameter	78 >80	40 4000K 30 3000K	WH White BNP Polished Brushed Nickel BZ Bronze	LED- No bulbs required
11981	6" x 6" x 8"		(blank) 2700K	WH White BNP Polished Brushed Nickel BZ Bronze	(1) 23W GU24 compact integrated spiral* (Included)

*Compact integrated spiral lamp includes ballast



Mushroom

Features glass diffuser.

EXAMPLE: **FMMUSL 9 14840 BNP**

Series	Dimensions	CRI	Color Temperature	Finish	Lamp Information
FMMUSL*	9 9" diameter	148 >80	40 4000K 30 3000K	WH White BNP Polished Brushed Nickel BZ Bronze	LED- No bulbs required
10976	9-1/8" x 9-1/8" x 5-5/8"		(blank) 2700K	WH White BNP Polished Brushed Nickel BZ Bronze	(1) 23W GU24 compact integrated spiral** (Included)

*ENERGY STAR qualified **Compact integrated spiral lamp includes ballast



Flush Mounts



Inertia

Features etched glass diffuser.

Model No.	Dimensions (L x W x H)	Finish	3500K Fluorescent Lamps Included
11762 PST M2	17" x 17" x 4"	Polished Steel Surround	(1) 55W 2C



Disk

Features etched glass diffuser.

Model No.	Dimensions (L x W x H)	Finish	3500K Fluorescent Lamps Included
11560 BNP M4	10-1/2" x 10-1/2" x 2-1/4"	Clear Glass Edge	(1) 22W T5 circline
11562 BNP M4	14-1/2" x 14-1/2" x 2-1/4"	Clear Glass Edge	(1) 40W T5 circline



Adari

Features etched glass diffuser.

Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp(s) Included
11984 AI M4	13-5/8" x 13-5/8" x 6-5/8"	White Glass Diffuser with Aged Iron Accents	(2) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast



Ferros

Features etched or tea-stained glass diffuser.

Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp Included
11530 BZA M4*	14" x 14" x 6-5/8" (flush) or 9-5/8" (semi-flush)	Antique Bronze	(1) 55W 2C
11530 BN M4*	14" x 14" x 6-5/8" (flush) or 9-5/8" (semi-flush)	Brushed Nickel	(1) 55W 2C

*can be mounted flush or semi-flush



Artisten

Molded acrylic diffuser.

Model No.	Dimensions (L x W x H)	Finish	3500K Fluorescent Lamps Included
10827 BZA M2	17-1/2" x 17-1/2" x 4"	Antique Bronze	(1) 22W & (1) 32W T9 circline



Flush Mounts

Sheffield

Features etched glass diffuser.

Fixture	Model No.	Dimensions (L x W x H)	Finish	2700K Fluorescent Lamp(s) Included
Small*	11780 BZ M4	11" x 11" x 5" (flush) or 13" (semi-flush)	Black Bronze	(2) 13W compact quad tube
Medium*	11782 BZ M4	13" x 13" x 5" (flush) or 13" (semi-flush)	Black Bronze	(2) 18W compact quad tube
Large*	11784 BZ M4	15" x 15" x 6" (flush) or 13" (semi-flush)	Black Bronze	(1) 55W 2C

*can be mounted flush or semi-flush



LED Flush Mount Hangers



6" 3-Stem Hanger
3SHL6
Brushed Nickel (BN)
Bronze (BZ)



6" Canopy Hanger
CAHL6
Brushed Nickel (BN)
Bronze (BZ)



Single Stem Hanger
1SHL40
White (WH)
Brushed Nickel (BN)
Bronze (BZ)



3-Cable Hanger
3CHL72
White (WH)
Brushed Nickel (BN)
Bronze (BZ)

*See fixture compatibility chart at AcuityBrands.com

EXAMPLE: **1SHL40 BZ**

				Size		Finish	
	3SHL6	6" 3-Stem Hanger		BN	Brushed Nickel		
	CAHL6	6" Canopy Hanger		BZ	Bronze		
	1SHL40	Single Stem Hanger (4" to 40")		WH	White		
	3CHL72	3-Cable Hanger (5" to 72")		BN	Brushed Nickel		
				BZ	Bronze		





Linear

LED Saturn Linear

EXAMPLE: **FMFL 30840 SATL BZ**

Model No.	Dimensions	Color Temperature	Finish	Lumens
FMFL 30840 SATL	1' x 4'	4000K	BN Brushed Nickel BZ Bronze	2,500

LED Litepuff

EXAMPLE: **FMFL 9 30840**

Model No.	Dimensions	Color Temperature	Finish	Lumens
FMFL 9 30840	1' x 4'	40 4000K	(blank) White	3,100

Litepuff

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
10651RE	27-3/8" x 27" x 6-1/2"	White	(2) 31WT8-U (6" leg)
10640RE	51-1/2" x 11-1/4" x 5-1/2"	White	(2) 32WT8 straight tube
10641RE*	27-1/2" x 16-5/8" x 5-1/2"	White	(4) 17WT8 straight tube
10642RE*	51-1/2" x 16-5/8" x 5-1/2"	White	(4) 32WT8 straight tube

*ENERGY STAR qualified



Linear



Cambridge

EXAMPLE: **FMFL 30840 CAML OA**

Model No.	Dimensions	Finish	Color Temperature	Lumens	Lamps Required
FMFL 30840 CAML*	1' x 4'	WH White OA Oak	4000K	2,800	LED- No bulbs required
11431RE	2' x 2'	WH White OA Oak			(2) 31W T8-U (6" leg) (Not included)
11430RE	1' x 4'	WH White OA Oak			(2) 32W T8 straight tube (Not included)
11432RE	1-1/2" x 4'	WH White OA Oak			(4)32W T8 staight tube (Not included)

*ENERGY STAR qualified

Riser



Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
10648RE BZ	49-3/4" x 8-3/8" x 3-9/16"	Black Bronze	(2) 32W T8 straight tube

Decorative End Wrap



Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
NEW 2 32 120 RE BN	49-1/8" x 8-3/8" x 3-9/16"	Brushed Nickel with Ribbed Acrylic Diffuser	(2) 32W T8 straight tube

Futra

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
10815 BN	24-1/2" x 9-7/8" x 3-1/2"	Brushed Nickel End Caps	(2) 17W T8 straight tube
10813 BN	48-1/2" x 9-7/8" x 3-1/2"	Brushed Nickel End Caps	(2) 32W T8 straight tube



Artisten

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
10816 BZA	24-1/2" x 9-7/8" x 3-1/2"	Antique Bronze End Caps	(2) 17W T8 straight tube
10814 BZA	48-1/2" x 9-7/8" x 3-1/2"	Antique Bronze End Caps	(2) 32W T8 straight tube



Arckell

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
10649RE BZ	49" x 14-3/8" x 4-3/16"	Bronze	(2) 32W T8 straight tube



Linear



Cirrus

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
11602RE	48-5/8" x 9-7/8" x 3-1/2"	Pearl White	(2) 32W T8 straight tube
11604RE	48-5/8" x 9-7/8" x 3-1/2"	Pearl White	(4) 32W T8 straight tube

Velegant

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
11692RE	31-3/4" x 12" x 3-3/8"	White Faux Marble Accents with Brushed Nickel Finials	(2) 17W T8 straight tube
11690RE	55-3/4" x 12" x 3-3/8"	White Faux Marble Accents with Brushed Nickel Finials	(2) 32W T8 straight tube
11694RE	57-1/2" x 15-1/4" x 3-7/8"	White Faux Marble Accents with Brushed Nickel Finials	(4) 32W T8 straight tube

Diamond Plate

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
11241DP RE*	49-7/8" x 7-5/8" x 2-7/8"	Diamond Plate Frame with Chrome Finish	(2) 32W T8 straight tube

*covered by the following patent: U.S. Patent Nos. 7,011,428



Track Lighting

- 31 Track Kits
- 31 Integrated LED Track
- 32 LED Lamped Track
- 33 Halogen Lamped Glass Track
- 33 Fixed Track
- 34 Track Accessories



Track Lighting

An attractive solution for accent and task lighting

Track lighting from Lithonia Lighting® combines clean, attractive aesthetics with superior functionality and savings. With a designer approved offering of track heads, fixed track and pre-assembled kits, the Lithonia program takes the guesswork out of the equation, allowing the design aesthetics and functionality to be at the focal point.

Multiple styles, finishes and accessories are available to enhance your decor. Ideal for spaces such as kitchens, boutiques, galleries, restaurants and common family areas.

Ordering track is easy with our 5-piece track kits.

Each kit includes 3 track heads, a 4' section of track and a floating power canopy. Additional accessories are available to customize your installation.



Track Kits

Integrated LED Track

Spot Light Integrated LED Track

EXAMPLE: **LTIHSPLT LED 27K ORB**

Model No.		Lamp/	Lumens	Color Temperature		Finish	
LTIHSPLT	Track Head	LED	500 Lumens, 8.6W	27K	2700 K	ORB	Oil Rubbed Bronze
LTIKSPLT	Track Kit						



Meshback Integrated LED Track

EXAMPLE: **LTIHMSBK LED 27K BN**

Model No.		Lamp/	Lumens	Color Temperature		Finish	
LTIHMSBK	Track Head	LED	500 Lumens, 8.6W	27K	2700 K	BN	Brushed Nickel
LTIKMSBK	Track Kit						



Bell Integrated LED Track

EXAMPLE: **LTIHBELL ORB**

Model No.		Lamp/	Lumens	Color Temperature		Finish	
LTIHBELL	Track Head	(blank)	440 Lumens, 8.3W	(blank)	2700 K	ORB	Oil Rubbed Bronze
LTIKBELL	Track Kit						



Gavel Integrated LED Track

EXAMPLE: **LTIHGAVL BN**

Model No.		Lamp/	Lumens	Color Temperature		Finish	
LTIHGAVL	Track Head	(blank)	440 Lumens, 8.3W	(blank)	2700 K	BN	Brushed Nickel
LTIKGAVL	Track Kit						



LED Lamped Track



Oval Track

EXAMPLE: **LTHOVAL MR16GU10 27K DBL**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHOVA	Track Head	MR16GU10 LED	300 Lumens, 4.5W	27K 2700 K
LTKOVA	Track Kit			
				MW Matte White
				DBL Black



Spot Light Track

EXAMPLE: **LTHSPLT MR16GU10 27K ORB**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHSPLT	Track Head	MR16GU10 LED	300 Lumens, 4.5W	27K 2700 K
LTKSPLT	Track Kit			
				ORB Oil Rubbed Bronze
				BN Brushed Nickel



Shade Track

EXAMPLE: **LTHBRSD BR20 ORB**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHBRSD	Track Head	BR20 LED	500 Lumens, 8W	(blank) 2700 K
LTKBRSD	Track Kit			
				ORB Oil Rubbed Bronze
				BN Brushed Nickel



Step Baffle Track

EXAMPLE: **LTHSTBF BR30 MW**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHSTBF	Track Head	BR20 LED	500 Lumens, 8W	(blank) 2700 K
LTKSTBF	Track Kit	BR30 LED	850 Lumens, 12.5W	
				MW Matte White
				DBL Black



Front Loading Track

EXAMPLE: **LTHFLT MR16GU10 LED DBL**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHFLT	Track Head	MR16GU10	480 Lumens, 50W Halogen	(blank) 2700 K
		MR16GU10 LED	300 Lumens, 4.5W	
				MW Matte White
				DBL Black
				BN Brushed Nickel ¹
				ORB Oil Rubbed bronze ¹

Note: (1) Available with Halogen Lamp Only.

Track Lighting

Decorative Antique Glass

EXAMPLE: **LTHANTQ MR16GU10 ORB**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHANTQ	Track Head	MR16GU10 600 Lumens, 50W Halogen	(blank) 2700 K	ORB Oil Rubbed Bronze
LTKANTQ	Track Kit			



Clear Ribbed Glass

EXAMPLE: **LTHCLRB MR16GU10 BN**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHCLRB	Track Head	MR16GU10 600 Lumens, 50W Halogen	(blank) 2700 K	BN Brushed Nickel
LTKCLRB	Track Kit			



Clear Cylinder Glass

EXAMPLE: **LTHCYLD MR16GU10 BN**

Model No.	Lamp/	Lumens	Color Temperature	Finish
LTHCYLD	Track Head	MR16GU10 600 Lumens, 50W Halogen	(blank) 2700 K	BN Brushed Nickel
LTKCYLD	Track Kit			



Fixed Track

EXAMPLE: **LTFSTCYL MR16GU10 LED 27K 6H ORB**

Model No.	Lamp/	Lumens	Color Temperature	Head Style	Finish
LTKMSBK	Meshback Fixed Single Head Round	MR16GU10 480 Lumens, 50W Halogen	(blank) 2700 K	-	MW BN Matte White Brushed Nickel
LTKMSBK	Meshback Fixed Single Head Round	MR16GU10 LED 300 Lumens, 4.5W	27K 2700K	-	MW DBL Matte White Black
LTKMSBK	Meshback Fixed Three Head Round	MR16GU10 480 Lumens, 50W Halogen	(blank) 2700 K	3R	MW BN Matte White Brushed Nickel
LTKMSBK	Meshback Fixed Three Head Linear	MR16GU10 480 Lumens, 50W Halogen	(blank) 2700 K	3L	MW BN Matte White Brushed Nickel
LTFSTCYL	Fixed Linear Step Cylinder	MR16GU10 LED 300 Lumens, 4.5W	27K 2700 K	3H 6H	ORB BN Oil Rubbed Bronze Brushed Nickel



LTKMSBK MR16GU10 BN



LTKMSBK MR16GU10 LED 27K MW



LTKMSBK MR16GU10 3R BN



LTKMSBK MR16GU10 3R BN












LTFSTCYL MR16GU10 LED 27K 6H ORB



LTFSTCYL MR16GU10 LED 27K 3H BN

Track Lighting

Accessories

 <p>Live End Conduit</p> <p>Connects to the end of the linear track section supplying power from a conduit feed.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLECF</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLECF	(blank) Matte white connector with black cover	 <p>Floating Feed</p> <p>Permits track to be wired anywhere along track length.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTFC</td> <td>(blank) Matte white connector with black and white cover</td> </tr> </tbody> </table>	Series	Finish	LTFC	(blank) Matte white connector with black and white cover
Series	Finish								
LTLECF	(blank) Matte white connector with black cover								
Series	Finish								
LTFC	(blank) Matte white connector with black and white cover								
 <p>L Connector</p> <p>Joins two track sections to make a 90° angle.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLDLC</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLDLC	(blank) Matte white connector with black cover	 <p>Live End Junction Box Feed</p> <p>Connects to the end of the linear track section supplying power from a junction box.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLLDC</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTLLDC	(blank) Matte white connector with black cover
Series	Finish								
LTLDLC	(blank) Matte white connector with black cover								
Series	Finish								
LTLLDC	(blank) Matte white connector with black cover								
 <p>Straight Connector</p> <p>Joins two track sections in a straight run.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTCV</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTCV	(blank) Matte white connector with black cover	 <p>Live End Power Feed</p> <p>Permits track to be connected to grounded outlet using a 15' cord with switch included.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTLECS</td> <td>(blank) Matte white</td> </tr> </tbody> </table>	Series	Finish	LTLECS	(blank) Matte white
Series	Finish								
LTCV	(blank) Matte white connector with black cover								
Series	Finish								
LTLECS	(blank) Matte white								
 <p>T Connector</p> <p>Joins three sections at 90° angles.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTTC</td> <td>(blank) Matte white connector with black cover</td> </tr> </tbody> </table>	Series	Finish	LTTC	(blank) Matte white connector with black cover	 <p>Monopoint</p> <p>Allows for a single linear track head to be installed in into an existing junction box.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTMPR</td> <td>(blank) Matte white</td> </tr> </tbody> </table>	Series	Finish	LTMPR	(blank) Matte white
Series	Finish								
LTTC	(blank) Matte white connector with black cover								
Series	Finish								
LTMPR	(blank) Matte white								
	 <p>Track Stick</p> <p>4-foot or 8-foot, 1-circuit track section with end caps.</p> <table border="1"> <thead> <tr> <th>Series</th> <th>Finish</th> </tr> </thead> <tbody> <tr> <td>LTS4</td> <td>MW Matte white</td> </tr> <tr> <td>LTS8</td> <td>DBL Black</td> </tr> </tbody> </table>	Series	Finish	LTS4	MW Matte white	LTS8	DBL Black		
Series	Finish								
LTS4	MW Matte white								
LTS8	DBL Black								



Recessed Lighting

- 36 LED Downlighting Modules
- 38 Traditional Downlighting Trims
- 46 LED and Incandescent Kits

Recessed downlighting

Lithonia Lighting® recessed downlighting offers optimum performance and aesthetics. Whether a project calls for a simple home solution or a commercial application, our breadth and depth of offering is designed with satisfied customers in mind.

Applications



General or ambient lighting fills an area with even illumination. Proper ambient lighting facilitates movement and makes occupants feel comfortable.



Accent lighting draws the eye to a given object by bathing it in significantly brighter light than the surrounding area.



Task lighting provides light for the job at hand, focusing on work surfaces that require higher levels of illumination than general lighting.



Grazing creates a dramatic shadowed effect on textured surfaces.

Wallwashing produces uniform illumination on vertical surfaces to expand space and accentuate walls.

Baffle (B)

Multiple grooves help reduce glare and minimize ceiling brightness. The crisp lines and classic look of the baffle have made it the most popular trim style.

Applications: general, task, accent



Open (O)

The smooth surface of an open trim creates wide light patterns and maximizes the efficiency of the light source.

Applications: general, task, accent



Wet-Lite™ (H2O)

A lens-free design delivers up to 30% more light than standard wet location trims. The Wet-Lite™ is ideal for applications that require higher light levels like assisted-living facilities or nursing homes. Includes lamp.


Applications: general, wet location



Sloped Baffle (SB) & Open (SO)

Lithonia Lighting's unique design creates a round aperture to match standard trims unlike poorly designed sloped trims with elliptical apertures. Tool-free adjustability on ceilings with pitches from 2/12 to 12/12 (10° to 45°).

Applications: slope ceiling

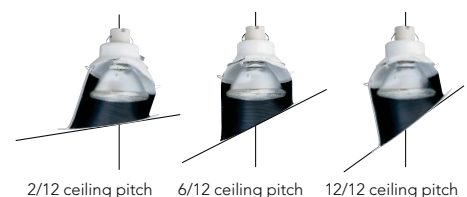

Adjustable

Available for highlighting artwork, furniture, walls and other architectural features.



Eyeballs (E and RE) & Gimbals (G)

Eyeballs adjust vertically up to 35° and rotate 350°. Gimbals rotate 180°.

Applications: task, accent



Low Voltage Recessed (V)

Adjustable directional lighting with the lamp above the ceiling.

Applications: accent

Shielded

Minimize direct view of the light source and concentrate light for a specific illumination objective.



Wallwash (W)

Bathe vertical surfaces with uniform light to highlight items on a wall and make a room feel larger.

Applications: wallwashing, grazing



Pinhole/Slotted (S)

Provide drama by concentrating light through a small opening; ideal for highlighting place settings, artwork and collectibles.

Applications: accent

Lensed (L)

Lenses or diffusers obscure the lamp and spread or focus light. Showers, closets and eaves or soffits are the most popular places for lensed trims.



Polycarbonate Lenses

An opal diffuser provides wide distribution of light. A prismatic lens provides 50% more light than an opal diffuser.

Applications: general, wet location




Glass Lenses


Provide an upscale appearance and higher wattage capabilities. Opal diffusers offer wide light distribution. Flat white diffusers provide uniform light with minimal brightness and fresnel lenses concentrate light distribution.

Applications: general, wet location


Trim Finishes




White (W)
Highly reflective; blends into white ceilings. Standard for open trims with no finish.



Matte White (MW)
Low-gloss finish matches white ceilings with less sheen.



Black
Absorbs light; minimizes glare. Standard for baffle trims with no finish.




Clear Specular (AZ) Excellent light control; matches chrome design elements.



Clear Diffuse (A)
Light control with low glare; matches chrome design elements.



Brushed Nickel (BN) Compliments stainless steel appliances and bathroom and kitchen hardware.




Oil Rubbed Bronze (ORB) Distinguished look for wood ceilings and matches bathroom and kitchen hardware.

LED Recessed Modules

E Series

Optimized value and performance you can trust. Cost and flexibility make E Series the perfect LED recessed option for high-volume projects and everyday stock business. Great for both indoor and outdoor use. Available in two apertures, a 4" and 6"/5" (fits both sizes).

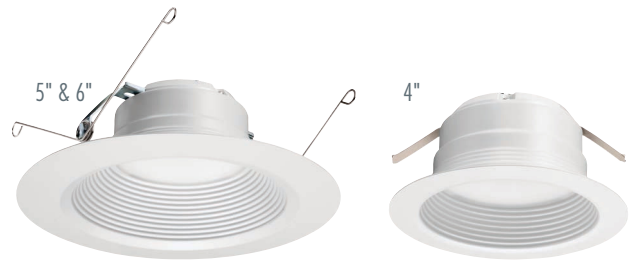

Series/Reflector		Finish		Lamps/Lumens		Color Temperature		Voltage		Housing	
4BE	E Series 4" Baffle LED Module	MW	Matte White	LED	600 Lumens	27K	2700K	(blank)	120V	L3LED T24	4" New construction rough-in LED base
65BE	E Series 5" & 6" Baffle LED Module			LED	710 Lumens	30K	3000K			L3RLED T24	4" Remodel rough-in LED base
						40K	4000K			L5LED T24	5" New construction rough-in LED base
										L5RLED T24	5" Remodel rough-in LED base
										L7XLED T24	6" New construction rough-in LED base
										L7XRLED T24	6" Remodel rough-in LED base

Gimbal LED Modules



The LED Gimbal downlighting modules are adjustable and easy to install — fitting into most common 4", 5" and 6" housings in retrofit and new construction application types. The fixtures provide directional lighting for accent and sloped ceiling applications and have an LED life

of 35,000 hours — 80% more efficient than incandescent luminaires. They are available in white, black, oil-rubbed bronze and brushed nickel finishes.

- Ideal for accent, task, and slope ceiling applications
- Similar light to a 50w and 65w general purpose flood
- Over 35° tilt in both directions with 180° rotation



Oil Rubbed Bronze



Matte Black



Matte White



Brushed Nickel

Series/Reflector		Finish		Lamps/Lumens		Color Temperature		Voltage		Housing	
4G1	4" Gimbal LED module	MW	Matte White	LED	435 Lumens	(blank)	3000K	(blank)	120V	L3LED T24	4" New construction rough-in LED Base
5G1	5" Gimbal LED module	MB	Matte Black	LED	600 Lumens					L3RLED T24	4" Remodel rough-in LED Base
6G1	6" Gimbal LED module	ORB	Oil Rubbed Bronze	LED	620 Lumens					L5LED T24	5" New construction rough-in LED Base
		BN	Brushed Nickel							L5RLED T24	5" Remodel rough-in LED Base
										L7XLED T24	6" New construction rough-in LED base
										L7XRLED T24	6" Remodel rough-in LED base

P Series

The power of performance. With the addition of trim inserts, P Series best-in-class, high-efficacy LED modules offer style and higher performance. Great for higher-end residential projects and light commercial spaces.



EXAMPLE: **4BPMW LED 27K 90CRI L3LEDT24**

Series	Finish	Light Source	Color Temperature / CRI / Watts / Lumens		Compatible Housing (120v)	
4BP	MW	LED	3000K	3000K / 83 CRI / 10.6W / 620L	L3LED T24	4" New construction rough-in LED Base
	TRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	ORB		3000K	3000K / 93 CRI / 11.2W / 600L	L3RLED T24	4" Remodel rough-in LED Base
	BN		4000K	4000K / 93 CRI / 11.2W / 650L		
5BP	MW	LED	3000K	3000K / 83 CRI / 10.6W / 620L	L5 LED T24	5" New construction rough-in LED Base
	TRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	ORB		3000K	3000K / 93 CRI / 11.2W / 600L	L5R LED T24	5" Remodel rough-in LED Base
	BN		4000K	4000K / 93 CRI / 11.2W / 650L		
6BP	MW	LED	3000K	3000K / 83 CRI / 12.7W / 725L	L7XLED T24	6" New construction rough-in LED Base
	TRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	ORB		3000K	3000K / 93 CRI / 11.2W / 600L	L7XRLED T24	6" Remodel rough-in LED Base
	BN		4000K	4000K / 92 CRI / 9.9W / 650L		
		HL LED	3000K	3000K / 83 CRI / 15.2W / 950L	LC6LED T24	6" New construction rough-in LED Base
			2700K	2700K / 93 CRI / 16.5W / 860L		
			3000K	3000K / 93 CRI / 16.5W / 860L		
			4000K	4000K / 92 CRI / 16.4W / 950L		
40P	A	LED	3000K	3000K / 83 CRI / 10.6W / 620L	L3LED T24	4" New construction rough-in LED Base
	ATRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	AZ		3000K	3000K / 93 CRI / 11.2W / 600L	L3RLED T24	4" Remodel rough-in LED Base
	AZ TRMW		4000K	4000K / 93 CRI / 11.2W / 650L		
50P	A	LED	3000K	3000K / 83 CRI / 10.6W / 620L	L5 LED T24	5" New construction rough-in LED Base
	ATRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	AZ		3000K	3000K / 93 CRI / 11.2W / 600L	L5R LED T24	5" Remodel rough-in LED Base
	AZ TRMW		4000K	4000K / 93 CRI / 11.2W / 650L		
60P	A	LED	3000K	3000K / 83 CRI / 10.6W / 620L	L7XLED T24	6" New construction rough-in LED Base
	ATRMW		2700K	2700K / 93 CRI / 11.2W / 600L		
	AZ		3000K	3000K / 93 CRI / 11.2W / 600L	L7XRLED T24	6" Remodel rough-in LED Base
	AZ TRMW		4000K	4000K / 92 CRI / 9.9W / 650L		
		HL LED	3000K	3000K / 83 CRI / 15.2W / 950L	LC6LED T24	6" New construction rough-in LED Base
			2700K	2700K / 93 CRI / 16.5W / 860L		
			3000K	3000K / 93 CRI / 16.5W / 860L		
			4000K	4000K / 92 CRI / 16.4W / 950L		



Matte White (**MW**)



Brushed Nickel Baffle (**BN**)



Oil Rubbed Bronze Baffle (**ORB**)



Black Baffle with Matte White Trim Ring (**TRMW**)



Clear Diffuse (**A**)



Clear Diffuse with Matte White Trim Ring (**A TRMW**)




Clear Specular with Matte White Trim Ring (**AZ TRMW**)



Clear Specular (**AZ**)

Recessed - 4"

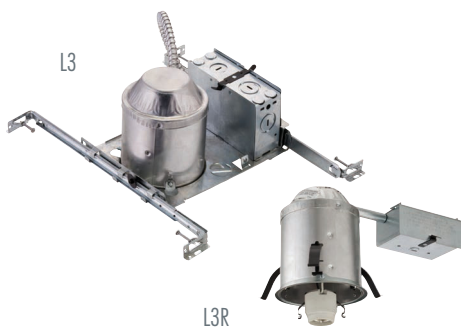

4" Housings

Housing	Model No.	Rating	Plenum
4" New Construction	L3	IC/Non-IC, Air-tight	2x6 or 2x8
4" Remodel	L3R	IC/Non-IC, Air-tight	2x6 or 2x8

4" Trims

Baffle

Trim	Flange	Model No.	Finish	Lamps (not included)
4" Baffle, Shallow	Narrow	3B1	Black, white flange	IC: 30R20, 35PAR20, 50R20, 50PAR20 (white only) Non-IC: 50PAR20
		3B1 TRMW	Black, matte white flange	
		3B1W	White	
		3B1MW	Matte white	
		3B1BN	Brushed nickel	
		3B1ORB	Oil rubbed bronze	
4" Baffle, Deep	Narrow	3B2	Black, white flange	IC: 30R20, 35PAR20 (white only) Non-IC: 50R20, 50PAR20 (black only)
		3B2W	White, white flange	

Open

Trim	Flange	Model No.	Finish	Lamps (not included)
4" Open, Shallow	Narrow	301	White	IC: 35PAR20, 30R30 Non-IC: 50PAR20
		301MW	Matte white	
		301A	Clear diffuse, white flange	
		301A PFMW	Clear diffuse, matte white plastic flange	
		301AZ	Clear specular, white flange	
		301BN	Brushed nickel	
		301ORB	Oil rubbed bronze	

Adjustable

Trim	Flange	Model No.	Finish	Lamps (not included)
4" Eyeball	Narrow	3E1	White	IC/Non-IC: 50R20, 50PAR20
		3E1MW	Matte white	
		3E1BN	Brushed nickel	
		3E1ORB	Oil rubbed bronze	
4" Gimbal	Narrow	4G2MW PAR20	Matte White	IC: 50PAR20 Incandescent IC: 8PAR20 LED
		4G2MB PAR20	Matte Black	
		4G2BN PAR20	Brushed Nickel	
		4G2ORB PAR20	Oil rubbed bronze	
		4G2A PAR20	Clear Diffuse	

Shielded

Trim	Flange	Model No.	Finish	Lamps (not included)
4" Wallwash	Narrow	3W1	White	Non-IC: 50R20, 35PAR20
4" Pinhole	Narrow	3S1	White	IC: 35PAR20 Non-IC: 50R20

Wet-Lite™




Trim	Flange	Model No.	Finish	Lamps included
4" Wet-Lite™	Stepped	3H2O	White	IC/Non-IC: 75PAR30
		3H2OMW	Matte white	
		3H2OBN	Brushed nickel	
		3H2OORB	Oil rubbed bronze	



Recessed - 5"

5" Housings


Housing	Model No.	Rating	Plenum
5" New Construction	L5	IC/Non-IC, Air-tight	2x8
5" Remodel	L5R	IC/Non-IC, Air-tight	2x8

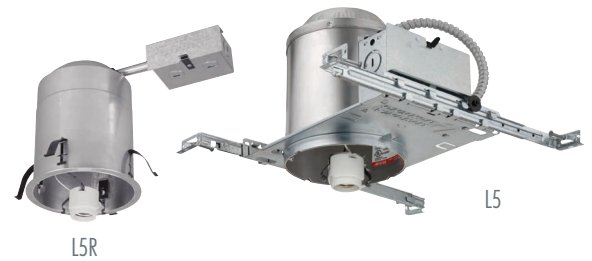

5" Trims

Baffle

Trim	Flange	Model No.	Finish	Lamps (not included)
5" Baffle, Shallow	Narrow	5B1 5B1W	Black, white flange White	IC/Non-IC: 50R20, 50PAR20, 75PAR30 (short neck)
5" Baffle, Deep	Narrow	5B2 TOR 5B2 TRMW TOR 5B2W TOR 5B2MW TOR 5B2BN TOR 5B2ORB TOR	Black, white flange Black, matte white flange White Matte white Brushed nickel Oil rubbed bronze	IC/Non-IC: 65R30

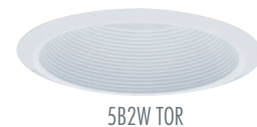

Open

Trim	Flange	Model No.	Finish	Lamps (not included)
5" Open	Wide	501	White	IC/Non-IC: 50R20, 65BR40, 75PAR30
5" Open	Narrow	502 TOR 502MW TOR 502A 502A PFMW TOR 502AZ 502BN TOR 502ORB TOR	White, white flange Matte white Clear diffuse, white flange Diffuse, matte white, plastic flange Clear specular, white flange Brushed nickel Oil rubbed bronze	IC/Non-IC: 50R20, 65BR40, 75PAR30



Adjustable

Trim	Flange	Model No.	Finish	Lamps (not included)
5" Eyeball	Narrow	5E1 5E1MW 5E1BN 5E1ORB	White Matte white Brushed nickel Oil rubbed bronze	IC/Non-IC: 65BR30, 50PAR20, 50R20, 75PAR30 (long neck)
5" Gimbal	Narrow	5G2MW PAR30 TOR 5G2MB PAR30 TOR 5G2BN PAR30 TOR 5G2ORB PAR30 TOR 5G2A PAR30 TOR	Matte White Matte Black Brushed Nickel Oil rubbed bronze Clear Diffuse	IC: 75PAR30 Incandescent IC: 15PAR30 LED



Lensed



Trim	Flange	Model No.	Finish	Lamps (not included)
5" Drop Polycarbonate Lens	Narrow	5LD1	Opal lens, white flange	IC/Non-IC: 40A19



Wet-Lite™




Trim	Flange	Model No.	Finish	Lamps included
5" Wet-Lite™	Stepped	5H20 TOR 5H20MW TOR 5H20BN TOR 5H20ORB TOR	White Matte white Brushed nickel Oil rubbed bronze	IC/Non-IC: 75PAR30



Recessed - 6"

6" Housings

Housing	Model No.	Rating	Plenum
6" New Construction	LC6	IC/Non-IC, Air-tight	2x8, Poke home connectors standard, T24 LED options available
6" High Wattage New Construction	LI6	IC	2x8
6" New Construction	L7X	IC/Non-IC, Air-tight	2x8, T24LED & GU24 options available
6" Remodel	L7XR	IC/Non-IC, Air-tight	2x8, T24LED & GU24 options available

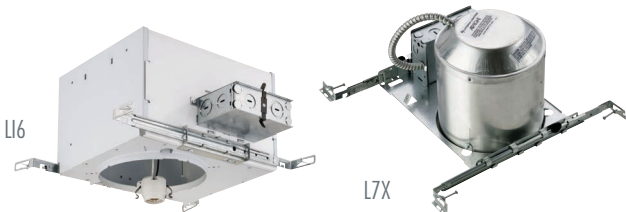

6" Trims

Baffle



Trim	Flange	Model No.	Finish	Lamps (not included)
6" Baffle	Narrow	7B2 TOR	Black, white flange	IC/Non-IC: 65BR30, 75PAR30
		7B2 TRMW TOR	Black, matte white flange	
		7B2MW TOR	Matte white	
		7B2W TOR	White	
		7B2W PF TOR	White, white plastic flange	
		7B2BN TOR	Brushed nickel	
		7B2ORB TOR	Oil rubbed bronze	
6" Baffle	Wide	7B3 TOR	Black, white flange	IC/Non-IC: 65BR30, 75PAR30
		7B3W TOR	White	
6" Baffle, Deep	Narrow	7B5	Black, white flange	Non-IC: 120BR40/PAR38
		7B5 TRMW TOR	Black, matte white flange	
		7B5W	White	
		7B5MW TOR	Matte white	

Open



Trim	Flange	Model No.	Finish	Lamps (not included)
6" Open	Narrow	702 TOR	White	IC/Non-IC: 65BR30, 75PAR30
		702MW TOR	Matte white	
		702BN TOR	Brushed nickel	
		702ORB TOR	Oil rubbed bronze	
		702A	Clear diffuse, white flange	
		702A PFMW TOR	Clear diffuse, matte white plastic flange	
		702AZ	Clear specular, white flange	
6" Open	Wide	703 TOR	White	IC/Non-IC: 65BR30, 75PAR30
6" Open, Deep	Narrow	705	White	Non-IC: 120BR40/PAR38
		705MW TOR	Matte white	
		705A	Clear diffuse, white flange	
		705AZ	Clear specular, white flange	


Recessed - 6"

6" Trims

Sloped*

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Sloped, Baffle	Narrow	6SB1	Black, white flange	IC: 65BR30, 75PAR30, 90BR40, 100PAR38 (LI6 only)
		6SB1W	White, white flange	
6" Sloped, Open	Narrow	6S01	White	IC: 65BR30, 75PAR30, 90BR40, 100PAR38 (LI6 only)

*For use with LI6 Housing only

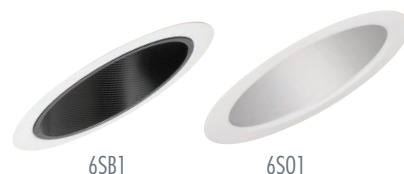

Shielded

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Wallwash	Narrow	7W1	White	IC/Non-IC: 40A19
6" Pinhole	Narrow	CS1	White	IC/Non-IC: 40A19, 50R20, 50PAR20



Adjustable

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Eyeball	Narrow	7E1 TOR	White	IC/Non-IC: 65BR30, 75PAR30
		7E1MW TOR	Matte white	
		7E1BN TOR	Brushed nickel	
		7E1ORB TOR	Oil rubbed bronze	
6" Regressed Eyeball	Narrow	7RE1	White	IC/Non-IC: 65BR30, 75PAR30
6" Eyeball, Rotatable	Narrow	CE1	White	IC/Non-IC: 65BR30, 75PAR30
6" Gimbal	Narrow	6G2MW PAR38 TOR	Matte White	IC: 75PAR38 Incandescent IC: 20PAR30 LED
		6G2MB PAR38 TOR	Matte Black	
		6G2BN PAR38 TOR	Brushed Nickel	
		6G2ORB PAR38 TOR	Oil rubbed bronze	
		6G2A PAR38 TOR	Clear Diffuse	



Lensed

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Glass Lens, White Splay	Narrow	6LD3	Drop opal, white flange	IC: 60A19 (LI6 only) Non-IC: 75A19
		6LF3	Flat white, white flange	
		6L4	Fresnel, white flange	IC: 40A19 (LI6 only) Non-IC: 75A19
6" Flush Polycarbonate Lens	Narrow Plastic	CLF1 PF	Opal lens, white flange	IC/Non-IC: 40A19
		CLF2 PF	Prismatic lens, white flange	
6" Flush Polycarbonate Lens	Narrow	CLF1	Opal lens, white flange	IC/Non-IC: 40A19
		CLF2	Prismatic lens, white flange	
6" Drop Polycarbonate Lens	Narrow	CLD1	Opal lens, white flange	IC/Non-IC: 40A19



Wet-Lite™

Trim	Flange	Model No.	Finish	Lamps included
6" Wet-Lite™	Stepped	6H2O TOR	White	IC/Non-IC: 75PAR30/38
		6H2OMW TOR	Matte white	
		6H2OBN TOR	Brushed nickel	
		6H2OORB TOR	Oil rubbed bronze	



Recessed - 6" Shallow

LCP



L7XPR



L7XP



CB1W



7X1MW TOR



7W1



CS1



CE1



CLD1

6" Shallow Housings

Shallow trims and housings are used in applications with shallow plenums.

Note: Shallow trims are compatible with standard 2x8 construction housings

Housing	Model No.	Rating	Plenum
6" Shallow New Construction	LC6	IC/Non-IC, Air-tight	2x6 or 2x8, Poke home connectors standard
6" Shallow New Construction	L7XP	IC/Non-IC, Air-tight	2x6 or 2x8
6" Shallow Remodel	L7XPR	IC/Non-IC, Air-tight	2x6 or 2x8

6" Shallow Trims

Baffle

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Baffle	Narrow	7BOW TOR	White	IC/Non-IC: 65BR30, 75PAR30
6" Baffle	Narrow	CB1 CB1W	Black, white flange White	IC/Non-IC: 65BR30, 75PAR30
6" Baffle	Wide	7XB1MW TOR	Matte white open top	IC/Non-IC: 65BR30, 75PAR30

Open

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Open	Wide	CO1 TOR	White	IC/Non-IC: 60A19, 65BR30, 75PAR30
6" Open	Wide	7X1MW TOR	Matte white, open top	IC/Non-IC: 65BR30, 75PAR30

Shielded

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Wallwash	Narrow	7W1	White	IC/Non-IC: 40A19
6" Pinhole	Narrow	CS1	White	IC/Non-IC: 40A19, 50R20, 50PAR20

Adjustable

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Eyeball	Narrow	7E1 TOR 7E1MW TOR 7E1BN TOR 7E1ORB TOR	White Matte white Brushed nickel Oil rubbed bronze	IC/Non-IC: 65BR30, 75PAR30
6" Regressed Eyeball	Narrow	7RE1	White	IC/Non-IC: 65BR30, 75PAR30
6" Eyeball, Rotatable	Narrow	CE1	White	IC/Non-IC: 65BR30, 75PAR30
6" Gimbal	Narrow	6G2MW PAR38 TOR 6G2MB PAR38 TOR 6G2BN PAR38 TOR 6G2ORB PAR38 TOR 6G2A PAR38 TOR	Matte White Matte Black Brushed Nickel Oil rubbed bronze Clear Diffuse	IC: 75PAR38 Incandescent IC: 20PAR30 LED

Lensed

Trim	Flange	Model No.	Finish	Lamps (not included)
6" Polycarbonate Lens	Narrow	CLF1 PF CLF2 PF	Opal lens, white plastic flange Flush prismatic, white flange	IC/Non-IC: 40A19
6" Polycarbonate Lens	Narrow	CLF1 CLF2	Flush opal, white flange Flush prismatic, white flange	IC/Non-IC: 40A19
6" Polycarbonate Lens	Narrow	CLD1	Drop opal, white flange	IC/Non-IC: 40A19


Recessed - Low Voltage

Low Voltage Housings

Low voltage housings are designed to allow the flexible use of MR16 lamps in the smallest possible aperture. Trims are compact and deliver dramatic lighting effects.

- Thermal protection provided against improper insulation use.
- Electronic stepdown transformer is standard for 120V/227V.
- Minimum starting temperature 0°F - 18°C. LIV3 Only - Precision-wound stepdown transformer with class H insulation.

Housing	Model #	Rating	Plenum
3" Low Voltage New Construction	LV3 120	Non-IC	2x6
3" Low Voltage Remodel	LV3R 120	Non-IC	2x6
3" Low Voltage New Construction	LIV3 120	IC, Air-tight	2x8

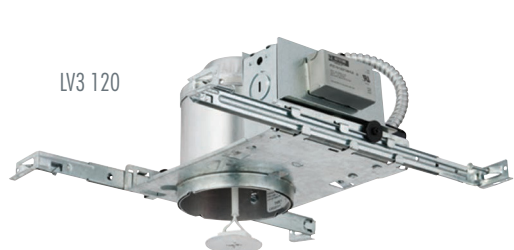

Low Voltage 3" Trims

Adjustable

Trim	Model No.	Finish	Lamp (not included)
3" Baffle, Adjustable	3VB1	Black, white flange	50MR16
	3VB1W	White	
3" Cones, Adjustable	3VO1AZ	Clear specular, white flange	50MR16
3" Adjustable	3VDW1W	White	50MR16
3" Eyeball, Open	3VE1	White	50MR16
3" Eyeball, Baffle	3VE2	Black baffle, white flange	50MR16
	3VE2W	White regressed baffle	
4" Gimbal	4G2MW MR16	Matte White	IC: 50MR16 Low Voltage Halogen IC: 6MR16 LED
	4G2MB MR16	Matte Black	
	4G2BN MR16	Brushed Nickel	
	4G2ORB MR16	Oil rubbed bronze	
	4G2A MR16	Clear Diffuse	



Shielded


Trim	Model No.	Finish	Lamp (not included)
3" Shielded, Slotted	3VA5	White baffle	50MR16
3" Shielded, Pinhole	3VS1	Black baffle, white flange	50MR16
3" Wallwash	3VW1	White	50MR16



Recessed Kits

Incandescent and LED Recessed Downlighting Kits make purchasing and installing downlighting a snap. A remodel housing, decorative trim, light source, wire nuts, and a cut-out stencil are all included in one package.

LED Kit

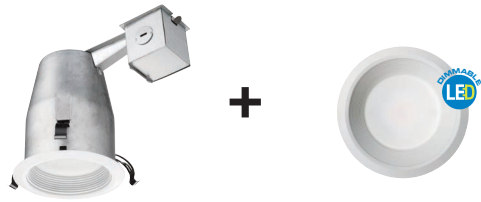

IC/Non-IC Housing

Trim & Integrated LEDs

OR

Incandescent and LED Lamped Kits



Non-IC Housing

Trim

Bulb

Integrated LED Recessed Kits

LED kits deliver equivalent lumen output as the comparable incandescent version – but last 17 times as long* while reducing energy costs with fewer watts consumed.



LK3BMW LED M6



LK4GMW LED M4



LK5BMW LED M6


Model No.	Aperture	Trim Style	Trim Finish	Lumens	CCT	CRI	Listings	Lamp Replacement	LED Life
LK3BMW LED	3"	Baffle	Matte White	450	30K	93	IC/Non-IC Wet Location	45W PAR20	28,000
LK4BMW LED	4"	Baffle	Matte White	530	30K	93	IC/Non-IC Wet Location	50W PAR20	35,000
LK5BMW LED	5"	Baffle	Matte White	660	30K	93	IC/Non-IC Wet Location	65W PAR30	35,000
LK5BORB LED	5"	Baffle	Oil-Rubbed Bronze	530	30K	93	IC/Non-IC Wet Location	65W PAR30	35,000
LK4GMW LED	4"	Gimbal	Matte White	530	30K	93	IC/Non-IC Damp Location	50W PAR20	35,000
LK5GMW LED	5"	Gimbal	Matte White	720	30K	93	IC/Non-IC Damp Location	50W PAR20	35,000

*Average savings and life based on incandescent bulb equivalent with a 2,000 hr. life.



New Construction Accessories

New Construction Pan	Type
LKA3P	3"
LKA4P	4"
LKA5P	5"

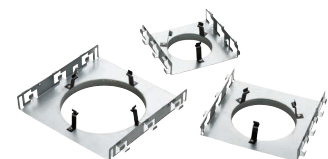

Hanger Bars	Type
LKABH	For All Sizes



Incandescent Kits

3" Aperture

Model No.	Aperture	Trim Style	Trim Finish	Lumens	Watts	Lamp Type	Lamp Life	Listings	
LK3BMW	3"	Baffle	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK3OAZ PFMW	3"	Open	Clear Specular/ Plastic White Flange	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK3GMW	3"	Gimbal	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK3GMW LED LPI	3"	Gimbal	Matte White	300	4.5W GU10	LED	25,000	Non-IC	Damp Location
LK3GBN	3"	Gimbal	Brushed Nickel	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK3GBN LED LPI	3"	Gimbal	Brushed Nickel	300	4.5W GU10	LED	25,000	Non-IC	Damp Location
LK3GORB	3"	Gimbal	Oil-Rubbed Bronze	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK3GORB LED LPI	3"	Gimbal	Oil-Rubbed Bronze	300	4.5W GU10	LED	25,000	Non-IC	Damp Location



4" Aperture

Model No.	Aperture	Trim Style	Trim Finish	Lumens	Watts	Lamp Type	Lamp Life	Listings	
LK4BMW	4"	Baffle	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK4OAZ PFMW	4"	Open	Clear Specular/ Plastic White Flange	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK4GMW	4"	Gimbal	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK4GMW LED LPI	4"	Gimbal	Matte White	300	4.5W GU10	LED	25,000	Non-IC	Damp Location
LK4GBN	4"	Gimbal	Brushed Nickel	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK4GBN LED LPI	4"	Gimbal	Brushed Nickel	300	4.5W GU10	LED	25,000	Non-IC	Damp Location
LK4LMW	4"	Shower Lens	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Wet Location
LK4SQMW	4"	Square	Matte White	-	50W GU10	Halogen	1,000	Non-IC	Damp Location
LK4SQMW LED LPI	4"	Square	Matte White	300	4.5W GU10	LED	25,000	Non-IC	Damp Location



5" Aperture

Model No.	Aperture	Trim Style	Trim Finish	Lumens	Watts	Lamp Type	Lamp Life	Listings	
LK5BMW	5"	Baffle	Matte White	-	75W PAR30	Halogen	1,000	Non-IC	Damp Location
LK5OAZ TRMW	5"	Open	Clear Specular/ Plastic White Flange	-	75W PAR30	Halogen	1,000	Non-IC	Damp Location
LK5LMW	5"	Shower Lens	Matte White	-	75W PAR30	Halogen	1,000	Non-IC	Wet Location



Recessed Layout Guide

General Parameters

Shown are some basic rules of lighting that will help you make the best decisions to meet your lighting needs.

GENERAL (5-20 fc)

Low to medium light levels.



Recommended lamps:

- A19, BR30 (10' ceiling or lower)
- BR40, PAR 30/38 (12' ceiling or higher)
- LED P Series, LED E Series

Fixture Estimator

(Room length x width) in feet

Example: 16' x 20' room = 8 fixtures

	6	8	10	12	14	16	18	20	22	24	26	28	30
12	2	2	4	4	4	4	6	6	8	8	8	9	9
14	2	2	4	4	4	4	6	6	8	8	9	9	9
16	2	4	4	4	4	4	6	8	8	8	9	9	9
18	2	4	4	6	6	6	8	8	9	9	10	10	12
20	4	4	4	6	6	8	8	9	9	10	10	12	12
22	4	4	6	8	8	8	9	9	10	10	12	12	12
24	4	6	6	8	8	8	9	10	10	12	12	12	12
26	6	6	6	8	9	9	10	10	12	12	12	12	12
28	6	6	6	9	9	9	10	12	12	12	12	12	14
30	6	6	8	9	9	9	12	12	12	12	14	14	14

Fixture Spacing

Ceiling Height	From Wall	Space Apart
8'	3'	6-7.5'
9'	3.5'	7-8.5'

TASK (35-44 fc)

Medium to high light levels.




Recommended lamps:

- PAR20, PAR30 (10' ceiling or lower)
- PAR38 (12' ceiling or higher)
- LED P Series, LED E Series

Lighting Kitchen Counters

Position center of fixtures over counter edge. This prevents shadowing and allows light to spill into cabinets.

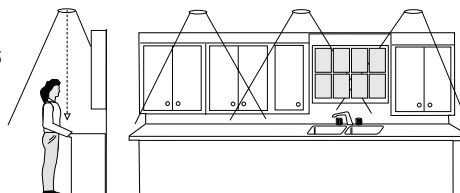

Fixture Spacing

Ceiling Height	Space Apart
8'	3'
10'	4'
12'	5'

ACCENT (40-80 fc)

Should be four to five times the general light level in the room.




Recommended lamps:

- PAR20, PAR30, MR16 (10' ceiling or lower)
- PAR38 (12' ceiling or higher)
- LED P Series, LED E Series

Artwork

Wall-mounted art and photos look best when lighted at an angle of 30 degrees from vertical. Use eyeball, gimbal, or adjustable trims.

Ceiling Height	From Wall
8'	18-24"
10'	30-36"
12'	40-48"



Collectables

Light free-standing objects at an angle of 30 degrees from vertical to prevent light from interfering with line of sight. Add a second light from a different position for greater visual interest.



WALLWASH (20-35 fc)

Provides consistent, uniform light levels across wall.



Recommended lamp:

- A19


Bookcases and Walls

Washing a wall with light visually expands a room, hides imperfections and adds dimension to books.



Fixture Spacing

From Wall	3'
Apart	3'



GRAZING (20-40 fc)

Low to medium light levels.




Recommended lamps:

- A19, BR30 (10' ceiling or lower)
- BR40, PAR 30/38 (12' ceiling or higher)
- LED P Series, LED E Series

Wall Grazing

Turn tough textures such as brick or stone into dynamic patterns of shadow and light.

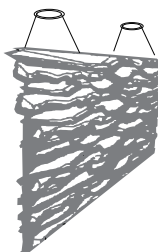

Fixture Spacing

From Wall	6-9"
Apart	12-18"



Undercabinet Lighting

- 50 LED Undercabinet, Toe-kick and Accent
- 52 Traditional-source Undercabinet and Accent


Cabinet Lighting

Linkable Rayzer LED Modular Lighting System

Ideal for lighting displays, under and over cabinets, under counter tops, office lighting and toe-kick lighting in residential and commercial applications.

Fixture	Model No.	Dimensions (L x W x H)	3000K LEDs Included
9" Linkable	RAZ9 M6	9-1/4" x 1-1/4" x 1/2"	(3) LED
12" Linkable	RAZ12 M6	12-1/4" x 1-1/4" x 1/2"	(4) LED
18" Linkable	RAZ18 M6	18-1/4" x 1-1/4" x 1/2"	(6) LED
24" Linkable	RAZ24 M6	24-1/4" x 1-1/4" x 1/2"	(8) LED

Includes 18" linking cord, mounting clips for flush or 30° mounting, and screws

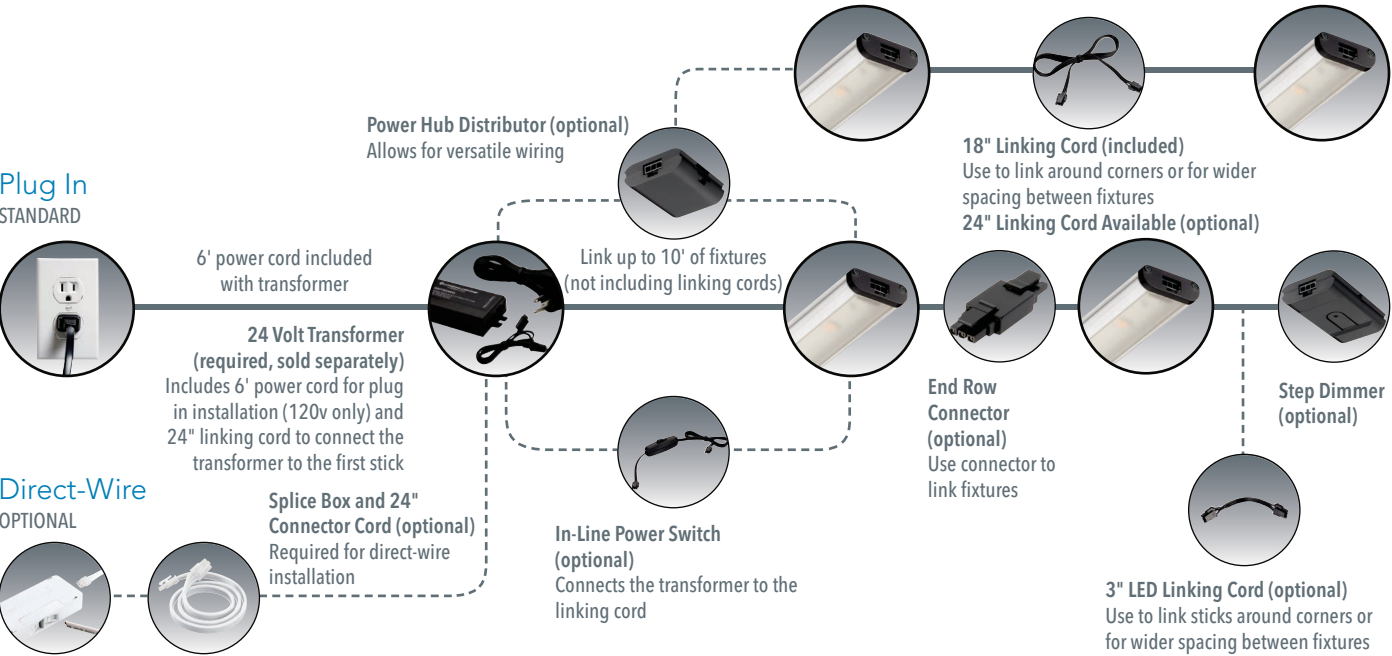

Accessory	Model No.
24V Transformer (required) with 120V Input Voltage (6' power cord and plug included)	RAZTRANS24 120 M6
24V Transformer (required) with 120-277V Input Voltage (Direct-Wire)	RAZTRANS24 MVOLT M6
24" Additional LED Linking Cord (fixture to fixture)	RAZ CC24 M12
3" Additional LED Linking Cord (fixture to fixture)	RAZ CC3 M12
3" Low Voltage Linking Cord (cord to cord)	RAZ LVCC M12
End Row Connector (fixture to fixture)	RAZ ERC M12
Cord Cover	UCH WWC R12*
In-Line Power Switch	RAZ INLS26 M12
Power Hub Distributor	RAZ PHD M12
Step Dimmer†	RAZDIM M12
Splice Box**	UCD JB M12 (white) UCD JB BL M12 (black)

*Only available in a retail 12-pack

**Required for Direct-Wire Installation with RAZTRANS24 120 only

†Not compatible with standard dimmer


Linkable LED Stick

Easy installation and a compact design make the LED Stick perfect for various cabinet lighting, display, accent and task lighting applications.

Fixture	Model No.	Dimensions (L x W x H)	3500K LEDs Included
6" Linkable	STK6 M12	6-1/4" x 3/8" x 1/2"	(6) LED
12" Linkable	STK12 M12	12-1/4" x 3/8" x 1/2"	(12) LED
18" Linkable	STK18 M12	18-1/4" x 3/8" x 1/2"	(18) LED



Plug In STANDARD

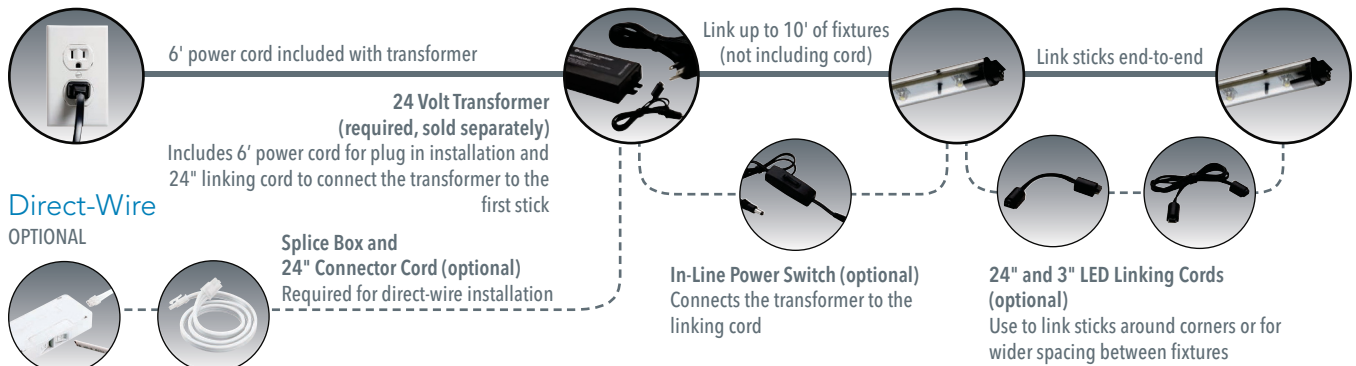

Direct-Wire OPTIONAL



Linkable UCLD LED

Dimmable with most standard triac based and ELV dimmers. Plug-in or hard-wire versatility and swivel head design allows you to direct light where you need it. 50,000 hour L70 rated life and links up to 340 fixture watts.



Accessory	Model No.
24" Connector Cord	UC ERC24 M12 (white) UC ERC24 BL M12 (black)
Cord Cover	UCH WWC R12*
Splice Box**	UCD JB M12 (white)UCD JB BL M12 (black)
Row Connector	UC ERC

*Linkable accessories only available in a retail 12-pack

**Recommended for Direct-Wire Installation

Fixture	Model No.	Dimensions (L x W x H)	Color Temperature	Finish
12" Linkable	UCLD 12 2700 BN M4	12" x 3-5/8" x 1"	2700K	Brushed Nickel
	UCLD 12 BN M4		3000K	
	UCLD 12 2700 BZ M4		2700K	Bronze
	UCLD 12 BZ M4		3000K	
	UCLD 12 2700 WH M4		2700K	White
	UCLD 12 WH M4		3000K	
18" Linkable	UCLD 18 2700 BN M4	18" x 3-5/8" x 1"	2700K	Brushed Nickel
	UCLD 18 BN M4		3000K	
	UCLD 18 2700 BZ M4		2700K	Bronze
	UCLD 18 BZ M4		3000K	
	UCLD 18 2700 WH M4		2700K	White
	UCLD 18 WH M4		3000K	
24" Linkable	UCLD 24 2700 BN M4	24" x 3-5/8" x 1"	2700K	Brushed Nickel
	UCLD 24 BN M4		3000K	
	UCLD 24 2700 BZ M4		2700K	Bronze
	UCLD 24 BZ M4		3000K	
	UCLD 24 2700 WH M4		2700K	White
	UCLD 24 WH M4		3000K	

Includes 5' cord/plug, 13" connector cord, Romex Connector and mounting screws

Cabinet Lighting

Linkable T5 Fluorescent

Snap on/off acrylic diffuser allows for tool-free lamp replacement.



Fixture	Model No.	Dimensions (L x W x H)	Finish	3500K Fluorescent Lamp Included
12" Linkable	UC5D 8 120 LP M6	12-1/4" x 2-5/8" x 1"	White	(1) 8W T5 Straight Tube
	UC5D 8 120 LP BZ M6		Bronze	
23" Linkable	UC5D 14 120 LP M6	22-3/4" x 2-5/8" x 1"	White	(1) 14W T5 Straight Tube
	UC5D 14 120 LP BZ M6		Bronze	
34" Linkable	UC5D 21 120 LP M6	34" x 2-5/8" x 1"	White	(1) 21W T5 Straight Tube
	UC5D 21 120 LP BZ M6		Bronze	

Includes 5' cord/plug, 13" connector cord and mounting hardware

NOTE: link fixtures up to 540 watts per power source

High Power Factor Ballast recommended for use in commercial applications. Consult factory for ballast options.

Plug In

STANDARD



5' power cord included with fixture

Link up to 540 watts to one power source

13" Connector Cord included with Linkable T5 Fluorescent fixtures

Direct-Wire

OPTIONAL



Splice Box (optional)
Recommended for direct-wire applications for ease of installation and the ability to link fixtures to both ends of the box

24" Connector Cord (optional)
For longer connections between fixtures or Splice Box.

Row Connectors (optional)
For continuous connections with minimal spacing (1-1/8")

Accessories

Accessory	Model No.
24" Connector Cord	UC ERC24 M12 (white)
	UC ERC24 BL M12 (black)
Cord Cover	UCH WWCC R12*
Splice Box**	UCD JB M12 (white)
	UCD JB BL M12 (black)
Row Connector	UC ERC

*Linkable accessories only available in a retail 12-pack

**Recommended for Direct-Wire Installation

Standard T5 Fluorescent

Snap on/off acrylic diffuser allows for easy lamp replacement.



Fixture	Model No.	Dimensions (L x W x H)	Switch	Lamp(s) Required (not included)
12"	UC 12E 120 SWR M6	12-3/8" x 5" x 1-1/8"	Yes	(1) 8W T5 Straight Tube
	UC 12E 120 M6		No	
21"	UC 21E 120 SWR M6	21-3/8" x 5" x 1-1/8"	Yes	(1) 13W T5 Straight Tube
	UC 21E 120 M6		No	
24"	UC 24E 120 SWR M6	24-1/2" x 5" x 1-1/8"	Yes	(2) 8W T5 Straight Tube
	UC 24E 120 M6		No	
33"	UC 33E 120 SWR M6	33-1/2" x 5" x 1-1/8"	Yes	(1) 8W & (1) 13W T5 Straight Tube
	UC 33E 120 M6		No	
42"	UC 42E 120 SWR M6	42-1/2" x 5" x 1-1/8"	Yes	(2) 13W T5 Straight Tube
	UC 42E 120 M6		No	

NOTE: For plug-in powered fixture, add "CSW" to model number. Example: UC 12E 120 CSW SWR

Standard T8 Fluorescent

Snap on/off acrylic diffuser allows for easy lamp replacement.



Fixture	Model No.	Dimensions (L x W x H)	Lamp Required (not included)
18"	UC8 15 120 SWR M6	18-3/8" x 4" x 1-3/8"	(1) 15W T8 Straight Tube
24"	UC8 17 120 SWR M6	24-3/8" x 4" x 1-3/8"	(1) 17W T8 Straight Tube
36"	UC8 25 120 SWR M6	36-3/8" x 4" x 1-3/8"	(1) 25W T8 Straight Tube
48"	UC8 32 120 SWR M6	48-3/8" x 4" x 1-3/8"	(1) 32W T8 Straight Tube



Indoor Utility Lighting

- 54 Closet & Pantry Solutions
- 55 Shoplights and Wet Location
- 57 Grow Light
- 58 Wraps
- 60 Strips
- 62 Troffers & High Bays

Closet Lights



LED Closet Light

Save energy with the PIR Motion Sensor option that automatically turns the lights off after 30 seconds of inactivity.

Model No.	Dimensions	CRI	Color Temperature	Controls	Lumens
FMMCL 840 S1	7"	>80	4000K	Pull Chain	575
FMMCL 840 PIR				Motion Sensor	
FMMCL 18 840 S1	18"			Pull Chain	925
FMMCL 18 840 PIR				PIR Motion Sensor	
FMMCL 24 840 S1	24"			Pull Chain	1225
FMMCL 24 840 PIR				PIR Motion Sensor	

Closet Light

Snap on/off acrylic diffuser allows for easy lamp replacement.

Fixture	Model No.	Dimensions (L x W x H)	3000K Fluorescent Lamp Included
18" Linear	CUC8 15 120 LP S1 M4	3-7/8" x 18-1/4" x 1-3/8"	(1) 15W T8 Straight Tube
24" Linear	CUC8 17 120 LP S1 M4	3-7/8" x 24-1/4" x 1-3/8"	(1) 17W T8 Straight Tube
8" Round	FMCL 13 ACRD M6	7-11/16" x 7-11/16" x 4"	(1) 13W GU24




Shoplights

High Lumen LED Shoplight

Includes 12" adjustable steel cables and 5' cord.

Model No.	CRI	Color Temperature	Finish	Lumens
1292L	87	4000K	Black/Gray	2900

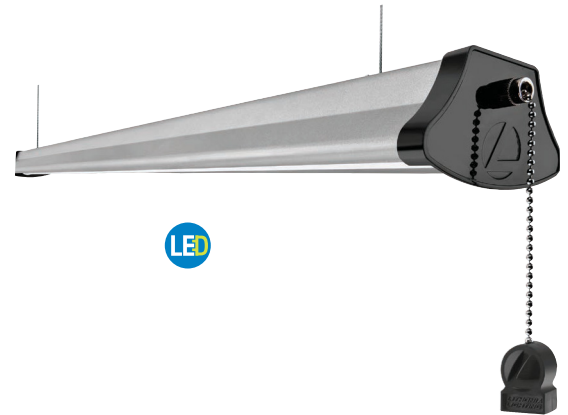

LED Shoplight

Includes 9-1/2" mounting chains, S-hooks and 5' cord.

Model No.	CRI	Color Temperature	Finish	Lumens
1290L	87	4000K	White	1700



Grid Shoplight


12" reflector, protective wireguard, pull-chain power switch, starts down to 0°F

Model No.	Dimensions (L x W x H)	Fixture	Lamps Required (not included)*
1284GRD RE	48-1/4" x 12" x 4"	Gray	(4) 32W T8 (F32T8/835)

**To meet ENERGY STAR requirement lamps must have minimum 10,000 hours life
Includes 5' cord/plug and (2) 48" mounting chains with s-hooks*



Shoplights

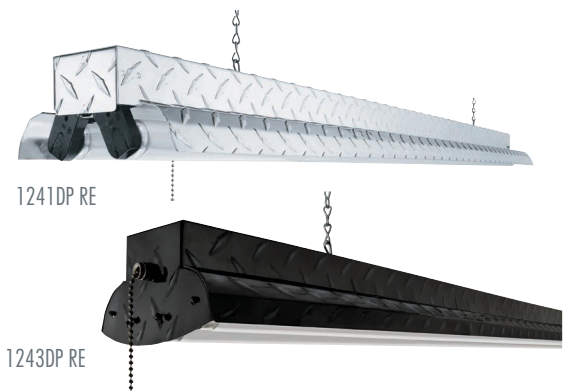

Diamond Plate Worklight

5-3/8" reflector, pull-chain power switch, starts down to 0°F

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
1241DP RE	48" x 5-3/8" x 2-5/8"	Chrome	(2) 32W T8 Straight Tubes
1243DP RE	48" x 5-3/8" x 3-1/8"	Black	(3) 32W T8 Straight Tubes

Includes 5' cord/plug and (2) 12" chains with s-hooks



Shoplights

Narrow Shoplight

4-3/4" reflector

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)
1233 RE	48" x 4-3/4" x 3"	White	(2) 32W T8 Straight Tubes

Includes 5' cord/plug and (2) 9-1/2" chains with s-hooks



All Season Shoplight

6" reflector, pull-chain power switch, starts down to 0°F

Model No.	Dimensions (L x W x H)	Finish	Lamps Required (not included)*
1242ZG RE	48" x 6" x 2-3/4"	Gray	(2) 32W T8 (F32T8/835)

**To meet ENERGY STAR requirement lamps must have minimum 10,000 hours life
Includes 5' cord/plug and (2) 9-1/2" chains with s-hooks*



Grow Light

Includes (2) 6500K daylight T5 lamps perfect for indoor gardening. A convenience outlet allows for linking multiple fixtures.

Fixture	Model No.	Dimensions (L x W x H)	6500K Fluorescent Lamps Included
2'	GRW 2 14 CSW CO M4	23-1/8" x 5-1/2" x 1-1/4"	(2) 14W T5 Straight Tube
4'	GRW 2 28 CSW CO M4	48" x 5-1/2" x 1-1/4"	(2) 28W T5 Straight Tube

Includes 5' cord/plug and (2) 48" mounting chains with brackets



LED Wet Light

Ideal for areas where dust, dirt, humidity, moisture and cold temperatures are present.

Model No.	CRI	Color Temperature	Finish	Lumens
XWLED4 120	88	4000K	Black/Gray	1800



Wraps



LED Narrow Wrap

Provides up to 50,000 hours of energy-saving, maintenance-free LED lighting.

Fixture	Model No.	CRI	Color Temperature	Lumens	Finish
2' Wrap	FMLWL 24 840	>80	4000K	1200	White
4' Wrap	FMLWL 48 840			2400	



LED Volumetric Wrap

Linear-faceted refractor with light diffusing film and white aluminum end caps. Delivers L90 performance for 60,000 hours. All models listed are for 120-277 VAC. For use in commercial and residential applications.

Fixture	Model No.	Lumens	Wattage	Color Temperature	Dimensions (L x W x H)
2' Wrap	STL2 20L EZ1 LP835	2058	20W	3500K	22-7/8" x 10-1/8" x 3-7/8"
4' Wrap	STL4 48L EZ1 LP835	4850	45W	3500K	46-3/8" x 10-1/8" x 3-7/8"



LED Wrap

Offers durable steel construction combined with long-lasting, maintenance-free LED life.

Fixture	Model No.	Lumens	Color Temperature	Voltage
2' Wrap	LBL2 LP835	2249	3500K	120-277V
2' Wrap	LBL2 LP840	2267	4000K	120-277V
4' Wrap	LBL4 LP835	4564	3500K	120-277V
4' Wrap	LBL4 LP840	4600	4000K	120-277V
4' Wrap	LBL4 347 LP835	4524	3500K	347V
4' Wrap	LBL4 347 LP840	4600	4000K	347V

Narrow Wrap

Steel endplates are finished in white enamel.

Fixture	Model No.	Dimensions (L x W x H)	Ballast	Lamps Required (not included)*
2' Wrap	3324 2L 17W WRAP	24" x 5-1/8" x 2-7/8"	Residential Electronic	(2) 17W T8 (F17T8/835)
4' Wrap	3348 2L 32W WRAP	48" x 5-1/8" x 2-7/8"	Residential Electronic	(2) 32W T8 (F32T8/835)
4' Wrap	RB232**	48" x 5" x 2-1/8"	Commercial Electronic	(2) 32W T8 (F32T8/835)

*To meet ENERGY STAR requirement lamps must have minimum 10,000 hours life

**Model RB232 is NOT ENERGY STAR qualified



Premium Wrap

Curved prismatic diffuser with linear side prisms. Luminous end plates soften appearance for improved aesthetics.

Fixture	Model No.	Dimensions (L x W x H)	Ballast	Lamp(s) Required (not included)*
2' Wrap	LB 2 17 120 RE	24" x 10" x 2-3/4"	Residential Electronic	(2) 17W T8 (F17T8/835)
4' Wrap	LB 2 32 120 RE	48" x 10" x 2-3/4"	Residential Electronic	(2) 32W T8 (F32T8/835)
2' Wide Housing Wrap	LB 4 17 120 1/4 RE	24" x 15-1/2" x 2-15/16"	Residential Electronic	(4) 17W T8 (F17T8/835)
4' Wide Housing Wrap	LB 4 32 120 1/4 RE	24" x 15-1/2" x 2-15/16"	Residential Electronic	(4) 32W T8 (F32T8/835)

*To meet ENERGY STAR requirement lamps must have minimum 10,000 hours life




Square Profile Wrap

Prismatic wraparound acrylic diffuser with steel endplates are finished in white enamel.

Fixture	Model No.	Dimensions (L x W x H)	Finish	Ballast	Lamp(s) Required (not included)*
1' x 2' Wrap	SB 2 17 120 RE	24" x 8-3/8" x 2-5/8"	Clear Lens / White Steel Ends	Residential Electronic	(2) 17W T8 (F17T8/835)
1' x 4' Wrap	SB 2 32 120 RE	48" x 8-3/8" x 2-5/8"	Clear Lens / White Steel Ends	Residential Electronic	(2) 32W T8 (F32T8/835)
1-1/2' x 4' Wide Housing Wrap	SB 4 32 120 1/4 RE	48" x 14-3/16" x 2-3/4"	Clear Lens / White Steel Ends	Residential Electronic	(4) 32W T8 (F32T8/835)

*To meet ENERGY STAR requirement lamps must have minimum 10,000 hours life

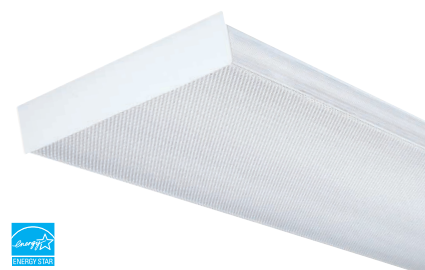

Strip Lights

Z Series LED Strip Lights

Can be surface, pendant, or stem mounted. Dimmable using a 0-10V dimmer. Delivers L70 performance for 100,000 hours. All models listed are for 120-277 VAC. For commercial and residential applications.



Fixture	Model No.	Lumens	Color Temperature	Dimensions (L x W x H)
24" Open	ZL1N L24 3500LM FST MVOLT 40K 80CRI WH	3177	4000K	24" x 2-1/2" x 1-1/2"
24" Lensed	ZL2N L24 2000LM MDD MVOLT 40K 80CRI WH	2249	4000K	24" x 3-3/8" x 3-1/4"
46" Open	ZL1N L46 3000LM FST MVOLT 40K 80CRI WH	2834	4000K	46" x 2-1/2" x 1-1/2"
46" Lensed	ZL2N L46 3000LM MDD MVOLT 40K 80CRI WH	3173	4000K	46" x 3-3/8" x 3-1/4"
48" Open	ZL1N L48 3000LM FST MVOLT 40K 80CRI WH	2834	4000K	48" x 2-1/2" x 1-1/2"
48" Lensed	ZL2N L48 3000LM MDD MVOLT 40K 80CRI WH	3173	4000K	48" x 3-3/8" x 3-1/4"

Z Series Strip Lights

Surface or suspension mount in unit or row applications. All models listed are for 120-277 VAC. For commercial and residential applications.



Fixture	Model No.	Dimensions (L x W x H)	Ballast	Lamp(s) Required (not included)
2'	Z117 MV Z217 MV	24" x 2-1/8" x 1-1/2"	Electronic Instant Start	(1) 17W T8 straight tube (2) 17W T8 straight tube
3'	Z125 MV Z215 MV	36" x 2-1/8" x 1-1/2"	Electronic Instant Start	(1) 25W T8 straight tube (2) 25W T8 straight tube
4'	Z132 MV Z232 MV	48" x 2-1/8" x 1-1/2"	Electronic Instant Start	(1) 32W T8 straight tube (2) 23W T8 straight tube
8' Tandem	TZ132 MV TZ232 MV	96" x 2-1/8" x 1-1/2"	Electronic Instant Start	(2) 32W T8 straight tube (4) 32W T8 straight tube

Strip Lights

Fixture	Model No.	Dimensions (L x W x H)	Ballast	3000K Fluorescent Lamp(s) Included
2'	MNS5 1 14 LP M6	22-3/4" x 1-1/2" x 2-7/8"	Residential Electronic	(1) 14W T5 straight tube
	MNS5 2 14 LP M6	22-3/4" x 2" x 2-3/8"		(2) 14W T5 straight tube
3'	MNS5 1 21 LP M6	34-3/4" x 1-1/2" x 2-1/8"	Residential Electronic	(1) 21W T5 straight tube
	MNS5 2 21 LP M6	34-3/4" x 2" x 2-3/8"		(2) 21W T5 straight tube
4'	MNS5 1 28 LP M6	46-3/4" x 1-1/2" x 2-1/8"	Residential Electronic	(1) 28W T5 straight tube
	MNS5 2 28 LP M6	46-3/4" x 2" x 2-3/8"		(2) 28W T5 straight tube

Fixture	Model No.	Dimensions (L x W x H)	Ballast	Lamp(s) Required (not included)
2'	MNS8 1 17 120 RE	24-3/8" x 1-5/8" x 2-3/4"	Residential	(1) 17W T8 straight tube
	MNS8 2 17 120 RE	24-3/8" x 2-3/8" x 2-7/8"	Electronic	(2) 17W T8 straight tube
3'	MNS8 1 25 120 RE	36-3/8" x 1-5/8" x 2-3/4"	Residential	(1) 25W T8 straight tube
	MNS8 2 25 120 RE	36-3/8" x 2-3/8" x 2-7/8"	Electronic	(2) 25W T8 straight tube
4'	MNS8 1 32 120 RE M6	48-3/8" x 1-5/8" x 2-3/4"	Residential	(1) 32W T8 straight tube
	MNS8 2 32 120 RE M6	48-3/8" x 2-3/8" x 2-7/8"	Electronic	(2) 32W T8 straight tube



Accessory	Model No. (for T5)	Model No. (for T8)
2' Diffuser	DMNS5 14 M12	DMNS8 17 M12
3' Diffuser	DMNS5 21 M12	DMNS8 25 M12
4' Diffuser	DMNS5 28 M12	DMNS8 32 M12

NOTE: Diffusers only available for single-lamp mini-strips

Mini Strip Lights

Can be unit or row mounted to ceiling or wall.



General Purpose Strip Lights

Can be unit or row mounted to ceiling or wall.



Fixture	Model No.	Dimensions (L x W x H)	Ballast	Lamp(s) Required (not included)
2'	C 2 17 120 RE	24" x 4-1/4" x 3"	Residential Electronic	(2) 17W T8 straight tube
3'	C 2 25 120 RE	36" x 4-1/4" x 3"	Residential Electronic	(2) 25W T8 straight tube
4'	C 2 32 120 RE	48" x 4-1/4" x 3"	Residential Electronic	(2) 32W T8 straight tube

Side-Mounted Strip Lights

Can be unit or row mounted to ceiling or wall.



High Bays & Troffers

LED High Bay

The I-BEAM® IBH LED luminaire gives even budget-conscious customers a very reliable LED solution.

Model No.	Lumens	Voltage	Color Temperature	CRI
IBH 12L MVOLT	12000LM	MVOLT	4000K	70
IBH 18L MVOLT	18000LM			
IBH 24L MVOLT	24000LM			

Fluorescent High Bay

Uses 40-60% less energy than HID. All models listed are for 120-277 VAC. For commercial and residential applications.

Model No.	4100K Fluorescent Lamps	Lamps Included	Distribution	Ballast	Dimensions (L x W x H)
IBZT5 4	(4) 54W T5	No	Narrow	Electronic, Program Rapid Start	48-1/6" x 13-1/4" x 2-3/8"
IBZT5 4L		Yes			
IBZT5 6	(6) 54W T5	No	Narrow	Electronic, Program Rapid Start	48-1/6" x 18-1/8" x 2-3/8"
IBZT5 6L		Yes			
IBZT5 4L WD	(4) 54W T5	Yes	Wide	Electronic, Program Rapid Start	48-1/6" x 13-1/4" x 2-3/8"
IBZT5 6L WD	(6) 54W T5	Yes	Wide		
IBZT8 4	(4) 32W T8	No	Narrow	Electronic, Instant Start, High BF	48-1/6" x 13-1/4" x 2-3/8"
IBZT8 4 WD		No	Wide		
IBZT8 6	(6) 32W T8	No	Narrow	Electronic, Instant Start, High BF	48-1/6" x 18-1/8" x 2-3/8"
IBZT8 6 WD		No	Wide		

Troffers


LED troffers are dimmable down to 5% with 0-10V dimmer switch. For commercial and residential applications.

Model No.	Dimensions	Lamp(s) Required (not included)
GT8 2 32 A12 120 GESB	1' x 4' Lay-In Troffer	(2) 32W T8 straight tube
GT8 F 2 32 A12 120 GESB	1' x 4' Flanged Troffer	
2GT8 2 U316 A12 120 GESB	2' x 2' Lay-In Troffer	(2) 31W T8-U (6" leg)
2GT8 F 2 U316 A12 120 GESB	2' x 2' Flanged Troffer	
2GT8 2 32 A12 120 GESB	2' x 4' Lay-In Troffer	(2) 32W T8 straight tube
2GT8 3 32 A12 120 1/3 GESB	2' x 4' Lay-In Troffer	(3) 32W T8 straight tube
2GT8 F 3 32 A12 120 1/3 GESB	2' x 4' Flanged Troffer	
2GT8 4 32 A12 120 1/4 GESB	2' x 4' Lay-In Troffer	(4) 32W T8 straight tube
2GT8 F 4 32 A12 120 1/4 GESB	2' x 4' Flanged Troffer	
2GTL2 LP835	2' x 2' LED Recessed Troffer	Integrated LEDs Included (3705 lumens)
2GTL4 LP835	2' x 4' LED Recessed Troffer	Integrated LEDs Included (4104 lumens)



Accessories	Type
HC36 M12	Chain Hangers (3')
IBAC120 M20	Aircraft Cable (10')
CMRB 6	360° Occupancy Sensor (see page 63)



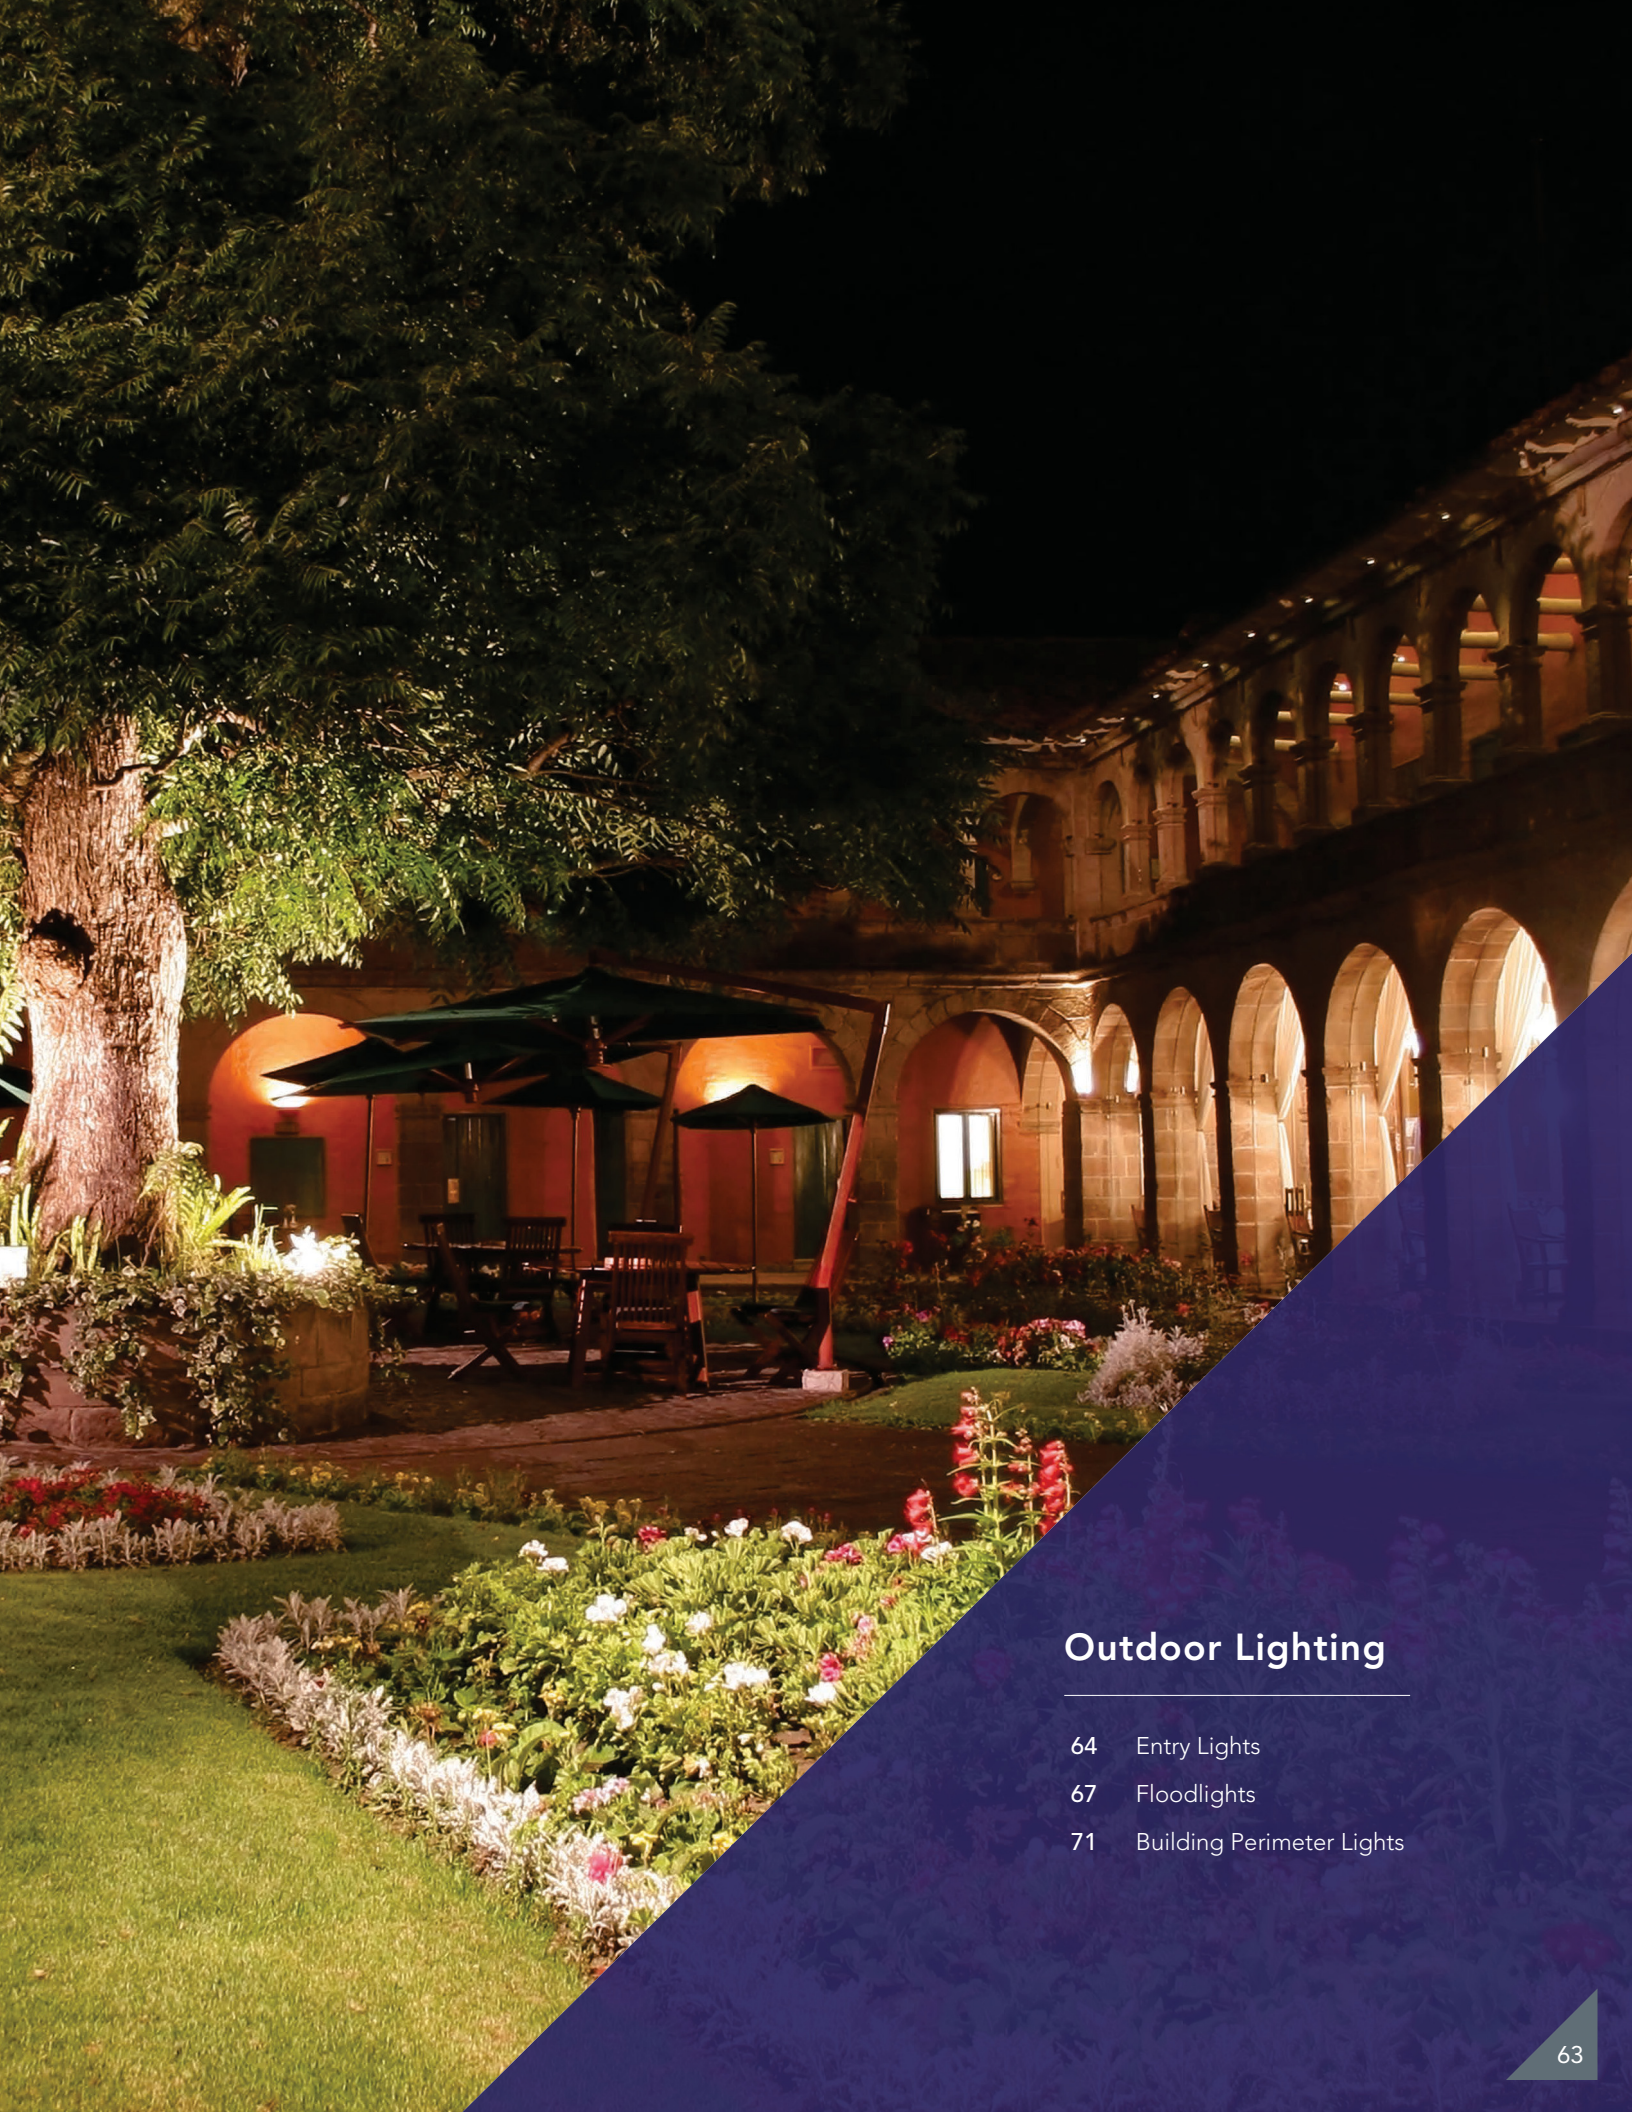

Outdoor Lighting

- 64 Entry Lights
- 67 Floodlights
- 71 Building Perimeter Lights

Entry Lights



LED Wall Pack

Capable of replacing up to a 70-watt HPS wall pack while saving up to 78% in energy costs, the TWS LED Wall Pack combines classic design with LED benefits.

Model No.	Dimensions (W x H x EXT)	Lumens	CCT	Controls	Finish
TWS LED 1 50K 120 PE	6-3/4" x 10-7/8" x 5-5/16"	1020	5000K	Photocell	Dark Bronze



LED Wall Pack

The OLCS provides bright, glare-free illumination and rugged durability making it ideal for entryways, walkways and stairwells.

Model No.	Dimensions (W x H x EXT)	Lumens	CCT	Finish
OLCS 8 DDB	8-7/8" x 12-9/16" x 3-3/4"	460	4000K	Dark Bronze
OLCS 8 WH	8-7/8" x 12-9/16" x 3-3/4"	510	4000K	White



LED Wall Pack

Provides years of maintenance-free general illumination for residential and commercial outdoor applications such as driveways, patios and entryways.

Model No.	Dimensions (W x H x EXT)	Lumens	CCT	Controls	Finish
OLWP 11 PE BZ	5-3/8" x 10-1/2" x 3-1/2"	1100	4000K	Photocell	Dark Bronze



Mini Wall Sconce

Delivers bright, even light while staying consistent with the LEED® and Green Globes™ criteria for eliminating wasteful uplight.

Model No.	Dimensions (W x H x EXT)	Lumens	CCT	Finish
WSTM LED 1A 40K 120 DDBTXD	12-1/2" x 5-3/4" x 7-1/2"	730	4000K	Textured Dark Bronze
WSTM LED 2A 40K 120 DDBTXD	12-1/2" x 5-3/4" x 7-1/2"	1280	4000K	Textured Dark Bronze

Entry Lights

LED Step Light

Provides energy-efficient accent and safety lighting for steps and walkways in residential and commercial applications. Integrated LEDs.

Model No.	Shape	Dimensions (W x H x EXT)	Finish	CCT	Lumens	Input Watts
OLSS DDB M6	Square	5-15/16" x 5-15/16" x 3-1/8"	Dark Bronze	4000K	330	9
OLSS WH M6	Square	5-15/16" x 5-15/16" x 3-1/8"	White	4000K	330	9
OLSR DDB M6	Round	6-1/2" x 6-1/2" x 3-1/8"	Dark Bronze	4000K	370	9
OLSR WH M6	Round	6-1/2" x 6-1/2" x 3-1/8"	White	4000K	370	9



LED Wall Cylinder

Provides energy-efficient architectural accent lighting on exterior walls in residential and commercial applications. Integrated LEDs.

Model No.	Description	Dimensions (W x H x EXT)	Finish	CCT	Lumens	Input Watts
OLLWD DDB M6	Up or Down Illumination	4-3/8" x 8" x 3-3/4"	Dark Bronze	4000K	270	9
OLLWD WH M6	Up or Down Illumination	4-3/8" x 8" x 3-3/4"	White	4000K	270	9
OLLWU DDB M6	Up and Down Illumination	4-3/4" x 9-1/4" x 3-3/4"	Dark Bronze	4000K	500	14
OLLWU WH M6	Up and Down Illumination	4-3/4" x 9-1/4" x 3-3/4"	White	4000K	500	14



LED Vapor Tight

Provides years of maintenance-free illumination for indoor or outdoor use in residential & commercial applications.

Model No.	Description	Dimensions (W x H x EXT)	Finish	CCT	Lumens	Input Watts
OLVTCM M6	Ceiling Mount	4-1/2" x 10-5/8" x 4-1/2"	Grey	4000K	600	15
OLVTWM M6	Wall Mount	4-1/2" x 11-1/4" x 7-3/8"	Grey	4000K	600	15



Entry Lights



Standard Vapor Tight

Ideal for use where dust, dirt, humidity, and moisture are present.

Model No.	Description	Dimensions (W x H x EXT)	Finish	Lamp Required (not included)
OVT 150I 120 M6	Ceiling Mount	4-1/4" x 4-1/4" x 9-1/8"	Grey	(1) 150W maximum incandescent



Cylinder Wall Light

Dusk-to-Dawn photocell provides automatic on/off.

Model No.	Dimensions (W x H x EXT)	Finish	2700K Fluorescent Lamp Included
OSC 13F 120 P LP WH M6	4-1/2" x 7-1/2" x 6-1/2"	White	(1) 13W GU24 compact integrated spiral*
OSC 13F 120 P LP BL M6	4-1/2" x 7-1/2" x 6-1/2"	Black	(1) 13W GU24 compact integrated spiral*

*compact integrated spiral lamp includes ballast



Standard Wall Pack

Dusk-to-Dawn photocell provides automatic on/off.

Model No.	Dimensions (W x H x EXT)	Finish	Lamp Included
OWP2 50M 120 P LP BZ M4	6-7/8" x 11" x 5-1/8"	Bronze	(1) 50W metal halide



Mini Wall Pack

Dusk-to-Dawn photocell provides automatic on/off.

Model No.	Dimensions (W x H x EXT)	Finish	4100K Fluorescent Lamp Included
OWP3 42F 120 P LP BZ M4	5-3/4" x 11" x 5"	Bronze	(1) 42W compact quad tube
OWP3 42F 120 P LP WH M4	5-3/4" x 11" x 5"	White	(1) 42W compact quad tube

Floodlights

LED Wall Pack/LED Pole Mount

Provides energy-efficient security and general purpose lighting in commercial applications. Integrated LEDs.

Series	Performance Package	Color Temperature	Mounting Hardware	Finish
DSXF1	1 One COB Engine	40K 4000K	THK Knuckle	DDBXD Dark Bronze
	2 Two COB Engine	50K 5000K		
DSXF2	3 Three COB Engine			
	4 Four COB Engine			
DSXF3	5 Five COB Engine		IS Integral Slipfitter	
	6 Six COB Engine		YKC62 Yoke	



LED Security Floodlight

The OLFL provides maintenance-free outdoor illumination and motion sensing controls for yards, driveways, patios, and more.

Model No.	Lumens	CCT	Controls	Finish
OLFL 14 PE BZ	1350	4000K	Photocell	Bronze



2-Head LED Floodlight

Delivers bright, high-performance LEDs with 180-degree motion detection and up to 70-foot forward motion detection.

Model No.	Lumens	CCT	Controls	Finish
OLF 2RH 40K 120V MO BZ	1570	4000K	Motion Photocell	Bronze
OLF 2RH 40K 120V MO WH	1570	4000K	Motion Photocell	White



Dusk-to-Dawn LED Floodlight

Provides energy-efficient security and general purpose lighting in residential or commercial applications. Integrated LEDs.

Series	No. of Heads	Voltage	Controls	Finish
OFLR	6LC 2-Head	120	MO Motion Sensor	BZ Bronze
	9LC 3-Head		P Photocell	WH White



Floodlights



LED Bullet Flood

Long-lasting energy-efficient landscape floodlight available with spot or flood optics is ideal for lighting landscapes, architectural features, flag poles and more.

Model No.	Description	Light Engine	Color Temperature	Finish
OLBS 8 30K DDB	Spotlight- 2x2 spot optics	8	3000K	Dark Bronze
OLBS 8 50K DDB	Spotlight- 2x2 spot optics	8	5000K	Dark Bronze
OLBF 8 30K DDB	Floodlight- 5x4 flood optics	8	3000K	Dark Bronze
OLBF 8 50K DDB	Floodlight- 5x4 flood optics	8	5000K	Dark Bronze



Dusk-to-Dawn Portable LED Stake Light

With an adjustable head, the portable stake lights are ideal for directional landscape and outdoor accent lighting.

Model No.	Lumens	Color Temperature	Controls	Finish
OSTLLED 120 P BL	670	4000K	Photocell	Black



Floodlights

Designer Twin Floodlights

Visor heads offer neighbor-friendly light control. Knockout allows for addition of photo control or motion sensor.

Model No.	Dimensions (W x H x EXT)	Finish	Quartz Halogen Lamps Included
OFTR 200Q 120 LP BZ M12	3-1/2" x 5-1/2" x 7"	Bronze	(2) 100W T-4 bi-pin, quartz halogen, single-ended
OFTR 200Q 120 LP WH M12	3-1/2" x 5-1/2" x 7"	White	(2) 100W T-4 bi-pin, quartz halogen, single-ended



Premium Floodlights

Model No.	Dimensions (W x H x EXT)	Finish	Metal Halide Lamp Included
OFL 100M 120 LP BZ M4	9" x 7" x 6"	Bronze	(1) 100W metal halide



Standard Floodlights

Model No.	Dimensions (W x H x EXT)	Finish	High Pressure Sodium Lamp Included
OFL 70S 120 LP BZ M4	9" x 7" x 6"	Bronze	(1) 70W high pressure sodium, medium-base



Mini Floodlights

Knockout allows for addition of photo control or motion sensor.

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	Quartz Halogen Lamps Included
Mini Twin-head	OFTM 300Q 120 LP BZ M6	12" x 6" x 7-7/8"	Bronze	(2) 150W T-3 quartz halogen, double-ended
	OFTM 300Q 120 LP WH M6		White	
Mini-Single Head	OFLM 150Q 120 LP BZ M12	5-1/2" x 4" x 8"	Bronze	(1) 150W T-3 quartz halogen, double-ended
	OFLM 150Q 120 LP WH M12		White	



PAR Holders

Fixture	Model No.	Dimensions (W x H x EXT)	Finish	Lamp(s) Required (not included)
Twin Head Dusk-to-Dawn	OFTH 300PR 120 P BZ M12	5-1/2" x 7" x 5"	Bronze	(2) 150W maximum PAR medium-base
	OFTH 300PR 120 P WH M12	5-1/2" x 7" x 5"	White	(2) 150W maximum PAR medium-base
Twin Head Flood	OFTH 300PR 120 BZ M12	4-1/2" x 4-1/2" x 6"	Bronze	(2) 150W maximum PAR medium-base
	OFTH 300PR 120 WH M12	4-1/2" x 4-1/2" x 6"	White	(2) 150W maximum PAR medium-base



Floodlights



Fluorescent Floodlight

Model No.	Dimensions (W x H x EXT)	Finish	6500K Fluorescent Lamp Included
OFL2 65F 120 LP BZ M4	13" x 9" x 4-1/2"	Bronze	(1) 65W triple tube
OFL2 65F 120 LP WH M4	13" x 9" x 4-1/2"	White	(1) 65W triple tube

Floodlight with Light Visor

Visor provides neighbor-friendly light control.

Model No.	Dimensions (W x H x EXT)	Finish	Quartz Halogen Lamp Included
OFL 300/500Q 120 LP BZ M6	9-1/4" x 6-5/8" x 6"	Bronze	(1) 300W or (1) 500W double-ended quartz halogen
OFL 300/500Q 120 LP WH M6	9-1/4" x 6-5/8" x 6"	White	(1) 300W or (1) 500W double-ended quartz halogen

Canopy and Parking Garage



LED Canopy/Ceiling

Model No.	Lumens	Color Temperature	Finish
VRC LED 1 50K MVOLT	3389	5000K	Dark Bronze



LED Outdoor Ceiling-Mount/Well Light

Model No.	Lumens	Color Temperature	Finish
OLCFM 15 DDB	1030	4000K	Dark Bronze
OLCFM 15 WH	1030	4000K	White



LED Ceiling / Canopy Light

Model No.	Description	Dimensions (W x H x EXT)	Input Watts	Color Temperature	Lumens	Finish
OLWCM 36 M2	Ceiling or Pendant Mount	13-7/8" x 2-1/2" x 11-1/8"	56	5000K	3600	Dark Bronze



Building Perimeter

LED Wall Packs

These maintenance-free LED wall packs offer general illumination and are ideal for lighting building facades, parking areas, walkways, garages and outdoor spaces that require additional safety and security.

Model No.	Lumens	Color Temperature	Controls	Finish
OLW14	1490	5000K	Photocell	Bronze, White
OLW 23	2720	5000K	Photocell	Dark Bronze
OLW 31	3970	5000K	Photocell	Dark Bronze
TWR1 LED	2100 3500 4900	4000K 5000K	Photocell option	Dark Bronze
TWH LED	2560 5560 6736	5000K		Dark Bronze
TWP LED	1610 3150 4380	5000K		Dark Bronze
OLWX1 LED	1280 1850 4030	4000K 5000K	Photocell option	Dark Bronze
TDD LED 1	1410	4000K	Photocell	Grey
TDD LED 2	3320	5000K	Twist-lock Photocell	Grey



*Complete ordering info available at www.AcuityBrands.com

Building Perimeter



LED Area/Wall Light

The OLAW offers a combination of energy-saving LED technology, attractive design, and increased sense of security.

Model No.	Lumens	Color Temperature	Controls	Finish
OLAW23	2300	5000K	Photocell	Bronze



Standard Area Light

Dusk-to-Dawn photocell provides auto on/off.

Model No.	Description	Dimensions (W x H x EXT)	Finish	Lamp Included
OALS10 65F 120 P LP M4	Wall or Arm Mount	9-1/2" x 13" x 11-1/2"	Aluminum	(1) 65W compact quad tube
OAL 70S 120 PER LP M2	Wall or Arm Mount	9-1/2" x 16" x 11-1/2"	Aluminum	(1) 70W high pressure sodium
OAL12 100M 120 PER LP M2	Wall or Arm Mount	12" x 17-3/4" x 13-3/4"	Aluminum	(1) 100W metal halide
OMA M6	Extension Arm	14-1/2" x 11-5/8"	Aluminum	NA



Area Light with Extension Arm

Dusk-to-Dawn photocell provides auto on/off. 12" acrylic diffuser. Includes 17" mounting extension arm.

Model No.	Dimensions (W x H x EXT)	Finish	Metal Halide Lamp Included
OAL12 150M 120M PER LP R2*	12" x 17-3/4" x 13-3/4"	Aluminum	(1) 150W metal halide

**only available in retail packs of 2*



Controls

- 74 Overview
- 76 Occupancy Sensors

Acuity Controls



AcuityControls.

Sensor Switch™

Superior Performance through Innovative Technology

Sensor Switch is the industry leader in lighting controls innovation, focusing on engineering products that cost-effectively deliver energy efficiency, as well as convenience. Our occupancy sensors and controllers utilize advanced detection technology with the added advantage of being simple to install and easy to use.





Energy Code Compliance

An important part of every lighting control project is meeting the local energy code requirements. Our lighting control products are designed to meet or exceed energy code requirements providing controls solutions for all applications.

Reliable Performance

Sensor Switch is a leader in lighting control innovation, continuously developing technologies to enhance performance of our occupancy sensors and photocells providing trusted quality and reliability. We offer the broadest selection of occupancy sensors and photocell devices to meet every application.

Ease of Installation

Sensor Switch products are easy to install due to our patented reversible line and load wires; the sensor cannot be wired incorrectly. This powerful feature eliminates extra costs on the job site due to incorrect wiring...saving time and money!

Acuity Controls

Wall Switch Sensors

WSX - Occupancy (Auto On)

The WSX is a stylish, easy to install, and simple to use wall switch and occupancy sensor available with Passive Infrared (PIR) or Passive Dual Technology (PDT) detection. It is ideal for private offices, copy rooms, closets or any small enclosed space without (WSX) or with (WSX PDT) obstructions.


SSD - Vacancy (Manual On)

The SSD VA 120 Series is a residential grade wall switch vacancy (manual on) sensor that utilizes Passive Infrared (PIR) detection. The fixture can be manually turned on or off or the SSD will automatically turn off once the vacancy time delay expires.




WSX Wall Switch

Applications

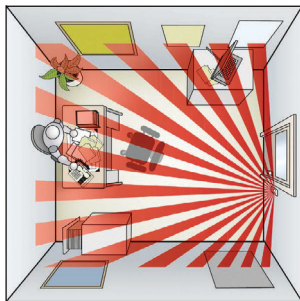

Passive Infrared Technology (PIR)
Private Office, Storage, Garage

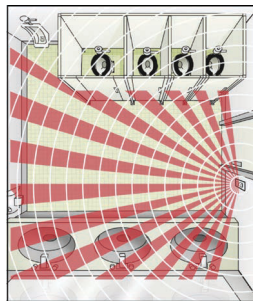

Passive Dual Technology (PDT)
Restrooms & Partitions

Series #	Finish	Power Type	Default On Mode	Detection	# of Relays
WSX WH	White	120-277, 347 VAC	Auto On	Passive Infrared (PIR)	1
WSX IV	Ivory				
WSX PDT WH	White	120-277, 347 VAC	Auto On	Passive Dual Technology (PDT)	1
WSX PDT IV	Ivory				
WSX 2P WH	White	120-277, 347 VAC	Auto On (P1)/Manual On (P2)	Passive Infrared (PIR)	2
WSX 2P IV	Ivory				
WSX PDT 2P WH	White	120-277, 347 VAC	Auto On (P1)/Manual On (P2)	Passive Dual Technology (PDT)	2
WSX PDT 2P IV	Ivory				
SSD VA 120 WH	White	120 VAC	Manual On	Passive Infrared (PIR)	1
SSD VA 120 IV	Ivory				

Acuity Controls



Wireless Product

Wireless Occupancy Sensor

Acuity Control's line of wireless occupancy sensors provides both Passive Infrared (PIR) and Passive Dual Technology (PDT) detection options. These battery operated sensors (with an estimated 10 year battery life) utilize RDT™ wireless technology. They are designed to work with the SPODMR WR series wall switch or other RDT™ wireless control devices to control a space's lighting.

Series #	Finish	Installation	Power Type	Detection
CM 9 WR	White	Ceiling	Wireless	Passive Infrared (PIR)
CM PDT 9 WR	White	Ceiling	Wireless	Passive Dual Technology (PDT)
SPODMR WR	White, Ivory	Wall	Wireless/120-277 VAC	n/a

360° Occupancy Sensors

Ceiling Mount

Provides automatic lighting control using 360° Passive Infrared (PIR) detection (or optional PDT technology) where a wall switch sensor is not applicable.



Ceiling Mount


Fixture Mount

Mounts directly to a fixture and provides excellent 360° coverage for rooms without obstructions. It is ideal for high bay fixtures, but it can also be used with strip lights and wrap around fixtures.




Fixture Mount

Applications

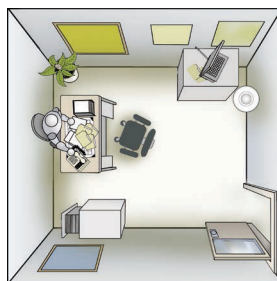

Private Office / Small Room

- Mount along entrance wall
- Use when a wall switch is not feasible

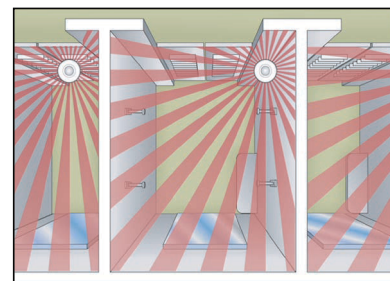

Dressing Room / Closet

- Eliminates need for switch
- Adds security

Series #	Installation	Power Type	Feature	Detection
CMR 9	Ceiling Mount	120-277 VAC	1-Pole	Passive Infrared (PIR)
CMR PDT 9	Ceiling Mount	120-277 VAC	1-Pole	Passive Dual Technology (PDT)
CMR 9 2P	Ceiling Mount	120-277 VAC	2-Pole	Passive Infrared (PIR)
CMR PDT 9 2P	Ceiling Mount	120-277 VAC	2-Pole	Passive Dual Technology (PDT)
LSXR 9	Fixture Mount	120-277 VAC	1-Pole	Passive Infrared (PIR)
LSXR 10	Fixture Mount	120-277 VAC	1-Pole	Passive Infrared (PIR)



Renovation Guide

Look up...Look around for Lighting renovation opportunities

The demand for renovation solutions is growing now more than ever – renovation opportunities now represent more than 40% of the US Lighting Market. The following guide will aid you in identifying renovation opportunities by enabling you to recommend energy efficient replacement solutions. Keep in mind local utility rebates when identifying fixtures and controls - often times, the rebate can significantly decrease the cost. This guide is broken out by application, and within each application, you'll notice that we're recommending lighting solutions that are intended to save time and money.

For the complete Look Up...Look Around Renovation Guide, visit www.AcuityBrands.com/Library.

When identifying a space, think about these key questions:

What Do You Look For?

- Outdated T12 or T8 fluorescent parabolics, troffers or strips
- Incandescent emergency or downlighting fixtures
- Metal halide or high pressure sodium HID or outdoor fixtures
- Areas where lighting is on continuously but not needed (i.e. no lighting controls)

What Do You Ask?

- How old are your existing fixtures?
- Are you looking to save on energy and maintenance costs?
- Are you satisfied with existing light levels?
- Are you looking for any safety upgrades?

What Do You Suggest?

- Lighting and controls solutions from Acuity Brands





Kitchen, Living Room, Bathroom

What do you see?	What do you ask?	What do you suggest?	Benefits
 <p>Incandescent Recessed</p>	<ul style="list-style-type: none"> What type of recessed replacement lamps do you use? How often do you have to replace lamps? Are you interested in cutting energy costs and improving your maintenance costs? 	<p>BETTER: LED Bulbs</p>  <p>BEST: P Series LED Module</p> 	<ul style="list-style-type: none"> Energy savings up to 80% Lower maintenance and relamping costs Extended life, up to 50,000 hours <ul style="list-style-type: none"> Easily installs in any existing incandescent housing - perfect for remodeling Integrated LEDs and trim create an improved lighting experience White lens hides the LEDs and reduces glare

Outdoor Security & General Purpose

What do you see?	What do you ask?	What do you suggest?	Benefits
 <p>Incandescent PAR Holders</p>  <p>High Pressure Sodium Area Lights</p>	<ul style="list-style-type: none"> How old are your existing fixtures? How often do you have to replace lamp? Are you satisfied with existing light levels? Can light output & color temperature be improved? 	<p>BETTER: OFLR LED Floods</p>  <p>BEST: OLW 23 LED Area/Wall Light</p> 	<ul style="list-style-type: none"> Energy savings up to 78% 50,000 hour maintenance-free operation Adjustable 180° motion sensor with built-in photocell provides added security Bright, even illumination <ul style="list-style-type: none"> Save energy - 64 lumens per watt Integrated design directs light where it is needed Higher lumen output means more mounting heights - up to 15'

Index

Model Number	Page	Model Number	Page	Model Number	Page	Model Number	Page
10511 KR M4	20	11990 GW M4	9	4G1 MB LED M6	38	50PAZ LED 30K 90CRI M6	39
10512 M4	19	11994 GA M4	9	4G1 MW LED M6	38	50PAZ LED 40K 90CRI M6	39
10513 BN M4	19	11994 GW M4	9	4G1 ORB LED M6	38	50PAZ LED M6	39
10640RE	25	1233 RE	57	4G2 ORB PAR20 R6	40	50PAZ TRMW 27K 90CRI M6	39
10641RE	25	1241DP RE	56	4G2A PAR20 R6	40	50PAZ TRMW 30K 90CRI M6	39
10642RE	25	1242ZG RE	57	4G2BN PAR20 R6	40	50PAZ TRMW 40K 90CRI M6	39
10648RE BZ	26	1243DP RE	56	4G2MB PAR20 R6	40	50PAZ TRMW M6	39
10649RE BZ	27	1284GRD RE	55	4G2MW PAR20 R6	40	65BE MW LED 27K M6	38
10651RE	25	1290L	55	40PA LED 27K 90CRI M6	39	65BE MW LED 30K M6	38
10813 BN	27	1292L	55	40PA LED 30K 90CRI M6	39	65BE MW LED 40K M6	38
10814 BZA	27	15HL40 BN M10	15, 24	40PA LED 40K 90CRI M6	39	6BP HL TRMW LED 27K 90CRI M6	39
10815 BN	27	15HL40 BZ M10	15, 24	40PA LED M6	39	6BP HL TRMW LED 30K 90CRI M6	39
10816 BZA	27	15HL40 WH M10	15, 24	40PA TRMW LED 27K 90CRI M6	39	6BP HL TRMW LED 40K 90CRI M6	39
10827 BZA M2	22	2GT8 2 32 A12 120 GESB	62	40PA TRMW LED 30K 90CRI M6	39	6BP HL TRMW LED M6	39
10842RET5 BNP M6	13	2GT8 2 U316 A12 120 GESB	62	40PA TRMW LED 40K 90CRI M6	39	6BP TRMW LED 27K 90CRI M6	39
10843RET5 BNP M4	13	2GT8 3 32 A12 120 1/3 GESB	62	40PA TRMW LED M6	39	6BP TRMW LED 30K 90CRI M6	39
10844RET5 BNP M2	13	2GT8 4 32 A12 120 1/4 GESB	62	40PAZ LED 27K 90CRI M6	39	6BP TRMW LED 40K 90CRI M6	39
10976 BN M4	21	2GT8 F 2 U316 A12 120 GESB	62	40PAZ LED 30K 90CRI M6	39	6BP TRMW LED M6	39
10976 BZ M4	21	2GT8 F 3 32 A12 120 1/3 GESB	62	40PAZ LED 40K 90CRI M6	39	6BPBN HL LED 27K 90CRI M6	39
10976 WH M4	21	2GT8 F 4 32 A12 120 1/4 GESB	62	40PAZ LED M6	39	6BPBN HL LED 30K 90CRI M6	39
11241DP RE	28	2GTL2 LP835	62	40PAZ TRMW LED 27K 90CRI M6	39	6BPBN HL LED 40K 90CRI M6	39
11430RE OA	26	2GTL4 LP835	62	40PAZ TRMW LED 30K 90CRI M6	39	6BPBN HL LED M6	39
11430RE WH	26	3324 2L 17W WRAP	59	40PAZ TRMW LED 40K 90CRI M6	39	6BPBN LED 27K 90CRI M6	39
11431RE OA	26	3348 2L 32W WRAP	59	40PAZ TRMW LED M6	39	6BPBN LED 30K 90CRI M6	39
11431RE WH	26	3B1 R12	40	5B1 R12	41	6BPBN LED 40K 90CRI M6	39
11432RE OA	26	3B1 TRMW R6	40	5B1W R12	41	6BPBN LED M6	39
11432RE WH	26	3B1BN R6	40	5B2 TOR R12	41	6BPMW HL LED 27K 90CRI M6	39
11530 BN M4	22	3B1MW R6	40	5B2 TRMW TOR R6	41	6BPMW HL LED 30K 90CRI M6	39
11530 BZA M4	22	3B1ORB R6	40	5B2BN TOR R12	41	6BPMW HL LED 40K 90CRI M6	39
11531 BN M6	10	3B1W R24	40	5B2MW TOR R6	41	6BPMW HL LED M6	39
11531 BZA M6	10	3B2 R12	40	5B2ORB TOR R12	41	6BPMW LED 27K 90CRI M6	39
11532 BN M4	12	3B2W R12	40	5B2W TOR R12	41	6BPMW LED 30K 90CRI M6	39
11532 BZA M4	12	3CHL72 BN M10	15, 24	5BPBN LED 27K 90CRI M6	39	6BPMW LED 40K 90CRI M6	39
11533 BN M2	12	3CHL72 BZ M10	15, 24	5BPBN LED 30K 90CRI M6	39	6BPMW LED M6	39
11533 BZA M2	12	3CHL72 WH M10	15, 24	5BPBN LED 40K 90CRI M6	39	6BPORB HL LED 27K 90CRI M6	39
11534 BN M2	12	3E1 R6	40	5BPBN LED M6	39	6BPORB HL LED 30K 90CRI M6	39
11534 BZA M2	12	3E1BN R6	40	5BPMW LED 27K 90CRI M6	39	6BPORB HL LED 40K 90CRI M6	39
11536 BN M6	9	3E1MW R6	40	5BPMW LED 30K 90CRI M6	39	6BPORB HL LED M6	39
11536 BZA M6	9	3E1ORB R6	40	5BPMW LED 40K 90CRI M6	39	6BPORB LED 27K 90CRI M6	39
11538 BZA	8	3H2O R6	40	5BPMW LED M6	39	6BPORB LED 30K 90CRI M6	39
11560 BNP M4	22	3H2OBN R6	40	5BPORB LED 27K 90CRI M6	39	6BPORB LED 40K 90CRI M6	39
11562 BNP M4	22	3H2OMW R6	40	5BPORB LED 30K 90CRI M6	39	6BPORB LED M6	39
11602RE	28	3H2OORB R6	40	5BPORB LED 40K 90CRI M6	39	6G1 BN LED M6	38
11604RE	28	3O1 R12	40	5BPORB LED M6	39	6G1 MB LED M6	38
11690RE	28	3O1A PFMW R6	40	5BPTRMW LED 27K 90CRI M6	39	6G1 MW LED M6	38
11692RE	28	3O1A U	40	5BPTRMW LED 30K 90CRI M6	39	6G1 ORB LED M6	38
11694RE	28	3O1AZ R12	40	5BPTRMW LED 40K 90CRI M6	39	6G2A PAR38 TOR	43
11734 BN M4	20	3O1BN R6	40	5BPTRMW LED M6	39	6G2BN PAR38 TOR	43
11736 BN M4	20	3O1MW R6	40	5E1 R6	41	6G2MB PAR38 TOR	43
11750 BN M4	20	3O1ORB	40	5E1BN R6	41	6G2MW PAR38 TOR	43
11750 BZA M4	20	3S1	40	5E1MW R6	41	6G2ORB PAR38 TOR	43
11752 BN M4	20	3SHL6 BN M6	15, 24	5E1ORB R6	41	6H2O TOR R6	43
11752 BZA M4	20	3SHL6 BZ M6	15, 24	5G1 BN LED M6	38	6H2OBN TOR R6	43
11762 PST M2	22	3VA5	45	5G1 MB LED M6	38	6H2OMW TOR R6	43
11780 BZ M4	23	3VB1	45	5G1 MW LED M6	38	6H2OORB TOR R6	43
11782 BZ M4	23	3VB1W	45	5G1 ORB LED M6	38	6L4 R6	43
11784 BZ M4	23	3VDW1W	45	5G2A PAR30 TOR R6	41	6LD3	43
11786 BZ M2	8	3VE1	45	5G2BN PAR30 TOR R6	41	6LF3	43
11788 BZ M6	10	3VE2	45	5G2MB PAR30 TOR R6	41	6OPA HL LED 27K 90CRI M6	39
11790 BZ M4	12	3VO1AZ	45	5G2MW PAR30 TOR R6	41	6OPA HL LED 30K 90CRI M6	39
11792 BZ M2	12	3VS1	45	5G2ORB PAR30 TOR R6	41	6OPA HL LED 40K 90CRI M6	39
11794 BZ M2	12	3VW1	45	5H2O TOR R6	41	6OPA HL LED M6	39
11802RET5 BN M6	13	3W1 R6	40	5H2OBN TOR R6	41	6OPA LED 27K 90CRI M6	39
11803RET5 BN M6	13	4BE MW LED 27K M6	38	5H2OMW TOR R6	41	6OPA LED 30K 90CRI M6	39
11804RET5 BN M4	13	4BE MW LED 30K M6	38	5H2OORB TOR R6	41	6OPA LED 40K 90CRI M6	39
11852RE	13	4BE MW LED 40K M6	38	5LD1 R6	41	6OPA LED M6	39
11853RE	13	4BP TRMW LED 27K 90CRI M6	39	5O1 M12	41	6OPA TRMW 27K 90CRI M6	39
11854RE	13	4BP TRMW LED 30K 90CRI M6	39	5O2 TOR R12	41	6OPA TRMW 30K 90CRI M6	39
11872RE	13	4BP TRMW LED 40K 90CRI M6	39	5O2A PFMW TOR R6	41	6OPATRMW 40K 90CRI M6	39
11873RE	13	4BP TRMW LED M6	39	5O2A R12	41	6OPATRMW HL LED 27K 90CRI M6	39
11874RE	13	4BPBN LED 27K 90CRI R6	39	5O2AZ R12	41	6OPATRMW HL LED 30K 90CRI M6	39
11881	10	4BPBN LED 30K 90CRI R6	39	5O2BN TOR R6	41	6OPATRMW HL LED 40K 90CRI M6	39
11890RE	13	4BPBN LED 40K 90CRI R6	39	5O2MW TOR R6	41	6OPATRMW HL LED M6	39
11891RE	13	4BPBN LED M6	39	5O2ORB TOR R6	41	6OPATRMW M6	39
11892RE	13	4BPMW LED 27K 90CRI M6	39	5OPA LED 27K 90CRI M6	39	6OPAZ HL LED 27K 90CRI M6	39
11891 BNP M4	21	4BPMW LED 30K 90CRI M6	39	5OPA LED 30K 90CRI M6	39	6OPAZ HL LED 30K 90CRI M6	39
11891 BZ M4	21	4BPMW LED 40K 90CRI M6	39	5OPA LED 40K 90CRI M6	39	6OPAZ HL LED 40K 90CRI M6	39
11891 WH M4	21	4BPMW LED M6	39	5OPA LED M6	39	6OPAZ HL LED M6	39
11983 BNP M2	21	4BPORB LED 27K 90CRI M6	39	5OPA TRMW 27K 90CRI M6	39	6OPAZ LED 27K 90CRI M6	39
11983 BZ M2	21	4BPORB LED 30K 90CRI M6	39	5OPA TRMW 30K 90CRI M6	39	6OPAZ LED 30K 90CRI M6	39
11983 WH M2	21	4BPORB LED 40K 90CRI M6	39	5OPA TRMW 40K 90CRI M6	39	6OPAZ LED 40K 90CRI M6	39
11984 AL M4	22	4BPORB LED M6	39	5OPA TRMW M6	39	6OPAZ LED M6	39
11990 GG M4	9	4G1 BN LED M6	38	50PAZ LED 27K 90CRI M6	39	6OPAZ TRMW LED 27K 90CRI M6	39

Model Number	Page	Model Number	Page	Model Number	Page	Model Number	Page
60PAZ TRMW LED 30K 90CRI M6	39	DCNE 1006 M6	7	DSCL 1010 M6	7	FMHDL 14 20830 M4	17
60PAZ TRMW LED 40K 90CRI M6	39	DCNE 1008 M6	7	DSXF LED 4 50K	67	FMHDL 14 20840 M4	17
60PAZ TRMW LED M6	39	DCNE 1008 M6	7	DSXF1 LED 1 40K	67	FMKML 14 20830 KR M4	17
6SB1	43	DFMADDL 11 F01	15	DSXF1 LED 1 50K	67	FMKML 14 20840 KR M4	17
6SB1W	43	DFMADDL 11 F02	15	DSXF1 LED 2 40K	67	FMKMSL 14 20830 KR M4	17
6S01	43	DFMADDL 11 F23	15	DSXF1 LED 2 50K	67	FMKMSL 14 20840 KR M4	17
7B0W TOR	44	DFMADDL 11 F24	15	DSXF2 LED 3 40K	67	FMLACL 14 20830 BA M4	19
7B2 TOR R12	42	DFMADDL 14 F01	15	DSXF2 LED 3 50K	67	FMLACL 14 20840 BA M4	19
7B2 TRMW TOR R6	42	DFMADDL 14 F02	15	DSXF2 LED 4 40K	67	FMLL 9 30840	25
7B2BN TOR R12	42	DFMADDL 14 F23	15	DSXF3 LED 6 40K IS	67	FMLR 19 3 26DTT M4	18
7B2MW TOR R6	42	DFMADDL 14 F24	15	DSXF3 LED 6 40K YKC62	67	FMLR 22 M4	18
7B2ORB TOR R12	42	DFMADRL 11 F01	15	DSXF3 LED 6 50K IS	67	FMLR 54 M4	18
7B2W PF TOR R24	42	DFMADRL 11 F02	15	DSXF3 LED 6 50K YKC62	67	FMLR 72 M4	18
7B2W TOR R24	42	DFMADRL 11 F23	15	DTCL 1001 M6	7	FMLR11 2 13DTT M4	18
7B3 TOR R6	42	DFMADRL 11 F24	15	DTCL 1005 M6	7	FMLR14 2 18DTT M4	18
7B3W TOR R24	42	DFMADRL 14 F01	15	DTCL 1009 M6	7	FMLRL 11 14830 M4	18
7B5 R24	42	DFMADRL 14 F02	15	DTCL 1010 M6	7	FMLRL 11 14840 M4	18
7B5 TRMW TOR R6	42	DFMADRL 14 F23	15	DTRB 1014 M6	7	FMLRL 14 20830 M4	18
7B5MW TOR R6	42	DFMADRL 14 F24	15	DZNT 1003 M6	7	FMLRL 14 20840 M4	18
7B5W R24	42	DFMADSL 11 F01	15	DZNT 1007 M6	7	FMLS 20 3 26DTT M4	19
7E1 TOR R6	43	DFMADSL 11 F02	15	FM22 ACLR LP M4	18	FMLS 54 M4	19
7E1 TOR R6	44	DFMADSL 11 F23	15	FM22 ACLS LP M4	19	FMLS 72 M4	19
7E1BN TOR R6	43	DFMADSL 11 F24	15	FM54 ACLR LP M4	18	FMLS11 2 13DTT M4	19
7E1BN TOR R6	44	DFMADSL 14 F01	15	FM54 ACLS LP M4	19	FMLS15 2 18DTT M4	19
7E1MW TOR R6	43	DFMADSL 14 F02	15	FM72 ACLR LP M4	18	FMLS11 14830 M4	19
7E1MW TOR R6	44	DFMADSL 14 F23	15	FM72 ACLS LP M4	19	FMLS11 14840 M4	19
7E1ORB TOR R6	43	DFMADSL 14 F24	15	FMAFBL 16 20830 F20 M4	16	FMLS14 20830 M4	19
7E1ORB TOR R6	44	DFMASDL 11 F01	15	FMAFBL 16 20830 F21 M4	16	FMLS14 20830 M4	19
7O2 TOR R24	42	DFMASDL 11 F02	15	FMAFBL 16 20830 F22 M4	16	FMLS14 20840 M4	19
7O2A PFMW TOR R6	42	DFMASDL 11 F23	15	FMAFBL 16 20840 F20 M4	16	FMLS14 20840 M4	19
7O2A R6	42	DFMASDL 11 F24	15	FMAFBL 16 20840 F21 M4	16	FMLWL 24 840	58
7O2AZ R6	42	DFMASDL 14 F01	15	FMAFBL 16 20840 F22 M4	16	FMLWL 48 840	58
7O2BN TOR R6	42	DFMASDL 14 F02	15	FMAFBL 16 20840 F23 M4	10	FMLWL48 840	58
7O2MW TOR R6	42	DFMASDL 14 F23	15	FMAFBL 16 20840 F24 M4	10	FMMCL 18 840 PIR M4	54
7O2ORB TOR R6	42	DFMASDL 14 F24	15	FMAFBL 16 20840 F25 M4	10	FMMCL 18 840 S1 M4	54
7O3 TOR R6	42	DFMASQL 11 F01	15	FMAFBL 16 20840 F26 M4	10	FMMCL 24 840 PIR M4	54
7O5 R12	42	DFMASQL 11 F02	15	FMAFBL 16 20840 F27 M4	10	FMMCL 24 840 S1 M4	54
7O5A	42	DFMASQL 11 F23	15	FMAFBL 16 20840 F28 M4	10	FMMCL 840 PIR M4	54
7O5AZ	42	DFMASQL 11 F24	15	FMAFBL 16 20840 F29 M4	18	FMMCL 840 S1 M4	54
7O5MW TOR R6	42	DFMASQL 14 F01	15	FMAFBL 16 20840 F30 M4	18	FMML 7 827 DDBT M6	17
7RE1 R6	43	DFMASQL 14 F02	15	FMAFBL 16 20840 F31 M4	18	FMML 7 827 DDBT WL M6	17
7RE1 R6	44	DFMASQL 14 F23	15	FMAFBL 16 20840 F32 M4	18	FMML 7 827 DNA M6	17
7W1	43, 44	DFMASQL 14 F24	15	FMAFBL 16 20840 F33 M4	18	FMML 7 827 DNA WL M6	17
7X1B1MW TOR R6	44	DFMASQL 6 M6	15	FMAFBL 16 20840 F34 M4	19	FMML 7 827 M6	17
7X1MW TOR R6	44	DFMASRL 11 F01	15	FMAFBL 16 20840 F35 M4	19	FMML 7 827 WL M6	17
C 2 17 120 RE	61	DFMASRL 11 F02	15	FMAFBL 16 20840 F36 M4	16	FMML 7 830 DDBT M6	17
C 2 25 120 RE	61	DFMASRL 11 F23	15	FMAFBL 16 20840 F37 M4	16	FMML 7 830 DDBT WL M6	17
C 2 32 120 RE	61	DFMASRL 11 F24	15	FMAFBL 16 20840 F38 M4	16	FMML 7 830 DNA M6	17
CAHL6 BN M10	15, 24	DFMASRL 14 F01	15	FMAFBL 16 20840 F39 M4	16	FMML 7 830 DNA WL M6	17
CAHL6 BZ M10	24	DFMASRL 14 F02	15	FMAFBL 16 20840 F40 M4	16	FMML 7 830 M6	17
CB1 R6	44	DFMASRL 14 F23	15	FMAFBL 16 20840 F41 M4	16	FMML 7 830 WL M6	17
CB1W R6	44	DFMASRL 14 F24	15	FMAFBL 16 20840 F42 M4	17	FMML 7 840 DDBT M6	17
CE1 R6	43	DFMASRL 6 M6	15	FMAFBL 16 20840 F43 M4	17	FMML 7 840 DDBT WL M6	17
CE1 R6	44	DGDT 1003 M6	7	FMAFBL 16 20840 F44 M4	17	FMML 7 840 DNA M6	17
CH36 BZ M30	8	DGNG 1007 M6	7	FMAFBL 16 20840 F45 M4	17	FMML 7 840 DNA WL M6	17
CH36 BZA M30	8	DGWW 1003 M6	7	FMAFBL 16 20840 F46 M4	21	FMML 7 840 M6	17
CLD1 R6	43	DLSD1 MB	11	FMAFBL 16 20840 F47 M4	21	FMML 7 840 WL M6	17
CLD1 R6	44	DLSD10 BZ/WH	11	FMAFBL 16 20840 F48 M4	21	FMMUSL 9 14830 BNP M4	21
CLF1 PF R6	43	DLSD12 BN	11	FMAFBL 16 20840 F49 M4	21	FMMUSL 9 14830 BZ M4	21
CLF1 PF R6	44	DLSD13 P12	11	FMAFBL 16 20840 F50 M4	21	FMMUSL 9 14830 WH M4	21
CLF1 R6	43	DLSD14 F03	11	FMAFBL 16 20840 F51 M4	21	FMMUSL 9 14840 BNP M4	21
CLF1 R6	44	DLSD16 BZ F02	11	FMAFBL 16 20840 F52 M4	21	FMMUSL 9 14840 BZ M4	21
CLF2 PF R6	43	DLSD17 BN P10	11	FMAFBL 16 20840 F53 M4	21	FMMUSL 9 14840 WH M4	21
CLF2 PF R6	44	DLSD2 BN P10	11	FMAFBL 16 20840 F54 M4	21	FMPANL 11 14830 M6	15
CLF2 R6	43	DLSD3 BN/BZ	11	FMAFBL 16 20840 F55 M4	21	FMPANL 11 14840 M6	15
CLF2 R6	44	DLSD4 CH	11	FMAFBL 16 20840 F56 M4	21	FMPANL 14 20830 M6	15
CM 9 WR	77	DLSD5 BZ	11	FMAFBL 16 20840 F57 M4	21	FMPANL 14 20840 M6	15
CM PDT 9 WR	77	DLSD6 ANS	11	FMAFBL 16 20840 F58 M4	17	FMPANL 6 7830 M6	15
CMR 9	77	DLSD7 BZ F08	11	FMAFBL 16 20840 F59 M4	17	FMPANL 6 7840 M6	15
CMR 9 2P	77	DLSD8 CLR P01	11	FMAFBL 16 20840 F60 M4	26	FMPANL 16 20830 BN M4	20
CMR PDT 9	77	DLSD9 BZ/S03	11	FMAFBL 16 20840 F61 M4	26	FMPANL 16 20840 BN M4	20
CMR PDT 9 2P	77	DMCN BNP M6	7	FMAFBL 16 20840 F62 M4	25	FMSATL 13 14830 BN M4	20
CO1 TOR R12	44	DMCN BZ M6	7	FMAFBL 16 20840 F63 M4	25	FMSATL 13 14830 BZA M4	20
CS1 J6	43, 44	DMNS5 14 M12	61	FMAFBL 16 20840 F64 M4	21	FMSATL 13 14840 BN M4	20
CUC8 15 120 LP S1 M4	54	DMNS5 21 M12	61	FMAFBL 16 20840 F65 M4	21	FMSATL 13 14840 BZA M4	20
CUC8 17 120 LP S1 M4	54	DMNS5 28 M12	61	FMAFBL 16 20840 F66 M4	21	FMSATL 16 20830 BN M4	20
DBEL 1001 M6	7	DPRG 1011 M6	7	FMAFBL 16 20840 F67 M4	21	FMSATL 16 20830 BZA M4	20
DBIL 1015 M6	7	DRBL 1001 M6	7	FMAFBL 16 20840 F68 M4	21	FMSATL 16 20840 BN M4	20
DBLT 1001 M6	7	DRBL 1008 M6	7	FMAFBL 16 20840 F69 M4	21	FMSATL 16 20840 BZA M4	20
DBLT 1004 M6	7	DSBL 1001 M6	7	FMAFBL 16 20840 F70 M4	18	FMSCNL 14 20840 M4	19
DCBL 1009 M6	7	DSCL 1001 M6	7	FMAFBL 16 20840 F71 M4	18	FMSCNL14 20830 M4	19
DCNE 1001 M6	7	DSCL 1005 M6	7	FMAFBL 16 20840 F72 M4	18	FMSATL 13 14830 BN M4	20
DCNE 1002 M6	7	DSCL 1009 M6	7	FMAFBL 16 20840 F73 M4	18	FMSATL 13 14830 BZA M4	20

Index

Model Number	Page	Model Number	Page	Model Number	Page	Model Number	Page
FMSSATL 13 14840 BN M4	20	LKA5P M6	46	MNS8 1 17 120 RE	61	OMA M6	72
FMSSATL 13 14840 BZA M4	20	LKABH M6	46	MNS8 1 25 120 RE	61	OSC 13F 120 P LP BL M6	66
FMVELL 14 20830 KR M4	20	LKOAZ PFMW M6	47	MNS8 1 32 120 RE M6	61	OSC 13F 120 P LP WH M6	66
FMVELL 14 20840 KR M4	20	LSXR 10	77	MNS8 2 17 120 RE	61	OSTLLED 120 P BL	68
FMXLR 72 M2	18	LSXR 9	77	MNS8 2 32 120 RE M6	61	OVT 150I 120 M6	66
FMXLR 72 M2	19	LTCV M6	34	MWSB BNP M6	7	OWP2 50M 120 P LP BZ M4	66
GRW 2 14 CSW CO M4	57	LTFC M6	34	MWSB BZ M6	7	OWP3 42F 120 P LP BZ M4	66
GRW 2 28 CSW CO M4	57	LTFSTCYL MR16GU10 LED 27K 3H BN M4	33	MWSC BNP M6	7	OWP3 42F 120 P LP WH M4	66
GT8 2 32 A12 120 GESB	62	LTFSTCYL MR16GU10 LED 27K 3H ORB M4	33	MWSC BZ M6	7	RAZ CC24 M12	50
GT8 F 2 32 A12 120 GESB	62	LTFSTCYL MR16GU10 LED 27K 6H BN M4	33	MWVB2 BNP M4	7	RAZ CC3 M12	50
IBH 12L MVOLT	62	LTFSTCYL MR16GU10 LED 27K 6H ORB M4	33	MWVB2 BZ M4	7	RAZ ERC M12	50
IBH 18L MVOLT	62	LTHANTQ MR16GU10 ORB M4	33	MWVB3 BNP M4	7	RAZ INLS26 M12	50
IBH 24L MVOLT	62	LTHBRSD BR20 BN M4	32	MWVC2 BNP M4	7	RAZ LVCC M12	50
IBZT5 4	62	LTHBRSD BR20 ORB M4	32	MWVC2 BZ M4	7	RAZ PHD M12	50
IBZT5 4L	62	LTHCLRB MR16GU10 BN M4	33	MWVC3 BNP M4	7	RAZ12 M6	50
IBZT5 4LWD	62	LTHCYLD MR16GU10 BN M4	33	MWVC3 BZ M4	7	RAZ18 M6	50
IBZT5 6	62	LTHFLT MR16GU10 BN M4	32	NEW 2 32 120 RE BN	26	RAZ24 M6	50
IBZT5 6L	62	LTHFLT MR16GU10 DBL M4	32	OAL12 150M 120M PER LP R2	72	RAZ9 M6	50
IBZT5 6LWD	62	LTHFLT MR16GU10 LED BN M4	32	OALS 70S 120 PER LP M2	72	RAZDIM M12	50
IBZT8 4	62	LTHFLT MR16GU10 LED DBL M4	32	OALS10 65F 120 P LP M4	72	RAZTRANS24 120 M6	50
IBZT8 4 WD	62	LTHFLT MR16GU10 LED MW M4	32	OFL 100M 120 LP BZ M4	69	RAZTRANS24 MVOLT M6	50
IBZT8 6	62	LTHFLT MR16GU10 LED ORB M4	32	OFL 300/500Q 120 LP BZ M6	70	RB232	59
IBZT8 6 WD	62	LTHFLT MR16GU10 MW M4	32	OFL 300/500Q 120 LP WH M6	70	SB 2 17 120 RE	59
L3 R6	40	LTHFLT MR16GU10 ORB M4	32	OFL 70S 120 LP BZ M4	69	SB 2 32 120 RE	59
L3LED T24 R6	38	LTHOVA MR16GU10 LED 27K DBL	32	OFL2 65F 120 LP BZ M4	70	SB 4 32 120 1/4 RE	59
L3R R6	40	LTHOVA MR16GU10 LED 27K MW	32	OFL2 65F 120 LP WH M4	70	SM 1 17 120 1/2 RE	61
L3RLED T24 R6	38	LTHSPLT MR16GU10 LED 27K BN M4	32	OFLM 150Q 120 LP BZ M12	69	SM 1 25 120 1/2 RE	61
L5 R6	41	LTHSPLT MR16GU10 LED 27K ORB M4	32	OFLM 150Q 120 LP WH M12	69	SM 1 32 120 1/2 RE	61
L5LED T24 R6	38	LTHSTBF BR20 LED DBL M4	32	OFLR 6LC 120 MO BZ M2	67	SM 2 17 120 RE	61
L5R R6	41	LTHSTBF BR20 LED MW M4	32	OFLR 6LC 120 MO WH M2	67	SM 2 25 120 RE	61
L5RLED T24 R6	38	LTHSTBF BR30 LED DBL M4	32	OFLR 6LC 120 P BZ M2	67	SM 2 32 120 RE	61
L7X R6	42	LTHSTBF BR30 LED MW M4	32	OFLR 6LC 120 P WH M2	67	SPODMR WR IV	77
L7XLED T24 R6	38	LTHBELL ORB M4	31	OFLR 9LN 120 MO BZ M2	67	SPODMR WR WH	77
L7XLED T24 R6	38	LTHGAVL BN M4	31	OFLR 9LN 120 MO WH M2	67	SSD VA 120 IV	76
L7XP R6	44	LTHMSBK LED 27K BN M4	31	OFLR 9LN 120 P BZ M2	67	SSD VA 120 WH	76
L7XPR R6	44	LTHSPLT LED 27K ORB M4	31	OFLR 9LN 120 P WH M2	67	STK12 M12	51
L7XR R6	42	LTKBELL ORB M4	31	OFTH 300PR 120 BZ M12	69	STK18 M12	51
LB 2 17 120 RE	59	LTKGAVL BN M4	31	OFTH 300PR 120 P BZ M12	69	STK6 M12	51
LB 2 32 120 RE	59	LTKMSBK LED 27K BN M4	31	OFTH 300PR 120 P WH M12	69	STL2 20L EZ1 LP835	58
LB 4 17 120 1/4 RE	59	LTKSPLT LED 27K ORB M4	31	OFTH 300PR 120 WH M12	69	STL4 48L EZ1 LP835	58
LB4 32 120 1/4 RE	59	LTKANTQ MR16GU10 ORB M4	33	OFTH 300Q 120 LP BZ M6	69	STMFERO12 BN M40	9
LBL2 LP835	58	LTKBRSD BR20 LED BN M4	32	OFTH 300Q 120 LP WH M6	69	STMFERO12 BZA M40	9
LBL2 LP840	58	LTKBRSD BR20 LED ORB M4	32	OFTR 200Q 120 LP BZ M12	69	SWBLIED M12	11
LBL4 347 LP835	58	LTKCLRB MR16GU10 BN M4	33	OFTR 200Q 120 LP WH M12	69	TDD LED 1 40K 120 PE M4	71
LBL4 347 LP840	58	LTKCYLD MR16GU10 BN M4	33	OLAW23 M2	72	TDD LED 2 50K 120 PER M4	71
LBL4 LP835	58	LTKMSBK MR16GU10 3L BN M4	33	OLBF 8 30K DDB M6	68	TWH LED 10C 50K	71
LBL4 LP840	58	LTKMSBK MR16GU10 3L MW M4	33	OLBF 8 50K DDB M6	68	TWH LED 20C 50K	71
LC6 R6	42	LTKMSBK MR16GU10 3R BN M4	33	OLBS 8 30K DDB M6	68	TWH LED 30C 50K	71
LCP R6	44	LTKMSBK MR16GU10 3R MW M4	33	OLBS 8 50K DDB M6	68	TWP LED 10C 50K	71
LFSTCYL MR16GU10 LED 27K 3H BN	33	LTKMSBK MR16GU10 DBL M4	33	OLCFM15 DDB M4	70	TWP LED 20C 50K	71
LFSTCYL MR16GU10 LED 27K 3H ORB	33	LTKMSBK MR16GU10 LED 27 BN M4	33	OLCFM15 WH M4	70	TWP LED 30C 50K	71
LFSTCYL MR16GU10 LED 27K 6H BN	33	LTKMSBK MR16GU10 LED 27 MW M4	33	OLCS 8 DDB M4	64	TWR1 LED 1 40K MVOLT M2	71
LFSTCYL MR16GU10 LED 27K 6H ORB	33	LTKMSBK MR16GU10 LED BN M4	33	OLCS 8 WH M4	64	TWR1 LED 1 40K MVOLT M2	71
U6	42	LTKMSBK MR16GU10 LED MW M4	33	OLF 2RH 40K 120V MO BZ M6	67	TWR1 LED 1 40K MVOLT PE M2	71
UV3 120	45	LTKMSBK MR16GU10 MW M4	33	OLF 2RH 40K 120V MO WH M6	67	TWR1 LED 1 50K MVOLT M2	71
LK30AZ PFMW M6	47	LTKOVA MR16GU10 LED 27K DBL	32	OLFL 14 PE BZ M4	67	TWR1 LED 1 50K MVOLT PE M2	71
LK3BMW LED M6	46	LTKOVA MR16GU10 LED 27K MW	32	OLLWD DDB M6	65	TWR1 LED 2 40K MVOLT PE M2	71
LK3BMW M6	47	LTKSPLT MR16GU10 LED 27K BN M4	32	OLLWD WH M6	65	TWR1 LED 2 50K MVOLT M2	71
LK3GBN M6	47	LTKSPLT MR16GU10 LED 27K ORB M4	32	OLLWU DDB M6	65	TWR1 LED 2 50K MVOLT PE M2	71
LK3GMW LED LPI M6	47	LTKSTBF BR20 DBL M4	32	OLLWU WH M6	65	TWS LED 1 50K 120 PE M2	64
LK3GMW M6	47	LTKSTBF BR20 MW M4	32	OLSR DDB M6	65	TZ 132 MV	60
LK3GORB LED LPI M6	47	LTKSTBF BR30 DBL M4	32	OLSR WH M6	65	TZ 232 MV	60
LK3GORB M6	47	LTKSTBF BR30 MW M4	32	OLSS DDB M6	65	UC 12E 120 SWR M6	52
LK40AZ PFMW M6	47	LTLDC M6	34	OLSS WH M6	65	UC 24E 120 M6	52
LK4BMW LED M6	46	LTLFCF M6	34	OLVTCM M6	65	UC 24E 120 SWR M6	52
LK4BMW M6	47	LTLFCS M6	34	OLVTWM M6	65	UC ERC R12	52
LK4GBN LED LPI M6	47	LTLLED M6	34	OLW 23 M2	71	UC ERC24 BL M12	52
LK4GBN M6	47	LTMPR M6	34	OLW 31 M2	71	UC ERC24 M12	52
LK4GMW LED LPI M6	47	LTS4 M6	34	OLW14 M2	71	UC12E 120 M6	52
LK4GMW LED M6	46	LTS8 M6	34	OLWCM 36 M2	70	UC21E 120 M6	52
LK4GMW M6	47	LITC M6	34	OLWP 11 PE BZ M4	64	UC21E 120 SWR M6	52
LK4LMW M6	47	LV3 120	45	OLWX1 LED 13W 40K 120 PE M4	71	UC33E 120 M6	52
LK4SQMW LED LPI M6	47	LV3R 120	45	OLWX1 LED 13W 40K M4	71	UC33E 120 SWR M6	52
LK4SQMW M6	47	MDPB BNP M6	7	OLWX1 LED 13W 50K 120 PE M4	71	UC42E 120 M6	52
LK50AZ TRMW M6	47	MDPB BZ M6	7	OLWX1 LED 13W 50K M4	71	UC42E 120 SWR M6	52
LK5BMW LED M6	46	MDPC BNP M6	7	OLWX1 LED 20W 40K 120 PE M4	71	UC5D 14 120 LP BZ M6	52
LK5BMW M6	47	MDPC BZ M6	7	OLWX1 LED 20W 40K M4	71	UC5D 14 120 LP M6	52
LK5BORB LED M6	46	MNS5 1 14 LP M6	61	OLWX1 LED 20W 50K 120 PE M4	71	UC5D 21 120 LP BZ M6	52
LK5GMW LED M6	46	MNS5 1 21 LP M6	61	OLWX1 LED 20W 50K M4	71	UC5D 21 120 LP M6	52
LK5LMW M6	47	MNS5 1 28 LP M6	61	OLWX1 LED 40W 40K 120 PE M4	71	UC5D 8 120 LP BZ M6	52
LK50AZ TRMW M6	47	MNS5 2 14 LP M6	61	OLWX1 LED 40W 40K M4	71	UC5D 8 120 LP M6	52
LKA3P M6	46	MNS5 2 21 LP M6	61	OLWX1 LED 40W 50K 120 PE M4	71	UC8 15 120 SWR M6	52
LKA4P M6	46	MNS5 2 28 LP M6	61	OLWX1 LED 40W 50K M4	71	UC8 17 120 SWR M6	52

Index

Model Number Page

UC8 25 120 SWR M6	52
UC8 32 120 SWR M6	52
UCD JB BL M12	50
UCD JB BL M12	52
UCD JB M12	50
UCD JB M12	52
UCH WWC R12	50
UCH WWC R12	52
UCH WWC R12	52
UCLD 12 2700 BN M4	51
UCLD 12 2700 BZ M4	51
UCLD 12 2700 MW M4	51
UCLD 12 BN M4	51
UCLD 12 BZ M4	51
UCLD 12 WH M4	51
UCLD 18 2700 BN M4	51
UCLD 18 2700 BZ M4	51
UCLD 18 2700 WH M4	51
UCLD 18 BN M4	51
UCLD 18 BZ M4	51
UCLD 18 WH M4	51
UCLD 24 2700 BN M4	51
UCLD 24 2700 BZ M4	51
UCLD 24 2700 WH M4	51
UCLD 24 BN M4	51
UCLD 24 BZ M4	51
UCLD 24 WH M4	51
VRC LED 1 50K MVOLT M2	70
WSTM LED 1A 40K 120 DDBTXD	64
WSTM LED 2A 40K 120 DDBTXD	64
WSX 2P IV	76
WSX 2P WH	76
WSX IV	76
WSX PDT 2P IV	76
WSX PDT 2P WH	76
WSX PDT IV	76
WSX PDT WH	76
WSX WH	76
XWLED4 120	57
Z117 MV	60
Z125 MV	60
Z132 MV	60
Z215 MV	60
Z217 MV	60
Z232 MV	60
ZL1N L24 3500LM FST MVOLT 40K 80CRI WH	60
ZL1N L46 3000LM FST MVOLT 40K 80CRI WH	60
ZL1N L48 3000LM FST MVOLT 40K 80CRI WH	60
ZL2N L24 2000LM MDD MVOLT 40K 80CRI WH60	60
ZL2N L46 3000LM MDD MVOLT 40K 80CRI WH60	60
ZL2N L48 3000LM MDD MVOLT 40K 80CRI WH60	60

Warranty Information:

- ENERGY STAR® qualified LED products carry a 5-year limited warranty
- ENERGY STAR® qualified fluorescent products carry a 3-year limited warranty
- Sensor Switch products carry a 5-year limited warranty
- All other products carry a 1-year limited warranty

For complete warranty information, visit the Terms & Conditions page at

www.acuitybrands.com.

AcuityControls

AEL American
Electric
Lighting

ANTIQUE
STREET LAMPS

eldoLED
your product | our drive

gotham

HEALTHCARE
LIGHTING

HOLOPHANE
LEADER IN LIGHTING SOLUTIONS

HYDREL

LITHONIA
LIGHTING

MARK
ARCHITECTURAL
LIGHTING

Peerless

RELOC
WIRING SOLUTIONS

SUNOPTICS

WINONA
solutions | forms | light



Expanding the boundaries of lighting™

One Lithonia Way, Conyers, Georgia 30012
Phone: 800.922.9641 | www.acuitybrands.com
©2015 Acuity Brands Lighting, Inc. All rights reserved.
6/15 | AB_1558