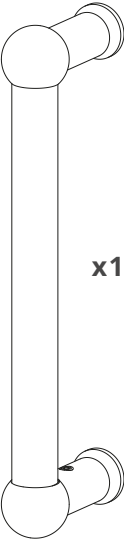
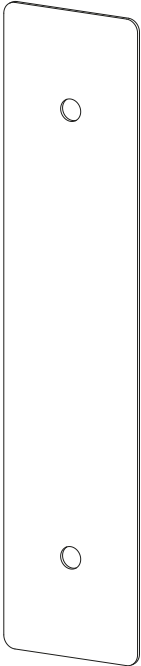






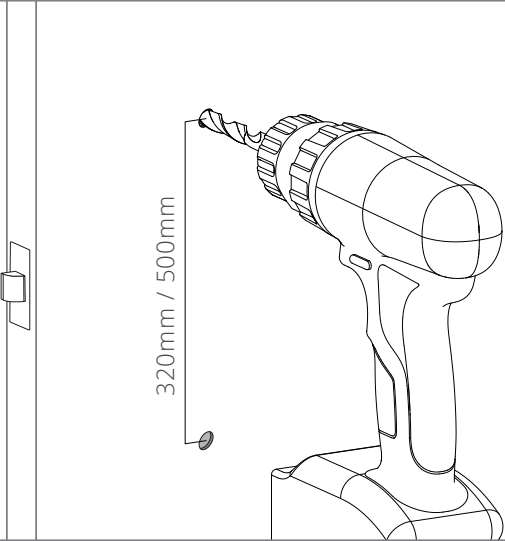
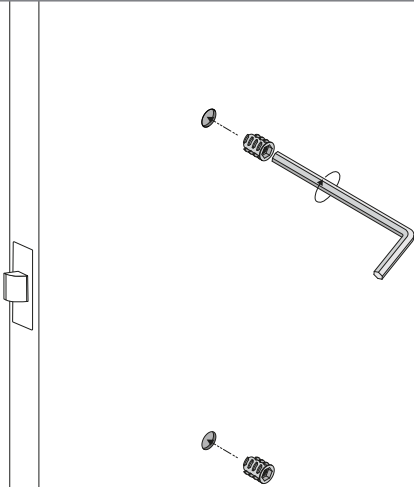
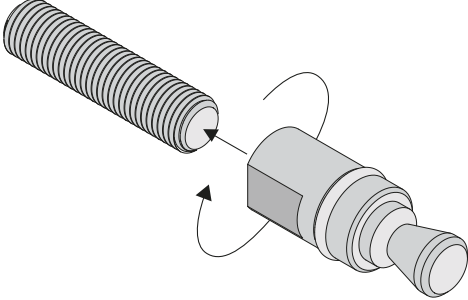
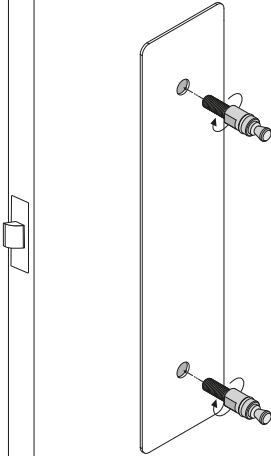
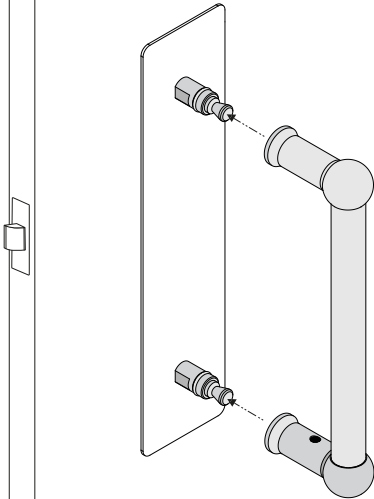
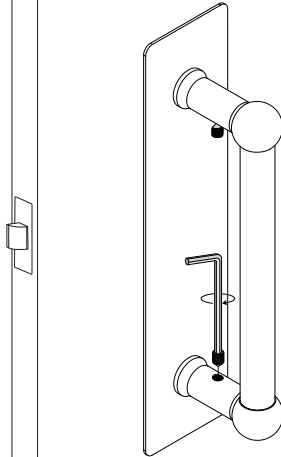


Single Harper Pull Handle

Contents	
 x1	 x1
 x1	 x1
 x2	 x2
 x2	 x2
Harper Pull Handle	Harper Pull Handle Plate
Double-Sided Pad (Optional)	2.5mm Allen Key
Threaded Bars	Rubber Washers
Handle Anchors	Insert Nuts

1. Drill the holes	2. Insert the nuts
	
Mark and drill two holes in the timber door using a 10mm drill bit. Masking tape can be used to mark accurate holes and adjust positioning.	Use an 8mm allen key (not provided) to drive the insert nuts into the holes. Ensure the insert nut is flush with surface.

Single Harper Pull Handle

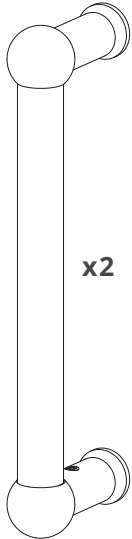
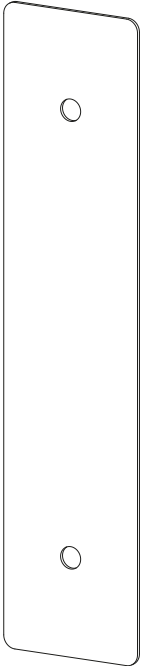





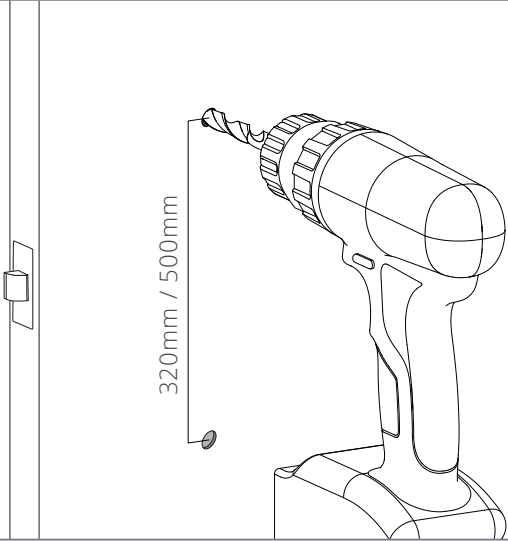
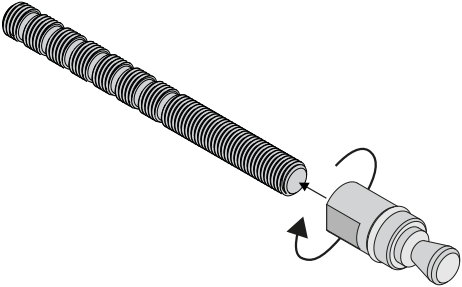
3. Insert the threaded bars	4. Attach handle anchors (and plate)
	
Insert threaded bar all the way into handle anchor.	Screw anchors into door over plate and tighten by hand. Use a spanner for more robust doors.
5. Attach the handle	6. Tighten the grub screws
	
Attach handle to the anchors. Both ends of the handle should be flush with the plate/door	Using the 2.5mm allen key, tighten the two grub screws on the inside of the handle.

Please Note

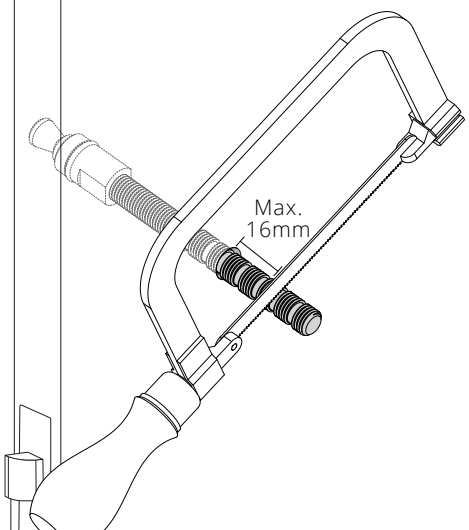
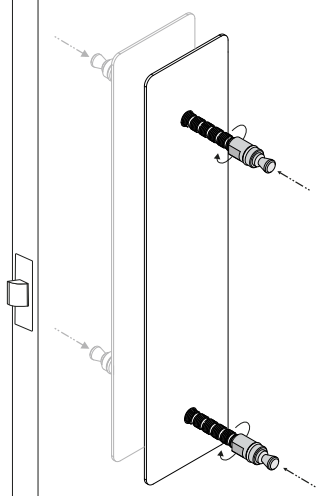
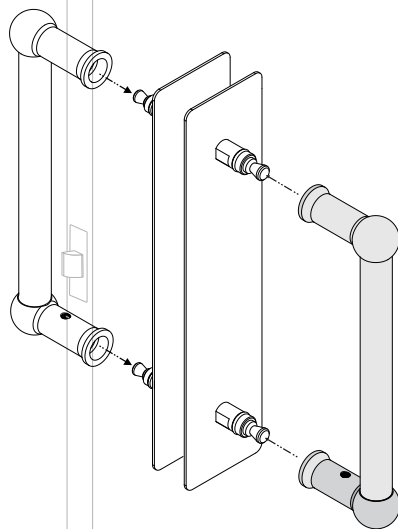
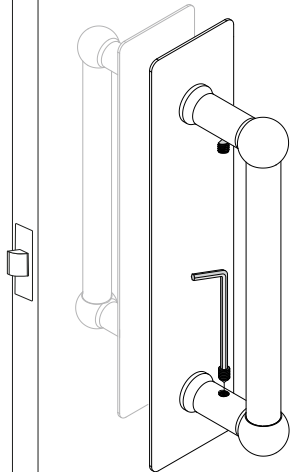
The double-sided pad can be used to secure the plate to the door. This is to assist with uneven door surfaces. Once attached to the plate, it cannot be removed. Only use if the plate is not stable without it.

Rubber washers can be used to protect the door frame but will be visible.

Double Harper Pull Handle

Contents	
<div><div><p>x2</p></div><div><p>x2</p></div><div><p>x2</p></div><div><p>x1</p><p>2.5mm Allen Key</p></div><div><p>x4</p><p>Rubber Washers</p></div><div><p>x4</p><p>Threaded Bars</p></div><div><p>x4</p><p>Handle Anchors</p></div><div><p>Harper Pull Handles</p></div><div><p>Harper Pull Handle Plates</p></div><div><p>Double-Sided Pads (Optional)</p></div><div><p>Threaded Bars</p></div><div><p>Handle Anchors</p></div></div>	
1. Drill the holes	2. Insert the threaded bars
	
Mark and drill two holes in the timber door using a 10mm drill bit. Masking tape can be used to mark accurate holes and adjust positioning.	Insert threaded bar all the way into handle anchor.

Double Harper Pull Handle

3. Cut the threaded bars	4. Attach handle anchors (and plates)
	
Insert the threaded bar through the door and mark 16mm of thread through the other side. Cut the threaded bar on a thread clearance with a hacksaw.	Screw anchors into door over plate and tighten by hand. Use a spanner for more robust doors.
5. Attach the handles	6. Tighten Grub Screws
	
The handle can be attached to the anchors. Both ends of the handle should be flush to the plate or the door	Using the 2.5mm allen key, tighten the four grub screws on the inside of the handle.

Please Note

The double-sided pad can be used to secure the plate to the door. This is to assist with uneven door surfaces. Once attached to the plate, it cannot be removed. Only use if the plate is not stable without it.

Rubber washers can be used to protect the door frame but they will be visable. **Rubber washers must be used when attaching to glass doors.**