

EL.RTL8733BU-CWFT

(CDT P/N: CDW-F7733BU-00)

Dual-band WiFi4 11n + BT5.2 Module Spec

Software:

客 户 Customer	客户承认 Approve（请盖印章）	日 期 Date

拟制 Design	审核 Check	批准 Approve	版本 Version	日期 Date
			V1.2	2025.05.30

深圳市中龙通电子科技有限公司
CHINA DRAGON TECHNOLOGY LIMITED

公司地址：深圳市宝安区沙井街道南浦路林坡坑蚝三第一工业园 B4 栋

电话：(86 755) 81449957

传真：(86 755) 81449967

E-mail: Info@cdtech.cn

Http://www.cdtech.cn

更改记录:

Reversion History:

版本 Version	日期 Date	更改内容 Modification
1.0	2025.03.22	First release
1.1	2025.04.18	Update package
1.2	2025.05.30	Update package


1. Overview

The EL.RTL8733BU-CWFT is a highly integrated 802.11a/b/g/n 1T1R WLAN and Bluetooth 5.2 combo chip. It combines a WLAN MAC, a 1T1R capable WLAN baseband, BT Protocol Stack (LMLL, and LE), BT Baseband, modem, and WLAN/BT RF in a combo chip. The EL.RTL8733BU-CWFT provides a complete solution for a high throughput performance integrated wireless LAN, and Bluetooth.

2. Features

- IEEE 802.11b/g/n compatible WLAN 802.11a/b/g/n 1T1R WLAN and Bluetooth single chip
- Complies with USB 2.0 for WLAN
- Complete 802.11n solution for 2.4GHz band
- Maximum data rate 54Mbps in 802.11g; and 150Mbps in 802.11n
- Security support for WPA/WPA2. Open, shared key, and pair-wise key authentication services
- Compatible with Bluetooth v2.1+EDR and v5.2 Systems
- Supports Bluetooth 4.0 Low Energy (BLE)
- PCM interface for audio data transmission via Bluetooth controller
- Supports multiple Low Energy states

3.Block Diagram

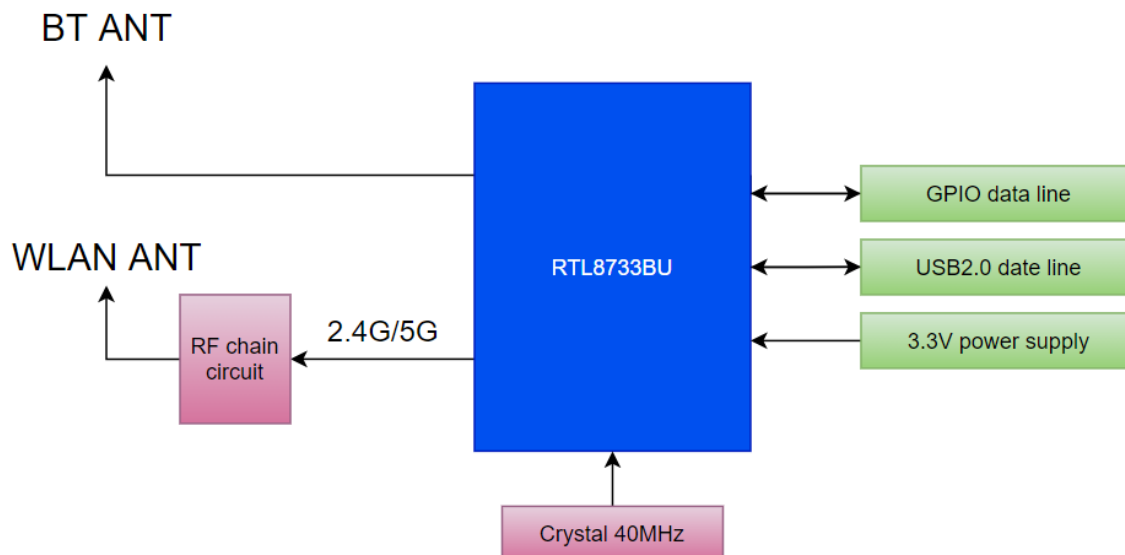

4.General Specification

Model	EL.RTL8733BU-CWFT	
Product Name	WLAN 11a/b/g/n 1T1R + BT5.2 module	
Major Chipset	RTL8733BU-CG	
Standard	802.11a/b/g/n	
Modulation Method	BPSK/ QPSK/ 16-QAM/64-QAM	
Frequency Band	2.4GHz/5GHz	
WiFi/BT Interface	Wifi: USB2.0	BT: USB2.0
Operating Temperature	-20° C ~ 65° C	
Storage Temperature	-40° C ~ 85°C	
Humidity	5% to 90% maximum	
Dimension	21.0x15.0x2.4 (LxWxH) ±0.2mm	

5.RF Specification

5.1wifi Specification

A.2.4GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11b/g/n WiFi compliant
Frequency Range	2.400 GHz ~ 2.4835 GHz (2.4 GHz ISM Band)
Modulation	802.11b : DQPSK, DBPSK, CCK 802.11 g/n : OFDM /64-QAM,16-QAM, QPSK, BPSK
Receive Sensitivity (11b,20MHz) @8% PER	<ul style="list-style-type: none"> - 1Mbps PER @ -95 dBm, typical - 2Mbps PER @ -93 dBm, typical - 5.5Mbps PER @ -90 dBm, typical - 11Mbps PER @ -87 dBm, typical
Receive Sensitivity (11g,20MHz) @10% PER	<ul style="list-style-type: none"> - 6Mbps PER @ -90 dBm, typical - 9Mbps PER @ -89 dBm, typical - 12Mbps PER @ -88 dBm, typical - 18Mbps PER @ -85 dBm, typical - 24Mbps PER @ -82 dBm, typical - 36Mbps PER @ -79 dBm, typical - 48Mbps PER @ -74 dBm, typical - 54Mbps PER @ -72 dBm, typical
Receive Sensitivity (11n,20MHz) @10% PER	<ul style="list-style-type: none"> - MCS=0 PER @ -90 dBm, typical - MCS=1 PER @ -87 dBm, typical - MCS=2 PER @ -85 dBm, typical - MCS=3 PER @ -81 dBm, typical - MCS=4 PER @ -78 dBm, typical - MCS=5 PER @ -73 dBm, typical - MCS=6 PER @ -72 dBm, typical - MCS=7 PER @ -70 dBm, typical
Receive Sensitivity (11n,40MHz) @10% PER	<ul style="list-style-type: none"> - MCS=0 PER @ -87 dBm, typical - MCS=1 PER @ -84 dBm, typical - MCS=2 PER @ -82 dBm, typical - MCS=3 PER @ -79 dBm, typical - MCS=4 PER @ -75 dBm, typical - MCS=5 PER @ -71 dBm, typical - MCS=6 PER @ -69 dBm, typical - MCS=7 PER @ -68 dBm, typical

Maximum Input Level	802.11b : -10 dBm
	802.11g/n : -20 dBm

B.5GHz RF Specification

Feature	Description
WLAN Standard	IEEE 802.11a/n WiFi compliant
Frequency Range	5.0 GHz ISM Band
Number of Channels	5.0GHz : Please see the table
Modulation	802.11a : OFDM /64-QAM,16-QAM, QPSK, BPSK 802.11n : OFDM /64-QAM,16-QAM, QPSK, BPSK
Receive Sensitivity (11a,20MHz) @10% PER	- 6Mbps PER @ -89 dBm, typical
	- 9Mbps PER @ -88 dBm, typical
	- 12Mbps PER @ -87 dBm, typical
	- 18Mbps PER @ -84 dBm, typical
	- 24Mbps PER @ -81 dBm, typical
	- 36Mbps PER @ -78 dBm, typical
	- 48Mbps PER @ -73 dBm, typical
	- 54Mbps PER @ -72 dBm, typical
Receive Sensitivity (11n,20MHz) @10% PER	- MCS=0 PER @ -89 dBm, typical
	- MCS=1 PER @ -86 dBm, typical
	- MCS=2 PER @ -84 dBm, typical
	- MCS=3 PER @ -81 dBm, typical
	- MCS=4 PER @ -77 dBm, typical
	- MCS=5 PER @ -72 dBm, typical
	- MCS=6 PER @ -71 dBm, typical
	- MCS=7 PER @ -68 dBm, typical
Receive Sensitivity (11n,40MHz) @10% PER	- MCS=0 PER @ -86 dBm, typical
	- MCS=1 PER @ -83 dBm, typical
	- MCS=2 PER @ -81 dBm, typical
	- MCS=3 PER @ -78 dBm, typical
	- MCS=4 PER @ -74 dBm, typical
	- MCS=5 PER @ -70 dBm, typical
	- MCS=6 PER @ -68 dBm, typical
	- MCS=7 PER @ -67 dBm, typical
Maximum Input Level	802.11a/n/ac : -20 dBm

1.1 5GHz(20MHz) Channel table

Band (GHz)	Operating Channel Numbers	Channel center frequencies(MHz)
5.15GHz~5.25GHz	36	5180
	40	5200
	44	5220
	48	5240
5.25GHz~5.35GHz	52	5260
	56	5280
	60	5300
	64	5320
5.5GHz~5.7GHz	100	5500
	104	5520
	108	5540
	112	5560
	116	5580
	132	5660
	136	5680
	140	5700
5.725GHz~5.825GHz	149	5745
	153	5765
	157	5785
	161	5805
	165	5825


5.3 BT Specification

Feature	Description																			
General Specification																				
Bluetooth Standard	Bluetooth 2.1/3.0/5.2																			
Host Interface	USB																			
Frequency Band	2402 MHz ~ 2480 MHz																			
Number of Channels	79 channels																			
Modulation	FHSS, GFSK, DPSK, DQPSK																			
RF Specification																				
	<table><tr><th>Min.</th><th>Typical.</th><th>Max.</th></tr><tr><td>Sensitivity @ BER=0.1% for GFSK (1Mbps)</td><td>-86 dBm</td><td></td></tr><tr><td>Sensitivity @ BER=0.01% for $\pi/4$-DQPSK (2Mbps)</td><td>-86 dBm</td><td></td></tr><tr><td>Sensitivity @ BER=0.01% for 8DPSK (3Mbps)</td><td>-80 dBm</td><td></td></tr><tr><td rowspan="3">Maximum Input Level</td><td colspan="2">GFSK (1Mbps):-20dBm</td></tr><tr><td colspan="2">$\pi/4$-DQPSK (2Mbps) :-20dBm</td></tr><tr><td colspan="2">8DPSK (3Mbps) :-20dBm</td></tr></table>	Min.	Typical.	Max.	Sensitivity @ BER=0.1% for GFSK (1Mbps)	-86 dBm		Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)	-86 dBm		Sensitivity @ BER=0.01% for 8DPSK (3Mbps)	-80 dBm		Maximum Input Level	GFSK (1Mbps):-20dBm		$\pi/4$ -DQPSK (2Mbps) :-20dBm		8DPSK (3Mbps) :-20dBm	
Min.	Typical.	Max.																		
Sensitivity @ BER=0.1% for GFSK (1Mbps)	-86 dBm																			
Sensitivity @ BER=0.01% for $\pi/4$ -DQPSK (2Mbps)	-86 dBm																			
Sensitivity @ BER=0.01% for 8DPSK (3Mbps)	-80 dBm																			
Maximum Input Level	GFSK (1Mbps):-20dBm																			
	$\pi/4$ -DQPSK (2Mbps) :-20dBm																			
	8DPSK (3Mbps) :-20dBm																			

6. Electrical Characteristics

symbol	Parameter	Minimum	Typical	Maximum	Units
VCC	3.3V supply voltage	3.0	3.3	3.6	V
VCC	3.3V rating current	--	--	1000	mA
VOH	output high Voltage	2.97	--	3.3	V
VOL	output low Voltage	0	--	0.33	V

7.Pin Description & Module size (unit: mm)

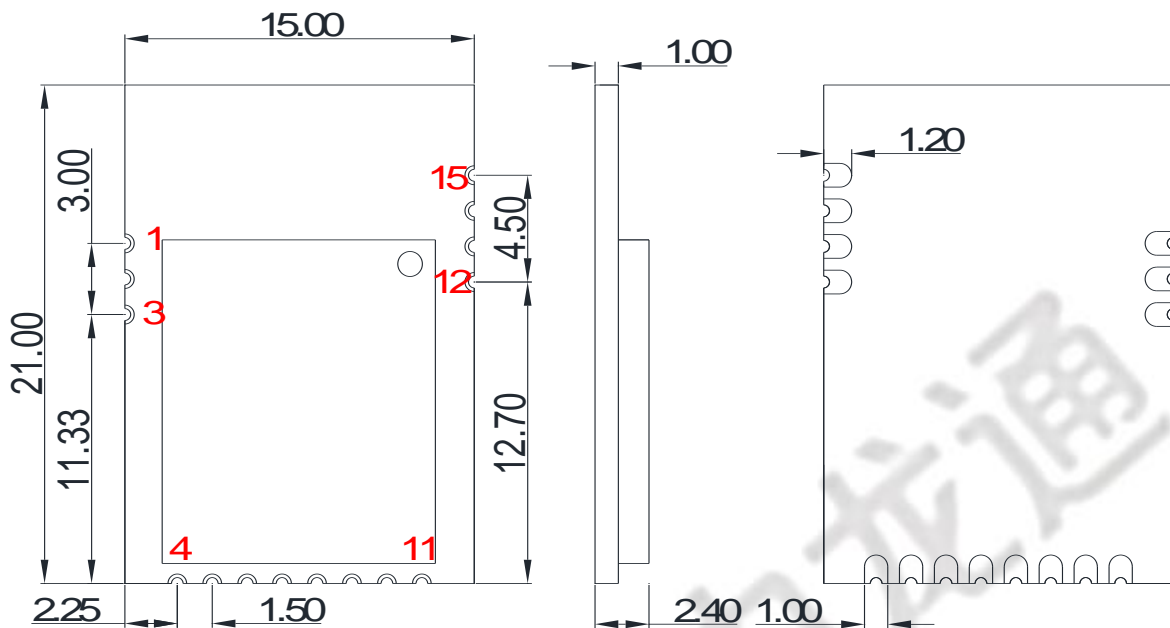


NO.	Symbol	Description
1	GND	Ground connections
2	BT_RF	Bluetooth RF output
3	GND	Ground connections
4	RESET	System reset,low active
5	WOW	Wake up system via wifi,low active
6	BT_WAKE_HOST	Wake up system via BT,low active
7	GND	Ground connections
8	DM	USB negative differential data lines
9	DP	USB positive differential data lines
10	GND	Ground connections
11	VCC	Power supply 3.3V

12	NC	NC
13	GND	Ground connections
14	NC	NC
15	GND	Ground connections

8. Footprint Dimensions

(Unit: mm)

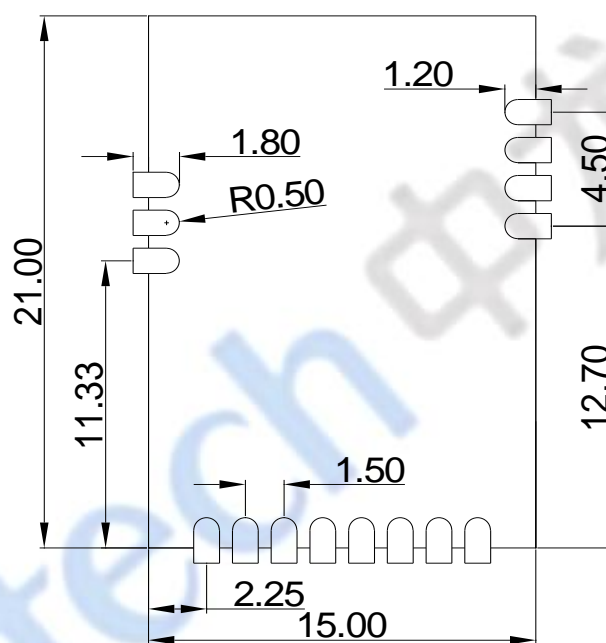


(Top view)

9. Suplier

Secondary supplier list	
Material name	Supplier brand
Crystal	JWT/FK/TKD/ECEC
Inductance	Sunlord/ DARFON/CHILISIN/DELI/Walsin/Murata
Wifi IC	Realtek
Capacitance	SAMSUNG /EYANG/ Walsin/Murata
Resistance	UniOhm /YAGEO
Diplexer	ACX/GLEAD/Sunlord/Walsin
PCB	A,I,O,S,D,P,T

10. Physical photo

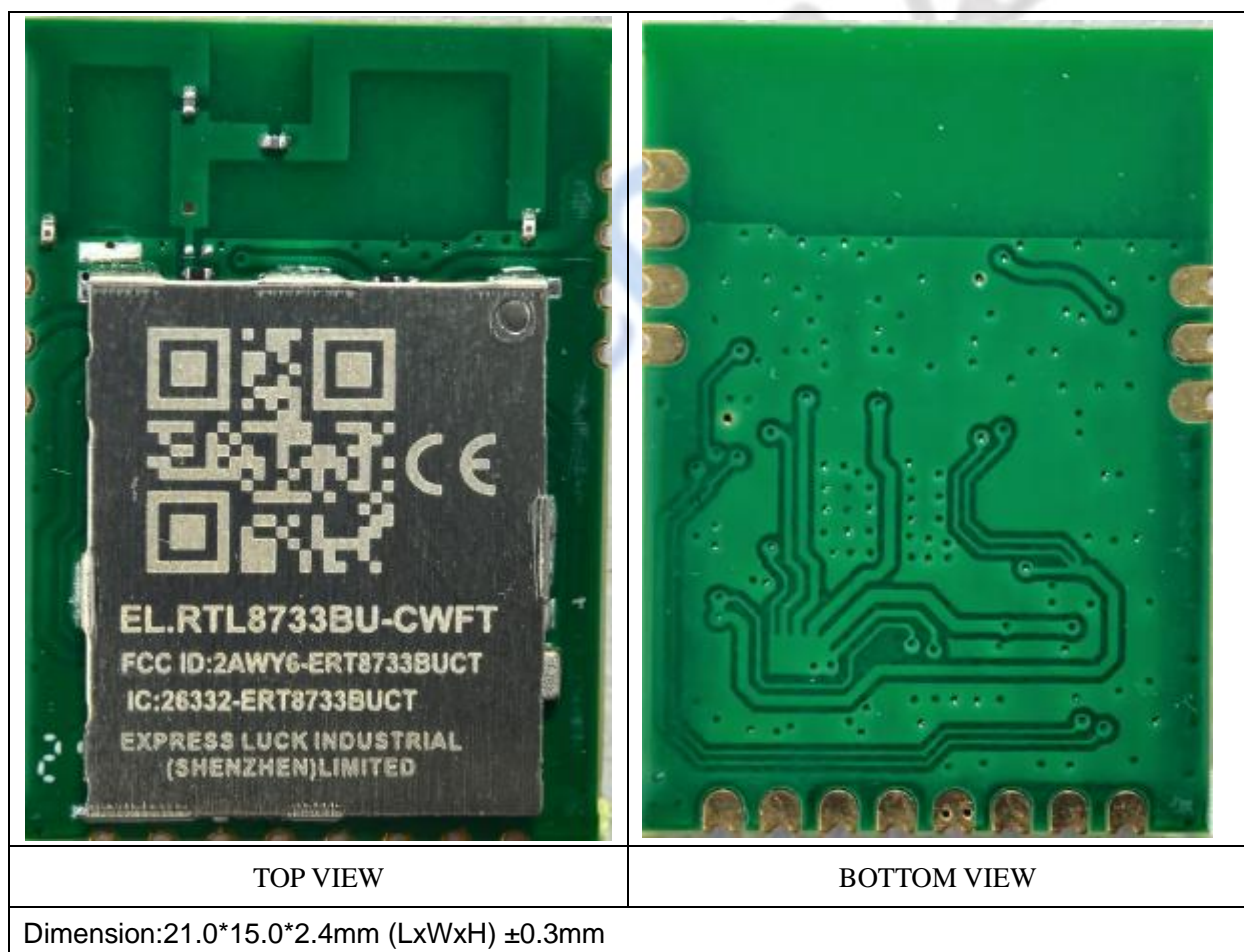


11. Recommended Reflow Profile


Referred IPC/JEDEC standard.

Peak Temperature : $< 50^{\circ}\text{C}$

Number of Times : ≤ 2 times

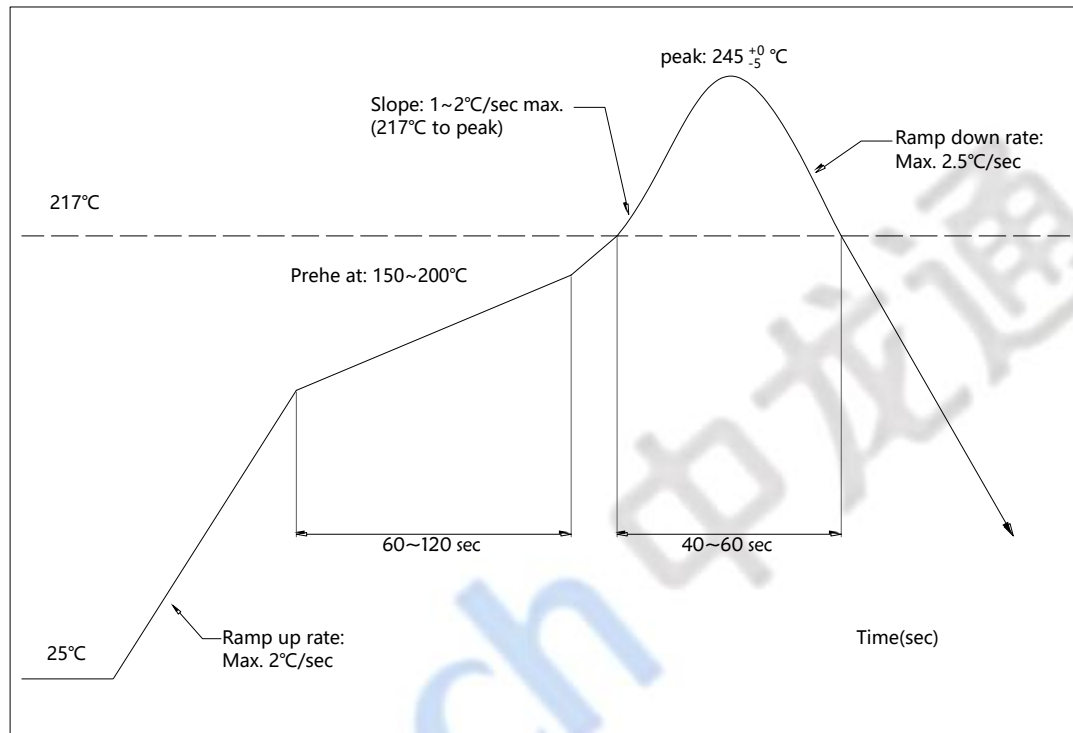

12. Packing information

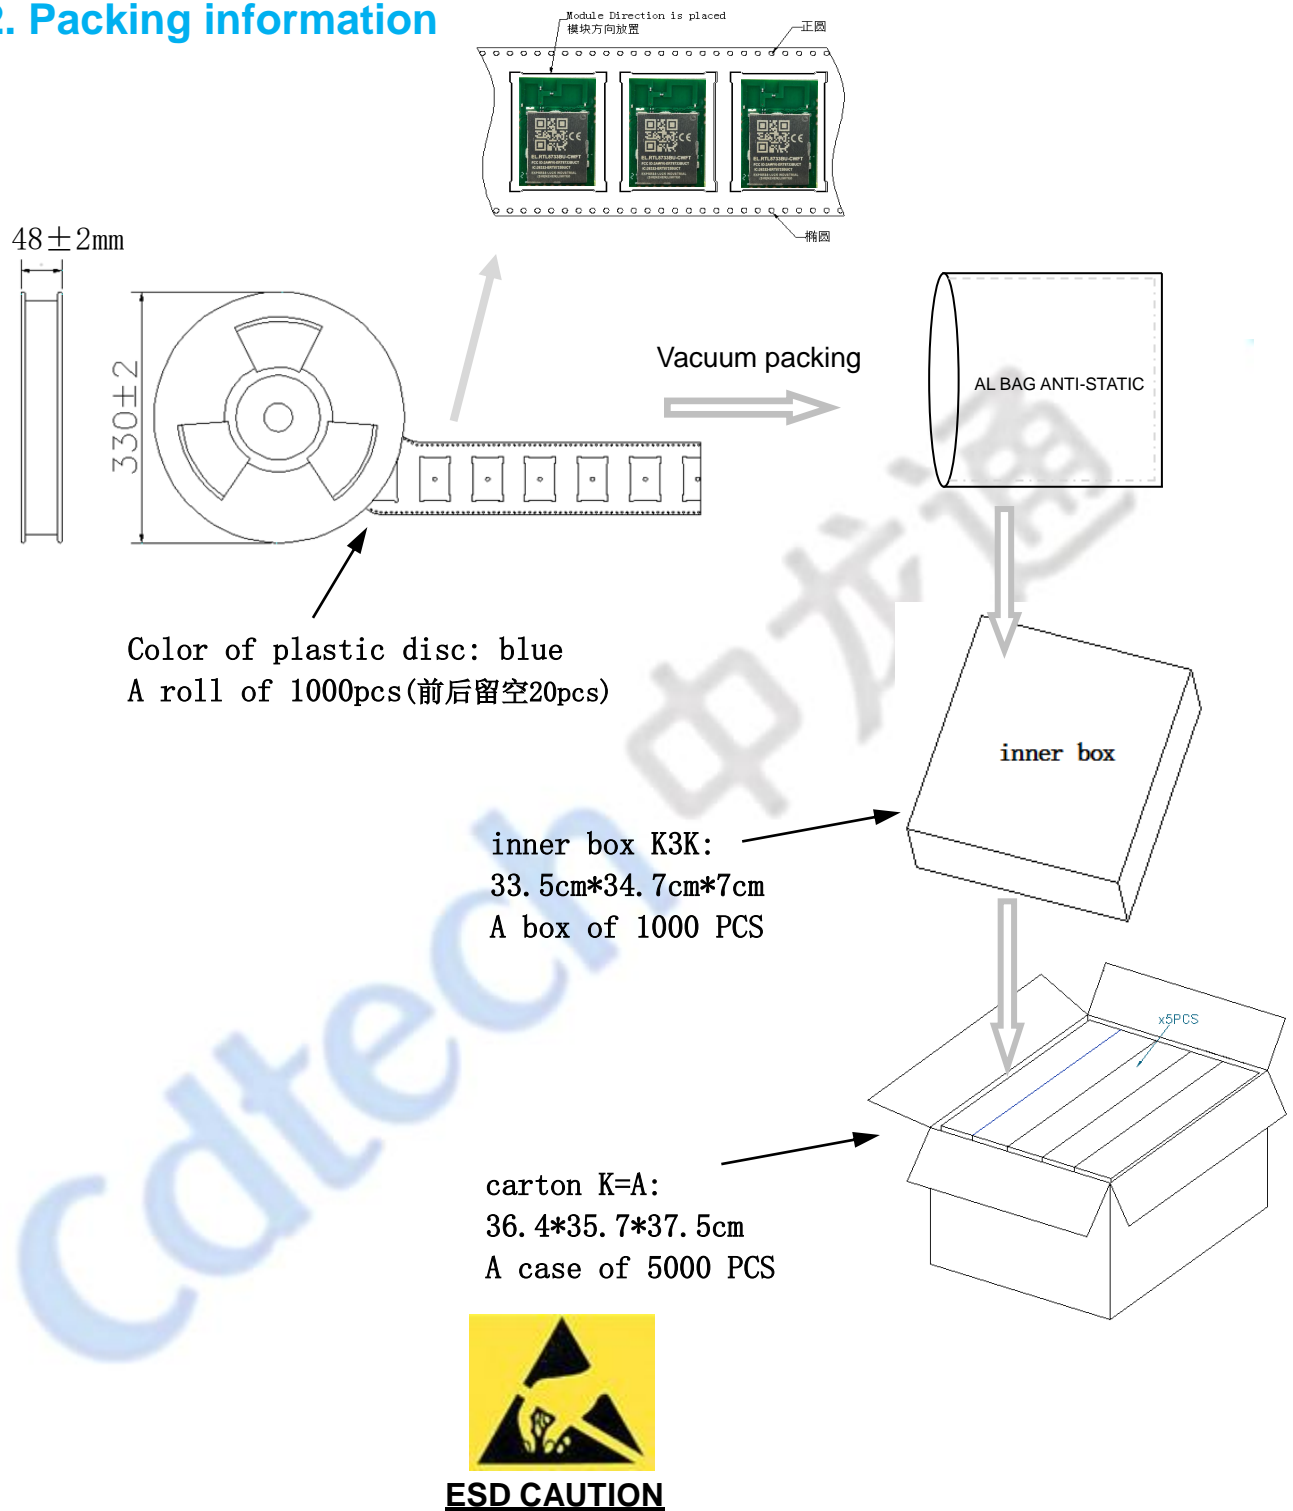

The EL.RTL8733BU-CWFT is ESD (electrostatic discharge) sensitive device and may be damaged with ESD or spike voltage. Although EL.RTL8733BU-CWFT is with built-in ESD protection circuitry, please handle with care to avoid the permanent malfunction or the performance degradation.

FCC WARNING

FCC Caution: Any changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate this equipment.

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:

(1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

This device and its antenna(s) must not be co-located or operating in conjunction with any other antenna or transmitter.

15.105 Information to the user.

(b) For a Class B digital device or peripheral, the instructions furnished the user shall include the following or similar statement, placed in a prominent location in the text of the manual:

Note: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to part 15 of the FCC Rules.

These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- Reorient or relocate the receiving antenna.
- Increase the separation between the equipment and receiver.
- Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- Consult the dealer or an experienced radio/TV technician for help.

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment. This equipment should be installed and operated with minimum distance 20 cm between the radiator and your body.

Radiation Exposure Statement:

This equipment complies with FCC radiation exposure limits set forth for an uncontrolled environment.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

The availability of some specific channels and/or operational frequency bands are country dependent and are firmware programmed at the factory to match the intended destination.

The firmware setting is not accessible by the end user.

The final end product must be labelled in a visible area with the following:

“Contains Transmitter Module FCC ID: 2AWY6-ERT8733BUCT”

Requirement per KDB996369 D03

2.2 List of applicable FCC rules

List the FCC rules that are applicable to the modular transmitter. These are the rules that specifically establish the bands of operation, the power, spurious emissions, and operating fundamental frequencies. DO NOT list compliance to unintentional-radiator rules (Part 15 Subpart B) since that is not a condition of a module grant that is extended to a host manufacturer. See also Section 2.10 below concerning the need to notify host manufacturers that further testing is required.³

Explanation: This module meets the requirements of FCC part 15C(15.247), FCC Part15 15.407.

2.3 Summarize the specific operational use conditions

Provide all the restrictions imposed by the specific rule(s), that extend to host's and any other notices or regulatory statements require in host's end-user manual. For example, the rule that restricts use to indoor operation, not operated on aircraft, etc.

Explanation: Equipment operating within the frequency band of 5150-5350MHz is for indoor use only

Also describe conditions that are applicable to the modular transmitter, such as including for example any limits on antennas. For example, if point-to-point antennas are used that require reduction in power or compensation for cable loss, for professional installed equipment, then this information must be in the instructions. In addition, certain information may also be needed, such as peak gain per frequency band and minimum gain, specifically for master devices in 5 GHz DFS bands.

Explanation: The EUT has PCB antenna, the module contains 2 permanently attached antennas. See antenna report for antenna details.

2.4 Limited module procedures

The Grantee of a limited module must file with the application for certification a procedure^[6] that describes the proposed method used to ensure host compliance when the limited module is installed in the host product.

If a modular transmitter is approved as a "limited module," then the module manufacturer is responsible for approving the host environment that the limited module is used with. The manufacturer of a limited module must describe, both in the filing and in the installation instructions, the alternative means that the limited module manufacturer uses to verify that the host meets the necessary requirements to satisfy the module limiting conditions.

A limited module manufacturer has the flexibility to define its alternative method to address the conditions that limit the initial approval, such as: shielding, minimum signaling amplitude, buffered modulation/data inputs, or power supply regulation. The alternative method could include that the limited module manufacturer reviews detailed test data or host designs prior to giving the host manufacturer approval. The Grantee can devise a strategy to be approved through a Pre-Approval Guidance (KDB Publication 388624 PAG item MODLIM) inquiry

This limited module procedure is also applicable for RF exposure evaluation when it is necessary to demonstrate compliance in a specific host. The module manufacturer must state how control of

the product into which the modular transmitter will be installed and maintained such that full compliance of the product is always ensured. For additional hosts other than the specific host originally granted with a limited module, a Class II permissive change is required on the module grant to register the additional host as a specific host also approved with the module.

Explanation: The module is a single module.

2.5 Trace antenna designs

If trace antenna designs are applicable, full-detail design specifications are required per D02 Module Q&A Question 11.

For a modular transmitter with trace antenna designs, see the guidance in Question 11 of KDB Publication 996369 D02 FAQ – Modules for Micro-Strip Antennas and traces. The integration information shall include for the TCB review the integration instructions for the following aspects: layout of trace design, parts list (BOM), antenna, connectors, and isolation requirements.⁴

- a) Information that includes permitted variances (e.g., trace boundary limits, thickness, length, width, shape(s), dielectric constant, and impedance as applicable for each type of antenna);
- b) Each design shall be considered a different type (e.g., antenna length in multiple(s) of frequency, the wavelength, and antenna shape (traces in phase) can affect antenna gain and must be considered);
- c) The parameters shall be provided in a manner permitting host manufacturers to design the printed circuit (PC) board layout;
- d) Appropriate parts by manufacturer and specifications;
- e) Test procedures for design verification; and
- f) Production test procedures for ensuring compliance.

The module grantee shall provide a notice that any deviation(s) from the defined parameters of the antenna trace, as described by the instructions, require that the host product manufacturer must notify the module grantee that they wish to change the antenna trace design. In this case, a Class II permissive change application is required to be filed by the grantee, or the host manufacturer can take responsibility through the change in FCC ID (new application) procedure followed by a Class II permissive change application.

Explanation: The module with PCB antenna designs, See antenna report for antenna details.

2.6 RF exposure considerations

It is essential for module grantees to clearly and explicitly state the RF exposure conditions that permit a host product manufacturer to use the module. Two types of instructions are required for RF exposure information: (1) to the host product manufacturer, to define the application conditions (mobile, portable – xx cm from a person's body); and (2) additional text needed for the host product manufacturer to provide to end users in their end-product manuals. If RF exposure statements and use conditions are not provided, then the host product manufacturer is required to take responsibility of the module through a change in FCC ID (new application).

Module Grantees are required to provide an RF exposure (RFX) exhibit for CoU related to fixed, mobile or portable configurations, as defined §2.1091 and §2.1093, as well as per further specification in by KDB Publication 447498. This exhibit shall include an RF exposure compliance statement, as well as references to Maximum Permissible Exposure (MPE) or Specific Absorption Rate (SAR) test reports, as required per KDB 447498.

Modules can only be used in a host for the conditions that it was granted for. To be used in any other way than granted, such as mobile to portable or with other transmitters simultaneously, requires additional evaluation, testing, or testing and Class 2 permissive change.

Explanation: This module complies with FCC RF radiation exposure limits set forth for an uncontrolled environment, this equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body." This module is designed to comply with the FCC statement, FCC ID is: 2AWY6-ERT8733BUCT.

2.7 Antennas

For Part 15 and licensed CMRS Client devices a list of antennas included in the application for certification must be provided in the instructions. For modular transmitters approved as limited modules, all applicable professional installer instructions must be included as part of the information to the host product manufacturer. The antenna list shall also identify the antenna types (monopole, PIFA, dipole, etc. (note that for example an "omni-directional antenna" is not considered to be a specific "antenna type"))).

For situations where the host product manufacturer is responsible for an external connector, for example with an RF pin and antenna trace design, the integration instructions shall inform the installer that unique antenna connector must be used on the Part 15 authorized transmitters used in the host product. The module manufacturers shall provide a list of acceptable unique connectors.

Licensed (non-client station) Modules for a base, fixed station can be stated as conducted, and antenna data is not required when it is clear that the licensee is responsible for the applicable limits under the rules and or license.

Explanation: The EUT has PCB antenna, the module contains 2 permanently attached antennas. See antenna report for antenna details.

2.8 Label and compliance information

Grantees are responsible for the continued compliance of their modules to the FCC rules. This includes advising host product manufacturers that they need to provide a physical or e-label stating "Contains FCC ID" with their finished product. See Guidelines for Labeling and User Information for RF Devices – KDB Publication 784748.

Explanation: The host system using this module, should have label in a visible area indicated the following texts: "Contains FCC ID: 2AWY6-ERT8733BUCT"

2.9 Information on test modes and additional testing requirements

Additional guidance for testing host products is given in KDB Publication 996369 D04 Module Integration Guide. Test modes should take into consideration different operational conditions for a stand-alone modular transmitter in a host, as well as for multiple simultaneously transmitting modules or other transmitters in a host product.

The grantee should provide information on how to configure test modes for host product evaluation for different operational conditions for a stand-alone modular transmitter in a host, versus with multiple, simultaneously transmitting modules or other transmitters in a host.

Grantees can increase the utility of their modular transmitters by providing special means, modes, or instructions that simulates or characterizes a connection by enabling a transmitter. This can

greatly simplify a host manufacturer's determination that a module as installed in a host complies with FCC requirements.

Explanation: Can increase the utility of our modular transmitters by providing instructions that simulates or characterizes a connection by enabling a transmitter.

2.10 Additional testing, Part 15 Subpart B disclaimer

The grantee should include a statement that the modular transmitter is only FCC authorized for the specific rule parts (i.e., FCC transmitter rules) listed on the grant, and that the host product manufacturer is responsible for compliance to any other FCC rules that apply to the host not covered by the modular transmitter grant of certification. If the grantee markets their product as being Part 15 Subpart B compliant (when it also contains unintentional-radiator digital circuitry), then the grantee shall provide a notice stating that the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.⁶

Explanation: The module is only FCC authorized for the specific rule parts listed on the grant. The OEM integrator is responsible for testing their end-product for any additional compliance requirements required with this module installed. If the final product contains circuits of other FCC PART 15 Subparts, the final host product still requires Part 15 Subpart B compliance testing with the modular transmitter installed.

2.11 Note EMI Considerations

Note that a host manufacture is recommended to use D04 Module Integration Guide recommending as "best practice" RF design engineering testing and evaluation in case non-linear interactions generate additional non-compliant limits due to module placement to host components or properties

Explanation: The host manufacturer is strongly recommended to confirm compliance with FCC requirements for the transmitter when the module is installed in the host. This module is a stand-alone modular. If the end product will involve the Multiple simultaneously transmitting condition or different operational conditions for a stand-alone modular transmitter in a host, the host manufacturer has to consult with the module manufacturer for the installation method in the end system. Host manufacturer is recommended to use D 04 Module Integration Guide. The final host product may also need to be evaluated against FCC rule part 15 Subpart B (criteria for unintentional radiators) in order to be properly authorized for operation as part 15B

2.12 How to make changes

Since. only Grantees are permitted to make permissive changes, it is recommended that module manufactures provide contact information and some guidance to host providers in the integration instructions if they expect their module will be used differently than granted.

Explanation: Module manufacturer contact: Tel: +86-15776493370,
E-mail: yf.aggcs2@caixun.net.cn

IC statement

This device contains licence-exempt transmitter(s)/receiver(s) that comply with Innovation, Science and Economic Development Canada's licence-exempt RSS(s). Operation is subject to the following two conditions:

- (1) This device may not cause interference.
- (2) This device must accept any interference, including interference that may cause undesired operation of the device.

The term "IC: " before the certification/registration number only signifies that the Industry Canada technical specifications were met.

This product meets the applicable Industry Canada technical specifications.

Cet appareil contient des émetteurs / récepteurs exemptés de licence conformes aux RSS (RSS) d'Innovation, Sciences et Développement économique Canada. L'exploitation est autorisée aux deux conditions suivantes : (1) l'appareil ne doit pas produire de brouillage, et (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

L'émetteur/récepteur exempt de licence contenu dans le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement économique Canada applicables aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes :

- 1) L'appareil ne doit pas produire de brouillage;
- 2) L'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

Please notice that if the ISED certification number is not visible when the module is installed inside another device, then the outside of the device into which the module is installed must display a label referring to the enclosed module. This exterior label can use wording such as the following:

"Contains IC: 26332-ERT8733BUCT" any similar wording that expresses the same meaning may be used. L'appareil hôte doit porter une étiquette donnant le numéro de certification du module d'Industrie Canada, précédé des mots « Contient un module d'émission », du mot « IC: 26332-ERT8733BUCT » ou d'une formulation similaire exprimant le même sens, comme suit

The device meets the exemption from the routine evaluation limits in section 6 of RSS-102 Issue 6 December 15, 2023 and compliance with RSS-102 RF exposure, users can obtain Canadian information on RF exposure and compliance.

Le dispositif rencontre l'exemption des limites courantes d'évaluation dans la section 6 de RSS-102 Issue 6 December 15, 2023 et la conformité

à l'exposition de RSS-102 rf, les utilisateurs peuvent obtenir l'information canadienne sur l'exposition et la conformité de rf.

This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter. This equipment should be installed and operated with a minimum distance of 20 centimeters between the radiator and your body.

Cet émetteur ne doit pas être Co-placé ou ne fonctionnant en même temps qu'aucune autre antenne ou émetteur. Cet équipement devrait être installé et actionné avec une distance minimum de 20 centimètres entre le radiateur et votre corps.

Operation of this device is restricted to indoor use only. (5150-5350MHz)

Le fonctionnement de cet appareil est limité à un usage intérieur seulement. (5150-5350MHz)

a.The underlying product code enables the device to automatically stop transmitting when there is no information to transmit or when there is a malfunction.

b.The use of a private network that allows only authenticated users to download software, Confirm that a third party cannot reprogram the device.

Antenna information:

	ANT Type	Manufacturer	Model	Peak Gain
WIFI Antenna	PCB antenna	EXPRESS LUCK INDUSTRIAL (SHENZHEN) LIMITED	EL.RTL8733BU-C WFT	2.4G BAND: -1.87dBi
				5.1G BAND: 0.97dBi
				5.3G BAND: 0.97dBi
				5.6G BAND: 1.89dBi
				5.8G BAND: 3.17dBi
BT Antenna	PCB antenna	EXPRESS LUCK INDUSTRIAL (SHENZHEN) LIMITED	EL.RTL8733BU-C WFT	-2.27dBi