

Wall Mounted Fans

BASIC RANGE



2 YEAR
WARRANTY
GUARANTEED
TO WORK
AUSTRALIAN
STANDARDS
APPROVED

Domestique Series




The Domestique Series is a low cost but high quality European made range of wall mounted fans. These reliable and high performance fans have been designed for domestic applications such as bathrooms, toilets and laundries.

Technical Data

Model No.	m ³ /hr†	L/sec†	Fan Speed rpm	dB(A) @ 3m	Watts	Volts	IP Rating
DOM-100C	95	26	2500	34	13	240	IPX4
DOM-100CT	95	26	2500	34	13	240	IPX4
DOM-100CHT	95	26	2500	34	13	240	IPX4
DOM-125C	185	51	2500	30	28	240	IPX4
DOM-125CT	185	51	2500	30	28	240	IPX4
DOM-125CHT	185	51	2500	30	28	240	IPX4
DOM-150C	280	78	2200	41	25	240	IPX4
DOM-150CT	280	78	2200	41	25	240	IPX4

† Air flow without duct and fittings

Dimensions

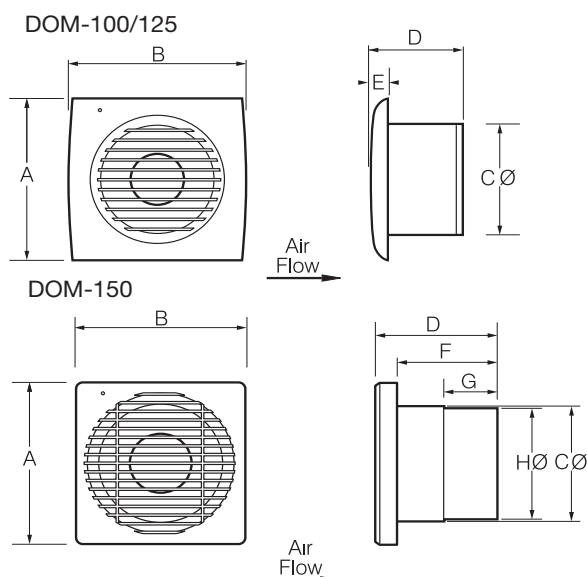

Model No.	Duct Size	A	B	C	D	E	F	G	H
DOM-100..	100	158	168	99	82	20	-	-	-
DOM-125..	125	180	190	118	102	26	-	-	-
DOM-150..	150	200	200	152	129	-	104	51	148

All dimensions in mm

Features

Model No.	Backdraft Damper	Humidistat	Run-on timer
DOM-100C	Yes	No	No
DOM-100CT	Yes	No	Yes (1 to 30min)
DOM-100CHT	Yes	Yes	Yes (2 to 20min)
DOM-125C	Yes	No	No
DOM-125CT	Yes	No	Yes (1 to 30min)
DOM-125CHT	Yes	Yes	Yes (2 to 20min)
DOM-150C	Yes	No	No
DOM-150CT	Yes	No	Yes (1 to 30min)

- Made from tough injection moulded plastic
- Available in the 3 most popular spigot sizes; 100, 125 and 150mm
- Low loss foil backdraft damper and “operating” light included
- Front grille can be easily removed for cleaning
- Internal thermal motor cut out protection
- 220-240V, single-phase, 50Hz supply
- Certificate of Approval number: ESO130139/00



Accessories

- Flexible Duct - Fire Rated AS/NZS 4254 (page A-40)
- External Grilles (page A-44)
- Wall Tubes (page A-47)

Please see page D-1 for performance curve.

FANTECHTRADE ///
MADE FOR TRADE

Domestique Fan kits

DWK Series

- Exhaust to outside of building
- In-built backdraft damper and “operating” light
- BCA compliant for ventilation & energy efficiency
- Internal thermal motor cut out protection
- Protection IPX4
- 220-240V, single-phase, 50Hz
- Includes quality PFL grille with fly wire mesh

2 YEAR
WARRANTY
GUARANTEED
TO WORK
AUSTRALIAN
STANDARDS
APPROVED

DWK100 kit

DWK125 kit

Technical Data

Model No.	L/sec*	dBA @ 3m	Air Flow (m³/h)†	Watts
DWK100	26 / 21	34	95	13
DWK125	51/ 42	30	185	28
DWK150	78/ 65	41	280	25

* Maximum air flow: fan only / fan with duct and fittings as supplied

† Air flow without duct and fittings

DWK100

Includes DOM-100C (100mm exhaust fan with backdraft damper), wall tube & external grille.


DWK125

Includes DOM-125C (125mm exhaust fan with backdraft damper), wall tube & external grille.

DWK150

Includes DOM-150C (150mm exhaust fan with backdraft damper), wall tube & external grille.

Dimensions

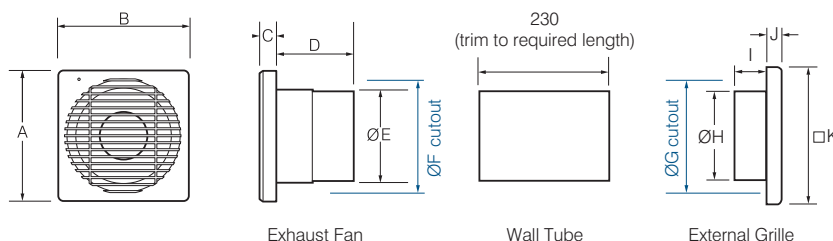

Model No.	A	B	C	D	E	F	G	H	I	J	K
DWK100	158	168	20	62	99	109	109	99	28	15	155
DWK125	180	190	26	76	118	128	130	120	25	12	160
DWK150	200	200	25	104	148	158	160	150	34	15	175