

SEAT COVER INSTALLATION

2-pack front bottom seat covers

WHAT'S IN THE PACKAGE


- front bottom seat covers *2,
- 2 hooks (clips) *4, 3 chucks*4

Note: If there is any part missing or defective, please reach out to us.

For Hooks Solve S

PREPARATION



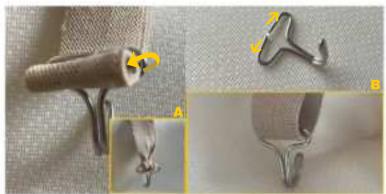

Chucks: Insert the back-side strap to the chuck (3) through the two gaps.

Hooks: a) Put the front-side straps through the hook (2) and tie a knot.


b) Open the clip (2), put the front-side strap into the clip (2) and close it.

BOTTOM COVER INSTALLATION





STEP1: Push the <u>chuck</u> (③) into the gap between bottom seat and backrest, and get <u>them</u> (③) from the backside.





STEP2: Pull the side straps to the backside.

Adjust the position of straps, then fix the latch in mid.





STEP3: Adjust the <u>seat cover</u> (1) make it flat, then hook the hooks (2) under the seat. Repeat the above step for another cover.