


OVERVIEW

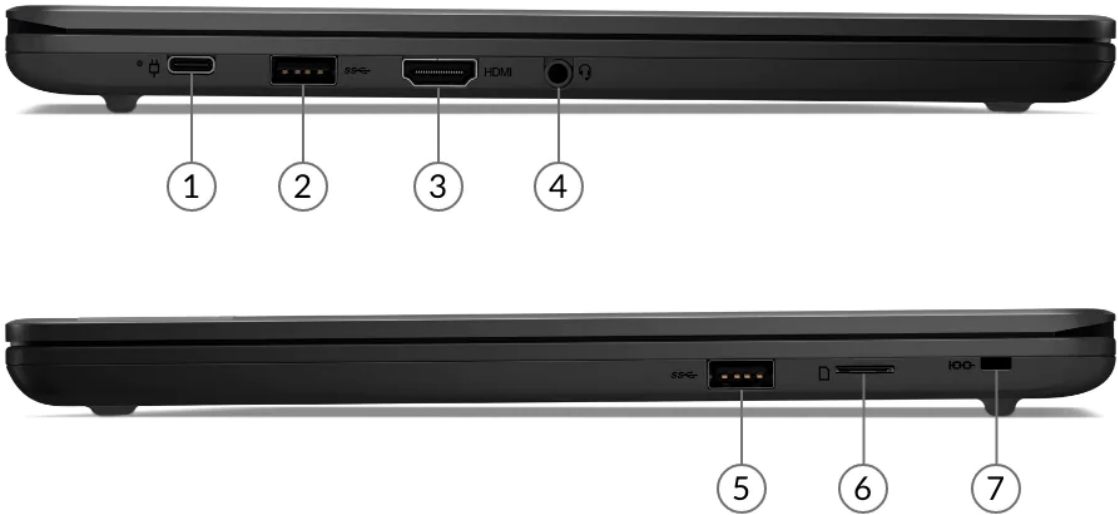

1. USB-C 3.2 Gen 1	5. USB 3.2 Gen 1 (Always On)
2. USB 3.2 Gen 1	6. microSD card reader
3. HDMI 1.4b	7. Kensington Nano Security Slot
4. Headphone / microphone combo jack (3.5mm)	

PERFORMANCE

Processor

Processor Family

AMD 3000 Processor

Processor

Processor Name	Cores	Threads	Base Frequency	Max Frequency	Cache	Processor Graphics
AMD 3015e	2	4	1.2GHz	2.3GHz	1MB L2 / 4MB L3	AMD Radeon™ Graphics

Operating System

Operating System\*\*

- Windows® 11 Pro
- Windows® 11 Pro (National Academic License)<sup>[1]</sup>
- Windows® 11 Home
- Windows® 11 DG Windows® 10 Pro 64
- Windows® 11 DG Windows® 10 Pro 64 (National Academic License)<sup>[2]</sup>
- Windows® 10 Pro (National Academic License)<sup>[3]</sup>
- Windows® 10 Pro 64
- Windows® 10 Pro 64 (National Academic License)<sup>[4]</sup>
- Windows® 10 Home 64
- Windows® 10 Home 64 Single Language
- Windows® 10 IoT Enterprise
- Windows® 11 SE
- LeTOS™ V2
- No preload operating system

Notes:

[1], [3], [4] Windows® (National Academic License) is for K-12 Education Customers only. Any request please contact Lenovo® Sales Representative for more information.

[2] Windows® (National Academic License) is for K-12 Education Customers only. Any request please contact Lenovo® Sales Representative for more information.

Graphics

Graphics

Graphics	Type	Memory	Key Features
AMD Radeon™ Graphics	Integrated	Shared	DirectX® 12

Monitor Support

Monitor Support

Supports up to 3 independent displays (native display and 2 external monitors via HDMI® and USB-C®)

- HDMI® supports up to 4K@30Hz
- USB-C® supports up to 4K@60Hz

Chipset

Chipset

AMD SoC (System on Chip) platform

Memory

Max Memory

- 4GB soldered memory, not upgradable
- 8GB soldered memory, not upgradable

Memory Slots

Memory soldered to systemboard, no slots

Memory Type<sup>[1]</sup>

DDR4-1600

Notes:

[1] Installed memory is actually DDR4-3200 but runs as DDR4-1600 due to processor limitation.

Storage

Max Storage Support\*\*[1][2]

- 64GB eMMC 5.01 on systemboard
- 128GB eMMC 5.01 on systemboard
- One drive, up to 256GB M.2 2242 SSD

Storage Slot\*\*

- eMMC on systemboard, no slots (eMMC models)
- One M.2 2242 PCIe® 3.0 x4 slot (M.2 SSD models)

Storage Type\*\*

Disk Type	Interface	Offering
Flash Memory	eMMC 5.01	64GB / 128GB
M.2 2242 SSD	PCIe® NVMe®, PCIe® 3.0 x4	128GB / 256GB

Notes:

[1] The storage capacity supported is based on the test results with current Lenovo® storage offerings.

[2] System has one eMMC on systemboard or one M.2 2242 SSD exclusively.

Removable Storage

Optical

None

Card Reader

microSD card reader

Multi-Media

Audio Chip

High Definition (HD) Audio, Realtek® ALC3287 codec

Speakers

Stereo speakers, 2W x2

Microphone

Dual-microphone array

Camera

HD 720p, with privacy shutter, fixed focus

Battery

Battery

57Wh Rechargeable Li-ion Battery, supports Rapid Charge (charge up to 80% in 1hr) with 65W AC adapter

Max Battery Life[1]

MobileMark® 2018: 13.5 hr

Notes:

[1] All battery life claims are approximate maximum and based on results using the MobileMark® 2014, MobileMark® 2018, MobileMark® 25, MobileMark® 30, JEITA 2.0, JEITA 3.0, continuous 1080p video playback (with 150nits brightness and default volume level) or Google Power Load Test (PLT) battery-life benchmark tests. Actual battery life will vary depending on many factors such as product configuration and usage, software use, wireless functionality, power management settings, and screen brightness. The maximum capacity of the battery will decrease with time and use.

Power Adapter

Power Adapter\*\*[1][2]

- 45W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 45W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- 65W USB-C® (2-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz

- 65W USB-C® (3-pin) AC adapter, supports PD 3.0, 100-240V, 50-60Hz
- No power adapter

Notes:

[1] AC adapter offerings depend on the country.

[2] No power adapter is for special bid only.

DESIGN

Display

Display**									
Size	Resolution	Touch	Type	Brightness	Surface	Aspect Ratio	Contrast Ratio	Color Gamut	Viewing Angle (L/R/U/D)
14"	HD (1366x768)	None	TN	220nits	Anti-glare	16:9	400:1	45% NTSC	45° / 45° / - / -
14"	FHD (1920x1080)	None	IPS <sup>[1]</sup>	250nits	Anti-glare	16:9	700:1	45% NTSC	85° / 85° / - / -
14"	FHD (1920x1080)	Multi-touch	IPS <sup>[2]</sup>	300nits	Anti-glare	16:9	700:1	45% NTSC	85° / 85° / - / -

- Touchscreen
- On-cell multi-touch, supports 10-point touch
  - Non-touch

Notes:

[1], [2] IPS (in-plane switching) technology may refer to IPS, PLS, ADS, AHVA, AAS.

Input Device

Pen

No support

Keyboard

6-row, spill-resistant, Anti-pry keycaps

Keyboard Backlight

- LED backlight
- Non-backlight

Touchpad

Buttonless Mylar® surface multi-touch touchpad, supports Precision TouchPad (PTP), 61.5 x 105 mm (2.42 x 4.13 inches)

Mechanical

Dimensions (WxDxH)<sup>[1]</sup>

325 x 223 x 17.7 mm (12.80 x 8.78 x 0.70 inches)

Weight<sup>[2]</sup>

Around 1.45 kg (3.20 lbs)

Case Color

Black

Surface Treatment

Anodizing sandblasting

Case Material

Aluminium (top), PC-ABS (bottom)

Notes:

[1] The system dimensions may vary depending on configurations.

[2] The system weight is approximate and based on results in Lenovo® lab, which varies depending on the source of component, variance of the distribution of each component, and manufacturing process. It may not be the exact weight

for each specific model.

## CONNECTIVITY

### Network

#### WLAN + Bluetooth®\*\*<sup>[1]</sup>

- Realtek® RTL8822CE, Wi-Fi® 5, 802.11ac Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.2 hardware ready), M.2 card
- Wi-Fi® 6, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card<sup>[2]</sup>
- MediaTek Wi-Fi® 6 MT7921, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.3 hardware ready), M.2 Card<sup>[3]</sup>
- Realtek® Wi-Fi® 6 RTL8852AE, 802.11ax Dual Band 2x2 Wi-Fi® + Bluetooth® 5.1, M.2 card<sup>[4]</sup>
- Intel® Wi-Fi® 6 AX200, 802.11ax 2x2 Wi-Fi® + Bluetooth® 5.1 (Bluetooth® 5.2 hardware ready), M.2 card<sup>[5]</sup>

#### WWAN

No support

#### Ethernet

No onboard Ethernet

Notes:

[1] Bluetooth® may operate at a lower version than hardware design depending on the factors such as operating system, driver, etc.

[2], [3], [4], [5] Wi-Fi® 6 full features might be limited by country-level restrictions.

### Ports<sup>[1]</sup>

#### Standard Ports

- 1x USB 3.2 Gen 1
- 1x USB 3.2 Gen 1 (Always On)
- 1x USB-C® 3.2 Gen 1 (support data transfer, Power Delivery 3.0 and DisplayPort™ 1.2)
- 1x HDMI® 1.4b
- 1x Headphone / microphone combo jack (3.5mm)
- 1x microSD card reader

Notes:

[1] The transfer speed of following ports will vary and, depending on many factors, such as the processing speed of the host device, file attributes and other factors related to system configuration and your operating environment, will be slower than theoretical speed.

USB 2.0: 480 Mbit/s;

USB 3.2 Gen 1 (SuperSpeed USB 5Gbps, formerly USB 3.0 / USB 3.1 Gen 1): 5 Gbit/s;

USB 3.2 Gen 2 (SuperSpeed USB 10Gbps, formerly USB 3.1 Gen 2): 10 Gbit/s;

USB4® 20Gbps / USB 3.2 Gen 2x2 (SuperSpeed USB 20Gbps): 20 Gbit/s;

USB4® 40Gbps (USB 40Gbps): 40 Gbit/s;

Thunderbolt™ 3/4: 40 Gbit/s.

### Docking

#### Docking

Various docking solutions supported via USB-C®.

For more compatible docking solutions, please visit [Docking for Lenovo® 14w Gen 2](#)

## SECURITY & PRIVACY

### Security

#### Security Chip

Discrete TPM 2.0, TCG certified

#### Physical Locks

Kensington® Nano Security Slot™

#### BIOS Security

- Hard disk password (M.2 SSD models only)
- Power-on password

- Supervisor password
- Other Security**
- Camera privacy shutter

SERVICE

Warranty

Base Warranty\*\*

- 1-year mail-in service
- 1-year courier or carry-in service
- 1-year courier or carry-in with 2-year system board service (Korea only)
- 2-year (1-yr battery) courier or carry-in service

ACCESSORIES

Bundled Accessories

Bundled Accessories<sup>[1]</sup>

None

Notes:

[1] For more compatible accessory solutions, please visit [Accessories for Lenovo® 14w Gen 2](#)

OPERATING REQUIREMENTS

Operating Environment

Temperature<sup>[1]</sup>

- Operating: 5°C (41°F) to 35°C (95°F)
- Storage: 5°C (41°F) to 43°C (109°F)

Relative Humidity

- Operating: 8% to 95% at wet-bulb temperature 23°C (73°F)
- Storage: 5% to 95% at wet-bulb temperature 27°C (81°F)

Altitude

Maximum altitude (without pressurization): 3048 m (10,000 ft)

Notes:

[1] When you charge the battery, its temperature must be no lower than 10°C (50°F).

CERTIFICATIONS

Green Certifications<sup>[1]</sup>

Green Certifications<sup>[2]</sup>

- ENERGY STAR® 8.0
- EPEAT™ Silver Registered<sup>[3]</sup>
- ErP Lot 3
- RoHS compliant
- TCO Certified

Notes:

[1] The items listed under the "Green Certifications" section may not only refer to certification but also registration or self-declaration. For ESG & regulatory compliance documents, please visit <https://compliance.lenovo.com>.

[2] EPEAT™ registration and ENERGY STAR® certification are optional and only available on the models with preloaded OS. Please visit [epeat.net](https://epeat.net) and [energystar.gov](https://energystar.gov) for more information.

[3] EPEAT™ is registered where applicable, please visit [epeat.net](https://epeat.net) for registration status by country.

Other Certifications

## Mil-Spec Test

MIL-STD-810H military test passed

- Feature with \*\* means that only one option listed under the feature can be configured on selected models. Please refer to the model configuration for specific information.
- Lenovo reserves the right to change specifications or other product information without notice. Lenovo is not responsible for photographic or typographical errors. LENOVO PROVIDES THIS PUBLICATION “AS IS,” WITHOUT WARRANTY OF ANY KIND, EITHER EXPRESS OR IMPLIED, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Some jurisdictions do not allow disclaimer of express or implied warranties in certain transactions, therefore this disclaimer may not apply to you.
- The specifications on this page may not be available in all regions, and may be changed or updated without notice.



AMD



AMD



AMD



AMD



AMD



AMD