

Single Pack NLE11MN 115-127V 60Hz CSIR

Single pack code number: **195B4359**

Position	Title	Code	Amount
1	Compressor NLE11MN	105H5980	1
2	Starting relay	117U7020	1
3	Starting capacitor (240µF 125V, 6.3mm)	117U5073	1
4	Cord relief	103N1010	1
5	Cover	103N2011	1
6	Bolt joint for one compressor M6 ø16mm	118-1917	1

Secop GmbH • Lise-Meitner-Straße 29 • 24941 Flensburg, Germany • Tel: +49 461 4941 0 • www.secop.com

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved.

Model			
Designation	NLE11MN	115-127V/60Hz 1~	Sales code: 105H5980

Compressor design

Oil type	Polyolester	Refrigerant(s)	R290
Oil viscosity	32cST	Displacement	11,15cm³ / 0,68cu.in
Oil quantity	298cm³ / 10,1fl.oz	Compressors on pallet	80
Refr. charge - tech. limit	400g / 14,1oz		
Free gas volume comp.	2360cm³ / 79,8fl.oz		
Weight	12,14kg / 26,8lbs		
Motor protection	1# internal		
Winding resistance main	0,85Ω (at 25°C)		
Winding resistance aux	4,17Ω (at 25°C)		
Max. winding temp.	125°C / 257°F		
Max. discharge temp.	130°C / 266°F		



General - Configurations with NLE11MN

	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Motorconfiguration	CSIR	CSIR	RSCR	RSCR
Power supply (nominal)	115V/60Hz	115V/60Hz	115V/60Hz	115V/60Hz
Number of phases	1	1	1	1
Voltage range	95-127V	95-135V	95-127V	95-135V
Approvals	UL, CCC	UL, CCC	UL, CCC	UL, CCC
Starting torque	HST	HST	LST	LST
Note	- / -			

Applications with NLE11MN

	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Refrigerant	R290	R290	R290	R290
Application	MBP	MBP	MBP	MBP
System cooling	fan 3m/s	fan 3m/s	fan 3m/s	fan 3m/s
Hot gas defrost	OK	OK	OK	OK
Long interval pull down	OK	OK	OK	OK

Electrical data - Configurations with NLE11MN


	Conf. 1	Conf. 2	Conf. 3	Conf. 4
Starting device type	relay	relay	PTC	PTC
Run capacitor	-/-	-/-	23,5μF	23,5μF
Start capacitor	240μF	240μF	-/-	-/-
LRA (locked rotor amps / 4s)	40,23A	40,23A	41,7A	41,7A
RLA (rated load amps / 1s)	8,37A	8,37A	8,37A	8,37A
Cut in current	40,23A	40,23A	51,83A	51,83A

Model			
Designation	NLE11MN	115-127V/60Hz 1~	Sales code: 105H5980


Compressor dimensions

Housing	A Height	203mm / 7,99in
	B Height	197mm / 7,76in
	C Length shell	205mm / 8,07in
	D Length w. cover	254mm / 10in
	E Width	166mm / 6,54in


Connectors		Suction X	Discharge Y	Process Z
Diameter	[mm]	øi 8,11-8,29	øi 6,41-6,59	øi 6,41-6,59
	(i:inside, o:outside) [in]	øi 0,32-0,33	øi 0,25-0,26	øi 0,25-0,26
Material		copper	copper	copper
Horizontal angle	±2°	0°	0°	0°
Vertical angle	±2°	15°	21°	155°
Position l/h/w	[mm]	132/69/57	94/102/81	-109/94/72
	[in]	5,2/2,7/2,2	3,7/4/3,2	-4,3/3,7/2,8
Straight tube l.	[mm]	12	12	12
	[in]	0,5	0,5	0,5

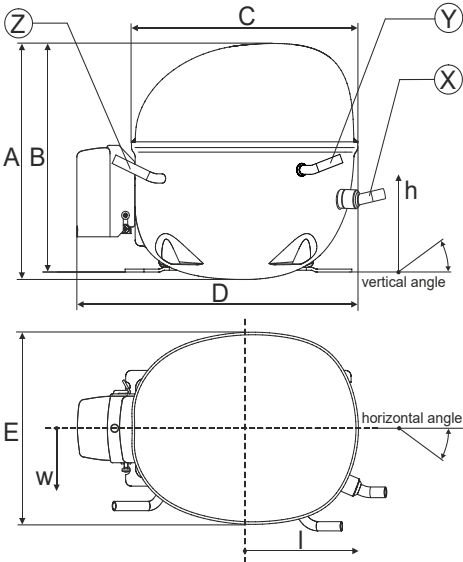


Compressor fixation

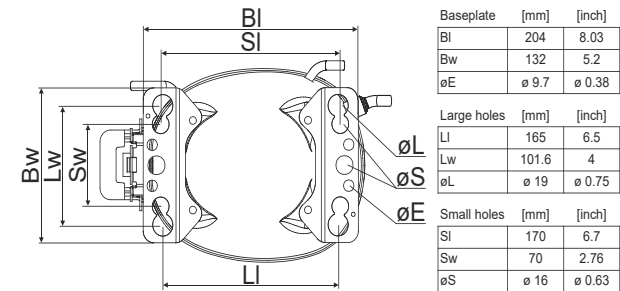

Bolt joint



Snap-on



Mounting accessories	one comp.	multi pack
Bolt joint M6 ø16mm	118-1917	118-1918
Bolt joint ø1/4" ø16mm	118-1946	
Bolt joint ø1/4" ø19mm	118-1949	
Snap-on ø7,3 ø16mm	118-1947	118-1919

Application notes

LRA value on compressor label and datasheet may differ due to different test conditions for UL approval.

Provision for PE Grounding is located at the PE Stamp on the compressor

Model				
Designation	NLE11MN	115V/60Hz	Conf. 1	Sales code: 105H5980

Configuration		Electrical accessories / wiring diagram		
Motorconfiguration	CSIR	CSIR		
Power supply (nominal)	115V/60Hz 1~			
Refrigerant	R290			
Application	MBP			
Voltage range	95-127V			
Starting torque	HST			
Approvals	UL			
	CCC	SA3693		


Ambient/ machine room temperatures minimum /maximum

Ambient temperature range: 10 - 43°C / 50 - 110°F

Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: fan 3m/s

Operation pressure range

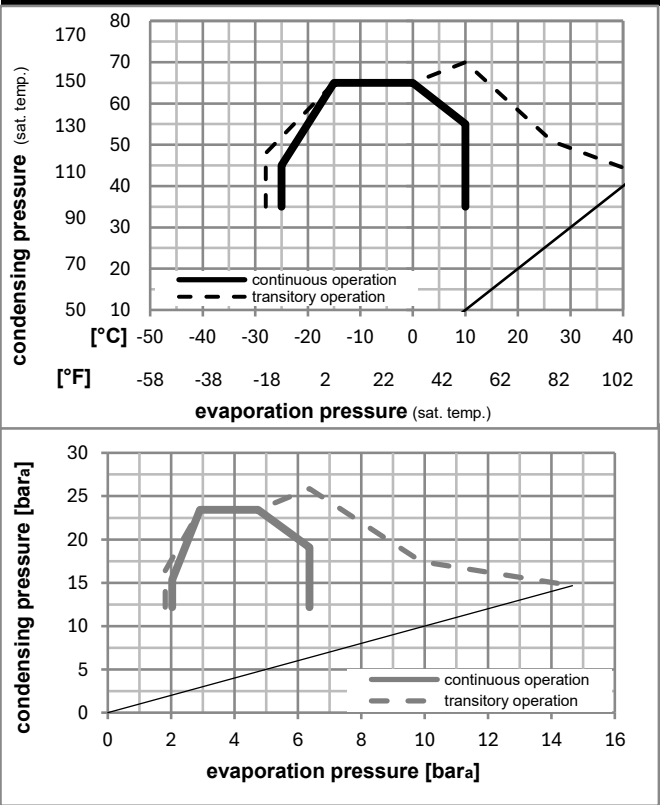

Components		
a2	relay	117U7020
c	start capacitor (240µF, 6,3mm)	117U5073
b	plastic cover	103N2011
d	cord relief	103N1010

Alternative components		
a2	relay	117U7020
c	start capacitor (240µF, 15kOhm)	117U5034
b	plastic cover	103N2011
d	cord relief	103N1010

Model											
Designation	NLE11MN			115V/60Hz			Conf. 1		Sales code:		105H5980

Optimization + standard conditions

R290, 115V/60Hz, CSIR, fan 3m/s, UL, CCC


Evaporating pressure (saturation temperature) Condensing pressure (saturation temperature) Return gas temp. Liquid temp. Cooling capacity COP EER Power consumption Current consumption Ref. mass flow														
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	P1	I	m		
[°C]	[°C]									[W]	[A]	[kg/h]		
[°F]	[°F]													
-7	54	35	46	1202,7	4107	1035,1	2,04	6,97	1,76	589,1	7,15	13,72	ASHRAE MBP	
20	130	95	115											
-10	55	32	55	959,7	3278	825,9	1,71	5,83	1,47	561,8	6,96	12,14	cecomaf MBP	
14	131	90	131											
-10	45	20	45	1058,4	3615	910,9	2,04	6,96	1,75	519,1	6,77	12,99	EN12900 MBP	
14	113	68	113											
-7	49	18	49	1124,6	3841	967,8	2,00	6,83	1,72	562,1	7,01	14,60	ARI540 MBP	
20	120	65	120											
-10	45	32	45	1101,8	3763	948,2	2,12	7,25	1,83	519,1	6,77	12,61	opt	
14	113	90	113											
-25	45	32	45	594,0	2029	511,2	1,45	4,94	1,24	410,8	6,09	6,70	opt	
-13	113	90	113											

Performance tables

R290, 115V/60Hz, CSIR, fan 3m/s, UL, CCC

	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-25	-13	594,0	2029	511,2	1,45	4,94	1,24	410,8	6,09	6,70
cond. pressure	-23	-10	642,1	2193	552,6	1,52	5,18	1,31	422,9	6,17	7,25
pc= 45/113	-15	5	912,1	3115	784,9	1,89	6,44	1,62	483,7	6,54	10,38
return gas temp.	-9	15	1124,4	3840	967,7	2,15	7,34	1,85	523,0	6,79	12,87
RGT= 32/90	0	32	1558,6	5323	1341,3	2,67	9,11	2,29	584,5	7,21	18,08
liquid temp	4,4	40	1799,8	6147	1548,9	2,95	10,08	2,54	609,9	7,38	21,03
Tliq= 45/113	10	50	2139,1	7305	1840,9	3,36	11,46	2,89	637,3	7,58	25,28
[°C / °F]	-25	-13	498,1	1701	428,7	1,18	4,03	1,01	422,5	6,09	6,20
cond. pressure	-23	-10	542,7	1853	467,1	1,24	4,23	1,07	438,1	6,18	6,77
pc= 55/131	-15	5	789,0	2695	679,0	1,53	5,22	1,32	515,9	6,66	9,92
return gas temp	-9	15	979,9	3347	843,3	1,73	5,90	1,49	566,8	7,00	12,40
RGT= 32/90	0	32	1367,3	4670	1176,7	2,11	7,20	1,82	648,2	7,57	17,56
liquid temp	4,4	40	1582,1	5403	1361,5	2,32	7,91	1,99	683,0	7,83	20,49
Tliq= 55/131	10	50	1884,1	6435	1621,5	2,61	8,91	2,24	722,4	8,13	24,70


Model				
Designation	NLE11MN	115V/60Hz	Conf. 2	Sales code: 105H5980

Configuration		Electrical accessories / wiring diagram	
Motorconfiguration	CSIR		
Power supply (nominal)	115V/60Hz 1~		
Refrigerant	R290		
Application	MBP		
Voltage range	95-135V		
Starting torque	HST		
Approvals	UL	SA3693	
	CCC		

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

Operation pressure range

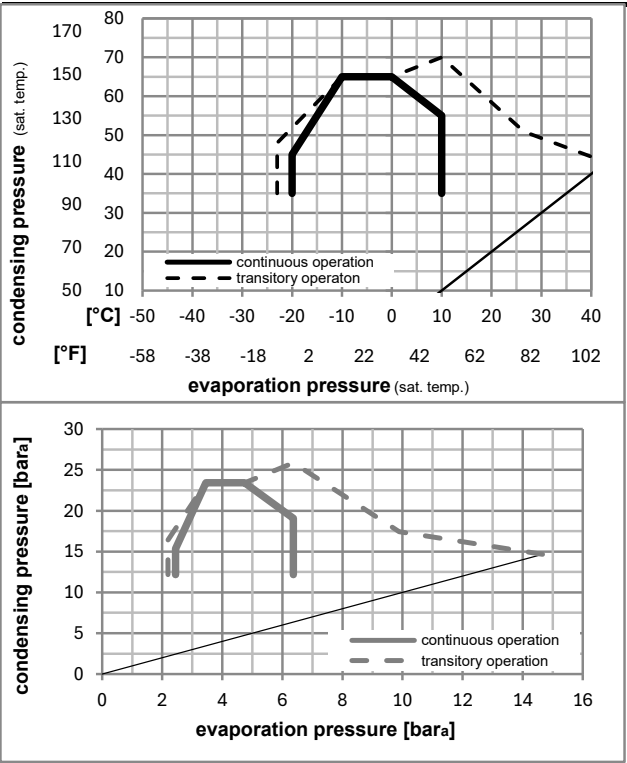

Components		
a2	relay	117U7020
c	start capacitor (240μF, 6,3mm)	117U5073
b	plastic cover	103N2011
d	cord relief	103N1010

Alternative components		
a2	relay	117U7020
c	start capacitor (240μF, 15kOhm)	117U5034
b	plastic cover	103N2011
d	cord relief	103N1010

Model										
Designation	NLE11MN		115V/60Hz		Conf. 2		Sales code:		105H5980	

Optimization + standard conditions

R290, 115V/60Hz, CSIR, fan 3m/s, UL, CCC

Evaporating pressure (saturation temperature)														
Condensing pressure (saturation temperature)														
Return gas temp.														
Liquid temp.														
Cooling capacity														
COP														
EER														
Power consumption														
Current consumption														
Ref. mass flow														
pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	P1	I	m		
[°C]										[W]	[A]	[kg/h]		
-7	54	35	46	1202,7	4107	1035,1	2,04	6,97	1,76	589,1	7,15	13,72	ASHRAE MBP	
20	130	95	115											
-10	55	32	55	959,7	3278	825,9	1,71	5,83	1,47	561,8	6,96	12,14	cecomaf MBP	
14	131	90	131											
-10	45	20	45	1058,4	3615	910,9	2,04	6,96	1,75	519,1	6,77	12,99	EN12900 MBP	
14	113	68	113											
-7	49	18	49	1124,6	3841	967,8	2,00	6,83	1,72	562,1	7,01	14,60	ARI540 MBP	
20	120	65	120											
-10	45	32	45	1101,8	3763	948,2	2,12	7,25	1,83	519,1	6,77	12,61	opt	
14	113	90	113											
-25	45	32	45	594,0	2029	511,2	1,45	4,94	1,24	410,8	6,09	6,70	opt	
-13	113	90	113											

Model				
Designation	NLE11MN	115V/60Hz	Conf. 3	Sales code: 105H5980

Configuration		Electrical accessories / wiring diagram		
Motorconfiguration	RSCR	RSCR		
Power supply (nominal)	115V/60Hz 1~			
Refrigerant	R290			
Application	MBP			
Voltage range	95-127V			
Starting torque	LST			
Approvals	UL	SA3693		
	CCC			


Ambient/ machine room temperatures minimum /maximum

Ambient temperature range: 10 - 43°C / 50 - 110°F

Machine room temperature range: 10 - 48°C / 50 - 119°F

Compressor cooling: fan 3m/s

Operation pressure range

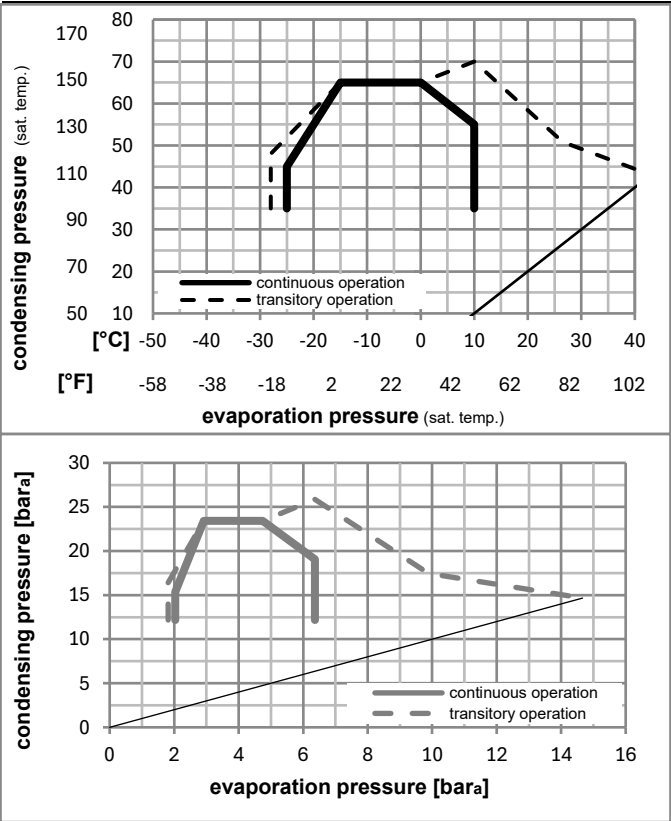

Components

a1	e-PTC starter	103N0058
e	run capacitor (23,5μF, 6.3mm)	117-7114
b	plastic cover	103N2011
d	cord relief bracket for run capacitor	103N1010
	screw M4x8mm	117-0301

Model											
Designation	NLE11MN			115V/60Hz			Conf. 3		Sales code:		105H5980

Optimization + standard conditions

R290, 115V/60Hz, RSCR, fan 3m/s, UL, CCC

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
					Return gas temp.						Current consumption			
					Liquid temp.						Ref. mass flow			
					Cooling capacity			COP	EER	P1			I	ṁ
	pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]	
[°C]	-7	54	35	46										
[°F]	20	130	95	115	1221,4	4171	1051,2	2,20	7,51	1,89	555,5	6,74	13,93	ASHRAE MBP
[°C]	-10	55	32	55										
[°F]	14	131	90	131	975,1	3330	839,2	1,84	6,29	1,58	529,7	6,56	12,33	cecomaf MBP
[°C]	-10	45	20	45										
[°F]	14	113	68	113	1067,3	3645	918,5	2,18	7,45	1,88	489,5	6,38	13,10	EN12900 MBP
[°C]	-7	49	18	49										
[°F]	20	120	65	120	1138,5	3888	979,8	2,15	7,34	1,85	530,0	6,61	14,78	ARI540 MBP
[°C]	-10	45	32	45										
[°F]	14	113	90	113	1111,1	3795	956,3	2,27	7,75	1,95	489,5	6,38	12,71	opt
[°C]	-25	45	32	45										
[°F]	-13	113	90	113	598,4	2044	515,0	1,54	5,28	1,33	387,4	5,75	6,75	opt

Performance tables

R290, 115V/60Hz, RSCR, fan 3m/s, UL, CCC


	pe		Cooling capacity			COP	EER		P1	I	m
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]
[°C / °F]	-25	-13	598,4	2044	515,0	1,54	5,28	1,33	387,4	5,75	6,75
cond. pressure	-23	-10	647,1	2210	556,9	1,62	5,54	1,40	398,8	5,81	7,31
pc= 45/113	-15	5	919,7	3141	791,5	2,02	6,89	1,74	456,0	6,17	10,46
return gas temp.	-9	15	1133,9	3872	975,8	2,30	7,85	1,98	493,1	6,40	12,98
RGT= 32/90	0	32	1572,1	5369	1353,0	2,85	9,74	2,45	551,1	6,79	18,23
liquid temp	4,4	40	1815,8	6201	1562,7	3,16	10,78	2,72	575,1	6,96	21,22
Tliq= 45/113	10	50	2158,8	7373	1857,9	3,59	12,27	3,09	601,0	7,14	25,51
[°C / °F]	-25	-13	508,1	1735	437,3	1,28	4,36	1,10	398,4	5,75	6,33
cond. pressure	-23	-10	553,3	1889	476,1	1,34	4,57	1,15	413,0	5,83	6,90
pc= 55/131	-15	5	802,5	2741	690,7	1,65	5,63	1,42	486,5	6,28	10,09
return gas temp	-9	15	995,5	3400	856,8	1,86	6,36	1,60	534,5	6,60	12,60
RGT= 32/90	0	32	1387,3	4738	1193,9	2,27	7,75	1,95	611,2	7,13	17,82
liquid temp	4,4	40	1604,7	5480	1381,0	2,49	8,51	2,14	644,0	7,38	20,78
Tliq= 55/131	10	50	1910,7	6525	1644,3	2,81	9,58	2,41	681,1	7,67	25,05

Model				
Designation	NLE11MN	115V/60Hz	Conf. 4	Sales code: 105H5980


Configuration		Electrical accessories / wiring diagram		
Motorconfiguration	RSCR	RSCR		
Power supply (nominal)	115V/60Hz 1~			
Refrigerant	R290			
Application	MBP			
Voltage range	95-135V			
Starting torque	LST			
Approvals	UL	SA3693		
	CCC			

Ambient/ machine room temperatures minimum /maximum

Ambient temperature range:	10 - 43°C / 50 - 110°F
Machine room temperature range:	10 - 48°C / 50 - 119°F
Compressor cooling:	fan 3m/s

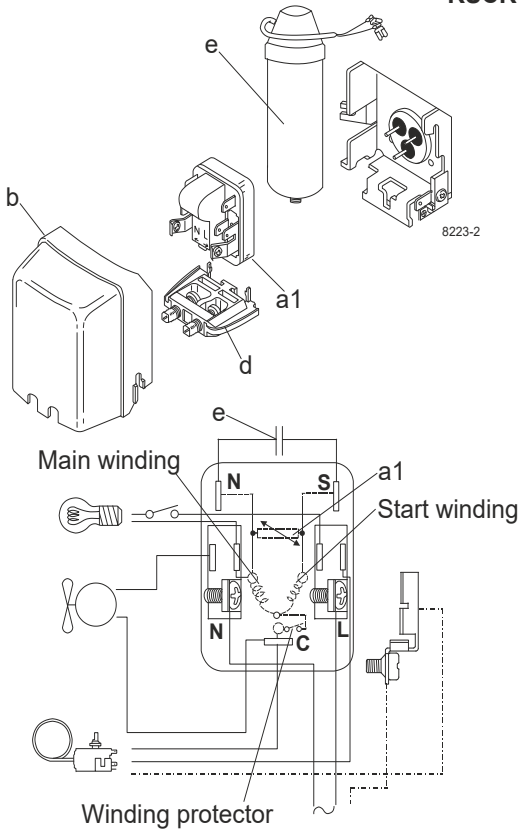

Operation pressure range

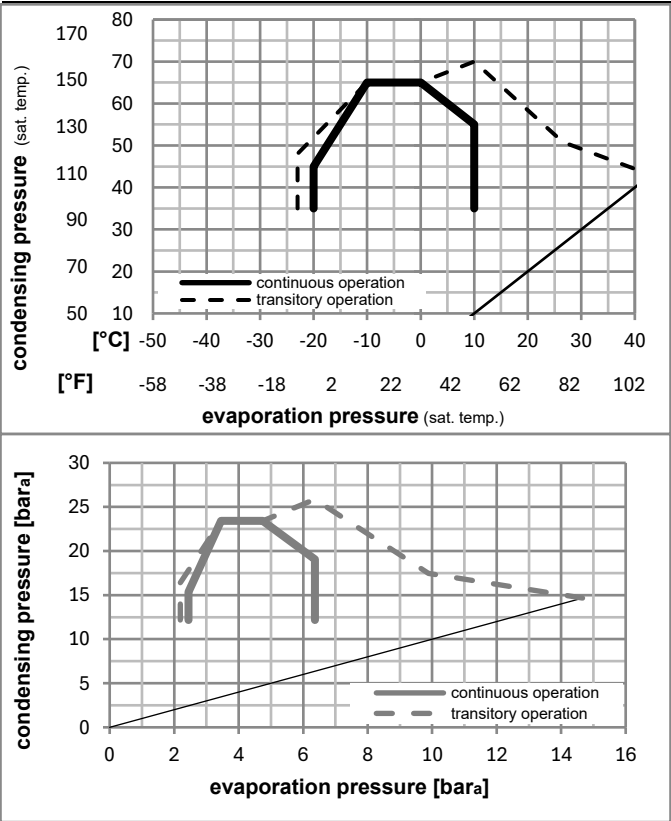

Components		
a1	e-PTC starter	103N0058
e	run capacitor (23,5μF, 6.3mm)	117-7114
b	plastic cover	103N2011
d	cord relief bracket for run capacitor	103N1010
	screw M4x8mm	117-0300
		117-0301

Model											
Designation	NLE11MN			115V/60Hz			Conf. 4		Sales code:		105H5980

Optimization + standard conditions


R290, 115V/60Hz, RSCR, fan 3m/s, UL, CCC

Evaporating pressure (saturation temperature)					Condensing pressure (saturation temperature)						Power consumption			
					Return gas temp.						Current consumption			
					Liquid temp.						Ref. mass flow			
					Cooling capacity			COP	EER	P1			I	ṁ
	pe	pc	RGT	Tliq	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]	[W]	[A]	[kg/h]	
[°C]	-7	54	35	46										
[°F]	20	130	95	115	1221,4	4171	1051,2	2,20	7,51	1,89	555,5	6,74	13,93	ASHRAE MBP
[°C]	-10	55	32	55										
[°F]	14	131	90	131	975,1	3330	839,2	1,84	6,29	1,58	529,7	6,56	12,33	cecomaf MBP
[°C]	-10	45	20	45										
[°F]	14	113	68	113	1067,3	3645	918,5	2,18	7,45	1,88	489,5	6,38	13,10	EN12900 MBP
[°C]	-7	49	18	49										
[°F]	20	120	65	120	1138,5	3888	979,8	2,15	7,34	1,85	530,0	6,61	14,78	ARI540 MBP
[°C]	-10	45	32	45										
[°F]	14	113	90	113	1111,1	3795	956,3	2,27	7,75	1,95	489,5	6,38	12,71	opt
[°C]	-25	45	32	45										
[°F]	-13	113	90	113	598,4	2044	515,0	1,54	5,28	1,33	387,4	5,75	6,75	opt

Performance tables




R290, 115V/60Hz, RSCR, fan 3m/s, UL, CCC


	pe		Cooling capacity			COP		EER		P1		I		m	
	[°C]	[°F]	[W]	[Btu/h]	[kcal/h]	[W/W]	[Btu/Wh]	[kcal/Wh]		[W]		[A]		[kg/h]	
[°C / °F]	-20	-4	749,9	2561	645,3	1,78	6,07	1,53		421,8		5,95		8,49	
cond. pressure	-15	5	919,7	3141	791,5	2,02	6,89	1,74		456,0		6,17		10,46	
pc= 45/113	-9	15	1133,9	3872	975,8	2,30	7,85	1,98		493,1		6,40		12,98	
return gas temp.	-7	20	1252,4	4277	1077,8	2,45	8,37	2,11		511,0		6,52		14,39	
RGT= 32/90	0	32	1572,1	5369	1353,0	2,85	9,74	2,45		551,1		6,79		18,23	
liquid temp	4,4	40	1815,8	6201	1562,7	3,16	10,78	2,72		575,1		6,96		21,22	
Tliq= 45/113	10	50	2158,8	7373	1857,9	3,59	12,27	3,09		601,0		7,14		25,51	
[°C / °F]	-20	-4	647,9	2213	557,6	1,46	5,00	1,26		442,5		6,01		8,10	
cond. pressure	-15	5	802,5	2741	690,7	1,65	5,63	1,42		486,5		6,28		10,09	
pc= 55/131	-9	15	995,5	3400	856,8	1,86	6,36	1,60		534,5		6,60		12,60	
return gas temp	-7	20	1101,8	3763	948,2	1,98	6,75	1,70		557,8		6,76		14,00	
RGT= 32/90	0	32	1387,3	4738	1193,9	2,27	7,75	1,95		611,2		7,13		17,82	
liquid temp	4,4	40	1604,7	5480	1381,0	2,49	8,51	2,14		644,0		7,38		20,78	
Tliq= 55/131	10	50	1910,7	6525	1644,3	2,81	9,58	2,41		681,1		7,67		25,05	

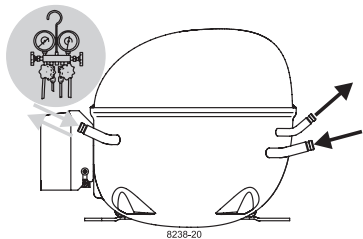

NL Compressors

SECOP

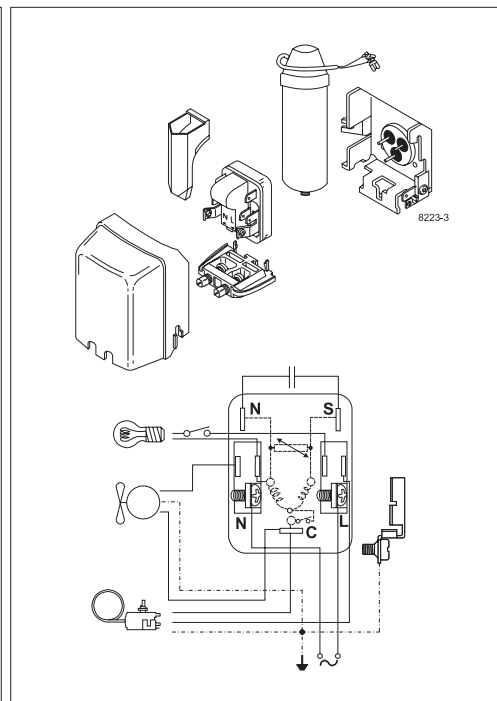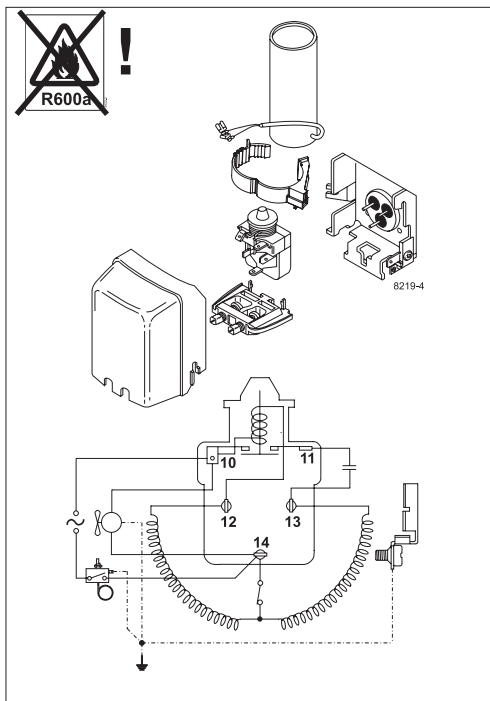
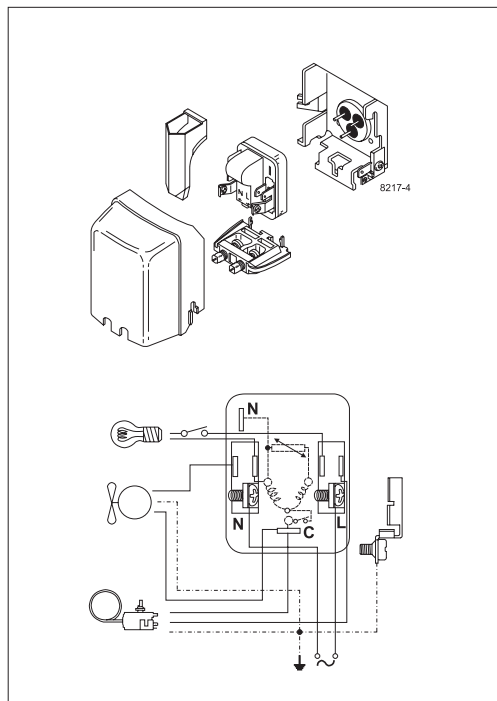


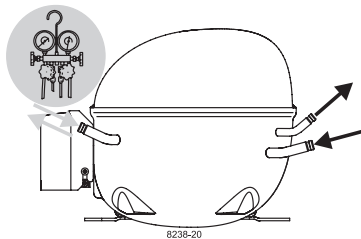


NL Compressors

SECOP

Service/Repair – R600a, R290

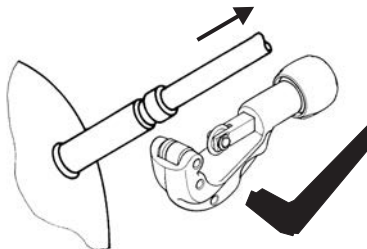

Brazing on Suction Connectors (Direct Intake)

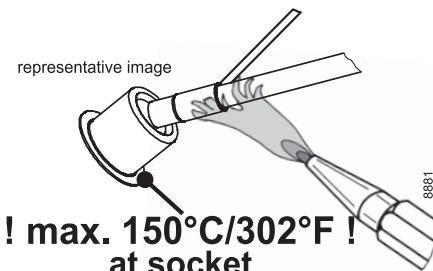

**! max. 150°C/302°F !
at socket**
brazing solder: phosphor (LP7) or silver

Refer to Product Bulletin:
**Brazing on Suction Connectors
(Compressors with Direct Suction Intake)**

Secop accepts no responsibility for possible errors in catalogs, brochures, and other printed material. Secop reserves the right to alter its products without notice. This also applies to products already on order provided that such alterations can be made without subsequent changes being necessary to specifications already agreed. All trademarks in this material are the property of the respective companies. Secop and the Secop logotype are trademarks of Secop GmbH. All rights reserved. www.secop.com