


ANALOG VOLTAGE GAUGE

IMPORTANT: This document guides our dealers, boatbuilders, and company service personnel in the proper installation or service of our products. If you have not been trained in the recommended servicing or installation procedures for these or similar Mercury Marine products, have the work performed by an authorized Mercury Marine dealer technician. Improper installation or servicing of the Mercury product could result in damage to the product or personal injury to those installing or operating the product. Always refer to the appropriate Mercury Marine service manual for component removal and installation instructions.

NOTE: After completing installation, place these instructions with the product for the owner's future use.

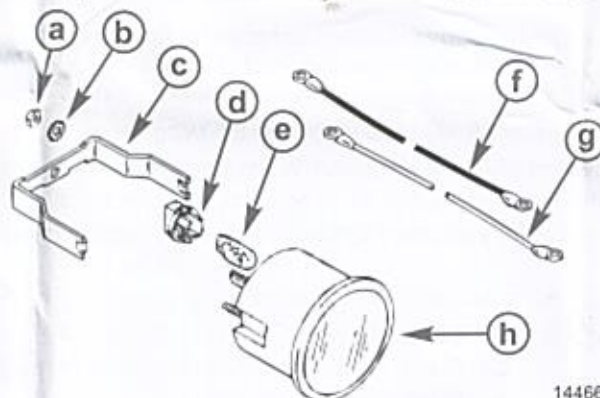

Ref.	Qty.	Description	Part Number
a	4	Hex nut	11-26419
b	4	Lockwasher	NSS
c	1	Retaining Bracket	NSS
d	1	Socket	88-898139
e	1	Bulb	88-898139001
f	1	Cable assembly - Black	NSS
g	1	Cable assembly - Purple	NSS
h	1	Voltage gauge	NSS

Preparation for Installation

⚠ WARNING

Performing service or maintenance without first disconnecting the battery can cause product damage, personal injury, or death due to fire, explosion, electrical shock, or unexpected engine starting. Always disconnect the battery cables from the battery before maintaining, servicing, installing, or removing engine or drive components.

1. Disconnect battery cables.

NOTE: The bezel of this gauge has an outside diameter of 62 mm (2-7/16 in.). Choose a gauge location that will ensure clearance between other gauges and instrumentation.

2. Select a location for the gauge that allows for good visibility and accessibility from behind the dashboard. Ensure that the harness will reach the gauge.

⚠ CAUTION

Avoid injury or product damage. Obstructions, such as braces and wiring, may be unseen when looking at the front of the dashboard. Before drilling or cutting any holes in the dashboard, check the area behind the dashboard for obstructions. Do not drill or cut when obstructions are present.

3. Before drilling or cutting, ensure there are no obstructions in the area behind the dashboard.
4. **If the dashboard is fiberglass**, apply masking tape to the area that is to be drilled or cut to help prevent the dashboard from cracking.
5. **If the dashboard is vinyl covered**, remove the vinyl with a razor blade from the area to be drilled or cut, to keep the vinyl from tearing.
6. Cut or drill a 54 mm (2-1/8 in.) hole through the dashboard.

Wire Connections

IMPORTANT: Position the wires on the back of all gauges so they will not rub or contact the retaining (mounting) bracket when it is installed.


Before placing the gauge in the dashboard, connect the wires to the appropriate terminals using lockwashers and hex nuts. Ensure all connections are secure. Apply sealant to the terminals.

Description	Where Used	Part No.
Liquid Neoprene	Terminals	92- 25711 3

NOTE: When installing the gauge into the dashboard, if the dashboard is too thin for the retaining bracket to hold the gauge securely, connect the ground wire to the back of the retaining bracket using the ground terminal stud, lockwasher, and hex nut. Tighten the nut securely.

1. If lighting is desired, use lamp terminal wired in one of the two following ways:

- If instrument lighting is desired when the key switch is on, connect a jumper wire from the ignition terminal (purple wire) to the lamp terminal.
- If using a separate light switch for instrument lighting, connect the lamp terminal to a 12-volt positive (+) switched source.

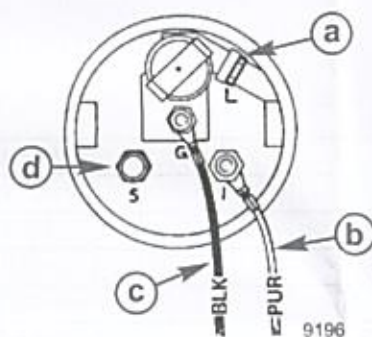

- a - Lamp terminal
- b - Purple - Connect to 12-volt positive (+) switched source
- c - Black - Ground
- d - Sender terminal - no connection


Installing the Gauge

IMPORTANT: Position the wires on the back of all gauges so that they will not rub or contact the retaining (mounting) bracket when it is installed.

1. Place the gauge into the dashboard.

NOTE: On installations where the dashboard is too thick, the legs of the retaining bracket may have to be shortened to install.

- Install the retaining bracket.
- Install the lockwashers and hex nuts and tighten securely.

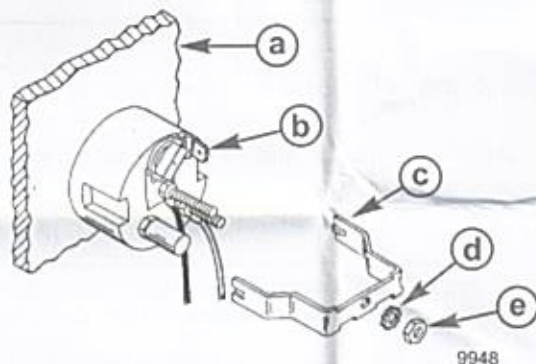

- a - Dashboard
- b - Battery gauge
- c - Retaining bracket
- d - Lockwasher
- e - Hex nut

Gauge Maintenance

Maintenance inspection is the owner's responsibility and must be performed at intervals as specified.

Normal Service - Every 50 hours of operation or 60 days (whichever comes first).

Severe Service - Every 25 hours of operation or 30 days (whichever comes first).

NOTE: Saltwater area operation is considered severe service.


1. Check the gauge for adequate tightness in the dashboard and retighten the retaining nut if necessary.
2. Check the electrical connections. Tighten and apply sealant to the terminals, if needed.

Description	Where Used	Part No.
Liquid Neoprene	Gauge terminal connections	92- 25711 3

3. Clean the gauge by washing with fresh water to remove sand and salt deposits. Wipe off with a soft cloth moistened with water. The gauge may be scored or damaged if wiped with abrasive material (sand, saline, or detergent compounds) or washed with solvents such as trichlorethylene, turpentine, or similar solvents.

Voltage Gauge Operation

NOTE: Readings of 16 or more volts on unregulated systems are possible with fully charged battery at full throttle.

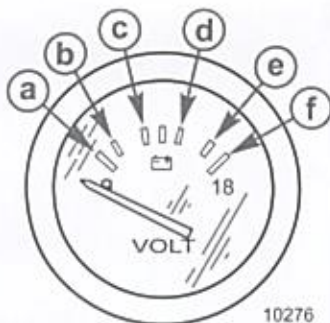

- a - Very low battery charge (0-8 volts)
- b - Low battery charge (8-12 volts)
- c - Well charged battery
- d - Low charge rate
- e - Charging system and voltage regulator OK
- f - Check charging system and/or battery