

100SB11


Allen-Bradley 100C Auxiliary Contact with 1NO Contact and 1NC Contact Side Mount



CONTACTORS



Allen-Bradley

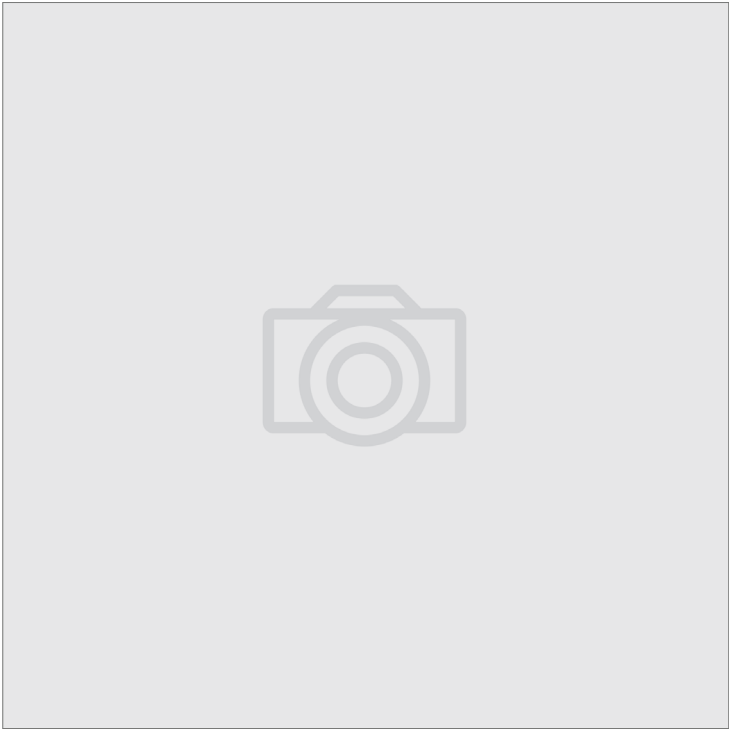

Component type	Auxiliary contact block
Range	100C
Model	N/A
Product status	Existing

The Allen-Bradley 100-C contactor line offers compact, high-performance design in 9 to 97 A contactors. These energy efficient contactors are designed to control motors and other loads. Straightforward wiring and installation process ensure quick and easy setup, reducing downtime and increasing productivity.

ELECTRICAL

Number of contacts as normally open contact	1
Number of contacts as normally closed contact	1
Rated insulation voltage U_i	690 V
Rated operation current I_e at AC-15, 24 V	6 A
Rated operation current I_e at AC-15, 120 V	6 A
Rated operation current I_e at AC-15, 240 V	5 A
Rated operation current I_e at AC-15, 400 V	3 A
Rated operation current I_e at DC-12, 24 V	6 A
Rated operation current I_e at DC-12, 110 V	1 A
Rated operation current I_e at DC-12, 220 V	0.5 A
Rated operation current I_e at DC-13, 24 V	5 A
Rated operation current I_e at DC-13, 110 V	0.68 A
Rated operation current I_e at DC-13, 220 V	0.32 A
Min. contact rating current	10 mA
Min. contact rating voltage	17 V
Rated operation current I_e at AC-15, 230 V	5.5 A

CONSTRUCTION

Mounting method	Side mounting
-----------------	---------------