



LED CCT Asymmetric Wallpack

- Asymmetric light distribution to reduce light spill
- CCT 3/4/6000K
- Genuine replacement for 50W Metal Halide & Sodium
- TUV Certified Driver
- High impact polycarbonate lens
- 50% energy saving
- 50000 hours

Options

- Standard
- Photocell
- Emergency
- Emergency Photocell



25W $\Rightarrow$ **50W** Energy Saving **50%**

Quality Assured
Product Warranty¹
7 Year

On site
Warranty¹
2 Year

Colour Rendering
Index¹
80


Lumens
Maintenance Ratio¹
L80 B10

Water & Dust
Protected
IP66

Impact
Rating
IK8

Operating
Hours
50,000

Technical Specification	
Construction	Aluminium Base Polycarbonate Lens
Driver	BELL
LED Chip	Samsung
Input Voltage	240V
Power Factor	> 0.9
Operating Temp	-30°C to +35°C / Emergency version min temp 0°C
Standard	CE & UKCA

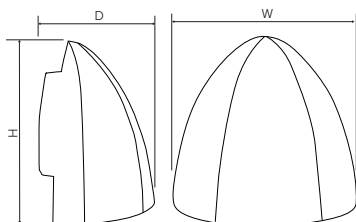

technical@belllighting.co.uk
sales@belllighting.co.uk



7 Year Gold Warranty

Code	W	Description	Lm	Temp	Lm/W	Weight	WxHxD (mm)
11500	25	Asymmetric Wallpack	2875-3250	3/4/6000K	115	1.9Kg	212x238x138
11501	25	Asymmetric Wallpack Emergency		3/4/6000K	115		
11502	25	Asymmetric Wallpack Photocell		3/4/6000K	115		
11503	25	Asymmetric Wallpack Emergency Photocell		3/4/6000K	115		