

Tesla Model Y

Tesla Half Surround Seat Cover

Installation Guide and
After-Sales Service

Installation Video



Installation Guide Video

Scan the QR code on the left to watch the Tesla-specific car seat cover installation guide video.

Contact Information



Service Hotline: +86 15989119397, +86 15361429403

Email: Ruiyue1022@outlook.com

Customer Service WhatsApp: Scan the QR code on the left to add our customer service on WhatsApp.

PRODUCT SPECIFICATION

Product Name	Tesla Model Y Custom Car Seat Covers
Material	Made of high-quality Napa leather, providing exceptional comfort, softness, and durability, with an outstanding tactile experience.
Compatibility	Designed specifically for Tesla Model Y.
Included Components	Five headrest covers, five backrest covers, three seat surface covers, and two armrest box covers. Total of 15 individual pieces.
Function	Offers comprehensive seat protection, preventing stains, scratches, and wear.
Special Design	Our seat covers are designed with ventilation openings to enhance airflow and breathability, ensuring a comfortable riding experience while preserving the original seat heating function.

USER GUIDE

Installation: Please follow the provided installation guide or scan the QR code on the instruction manual cover to watch the installation video for detailed step-by-step instructions. If you encounter any issues during the installation process, please contact our customer service department for assistance.

Component Inspection: Upon receiving the package, carefully inspect all components as smaller parts might be placed within larger ones. If any parts are missing, contact us, and we will assist in resolving the issue.

Front Seat Backrest Airbags: Both the driver and passenger front seat backrest airbags are located on the side near the door. Before installing, ensure proper identification and alignment of the front seat backrest covers. During installation, ensure that the airbag openings on the seat covers are aligned with the airbags to facilitate proper airbag deployment in emergencies.

AFTER-SALES SERVICE

WRINKLE TREATMENT:

Due to transportation and packaging, the seat covers may have wrinkles. These creases are unavoidable but will gradually disappear after installation and usage.

CLEANING AND MAINTENANCE:

Our seat covers are made from high-quality Napa leather. We recommend regularly wiping them with a soft, damp cloth to keep them clean. For stubborn stains, use regular toothpaste or automotive cleaner, followed by a damp cloth wipe.

AFTER-SALES SERVICE:

For any questions or concerns during use, please contact us. We are committed to providing prompt and satisfactory solutions.

Our product comes with a one-year warranty, covering manufacturing defects and material issues. Unauthorized disassembly or modification of the product will void the warranty.

RETURN AND EXCHANGE POLICY:

Within 7 days of purchase, you can apply for a return if you are not satisfied with the product. The product must be in its original condition and unused, and return shipping will be borne by the customer.

If you receive a product with quality issues, please contact us within 15 days of purchase, and we will provide free exchange service.


DISCLAIMER:

This product is specifically designed for Tesla Model Y, and compatibility or performance with other car models may vary.

When using this product, please follow Tesla's instructions and safety guidelines. Improper use may result in safety hazards or damage, and we assume no responsibility.

If you are pleased with our comfortable and high-quality product, we would greatly appreciate your positive feedback on our product page. Your honest feedback not only helps us grow as a seller but also aids potential customers in making informed decisions. We take pride in our product and believe that your positive experience will encourage others to trust us.

Tesla Model Y Seat Cover Components Display

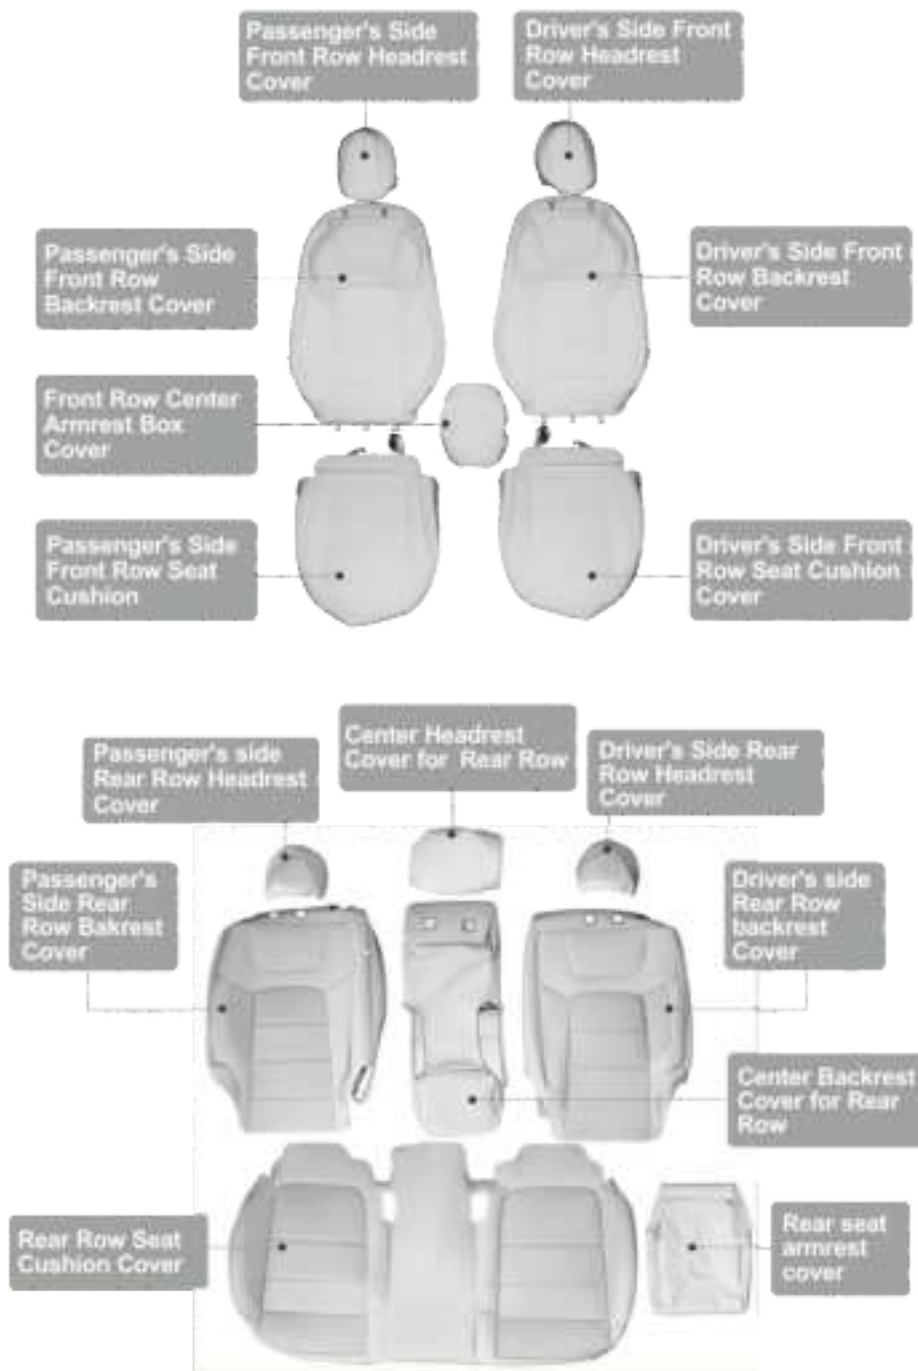

INSTALLATION GUIDE

1-01 Model Y Installation Instructions for Front Backrest



The velcro on the backrest cover is first opened and then snapped straight in from the top to the bottom. It is not necessary to take the headrest out.

1-02 Model Y Installation Instructions for Front Backrest



The extra leather at the opening where the backrest cover attaches to the headrest is pushed into the gap between the headrest and the backrest. Note that the front and back of the headrest are pushed into the gap between the headrest and the backrest.

1-03 Model Y Installation Instructions for Front Backrest



The rubber band on the chuck attached to the backrest cover needs to be wound a few more times and shortened to the right length to allow the backrest cover to fit more closely to the original seat.

1-04 Model Y Installation Instructions for Front Backrest



The chuck is pushed flat into the gap between the seat and backrest and is then equared at 90 degrees and clamped tightly into the gap until it does not come loose.

1-05 Model Y Installation Instructions for Front Backrest



Once the chuck has been jammed 90 degrees vertically into the gap, its very strong and will not come loose. If it needs to be dismantled, the chuck simply needs to be pushed flat and it will come loose.

1-06 Model Y Installation Instructions for Front Backrest



At the backrest, it is necessary to snap the extra leather into the seam of the rubber shell.

2-01 Model Y Installation Installations for front seat surface



The book bag strap of the seat cover is pushed into the slit and pulled out through the slit to the back of the seat.

2-02 Model Y Installation Installations for front seat surface



At the back of the seat, the straps pushed over the front are pulled out until the leather is visible. The leather is then pulled with a bit of force and tugged into place.

2-03 Model Y Installation Installations for front seat surface



At the front of the seat, there are two iron hooks on each side of the seat cover. The hooks with rubber bands are pushed into the seam of the seat and are pulled out later on to the back of the seat (some products may not have this hook due to production batches).

2-04 Model Y Installation Installations for front seat surface



At the front of the seat, there are two iron hooks on each side of the seat cover. The hooks with rubber bands are pushed into the seam of the seat and pulled out a little later to the back of the seat (some products may not have this hook due to production batches).

2-05 Model Y Installation Installations for front seat surface



The extra leather on the side of the seat cover can be pushed into the seam of the rubber shell with the aid of a small tool.

2-06 Model Y Installation Installations for front seat surface



At the front of the seat, after the straps that were just pulled out have been pulled to the front, the buckles are put on and then tightened.

3-01 Model Y Installation Installations for front headrest



The headrest cover is taken out and fitted directly from the top to the bottom. It is not necessary to remove the headrest.

3-02 Model Y Installation Installations for front headrest



The extra leather under the headrest cover is then locked into the gap between the headrest and the backrest.

4-01 Model Y Installation Instructions For Central Armrest



When fitting the armrest gloves, the armrest box lid must first be opened. The armrests are then fitted from the back first, with the part of the armrest with the rubber band being stuck into the slit at the back. The armrests are then pulled towards the front until they fit over the entire armrest box lid.

4-02 Model Y Installation Instructions For Central Armrest



The rubber bands around the four sides of the armrest cover are adjusted into position until the entire armrest cover is wrapped completely around the cover.

5-01 Model Y Instructions For Rear Seat Disassembly



It is important to note here that when hooking up the hooks, please do not hang them on areas with wires. There are many places under the seat where the hooks can be hung, and they must be hung on iron bars or in iron holes in the tin under the seat.

5-02 Model Y Instructions For Rear Seat Disassembly



When fitting the back seat, pay particular attention to the fact that the seat has a power connection and that the connection has a plug. This plug can be loosened. It is advisable to loosen this plug before installing the seat cover in order to avoid tearing the wires. Of course, it is possible to install the cover without loosening the plug, but care must be taken to avoid tearing the power cable.

6-01 Model Y Disassemble the rear headrests

The Model Y has three headrests in the rear backrest, which must be removed with the help of a tool. When each headrest is lifted up, the underside of the two iron posts can be seen. There is a button on the left and a small hole on the right. A small screwdriver is needed here. The button on the left is pressed by hand and the small hole on the right is poked in with the screwdriver while the button is pressed. The headrest is then pulled upwards by hand and the headrest is removed.

6-02 Model Y Disassemble the rear headrests

Below the two iron posts, there is a button on the left and a very small hole on the right. Here you need to use a small one-way screwdriver. The button on the left is pressed by hand and the small hole on the right is poked in with the screwdriver at the same time as the button is pressed. The headrest is then removed by pulling the headrest upwards by hand again.

7-01 Model Y Installation Instructions For Rear Left Backrest

After the backrest cover has been aligned with the holes and positioned properly, it is slipped in directly from the top to the bottom.

7-02 Model Y Installation Instructions For Rear Left Backrest

The velcro straps under the backrest cover are pulled out and pushed through the slit to the back of the backrest.

7-03 Model Y Installation Instructions For Rear Left Backrest



In the trunk, the padded panel behind the backrest is opened in order to facilitate pulling out the Velcro straps.

7-04 Model Y Installation Instructions For Rear Left Backrest



The backrest cover has two child seat snaps on the underside. Take care that the leather is passed over the top of the child seat snaps and does not cover the snaps.

7-05 Model Y Installation Instructions For Rear Left Backrest



The Velcro straps on the back of the backrest cover are pulled out and positioned before being attached to the backrest.

7-06 Model Y Installation Instructions For Rear Left Backrest



The extra leather of the backrest cover is pushed into the slit with the help of a small tool.

8-01 Model Y Installation Instructions For Rear Left Backrest



Once the holes have been aligned and positioned, it is snapped in directly from the top to the bottom.

8-02 Model Y Installation Instructions For Rear Left Backrest



The armrests of the centre backrest are lowered and then the leather underneath the centre backrest cover, through the slit in the armrests and then pulled out.

8-03 Model Y Installation Instructions For Rear Middle Backrest



The armrests of the centre backrest are retracted and the leather under the front of the centre backrest cover is then pulled out through the slit in the armrests.

8-04 Model Y Installation Instructions For Rear Middle Backrest



The leather underneath the front of the centre backrest cover is passed under the seam of the armrest. Once fully pulled out, the Velcro straps attached under the leather are then pulled through the entire seam of the centre backrest to the back.

8-05 Model Y Installation Instructions For Rear Middle Backrest



Once the centre backrest has been lowered, the Velcro straps that were just pushed into the gap are pulled out in fact until the leather is visible. After the leather has been pulled by hand and adjusted in position, the Velcro straps are dipped tightly.

8-06 Model Y Installation Instructions For Rear Middle Backrest



The armrests are retracted then the excess leather is tucked into the slit with a small tool.

9-01 Model Y Installation Instructions For Rear Middle Backrest



The zip at the back of the backrest cover is opened and the seat belt is pulled up through the backrest cover and adjusted to fit into the backrest from top to bottom.

9-02 Model Y Installation Instructions For Rear Middle Backrest



The Velcro straps under the backrest cover are pushed through the slit under the backrest and into the back of the backrest. Take care that when pushing through, the leather goes over the top of the child seat buckle and that it does not cover the child seat buckle.

9-03 Model Y Installation Instructions For Rear Right Backrest



The Velcro straps that have just passed under the backrest and come to the back are finished and attached to the backrest. When tightening the backrest, try not to apply too much force as this may break the straps. When tightening the backrest, the leather coming through the back is pulled to adjust the fit of the backrest.

9-05 Model Y Installation Instructions For Rear Right Backrest



At the front of the backrest, the extra leather is tucked into the slit with the help of a small tool.

10-02 Model Y Installation Instructions for Rear Armrest



The leather underneath the front of the armrest is tucked into the slit in the armrest.

9-04 Model Y Installation Instructions For Rear Right Backrest



After the backrest cover has been positioned and the holes in the aligned backrest have been adjusted, the zip on the back of the backrest cover is tightened. The backrest cover is then pulled downwards to adjust its position and is tightened against the backrest of the seat.

10-01 Model Y Installation Instructions for Rear Armrest



The armrests are adjusted in position and slipped in from the top to the bottom.

10-03 Model Y Installation Instructions for Rear Armrest



The leather under the front of the armrest, after being tucked into the slit in the armrest, is pulled out. The leather under the front of the armrest is tucked into the slit in the armrest and pulled out. When pulling, use a small amount of force to pull the leather through the gap. Then use a little more force to pull the leather until the armrests are fully in place. Be careful not to pull on the straps with so much force that you may break the straps and not be able to get the leather through the seam.

10-04 Model Y Installation Instructions for Rear Armrest



After the leather has been pulled tight from underneath the seam, the armrests are positioned and the velcro behind the leather is dabbed in place.

11-01 Model Y Installation Instructions for Rear Headrest



The 3 headrests that are removed were first fitted back into place.

11-02 Model Y Installation Instructions for Rear Headrest



The headrest cover is taken out and fitted directly from top to bottom. Take care that the front and back of the headrest cover are distinguished.

11-03 Model Y Installation Instructions for Rear Headrest



Once the position of the headrest cover has been adjusted, the cover is pulled down as tightly as possible and the extra leather is tucked into the slit under the headrest.

12-01 Model Y Installation Instructions For Rear Seat Cover



The seat cover is taken out and laid on the rear seat surface.

12-02 Model Y Installation Instructions For Rear Seat Cover



Note the two iron hooks in the seat belt holes. The hooks need to be threaded through the seat belt holes in the seat to the back of the cushion.

12-03 Model Y Installation Instructions For Rear Seat Cover



The hooks that come through the seat belt holes need to be hung under the seat surface.

12-04 Model Y Installation Instructions For Rear Seat Cover



The hooks that come through the seat belt holes need to be hung under the seat surface.

12-05 Model Y Installation Instructions For Rear Seat Cover



The straps for the back seat need to be threaded. However, care should be taken that it is not pulled too tightly, so that the back seat does not fit back in because the straps are pulled too tightly. Here it can be the same as in the photo. The two recessed positions on the back of the seat are pressed down with your fingers so that they are just deep enough to be pressed into the recessed position, and the tension of the straps is adjusted so that they are not too slack. Because the two recessed positions are for the two bars that hold the back seat in place. If they are pulled too tightly, the back seat will not fit tightly because of the elasticity of the straps.

12-06 Model Y Installation Instructions For Rear Seat Cover



Once the iron hooks under the rear seat face have been hung in the right place under the rear seat, they do not need to be pulled too tightly so that the rear seat is not easily fitted back in.

12-07 Model Y Installation Instructions For Rear Seat Cover



After the elasticity of the straps under the back seat has been adjusted, adjust the fitness of the seat cover. After the back seat has been fitted back in place, the seat cover is installed.