

EC510-ADS/EC511-ADS

12th Gen Intel® Core™
Modular-Designed Embedded System

Q670E



KEY FEATURES



DDR4

DDR4 SODIMM up to 64GB



PoE

Support up to 4 PoE (EC51x-ADS62GA6E-Q)




Three Independent Displays

1 VGA + 2 DP++



Support 5G Communication

Support 5G communication



Multiple Expansion

3 M.2 and 1 PCIe or 1 PCI



Wide-Temperature


Operating Temperature: -20 to 60°C




IoT Solutions
Alliance



PANEL

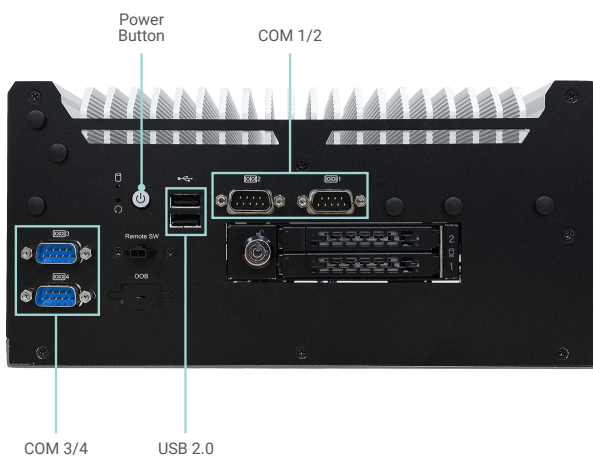


Front View

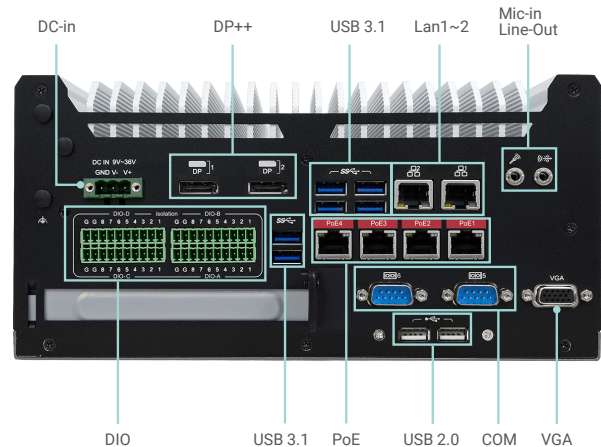


Rear View
EC51x-ADS62GA6E-Q


PANEL

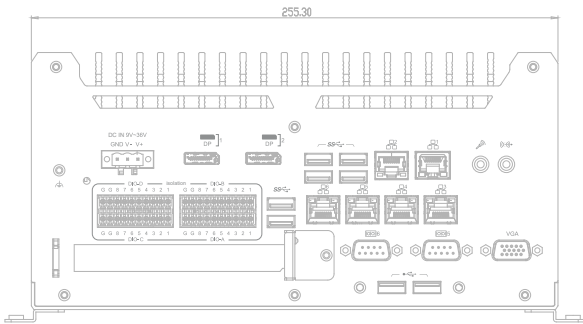


Rear View
EC51x-ADS62GA6-Q

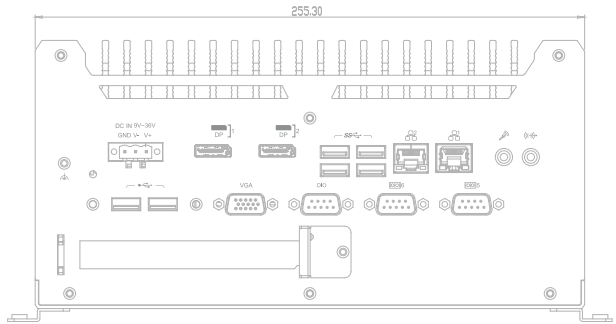

Rear View
EC51x-ADS6881-Q

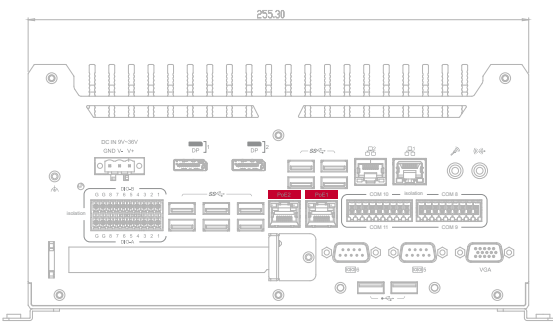


Rear View
EC51x-ADSAGE4E-Q

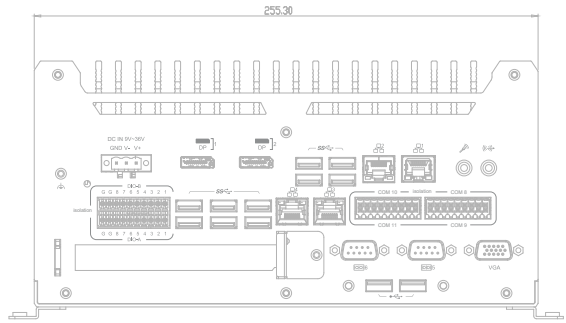


Rear View



DIMENSIONS

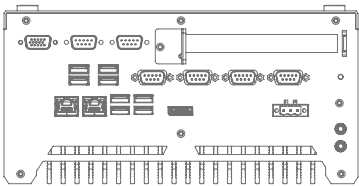


Front View



Left View


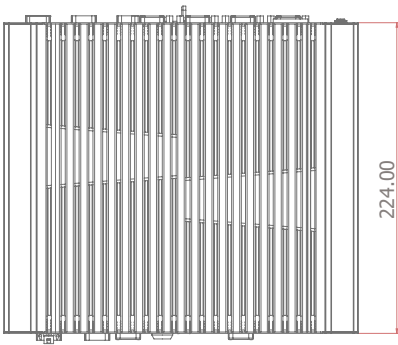


Right View

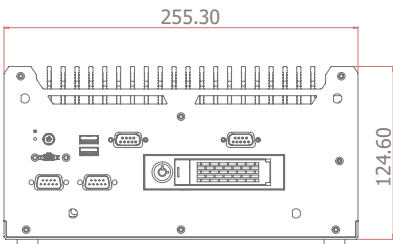

Rear View

WALL MOUNTING

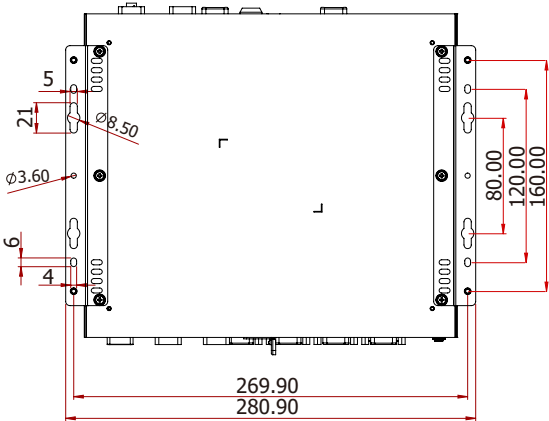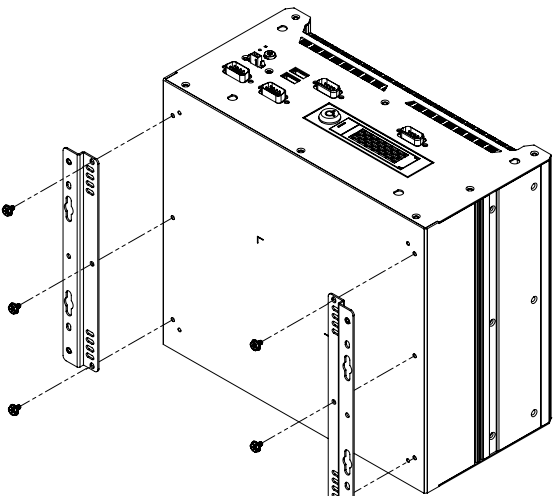

531-510300-000G
A31-028003-102G

SPECIFICATION

SYSTEM	Processor	12th Generation Intel® Core™ Processors, LGA 1700 Intel® Core™ i9-12900TE (16 Cores, 30M Cache, up to 4.8GHz); 35W Intel® Core™ i7-12700TE (12 Cores, 25M Cache, up to 4.6GHz); 35W Intel® Core™ i5-12500TE (6 Cores, 18M Cache, up to 4.3GHz); 35W Intel® Core™ i3-12100TE (4 Cores, 12M Cache, to 4GHz); 35W Intel® Pentium® G7400TE (2 Cores, 6M Cache, 3GHz); 35W Intel® Celeron® G6900TE (2 Cores, 4M Cache, 2.4GHz); 35W				
	Chipset	Intel® Q670E Chipset				
	Memory	Two 260-pin DDR4 2400/2666MHz SODIMM up to 64GB				
	BIOS	AMI SPI 128Mbit				
GRAPHICS	Controller	Intel® HD Graphics				
	Feature	OpenGL up to 5.0, DirectX 11, OpenCL 2.1 HW Decode: HEVC/H.265, H.264, M/JPEG, MPEG2, VC1/WMV9, VP8 (8-bit), VP9 (10-bit) HW Encode: HEVC/H.265, M/JPEG, MPEG2, VP8				
	Display	1 x VGA 2 x DP++	VGA: resolution up to 1920x1200 @ 60Hz DP++: resolution up to 4096x2304 @ 60Hz			
	Triple Displays	1 VGA + 2 DP++				
STORAGE	Interface	2 x 2.5" SATA 3.0 drive bay (Support RAID 0/1)				
EXPANSION	Interface	[EC510-ADS Series] 1 x M.2 2230 E key (PCIe/USB 2.0) 1 x M.2 2280 M key (PCIe x4 NVMe) 1 x M.2 3042/3052 B key (PCIe/USB 3.0) 1 x PCI slot	[EC511-ADS Series] 1 x M.2 2230 E key (PCIe/USB 2.0) 1 x M.2 2280 M key (PCIe x4 NVMe) 1 x M.2 3042/3052 B key (PCIe/USB 3.0) 1 x PCIe x16 slot			
AUDIO	Audio Codec	ALC888				
ETHERNET	Controller	2 x Intel® i225-IT				
LED	Indicators	1 x Status LED 1 x HDD LED				
FRONT I/O	Serial	4 x RS-232/422/485 (DB-9)				
	USB	2 x USB 2.0 (type A)				
	Buttons	1 x Power button 1 x Reset button				
	Antenna	6 x Antenna hole (WiFi)				
REAR I/O	Ethernet/PoE	EC51x-ADS62GA6E-Q	EC51x-ADS62GA6-Q	EC51x-ADSAGE4E-Q	EC51x-ADSAGE4-Q	EC51x-ADS6881-Q
		2 x GbE (RJ-45) 4 x PoE (RJ-45)	6 x GbE (RJ-45)	2 x GbE (RJ-45) 2 x PoE (RJ-45)	4 x GbE (RJ-45)	2 x GbE (RJ-45)
	Serial	EC51x-ADS62GA6E-Q	EC51x-ADS62GA6-Q	EC51x-ADSAGE4E-Q	EC51x-ADSAGE4-Q	EC51x-ADS6881-Q
		2 x RS232	2 x RS232	4 x RS232/422/485 (w/ isolation 2KV) 2 x RS232	4 x RS232/422/485 (w/ isolation 2KV) 2 x RS232	2 x RS232
	USB	EC51x-ADS62GA6E-Q	EC51x-ADS62GA6-Q	EC51x-ADSAGE4E-Q	EC51x-ADSAGE4-Q	EC51x-ADS6881-Q
		6 x USB 3.1 (Gen2) 2 x USB 2.0	6 x USB 3.1 (Gen2) 2 x USB 2.0	10 x USB 3.1 (Gen2) 2 x USB 2.0	10 x USB 3.1 (Gen2) 2 x USB 2.0	4 x USB 3.1 (Gen2) 2 x USB 2.0
	DIO	EC51x-ADS62GA6E-Q	EC51x-ADS62GA6-Q	EC51x-ADSAGE4E-Q	EC51x-ADSAGE4-Q	EC51x-ADS6881-Q
		32 bits DIO (w/ isolation 2KV)	32 bits DIO (w/ isolation 2KV)	16 bits DIO (w/ isolation 2KV)	16 bits DIO (w/ isolation 2KV)	8 bits DIO
	Display	1 x VGA 2 x DP++				
	Audio	1 x Line-out 1 x Mic-in				
WATCHDOG TIMER	Output & Interval	System reset, programmable via software from 1 to 255 seconds				
SECURITY	TPM	TPM 2.0				
POWER	Type	Wide range 9~36V				
	Connector	3-pole terminal block 2-pin power remote switch connector				
OS SUPPORT	OS Support	Windows 10 IoT Enterprise 64 Bit Linux (available upon request)				
ENVIRONMENT	Operating Temperature	-20 to 60°C (2.5" SSD or M.2 SSD)				
	Storage Temperature	-20 to 85°C				
	Relative Humidity	5 to 95% RH (non-condensing)				
MECHANICAL	Construction	Metal + Aluminum				
	Mounting	Wall mount				
	Dimensions (W x H x D)	255.3 x 124.6 x 224mm				
	Weight	5.1 kg				
STANDARDS AND CERTIFICATIONS	Shock	Half sine wave 3G, 11ms, 3 shock per axis				
	Vibration	IEC 60068-2-64				
	Certifications	CE, FCC Class A, UKCA, RoHS, BIS				