


# Smart Color Bulb ZL1

## User Manual

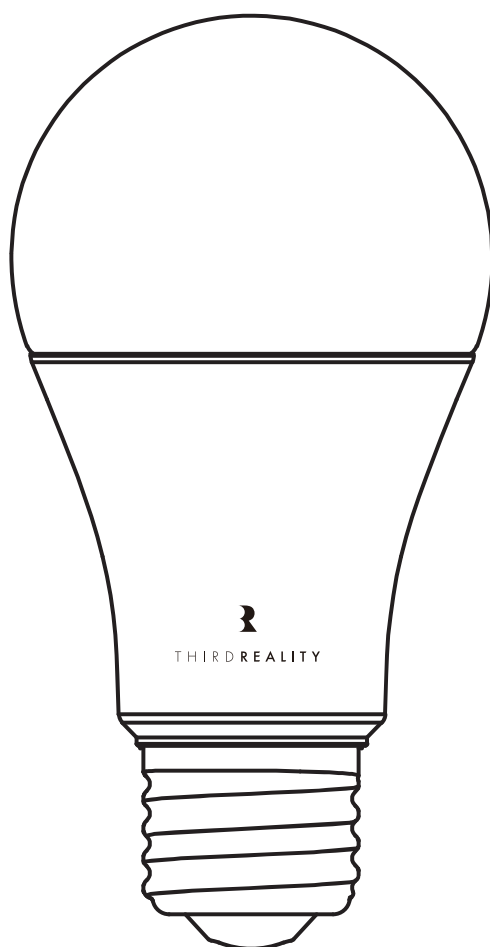

# Contents

|                                                     |    |
|-----------------------------------------------------|----|
| Introduction .....                                  | 01 |
| Factory Reset .....                                 | 01 |
| Specifications .....                                | 02 |
| Zigbee Mesh Network .....                           | 03 |
| Setup with Smart Bridge MZ1 .....                   | 04 |
| Setup with Third Reality Hub and SKILL .....        | 07 |
| Setup with Compatible Third-Party Zigbee Hubs ..... | 09 |
| Pairing with SmartThings .....                      | 10 |
| Pairing with Amazon Alexa .....                     | 13 |
| Pairing with Hubitat .....                          | 16 |
| Pairing with Home Assistant .....                   | 19 |
| Important Safety Information .....                  | 24 |
| FCC Regulatory Conformance .....                    | 25 |

# Introduction

Third Reality Smart Color Bulb ZL1 offers an easy smart lighting solution in your home. The smart color bulb enables you to control your lights in multiple ways - on/off, dimming, routines, away mode, etc. - through your Smart Home app on your phones or simply voice commands.

## Factory Reset

Power the smart color bulb, power cycle(power off and on) smart color bulb 5 times in a row to factory reset it, it flashes warm white - cold white - red - green - blue in a row within 3 seconds, then it turns solid warm white, indicating it enters Zigbee pairing mode. It will exit Zigbee pairing mode if not paired within 3 min.

# Specifications


|                                  |                                                             |
|----------------------------------|-------------------------------------------------------------|
| Name                             | Smart Color Bulb ZL1                                        |
| Model                            | 3RCB01057Z                                                  |
| Type                             | A19                                                         |
| Socket                           | E26                                                         |
| Wireless Protocol                | Zigbee 3.0                                                  |
| Wireless Frequency Range         | 2405~2480MHz                                                |
| Operating Channels               | CH11~CH26                                                   |
| Maximum Transmitted Output Power | 14dBm                                                       |
| Input                            | 120V AC ~ 60Hz                                              |
| Power                            | 8.5W                                                        |
| Luminous Flux                    | 800LM $\pm$ 10%                                             |
| Color Temperature                | 2700-6500K+RGB                                              |
| Working conditions               | -4°F ~ 104°F (-20°C ~ 40°C)<br>20%-85 RH<br>Indoor Use Only |



# Zigbee Mesh Network

Work as a Zigbee repeater.





Extent the signal range of the Zigbee Mesh Network.

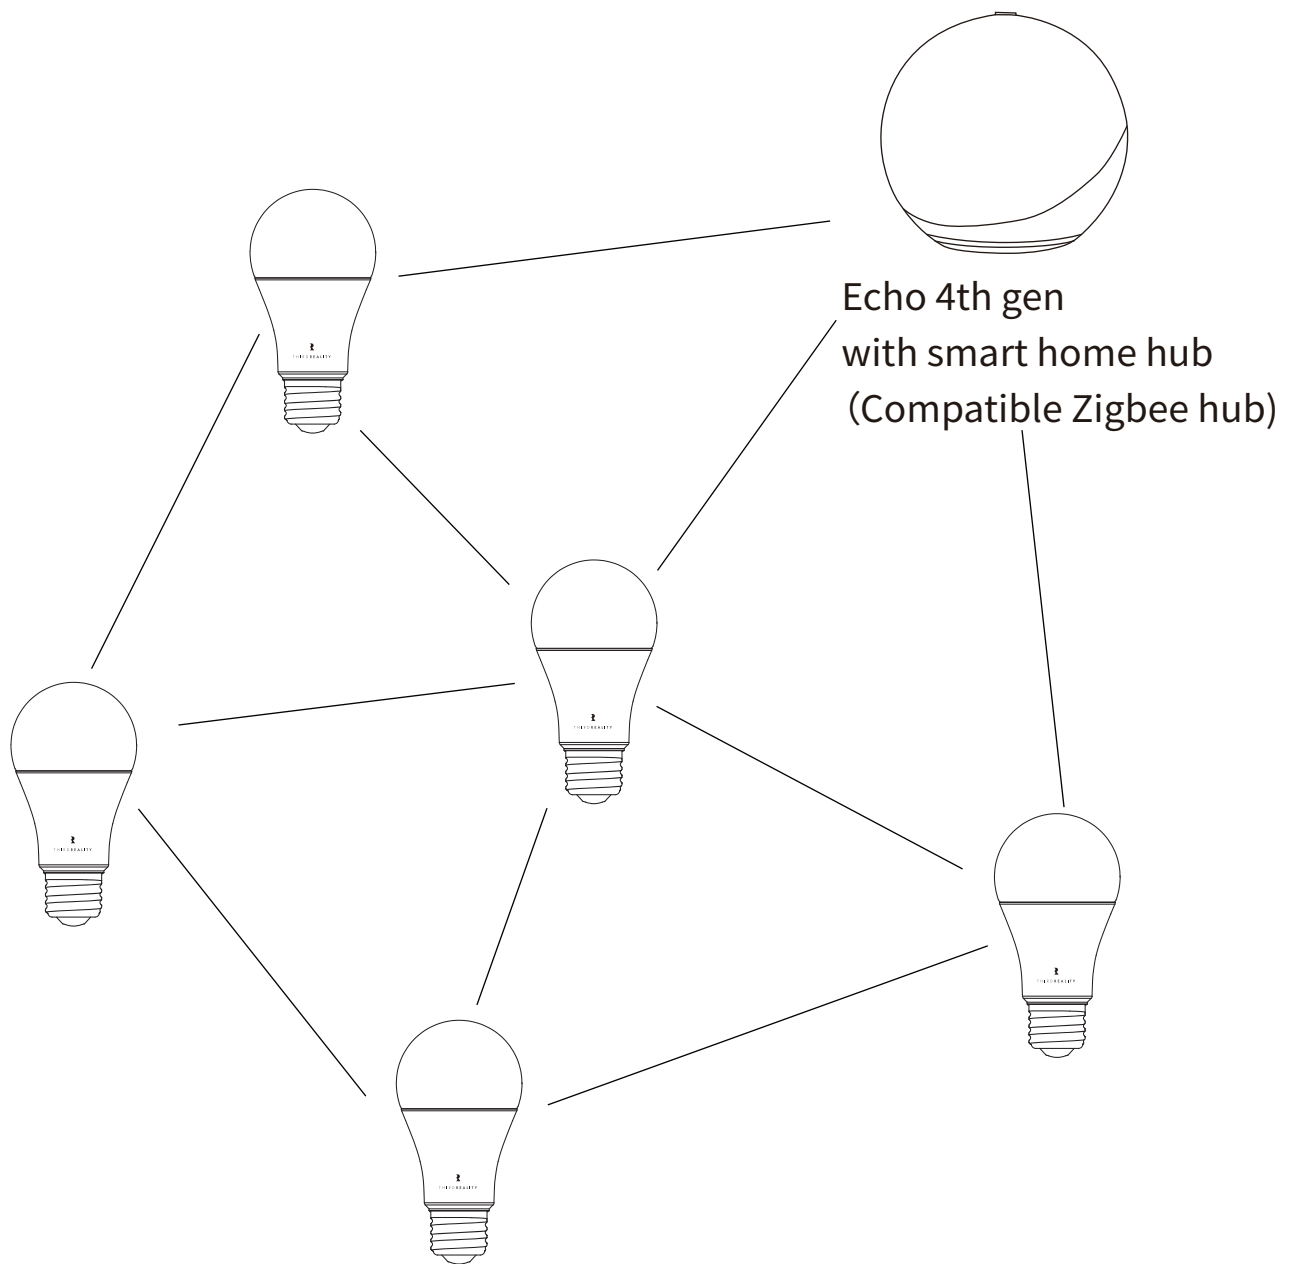

# Setup with Smart Bridge MZ1

The Smart Bridge (sold separately) enables your Zigbee device to become Matter-compatible, allowing seamless integration with major Matter ecosystems like Apple Home, Google Home, Amazon Alexa, Samsung SmartThings, and Home Assistant. By setting up your Zigbee light bulb with the Smart Bridge, it transforms into a Matter compatible smart color bulb, enabling local control through Matter. Third Reality also offers the 3R-Installer APP, which lets you configure Zigbee bulb attributes such as default-on behavior and perform firmware updates.

1. Ensure your bridge is already set up within your smart home system.
2. Ensure the light switch controlling the E26 bulb socket is turned off. Then install the smart color bulb by screwing it securely into the socket.
3. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
4. Press the pinhole button on the bridge to activate Zigbee pairing mode. The Zigbee blue LED should start blinking.
5. The bulb will pair with the bridge, and a new device will appear in your smart home app, such as Google Home or Alexa.
6. Optionally, you can install the 3R-Installer APP and use the multi-admin feature in your smart home app to share permissions with the 3R-Installer APP.

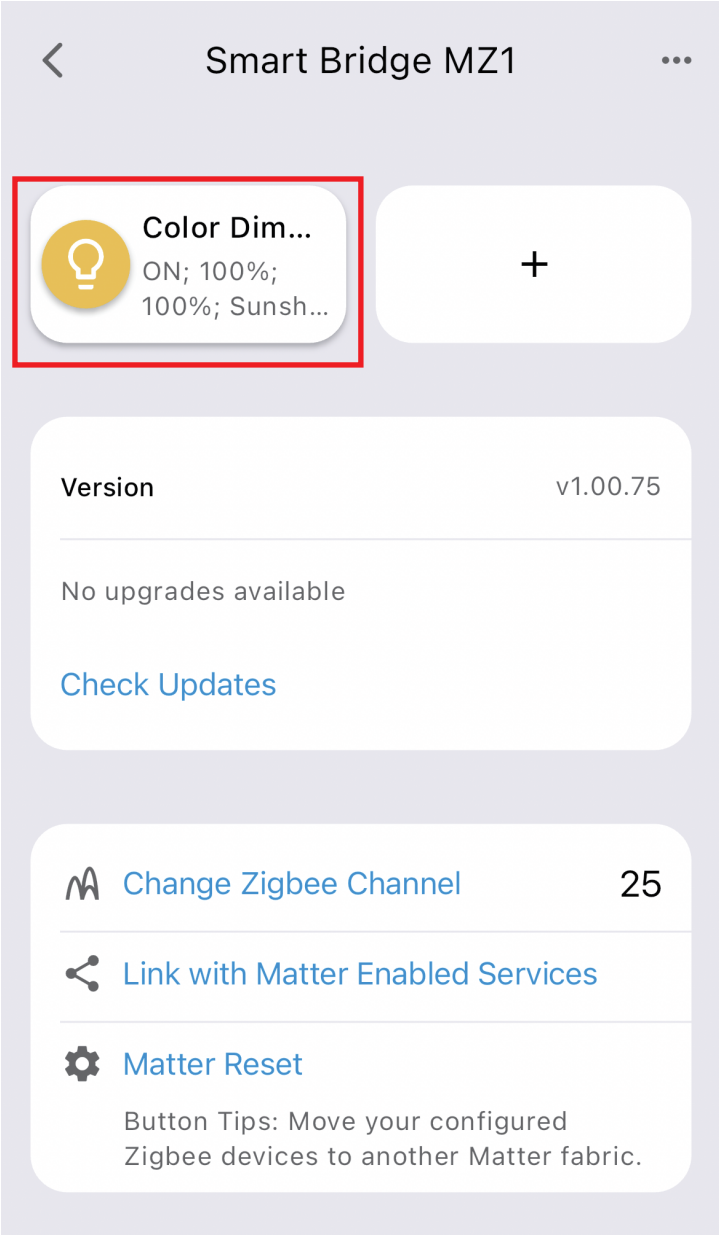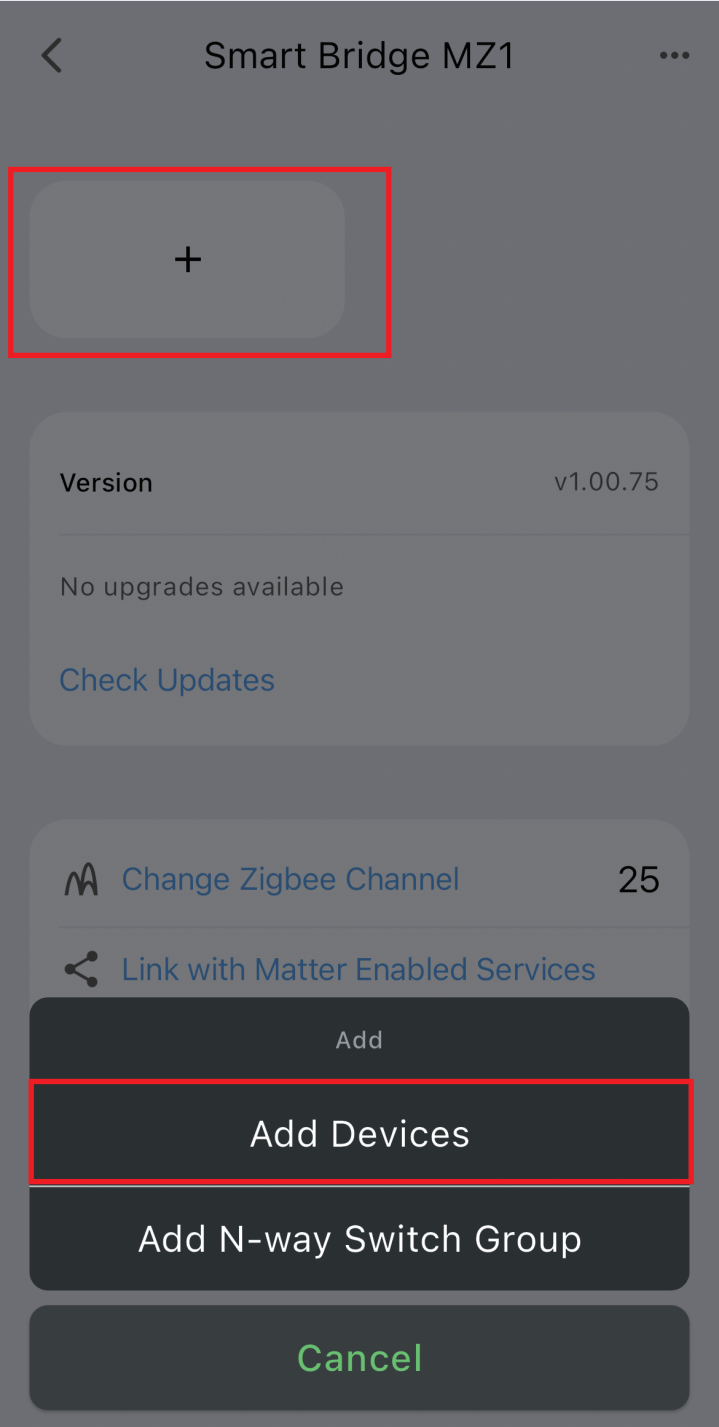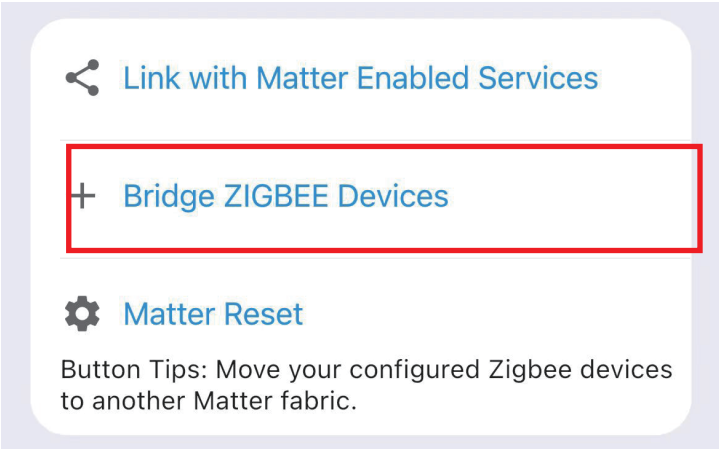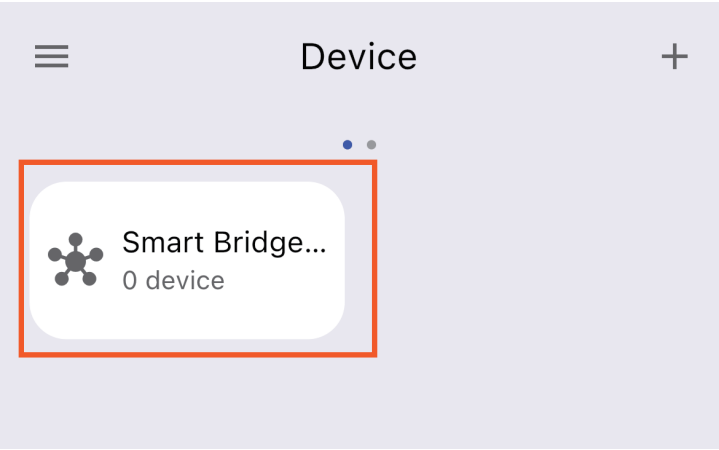

Color Dimmable Light

ON

BRIGHTNESS 100%

COLOR TEMPERATURE 100%

COLOR Sunshade

Startup ON/OFF

OFF

ON

TOGGLE

PREVIOUS

Change Zigbee Channel

25

Link with Matter Enabled Services

Matter Reset

Button Tips: Move your configured Zigbee devices to another Matter fabric.

Link with Manual Setup Code or Scan the QR Code

Effective duration: 2 minutes 54 seconds

1324-192-6558





Done

06

# Setup with Third Reality Hub and SKILL

The Third Reality Hub (sold separately) allows you to control your device remotely via the Third Reality APP, making it a great option for smart home beginners or those without a system from major providers. Additionally, the Third Reality Cloud supports SKILL integration with Google Home or Amazon Alexa, enabling you to connect your device to these platforms. However, due to the potential for slow and unreliable Cloud-to-Cloud connections, we recommend using the Bridge solution if Google Home or Alexa is your primary smart home platform.

1. Ensure your hub is properly set up with Third Reality App.  
Ensure the light switch controlling the E26 bulb socket is turned off.
2. Then install the smart color bulb by screwing it securely into the socket.
3. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode within 3 minutes. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
4. Open the Third Reality APP, press the "+" icon next to the hub, and select "Quick Pair."
5. The bulb will pair with your hub and appear in the Third Reality APP.
6. Optionally, you can enable the Third Reality SKILL in either the Alexa or Google Home app to enable Cloud-to-Cloud communication.

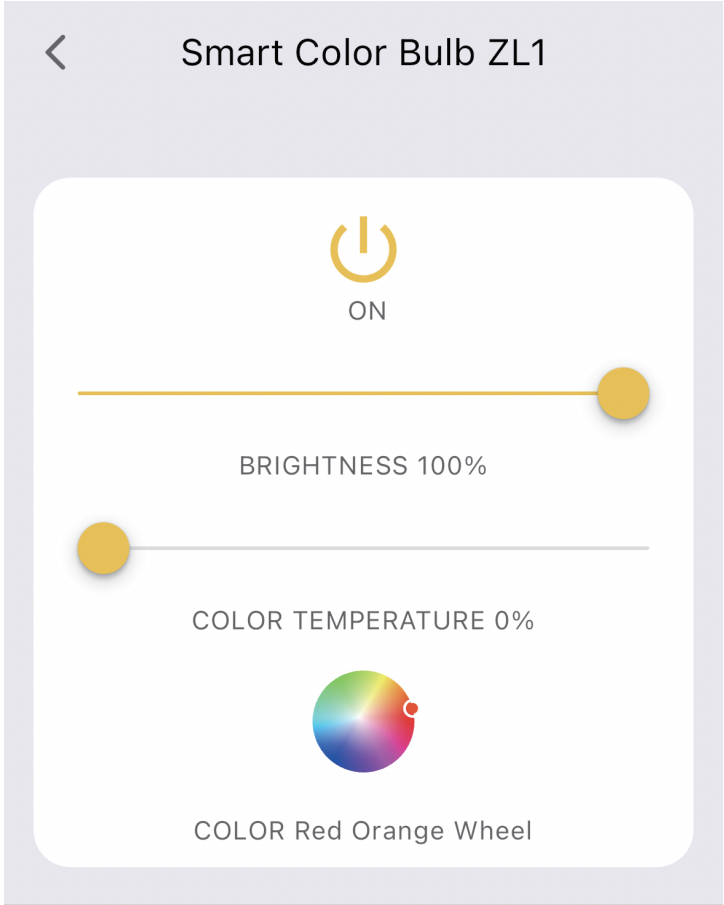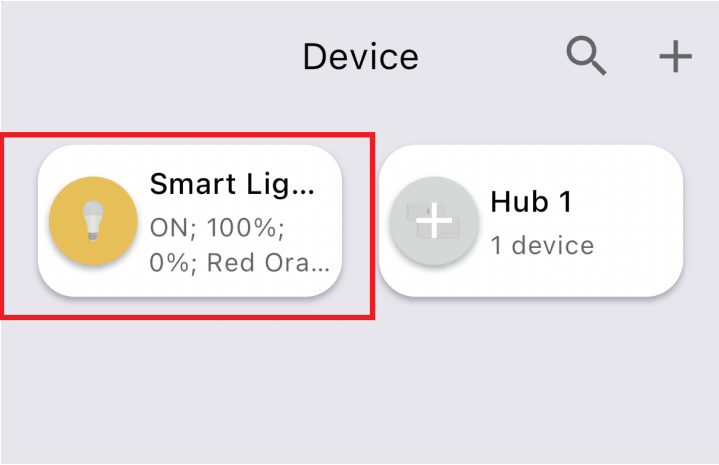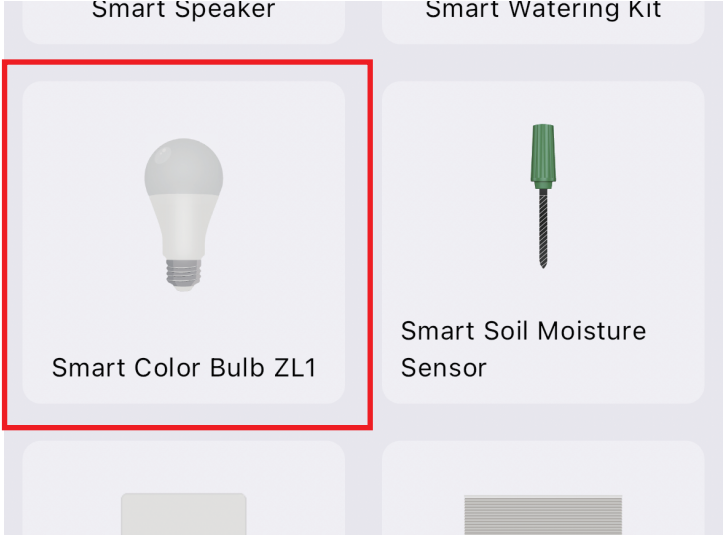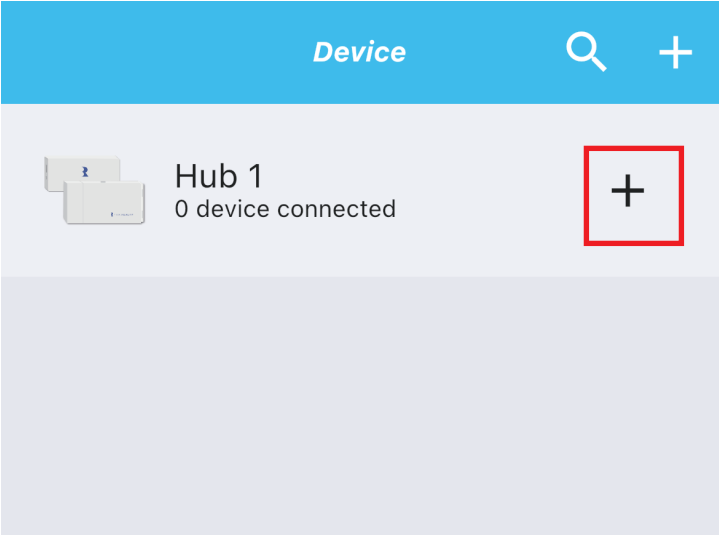

|         |                        |   |
|---------|------------------------|---|
| Name    | Smart Light Bulb ZL1 1 | > |
| Network | Connected              |   |
| Type    | Smart Color Bulb ZL1   |   |
| Mac     | B40ECFD212110000       |   |

# Setup with Compatible Third-Party Zigbee Hubs

Third Reality supports integration with various open Zigbee platforms, including Amazon Echo with built-in Zigbee, Samsung SmartThings, Home Assistant (with ZHA or Z2M), Homey and Hubitat. If you own any of these devices, you can pair the smart bulb directly without the need for an additional bridge or hub.

1. Ensure your Zigbee Hub is already set up within your smart home system.
2. Ensure the light switch controlling the E26 bulb socket is turned off. Then install the smart color bulb by screwing it securely into the socket.
3. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode within 3 minutes. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
4. Open your smart home app and follow the on-screen instructions to begin the Zigbee pairing process.
5. The smart bulb will flash and then turn warm white, indicating it has successfully paired with the Zigbee hub.
6. You can now use your smart home app to turn the bulb on/off, adjust its color and color temperature, and create routines.

# Pairing with SmartThings

App: SmartThings App



Devices: SmartThings Hub 2nd Gen(2015) and 3rd Gen(2018), Aeotec Smart Home Hub.





## Pairing steps:

1. Before pairing, check for updates to make sure the SmartThings Hub firmware is up to date.
3. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
4. Open your SmartThings App, tap "+" on the top right corner to "Add device" and then tap "Scan nearby".




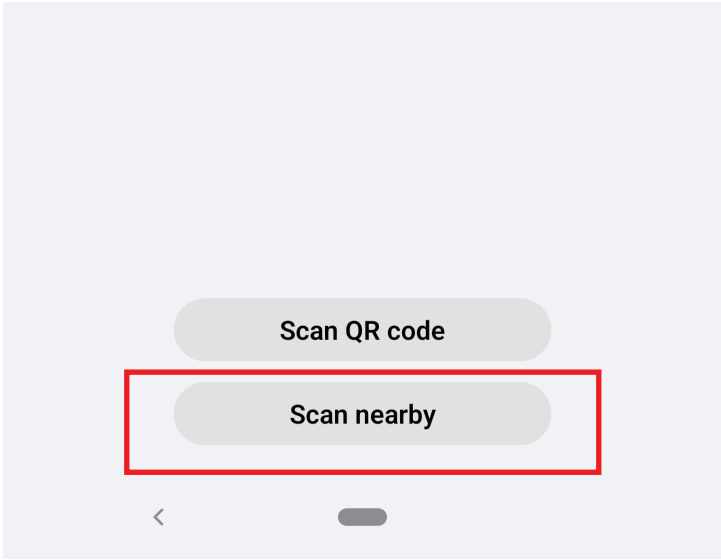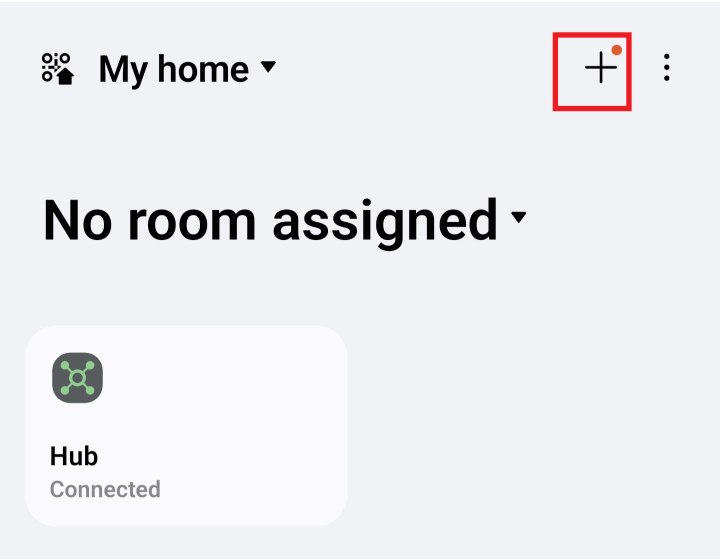

5. The bulb will be added to your SmartThings hub in a few seconds.

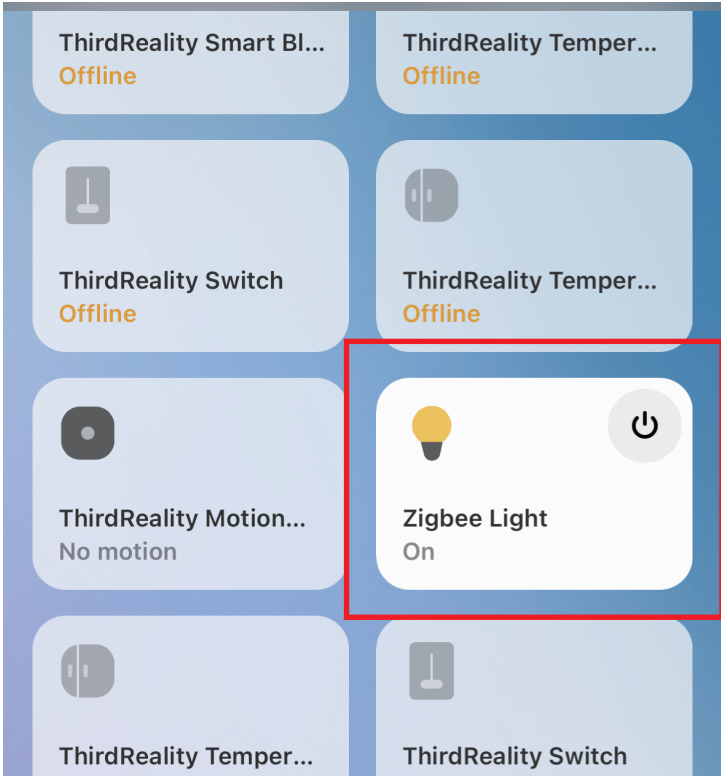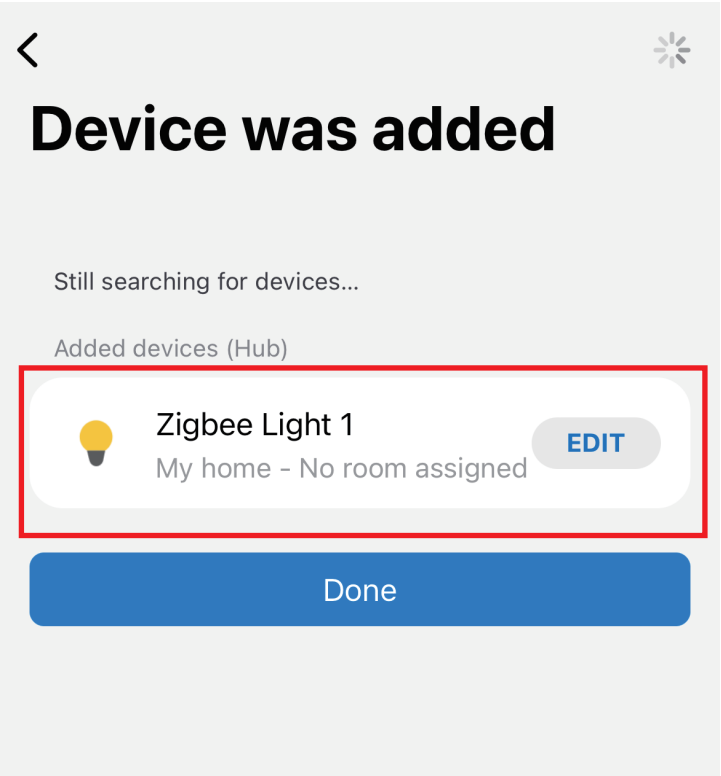

6. Create routines to control connected devices.

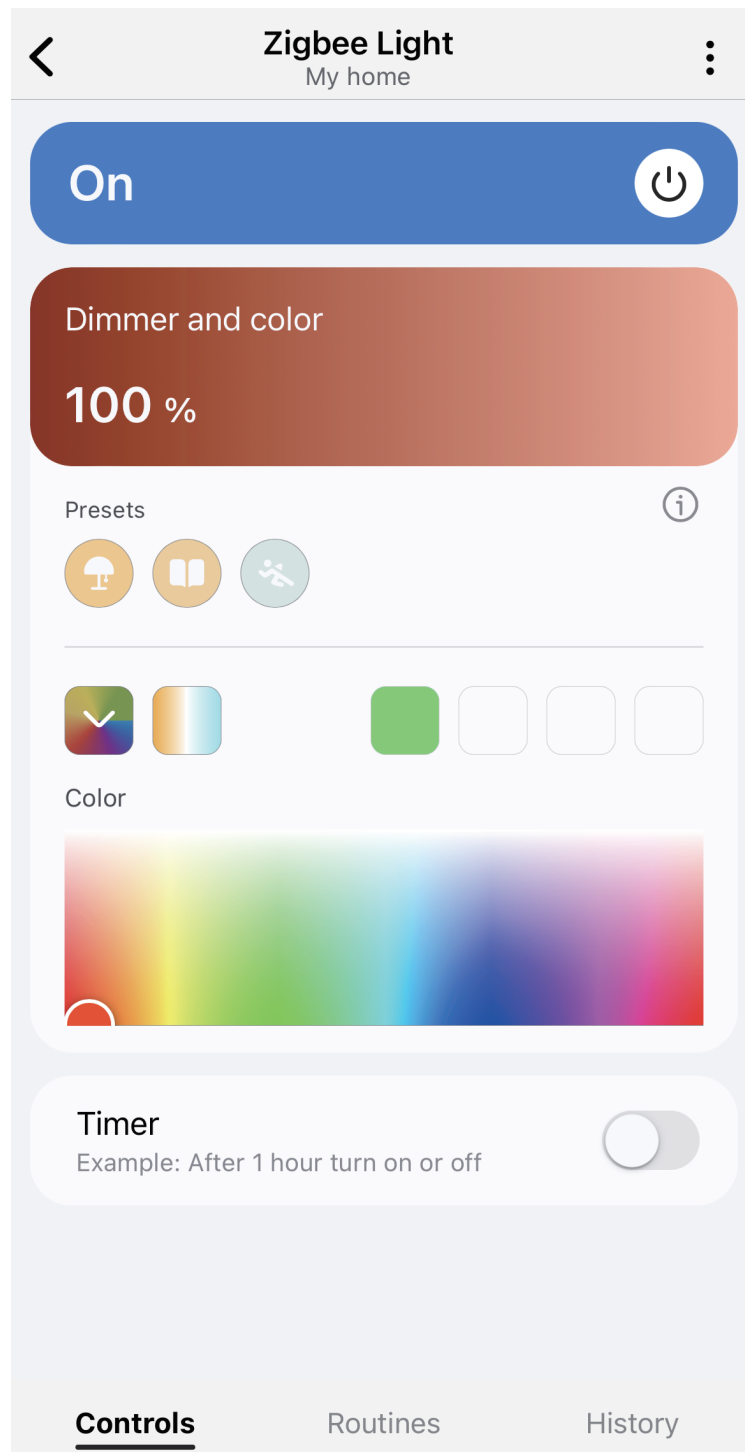

# Pairing with Amazon Alexa

App: Amazon Alexa

Devices: Echo speakers with built-in Zigbee hub, Echo 4th Gen, Echo Plus 1st & 2nd Gen, Echo Studio



## Pairing steps:

1. Ask Alexa to check for updates before pairing.
2. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
3. Tap "+" in the Alexa App, choose "Other" and "Zigbee" to add device, the bulb will be added.
4. You can create routines with the device.

<

All Devices

+



Tina's Echo

Online



Alexa on This Phone

Online

Add Device

Echo, Smart Home and Accessories

Add Group

Create rooms, device groups and larger areas

Combine speakers

Set up multi-room music, a home cinema or a stereo pair.



Smoke and CO Detector



Soap Dispenser



Water Heater



Water Leak Detector



Other





Home



Devices



More

Connect your Zigbee device to Alexa

1

Make sure your device is within 30 feet of your compatible Echo or hub.

2

Put your device into pairing mode by powering it off and on again.

3

Press Discover Devices

When you discover devices, Alexa may connect additional compatible devices in your home. You can learn about or delete these devices in device settings.

Discover Devices





1 Other light found and connected

Your light has been added to your Alexa account. Next, we'll help you finish setting up your device.



First light is set up and ready to use

To control it, say  
"Alexa, turn off First light"

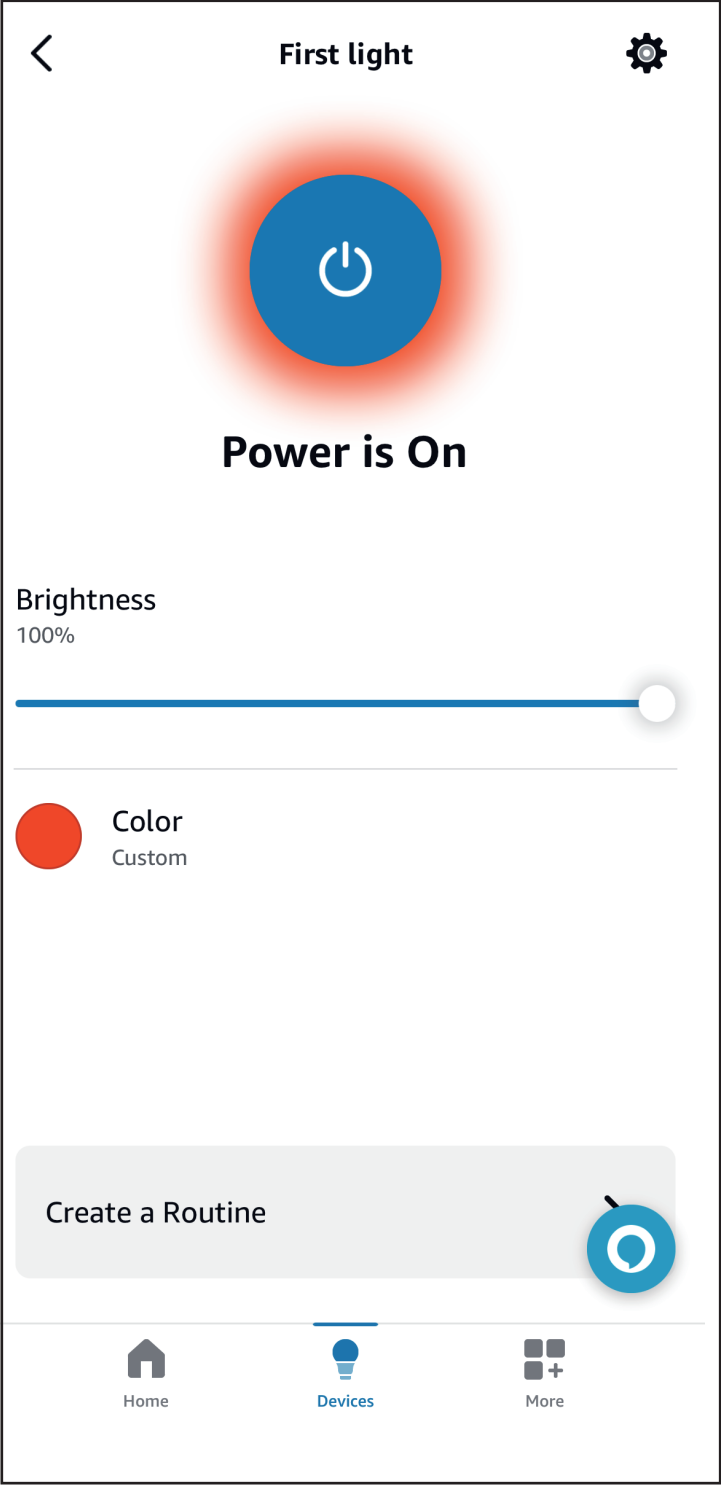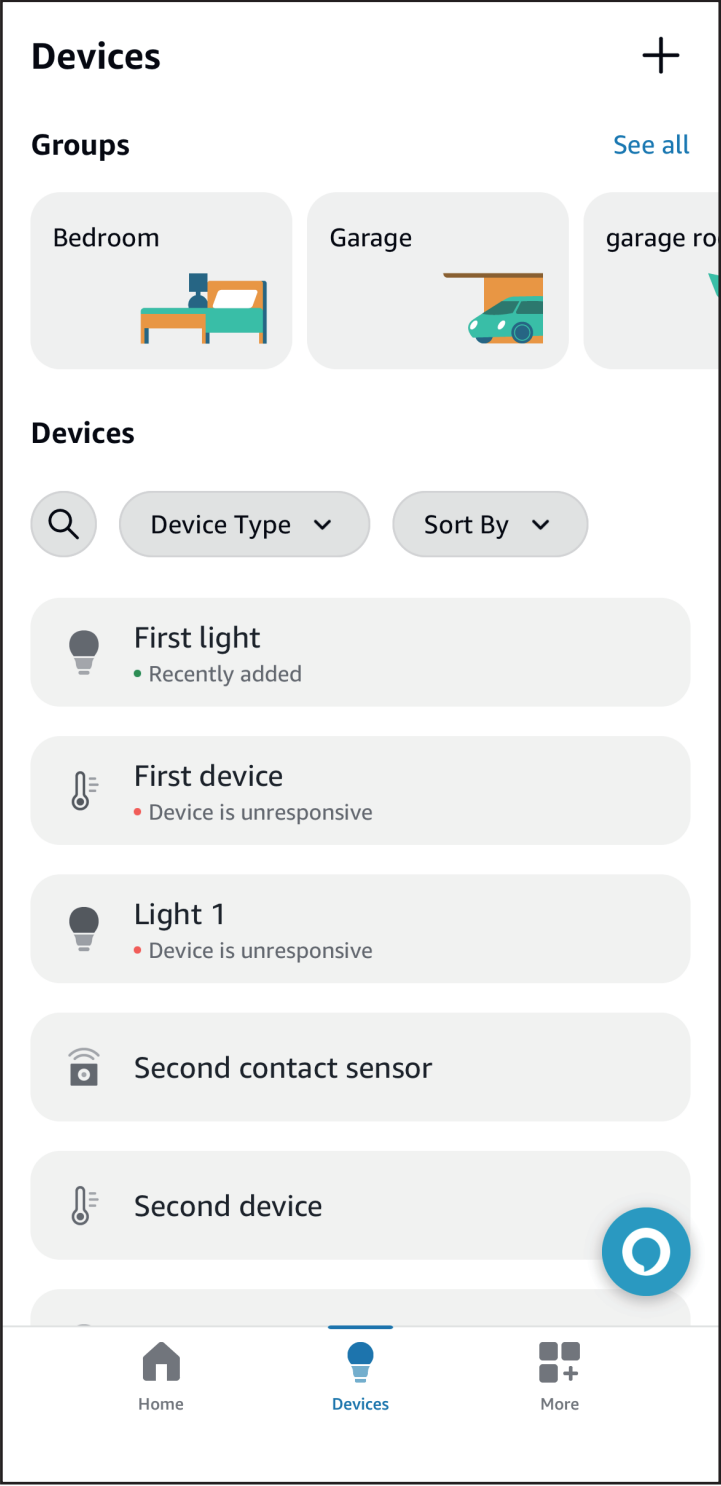

# Pairing with Hubitat

Website: <http://find.hubitat.com/>



## Pairing steps:

1. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
2. Visit your Hubitat Elevation hub device page from your web browser, select the Devices menu item from the sidebar, then select Discover Devices in the upper right.
3. Click Start Zigbee Pairing button after you select a Zigbee device type, the Start Zigbee Pairing button will put the hub in Zigbee pairing mode for 60 seconds.
4. Pairing is completed.
5. Tap Apps, and Create New Basic Rules.

Hubitat

ELEVATE YOUR ENVIRONMENT

hubitat-c7

Rooms

Devices

Dashboards

Apps

Settings

Subscriptions

Developer tools

Apps code

Drivers code

Libraries code

Bundles

Logs

Devices

Compatible device list

X Clear

Search...

+ Add device

| Disable                             | Label (Name)                                      | Type                                       | Room | Source | DNI                      | Status | Last Activity      |     |
|-------------------------------------|---------------------------------------------------|--------------------------------------------|------|--------|--------------------------|--------|--------------------|-----|
| <input type="checkbox"/>            | 1<br>(Advanced Zigbee CT Bulb)                    | Advanced Zigbee CT Bulb                    |      | System | 2EA3<br>B40ECFD298B00000 |        | 8/27/2024 10:42:35 |     |
| <input checked="" type="checkbox"/> | 444<br>(Device)                                   | Device                                     | huan | System | 1315<br>262C02BFFFE909D1 |        |                    |     |
| <input type="checkbox"/>            | 729ms<br>(Generic Zigbee Motion Sensor (no temp)) | Generic Zigbee Motion Sensor (no temp)     |      | System | 8439<br>262C02BFFFE6379  |        | 7/29/2024 15:44:55 | 60  |
| <input type="checkbox"/>            | Advanced Zigbee CT Bulb                           | Advanced Zigbee CT Bulb                    |      | System | 1AED<br>B40ECFD32AAC0000 |        | 8/27/2024 10:42:28 |     |
| <input type="checkbox"/>            | del<br>(Third Reality Smart Button)               | Third Reality Smart Button                 |      | System | 5A05<br>262C02BFFFE38F45 |        | 8/06/2024 13:42:54 | 100 |
| <input type="checkbox"/>            | Plant Watering System                             | Generic Zigbee Switch                      |      | System | 4F31<br>262C02BFFFE900C0 |        | 8/27/2024 10:13:02 |     |
| <input type="checkbox"/>            | Smart Soil Moisture Sensor<br>(Device)            | Generic Zigbee Temperature/Humidity Sensor |      | System | 952B<br>A4C138EED8829E73 |        |                    |     |

DocumentationCommunityVideosFAQTerms of ServiceCopyright 2018-2024 Hubitat, Inc

Hubitat

ELEVATE YOUR ENVIRONMENT

hubitat-c7

Rooms

Devices

Dashboards

Apps

Settings

Subscriptions

Developer tools

Apps code

Drivers code

Libraries code

Bundles

Logs

Add device

Find by device type

Bulbs, dimmers, locks, outlets, switches...

Find by brand

Aeotec, Bosch, Centralite, Dome, Ecolink...

Add device manually:

☒ Zigbee

☐ Z-Wave

☐ Matter

☐ Iris V1 Zigbee

☐ Virtual

DocumentationCommunityVideosFAQTerms of ServiceCopyright 2018-2024 Hubitat, Inc

Hubitat

ELEVATE YOUR ENVIRONMENT

hubitat-c7

Rooms

Devices

Dashboards

Apps

Settings

Subscriptions

Developer tools

Apps code

Drivers code

Libraries code

Bundles

Logs

Add device

Home - Zigbee

Cancel



Make sure that the device has been **factory reset**. Simply removing it from a previous mesh may not allow it to be joined. A factory reset will ensure it is discoverable.

+ Stop Zigbee pairing

Pairing, 90s remaining

DocumentationCommunityVideosFAQTerms of ServiceCopyright 2018-2024 Hubitat, Inc

17

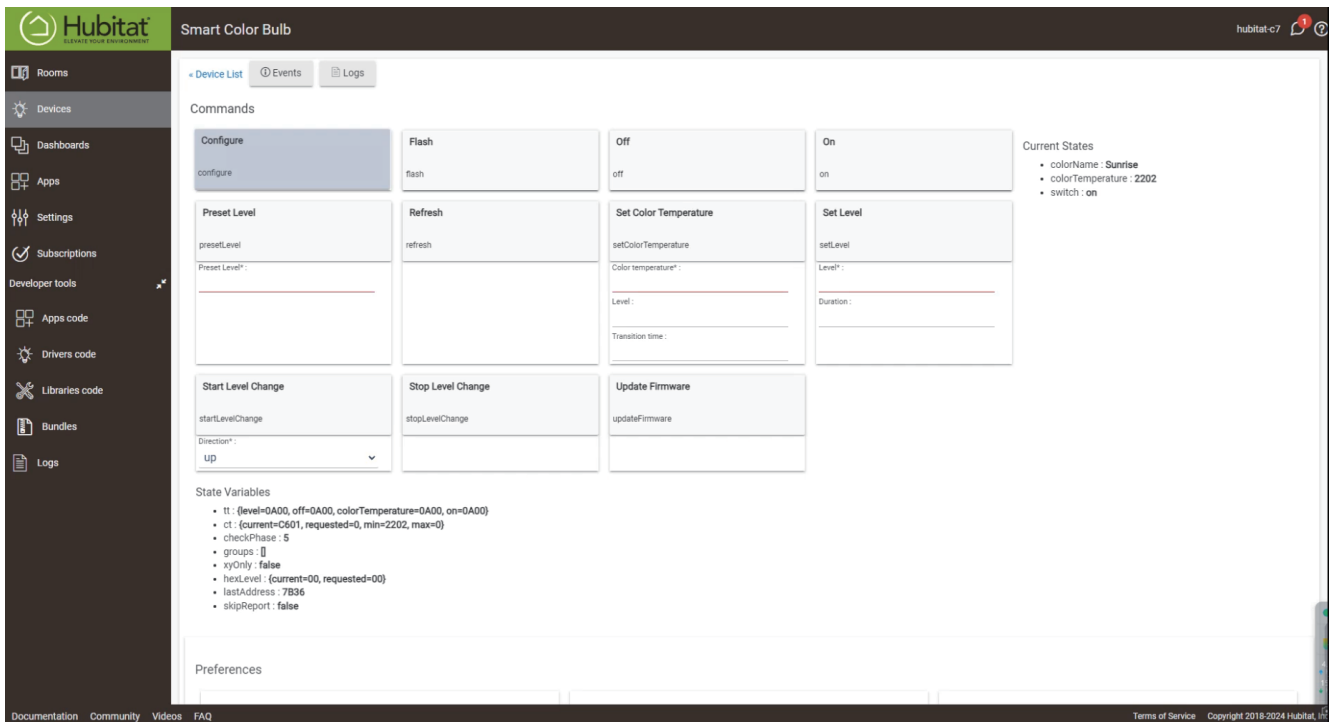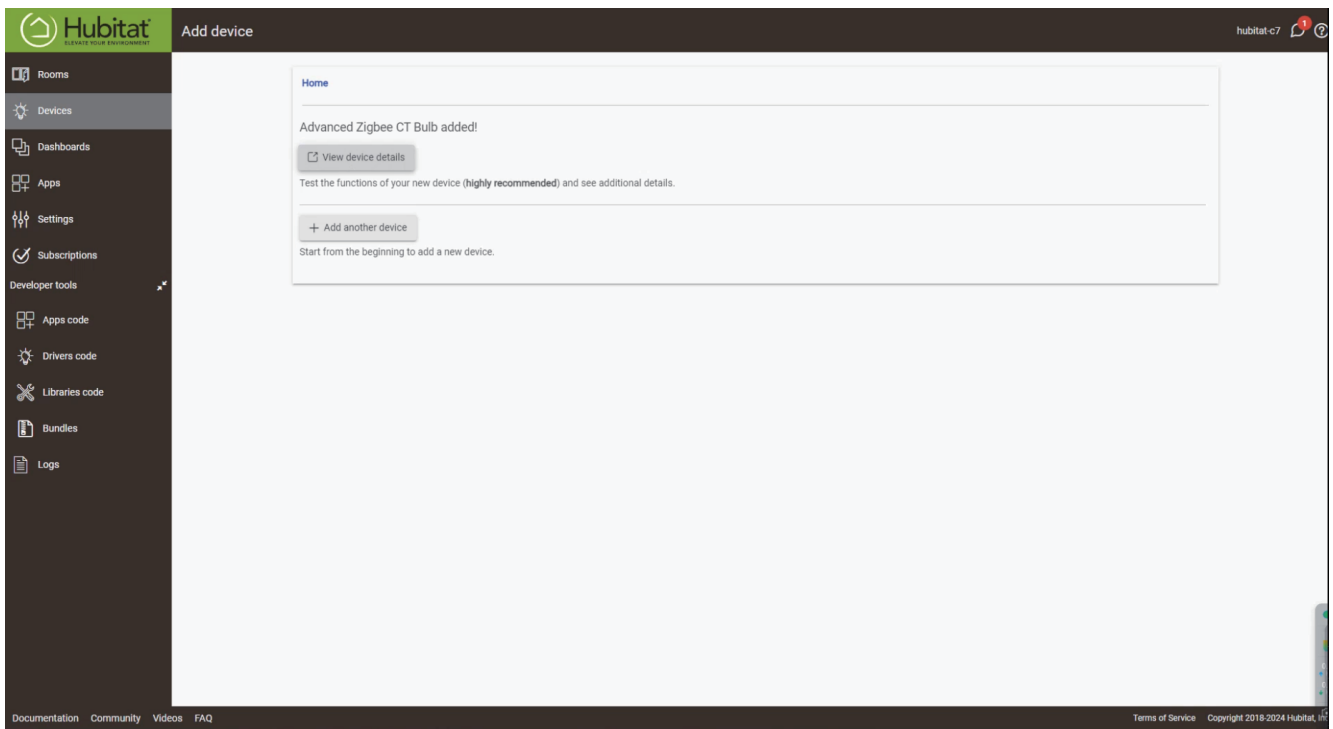





# Pairing With Home Assistant

Device: Zigbee dongle



## Zigbee Home Automation

1. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
2. In Zigbee Home Automation, go to "Configuration" page, click "integration".
3. Then click the "Devices" on the Zigbee item, then click "Add Devices".
4. Pairing completed.
5. Back to "Devices" page to find the sensor added.
6. Click to enter in the control interface to set the bulb.
7. Click "+" belongs to Automation and add trigger and actions.

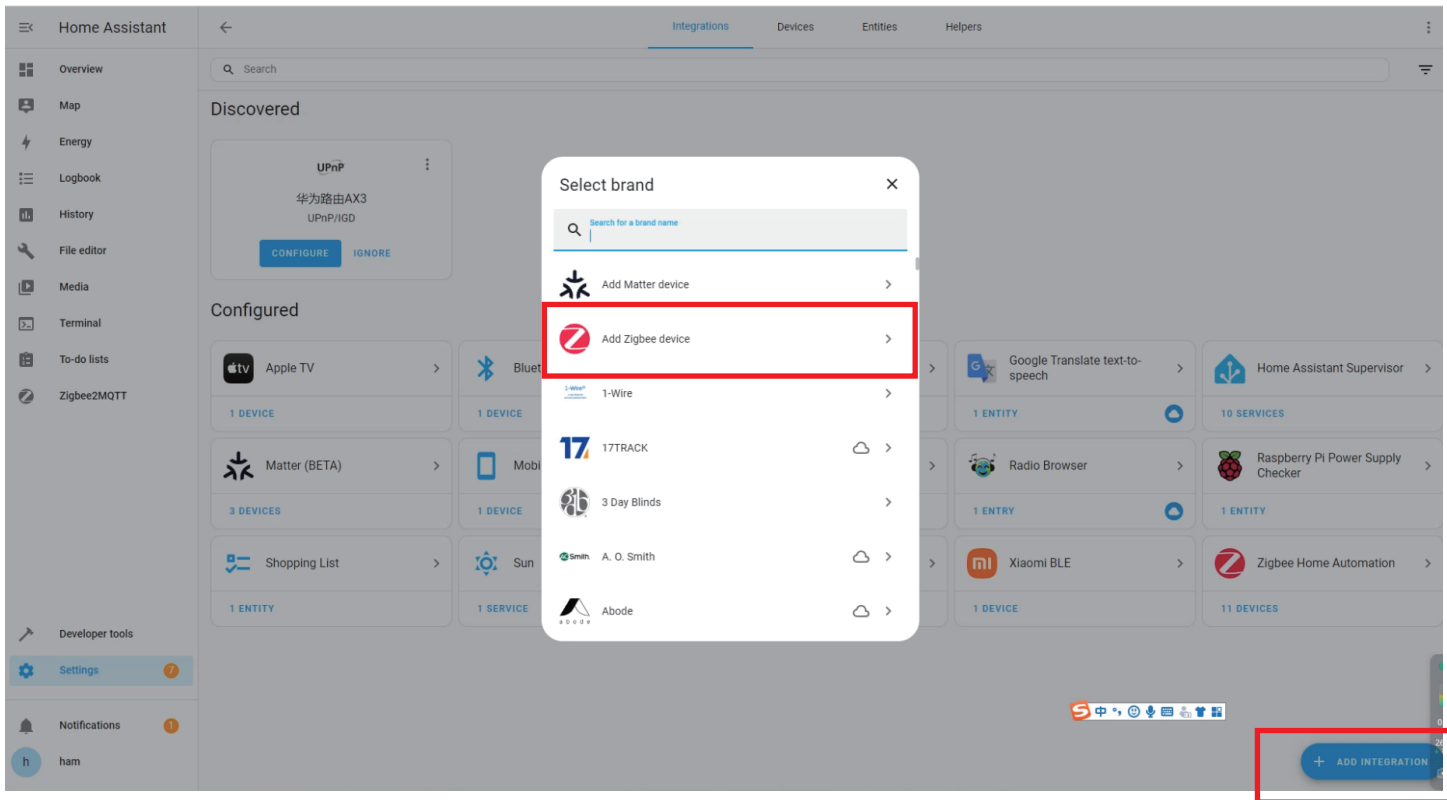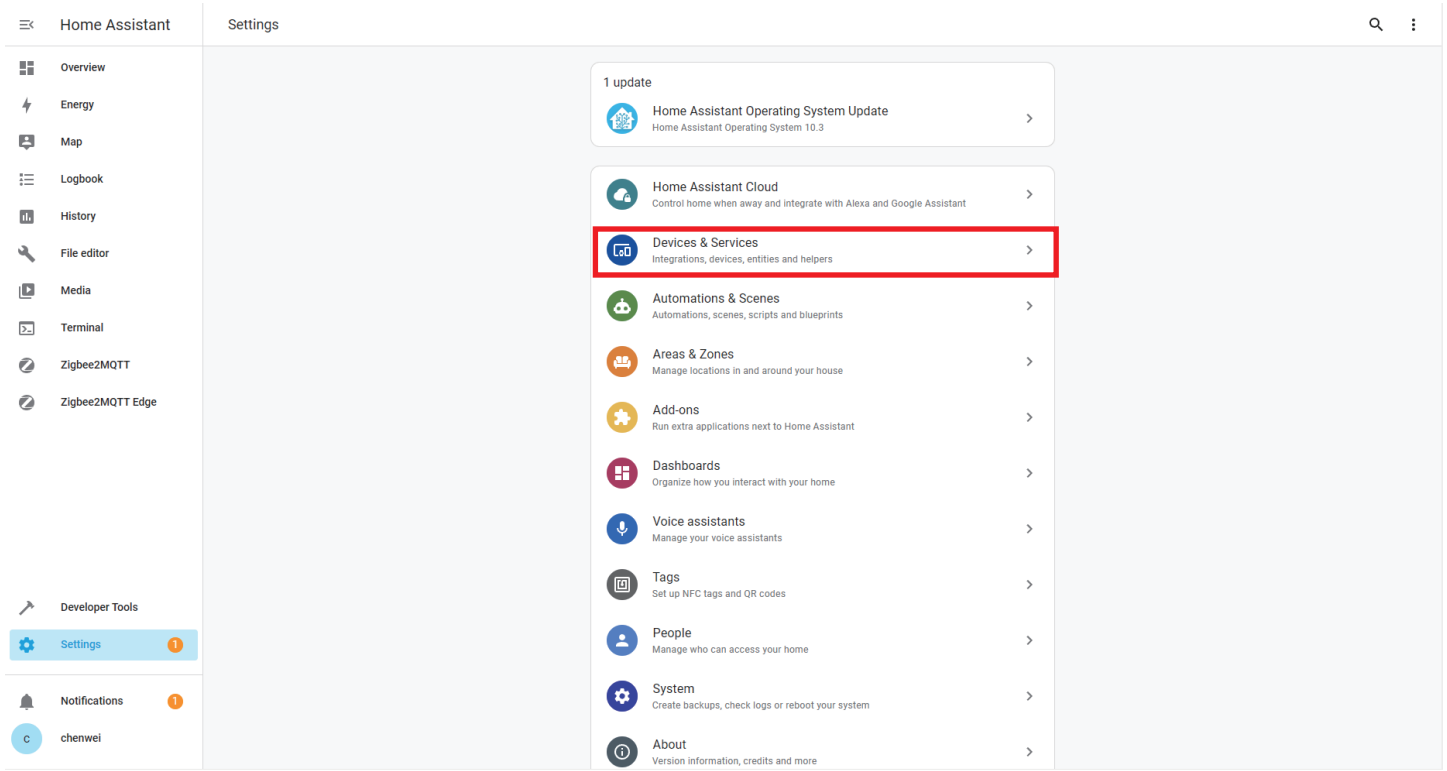

Home Assistant

Overview

Map

Energy

Logbook

History

File editor

Media

Terminal

To-do lists

Zigbee2MQTT

Developer tools

Settings

Notifications

ham

Integrations

Devices

Entities

Helpers

Filters

Search 12 devices

Group by

Sort by Device

| Device                         | Manufacturer       | Model       | Area        | Integration            | Battery |
|--------------------------------|--------------------|-------------|-------------|------------------------|---------|
| _TZE200_l0cansqn TS0601        | _TZE200_l0cansqn   | TS0601      | —           | Zigbee Home Automation | —       |
| Silicon Labs EZSP              | Silicon Labs       | EZSP        | —           | Zigbee Home Automation | —       |
| Third Reality 3RTHS0224Z       | Third Reality      | 3RTHS0224Z  | —           | Zigbee Home Automation | —       |
| Third Reality 3RTHS0224Z       | Third Reality      | 3RTHS0224Z  | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RDS17BZ    | Third Reality, Inc | 3RDS17BZ    | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RDS17BZ    | Third Reality, Inc | 3RDS17BZ    | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RDS17BZ    | Third Reality, Inc | 3RDS17BZ    | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RSM0147Z   | Third Reality, Inc | 3RSM0147Z   | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RSP02028BZ | Third Reality, Inc | 3RSP02028BZ | —           | Zigbee Home Automation | —       |
| Third Reality, Inc 3RTHS24BZ   | Third Reality, Inc | 3RTHS24BZ   | Living Room | Zigbee Home Automation | —       |
| Third Reality, Inc 3RVS01031Z  | Third Reality, Inc | 3RVS01031Z  | —           | Zigbee Home Automation | —       |
| Thirdreality 3RCB01057Z        | Thirdreality       | 3RCB01057Z  | —           | Zigbee Home Automation | —       |

+ ADD DEVICE

Home Assistant

← Thirdreality 3RCB01057Z

Overview

Map

Energy

Logbook

History

File editor

Media

Terminal

To-do lists

Zigbee2MQTT

Developer tools

Settings

Notifications

ham

Device info

3RCB01057Z  
by Thirdreality

Zigbee info

Zigbee Home Automation

RECONFIGURE

Automations

No automations have been added using this device yet. You can add one by clicking the + button above.

Scenes

No scenes have been added using this device yet. You can add one by clicking the + button above.

Scripts

No scripts have been added using this device yet. You can add one by clicking the + button above.

Controls

Light

ADD TO DASHBOARD

Configuration

Firmware Up-to-date

On level

On/Off transiti... 0

Start-up behavior On

Start-up color t... 65535

Start-up curre...

ADD TO DASHBOARD

Diagnostic

Identify

PRESS

+2 entities not shown

ADD TO DASHBOARD


Logbook

September 4, 2024

Thirdreality 3RCB01057Z Light turned on 2:53:38 PM - 27 seconds ago

# Zigbee2MQTT

1. Turn on the light bulb and confirm it's in pairing mode. The smart bulb will flash warm white, cool white, red, green, and blue within 3 seconds, then turn solid warm white, indicating it has entered Zigbee pairing mode. If this sequence doesn't occur, please factory reset the bulb to initiate pairing mode.
2. Permit join to start Zigbee pairing in Zigbee2MQTT.
3. Pairing completed, the bulb will be displayed in the device list  
Go to Settings page, create automation.

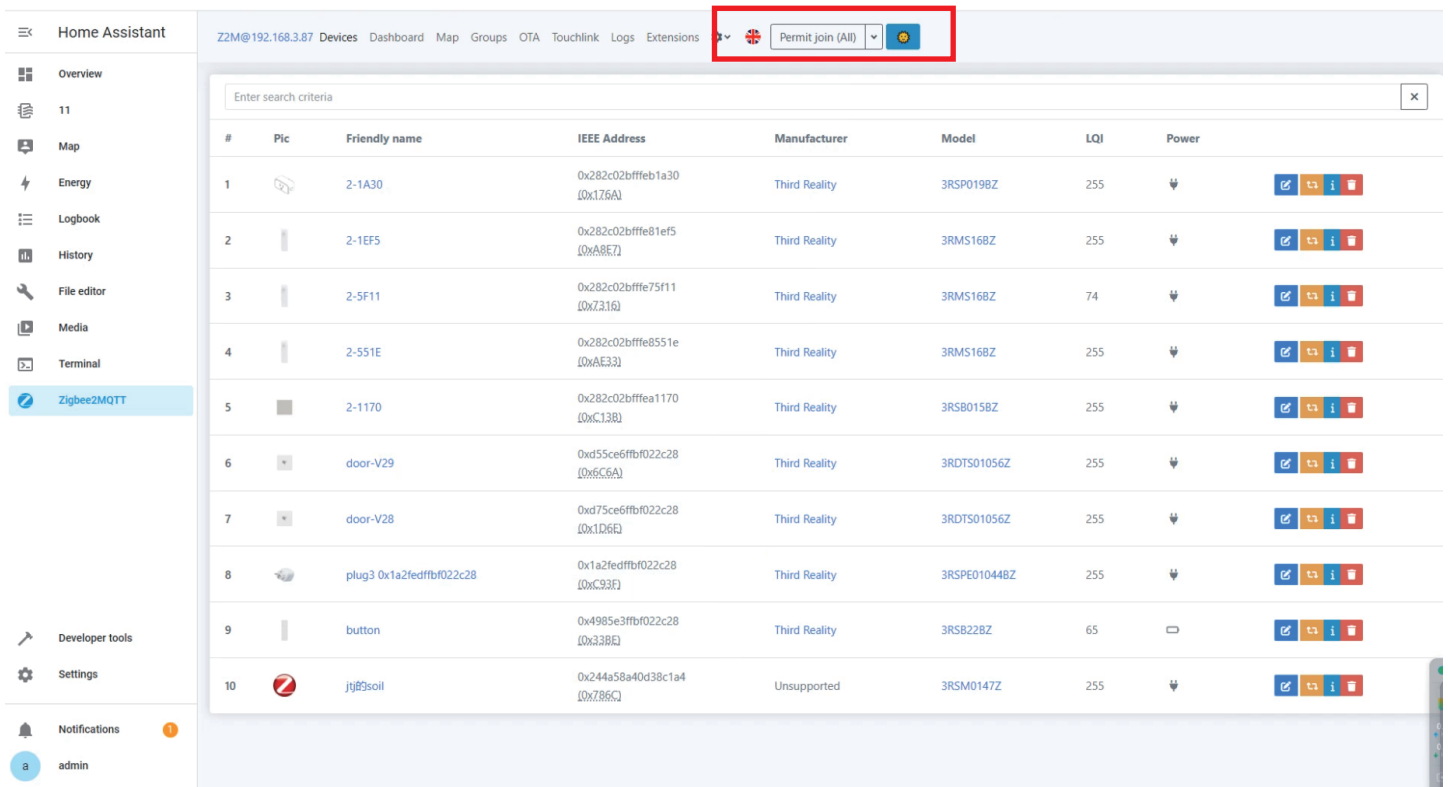

The screenshot shows the Home Assistant interface with the Zigbee2MQTT extension active. The left sidebar contains navigation options: Overview, 11, Map, Energy, Logbook, History, File editor, Media, Terminal, and Zigbee2MQTT (highlighted). Below these are Developer tools, Settings, and Notifications. The main area displays the Zigbee2MQTT device list. At the top of this list, there is a search bar and a 'Permit join (All)' button, which is highlighted with a red box. The device list table has columns for #, Pic, Friendly name, IEEE Address, Manufacturer, Model, LQI, and Power. It contains 10 rows of device information.

| #  | Pic | Friendly name           | IEEE Address                   | Manufacturer  | Model        | LQI | Power |
|----|-----|-------------------------|--------------------------------|---------------|--------------|-----|-------|
| 1  |     | 2-1A30                  | 0x282c02bffe1a30<br>(0x176A)   | Third Reality | 3RSP019BZ    | 255 | 🔌     |
| 2  |     | 2-1EF5                  | 0x282c02bffe81ef5<br>(0xA8E7)  | Third Reality | 3RMS16BZ     | 255 | 🔌     |
| 3  |     | 2-5F11                  | 0x282c02bffe75f11<br>(0x7316)  | Third Reality | 3RMS16BZ     | 74  | 🔌     |
| 4  |     | 2-551E                  | 0x282c02bffe8551e<br>(0xAE33)  | Third Reality | 3RMS16BZ     | 255 | 🔌     |
| 5  |     | 2-1170                  | 0x282c02bffe1170<br>(0xC138)   | Third Reality | 3RS015BZ     | 255 | 🔌     |
| 6  |     | door-V29                | 0xd55ce6ffb022c28<br>(0x6C6A)  | Third Reality | 3RDT01056Z   | 255 | 🔌     |
| 7  |     | door-V28                | 0xd75ce6ffb022c28<br>(0x1D6E)  | Third Reality | 3RDT01056Z   | 255 | 🔌     |
| 8  |     | plug3 0x1a2fedffb022c28 | 0x1a2fedffb022c28<br>(0xC93F)  | Third Reality | 3RSPE01044BZ | 255 | 🔌     |
| 9  |     | button                  | 0x4985e3ffb022c28<br>(0x338E)  | Third Reality | 3RS822BZ     | 65  | 🔌     |
| 10 |     | jtg9soil                | 0x244a58a40d38c1a4<br>(0x786C) | Unsupported   | 3RSM0147Z    | 255 | 🔌     |

Home Assistant

Overview

11

Map

Energy

Logbook

History

File editor

Media

Terminal

Zigbee2MQTT

Developer tools

Settings

Notifications

admin

Z2M@192.168.3.87

Devices

Dashboard

Map

Groups

OTA

Touchlink

Logs

Extensions

Permit join (All)

Enter search criteria

| #  | Pic | Friendly name           | IEEE Address                   | Manufacturer  | Model       | LQI | Power |  |
|----|-----|-------------------------|--------------------------------|---------------|-------------|-----|-------|--|
| 1  |     | 2-1A30                  | 0x282c02bffe1a30<br>(0x176A)   | Third Reality | 3RSP0198Z   | 255 | ⬇     |  |
| 2  |     | 2-1EF5                  | 0x282c02bffe81ef5<br>(0xA8E7)  | Third Reality | 3RMS168Z    | 255 | ⬇     |  |
| 3  |     | 2-5F11                  | 0x282c02bffe75f11<br>(0x7316)  | Third Reality | 3RMS168Z    | 74  | ⬇     |  |
| 4  |     | 2-551E                  | 0x282c02bffe8551e<br>(0xAE33)  | Third Reality | 3RMS168Z    | 255 | ⬇     |  |
| 5  |     | 2-1170                  | 0x282c02bffe1170<br>(0xC138)   | Third Reality | 3RSB0158Z   | 255 | ⬇     |  |
| 6  |     | door-V29                | 0xd55ce6ffb022c28<br>(0x6C6A)  | Third Reality | 3RDT01056Z  | 255 | ⬇     |  |
| 7  |     | door-V28                | 0xd75ce6ffb022c28<br>(0x1D6F)  | Third Reality | 3RDT01056Z  | 255 | ⬇     |  |
| 8  |     | plug3 0x1a2fedfbf022c28 | 0x1a2fedfbf022c28<br>(0xC93F)  | Third Reality | 3RSP010448Z | 255 | ⬇     |  |
| 9  |     | button                  | 0x498e3ffb022c28<br>(0x338E)   | Third Reality | 3RSB228Z    | 65  | ⬇     |  |
| 10 |     | jij3soil                | 0x244a58a40d38c1a4<br>(0x786C) | Unsupported   | 3RSM0147Z   | 255 | ⬇     |  |
| 11 |     | 0xb40ecfd212110000      | 0xb40ecfd212110000<br>(0x9073) | Unsupported   | 3RCB01057Z  | 0   | ⬇     |  |

Home Assistant

Overview

11

Map

Energy

Logbook

History

File editor

Media

Terminal

Zigbee2MQTT

Developer tools

Settings

Notifications

admin

Z2M@192.168.3.87

Devices

Dashboard

Map

Groups

OTA

Touchlink

Logs

Extensions

Permit join (All)

0xb40ecfd212110000 ▾

About

Exposes

Bind

Reporting

Settings

Settings (specific)

State

Clusters

Scene

Dev console

State

On/off state of this light

OFF

☒

ON

Brightness

Brightness of this light

254

Color temp

Color temperature of this light

coolest

cool

neutral

warm

warmest

1000

mired

Color temp startup

Color temperature after cold power on of this light

coolest

cool

neutral

warm

warmest

previous

mired

Color (X/Y)

Color of this light in the CIE 1931 color space (x/y)

Color (HS)

Color of this light expressed as hue/saturation

Effect

Triggers an effect on the light (e.g. make light blink for a few seconds)

Power-on behavior

Controls the behavior when the device is powered on after power loss. If you get an 'UNSUPPORTED\_ATTRIBUTE' error, the device does not support it.

off

on

toggle

previous

Linkquality

Link quality (signal strength)

168

192.168.3.87:8123/api/hassio\_ingress/qs80r8DoeIXD9RWSCeXbJ75D1Cj8TcciMwMnKUGjk/#/device/0xb4...

# Important Safety Information

Before installing the Smart Bulbs, please read and follow all precautions, including:

Turn off power before installation or removal. Discontinue use if damaged.

Warning: risk of electric shock. Do not attempt to disassemble bulb.

Only use the control provided with or specified by these instructions to control this lamp. This lamp will not operate properly when connected to a standard (incandescent) dimmer or dimming control.

Suitable for use in operating environment

-4°F ~ 104°F (-20°C ~ 40°C).

Utilisez uniquement la commande fournie avec ou spécifiée par ces instructions pour commander cette lampe. Cette lampe ne fonctionnera pas correctement lorsqu'elle est raccordée à un gradateur ou à un régulateur de gradation standard (à incandescence).

Convient pour une utilisation en environnement de fonctionnement -4°F ~ 104°F (-20°C ~ 40°C).

THIS DEVICE IS NOT INTENDED FOR USE WITH EMERGENCY EXITS.

NE CONVIENT PAS AUX SORTIES DE SECOURS.

Indoor use only.

Customer Service:

<https://3reality.com/email-support/>

Forum: <https://discuss.3reality.com/>

FAQ: <https://3reality.com/faq-help-center>

# FCC Regulatory Conformance

This device complies with Part 15 of the FCC Rule. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

## 1. Caution statement:

Modifications not approved by the party responsible for compliance could void user's authority to operate the equipment.

## 2. Instruction statement:

This equipment has been tested and found to comply with the limits for Class B digital device, pursuant to part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates, uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:

- \*Reorient or relocate the receiving antenna.
- \*Increase the separation between the equipment and the receiver
- \*Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
- \*Consult the dealer or an experienced radio/TV technician for help.

## **ISED RSS warning**

This device complies with Innovation, Science and Economic Development Canada Compliance licence-exempt RSS standard (s). Operation is subject to the following two conditions: (1) this device may not cause interference, and (2) this device must accept any interference, including interference that may cause undesired operation of the device.

Le présent appareil est conforme aux CNR d'Innovation, Sciences et Développement

économique ISED applicable aux appareils radio exempts de licence.

L'exploitation est autorisée aux deux conditions suivantes:

- (1) l'appareil ne doit pas produire de brouillage, et
- (2) l'utilisateur de l'appareil doit accepter tout brouillage radioélectrique subi, même si le brouillage est susceptible d'en compromettre le fonctionnement.

## **FCC/ ISED Radiation Exposure Statement**

This equipment should be installed and operated with minimum distance 20cm between

the radiator & your body. This transmitter must not be co-located or operating in conjunction with any other antenna or transmitter.

Cet équipement doit être installé et utilisé avec un minimum de 20cm de distance entre le radiateur et votre corps.

Cet émetteur ne doit pas être co-localisés ou fonctionner en conjonction avec une autre antenne ou émetteur.