


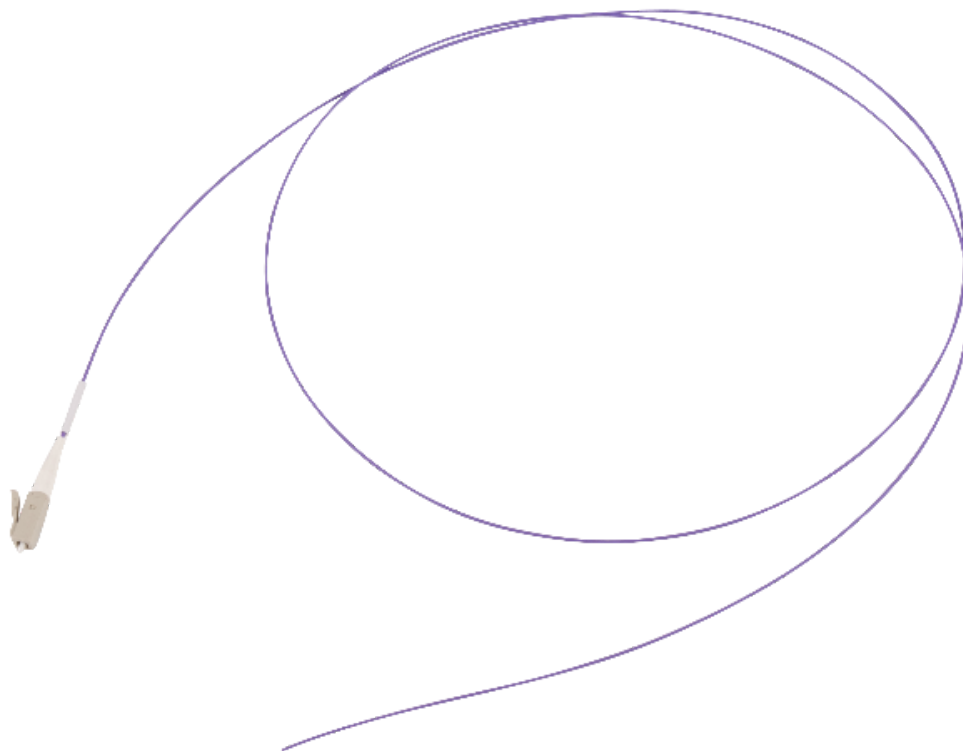

Pigtails OM4

Purple 900µm

Funksjoner

- OM4 50/125 fiber for standard installations
- Halogenfri flame-retardant material (HFFR)
- Various connector options

Bruksområde

The D10+ series is designed to meet the standards mainly used in access and transport termination points. Polished Connectors (PC) ensures low insertion loss and minimal back reflection. All assemblies are marked with a unique ID-number and all measurement data is stored

Design

The D10+ series has an extended operating temperature range, -40°C to +70°C. This makes them very stable over time in various environmental conditions.

The bending radius is 25 mm when installed or handled during installation.

The pigtails are designed with Ø 0.9 mm buffered secondary coating and are made of halogen-free flame-retardant (HFFR) material giving excellent protection.

Produktinformasjon

The contact housing made of plastic or metal and the ferrulle is made of Zirconia. Each pigtail is equipped with a dust cover and packed in a sealed plastic bag.

The label indicates light attenuation (IL) and reflection (RL) metrics. Can also be supplied in multipacks with 12 or 24 pcs pigtails.

Technical Information

Fibertype	OM4
Produktfarge	Purple
Temperatur, installasjon [°C]	-40° til +70°
Temperatur, drift [°C]	-40° to +70°
Temperatur, lagring [°C]	-40° to +70°
Innsettingstap, maks [dB]	PC 0.2
Returtap, min [dB]	PC 30

Articles 2

Artikkelnavn	Farge	Antall fibre	Layout	Bøyeradius [mm]	Diameter Ø [mm]	Lengde [m]	Leveringsform
Pigtail 1x50/125 OM4 SC/PC 1m D10401	Lilla	1	Pigtail	10	0.9	1	Pose
Pigtail 1x50/125 OM4 LC/PC 1m D10L01	Lilla	1	Pigtail	10	0.9	1	Pose