

DIGITAL NAVIGATION

[Mounting Hardware](#) [Drawing & Dimensions](#) [Tech Guide](#) [SensorSwitch Platform](#) [nLight Platform](#)

FEATURES & SPECIFICATIONS

INTENDED USE — Lithonia Linear is a suspended linear fixture designed for open, mixed, grid, or hard surface applications. The perfect blend of configurability and simplicity - Lithonia Linear is perfect for contractors, design builders, architects and specifiers for use in almost any application including open ceilings, retail, office, hospitality, education, healthcare, and transportation.

CONSTRUCTION — Lithonia Linear is built on an extruded aluminum chassis for the perfect blend of strength, weight, and thermal performance. The power modules/ end caps are made of injections molded plastic and lens is constructed of polycarbonate.

OPTICS — Lithonia Linear utilizes a frosted polycarbonate diffuser which provides an optimal 13% uplight to prevent a dark ceiling effect without reducing overall fixture efficiency.

CONTROLS — **Integrated Sensor (nLight® Wired Networking):** This sensor is nLight-enabled, meaning it has the ability to communicate over an nLight network. When wired, using CAT-5 cabling, with other nLight-enabled sensors, power packs, or WallPods, an nLight control zone is created. Once linked to a Gateway, directly or via a Bridge, the zone becomes capable of remote status monitoring and control via SensorView software.

Integrated Smart Sensor (nLight Air Wireless Platform): The RES7 sensor is nLight AIR enabled, meaning it has the ability to communicate over the wireless nLight control platform. It is available with an automatic dimming photocell, and either a digital PIR or a microphonics (PDT) dual technology occupancy sensor. It pairs to other luminaires and wall switches through our mobile app, CLAIRITY+, which allows for simple sensor adjustment

Integrated Wireless Sensor (single room control): Sensor Switch™ VPIR or VAPIR luminaire-embedded occupancy and ambient light sensor allows the luminaire to power off when the space is unoccupied or when enough ambient light is entering the space.

INSTALLATION — Lithonia Linear is designed to be extremely easy to install in multiple applications. Adjustable mounting points and aircraft cable make it easy to order, without knowing exact layouts and mounting points ahead of time. Just by determining if you have an open ceiling or T-grid style ceiling, you can order everything you need for a hassle-free installation. All power cords are factory installed and suspension hardware is included with each luminaire. We have taken the guesswork out of what you need for the installation.

LISTINGS — UL certified to US and Canadian safety standards. Damp location listed. IP5X Option. DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at www.designlights.org/QPL to confirm which versions are qualified.

WARRANTY — 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: www.acuitybrands.com/support/warranty/terms-and-conditions

Note: Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

MOUNTING HARDWARE — Mounting hardware included and optional replacement parts table on page 3.

Catalog Number
Notes
Type

Open Ceiling LED Suspended

LL

Lithonia® Linear



EPD ZT DEC



EPD EZTR DEC



EPD EZCB DEC



ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: LL8 6000LM 80CRI CPD MIN10 ZT MVOLT F1/120A DNA

Series	Lumens ‡	CRI	CCT	Power Drop (See images below on page 5)	Minimum Dimming Level	Dimming
LL4 4' LED Suspended	3000LM 3000 Lumens 4000LM 4000 Lumens 5000LM 5000 Lumens	80CRI	30K 3000K 35K 3500K 40K 4000K 50K 5000K	CPD Center Power Drop ‡ EPD End Power Drop ‡	MIN1 Dims to 1% ‡ MIN10 Dims to 10%	ZT Generic 0-10V integrated driver ‡ <u>Remote driver box</u> ZTR Generic 0-10V driver ‡ SLD Step level dimming ‡ EZTR eldoLED 0-10V remote box EZCR eldoled controls remote box ‡
LL8 8' LED Suspended	6000LM 6000 lumens 8000LM 8000 lumens 10000LM 10000 lumens					<u>Driver backpack</u> EZTB eldoLED 0-10V backpack ‡ EZCB eldoled controls backpack ‡
LL16 16' LED Suspended ‡	12000LM 12000 lumens 16000LM 16000 lumens 20000LM 20000 lumens					

Voltage	Emergency Option	Mounting Type/Overall Suspension ‡ (See images below on page 3)	Finish ‡
MVOLT MVOLT (120-277V) 347 347V ‡	(Blank) no emergency option IE10WCP 10W Emergency backup ‡ IE10WCPHE 10W Emergency backup w/standby mode (T20) ‡ IE7WCPHE 7W Emergency back w/standby mode (T20) ‡ GTD Generator Transfer Device ‡	F1/120A T-bar ceiling (universal mounting bracket) 120" (10ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy included. F1/240A T-bar ceiling (universal mounting bracket) 240" (20ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy included. F2/120A Hard Ceiling (horizontal J-box) 120" (10ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy included. F2/240A Hard ceiling (horizontal J-box) 240" (20ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy included. F3/120A Open Ceiling (closed loop) 120" (10ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy not included. F3/240A Open Ceiling (closed loop) 240" (20ft) Adjustable Aircraft Cables, 18/5 SJT, Cord Included. Canopy not included.	WH Matte White, fixture finish and cord set DNA Natural Aluminum, fixture finish and white cord set MB Matte Black, fixture finish and cord set

NOTE: ‡ Indicates option chosen has ordering restrictions or note. Please reference ordering notes chart. Options are sorted alphanumerically.

LL LED Suspended

Controls			
Control Input		Sensor	
(blank)	No Control Input	(blank)	No Sensor or Control Input function only, if selected.
NLTAIR2	nLight AIR Generation 2 (wireless) enabled ‡	(blank)	No sensor, Control Input function only
NLTAIREM2	nLight AIR Generation 2 (wireless) enabled and UL924 Emergency Operation, via power interrupt detection ‡	APIR	Passive Infrared Occ sensor with auto-dimming photocell
		APDT	Occ sensor dual tech (passive infrared & microphonics) and auto dimming photocell
		APIREM	Occ sensing with passive infrared - on/off functionality and auto dimming photocell and UL924 Emergency Operation, via power interrupt detection
		APDTEM	Occ sensor dual tech (passive infrared & microphonics) and auto dimming photocell and UL924 Emergency Operation, via power interrupt detection.
NLIGHT	nLight enabled	(blank)	No sensor, Control Input function only
NLIGHTER	nLight enabled, for use with generator supply EM power	PIR	Occ sensing with passive infrared - on/off functionality
NLIGHTLM	nLight enabled with lumen management	PDT	Occ sensor dual tech (passive infrared & microphonics)
NLIGHTERLM	nLight enabled with lumen management, for use with generator supply EM power	APIR	Passive Infrared Occ sensor with auto-dimming photocell
		APDT	Occ sensor dual tech (passive infrared & microphonics) and auto dimming photocell
		VPIR	Vertex passive Infrared OCC sensor with on/off photocell
SSE	Sensor Switch Embedded	APIR	Passive Infrared Occ sensor with auto-dimming photocell
		APDT	Occ sensor dual tech (passive infrared & microphonics) and auto dimming photocell
		VPIR	Vertex passive Infrared OCC sensor with on/off photocell
		VAPIR	Vertex passive Infrared Occ sensor with auto-dimming photocell
SSAIR	Wireless standalone embedded control by SensorSwitch. ‡	(blank)	No sensor, Control Input function only
		VAPIR	Vertex passive Infrared Occ sensor with auto-dimming photocell

End Cap Options (When ordering EPD. See page 5 with configuration examples. Aesthetic pieces only)		Options	
(Blank)	Center Power Drop	IP5X	Gasketing to meet IP5X rating ‡
DEC	Decorative End Cap	NLG	No Lithonia Logo
DEM	Decorative End Module		

NOTE: ‡ Indicates option chosen has ordering restrictions or note. Please reference ordering notes chart. Options are sorted alphanumerically.

‡ Ordering Notes/ Restrictions	
Option value	Restriction
LL16	LL16 EPD ordered with controls must be EZCR. LL16 CPD ordered with NLTAIR, SSE/SSAIR can be ordered with EZCB and EZCR. If ordering NLIGHT, NLIGHTER, NLIGHTLM, NLIGHTERLM must be EZCR.
Lumens	Nominal lumen output.
CPD, EPD	CPD comes with (DEC) decorative end caps. CPD is not available in LL4. EPD ships with choice of decorative end caps (DEC) or decorative module (DEM). LL16 EPD ships with decorative module (DEM).
MIN1	Only available with nLight, nLight Air and EldoLED.
ZT	Not available with MIN1, Controls or EM, 347V.
ZTR	Generic driver available with with 347V, EM or GTD. Not available with MIN1 and controls
SLD	Only available with remote box driver. Not available with controls, 347V or MIN1.
EZCR	When ordering EZCR luminaire, two cords will run from the remote driver box to the power module on the fixture.
EZTB, EZCB	Not available with EM or 347V. EZTB not available with any Control options.
347	Must be remote driver box mounted. Not available with Emergency, GTD or ZT, EZTB, EZCB.
IE10WCP, IE10WCPHE, IE7WCPHE GTD	Not available with 347. Must be remote mounted – EZTR, EZCR, ZTR. Not available with ZT.
Mounting Type/ Overall Suspension	All mounting/suspension cable and hardware included. Refer to the Mounting/Suspension Hardware Included Key on page 3 for the number of suspension drops and power feed(s).
Finish	Metal components painted after fabrication.
NLTAIR2	Can be used as a normal power sensing device for nLight AIR devices and luminaires with EM emergency options. EZCR or EZCB must be chosen. Not available with MIN10.
NLTAIREM2	See UL924 Sequence of Operation. Leave Sensor option group blank, not available with APIR, APDT, APIREM and APDTEM. EZCR or EZCB must be chosen. Not available with MIN10.
NLIGHT, NLIGHTER, NLIGHTLM, NLIGHTLERM	Must be remote box mounted EZCR. Not available with MIN10.
SSAIR	Only available with EZCR and EZCB.
IP5X	Gasketing for the driver enclosure to meet IP5X. Only available with ZT.

LL LED Suspended

WHAT'S IN THE BOX:




+ MOUNTING/ HARDWARE BAG

F1 – T-GRID ceiling mount	
LL4 EPD	1ZAC + 1ZACFP + 2 T GRID CLIPS
LL8 CPD	2ZAC + 1ZACFP + 3 T GRID CLIPS
LL8 EPD	1ZAC + 1ZACFP + 2 T GRID CLIPS
LL16 CPD	2ZAC + 1ZACFP + 3 T GRID CLIPS
LL16 EPD	2ZAC + 2ZACFP + 4 T GRID CLIPS


F2 – Hard ceiling mount	
LL4 EPD	1ZAC + 1ZACFP
LL8 CPD	2ZAC + 1ZACFP
LL8 EPD	1ZAC + 1ZACFP
LL16 CPD	2ZAC + 1ZACFP
LL16 EPD	2ZAC + 2ZACFP

F3 – Open ceiling mount	
LL4 EPD	2LLAC + 1PC
LL8 CPD	3LLAC + 1PC
LL8 EPD	2LLAC + 1PC
LL16 CPD	3LLAC + 1PC
LL16 EPD	4LLAC + 2PC


POWER CORD (PC)

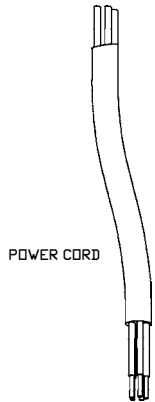


LLAC

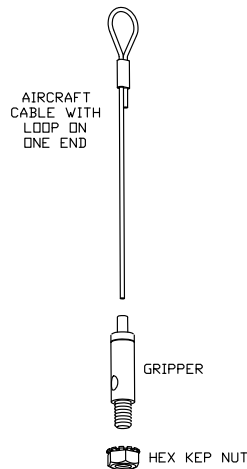


ZAC

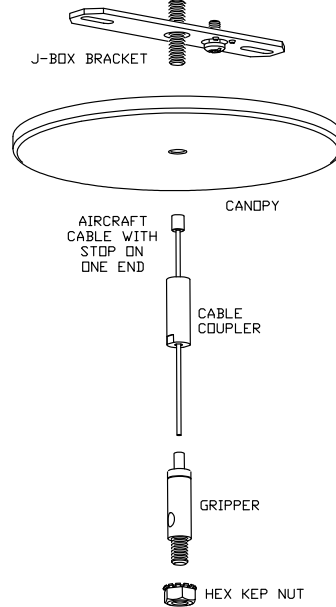

ZACFP

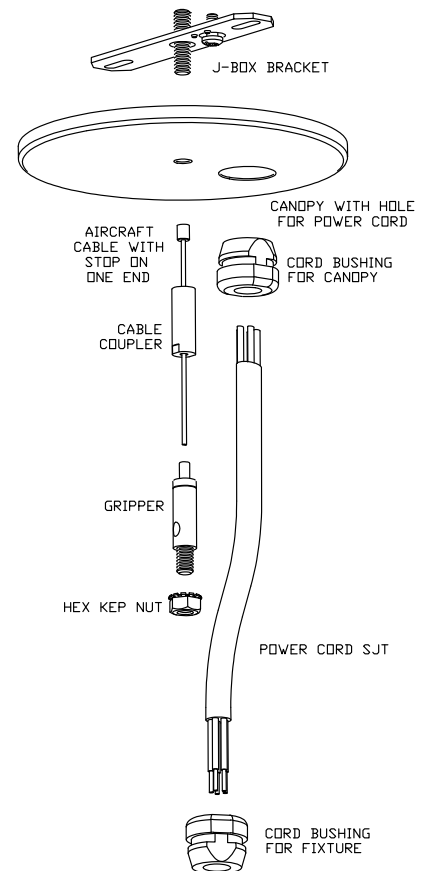


HARDWARE IMAGES




Joiner Bracket LLCR


Note: *Included with every fixture configurations

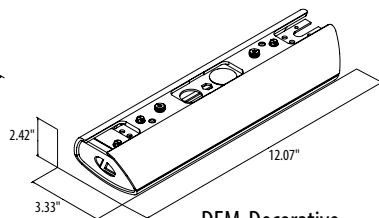


DEM-Decorative End Module




DEC- Decorative End Cap



U0776 (Tgrid Clip)

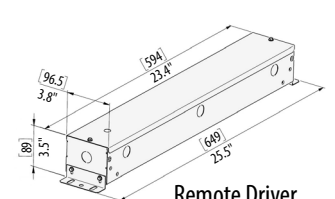

Remote Driver Box/Emergency Battery Box




Sliding Mounting Hardware

Note: *Included with every fixture configurations




Screws for power Module Connection

Note: *Included with every fixture configurations



Remote Box Bracket




Remote Box Hanger Bracket

LL LED Suspended

OPTIONAL REPLACEMENT PARTS			
SUSPENSION KIT	CI Code	Model	Description
	*265WLF	LLAC120	120" cable gripper w/nut - NO Canopy
	*265WLG	LLAC240	240" cable gripper w/nut - NO Canopy
	*267MEP	LLCNPY WHT	White, 5" Canopy with 15/32" and 1/2" diameter holes
	*267MF2	LLCNPY BLK	Black, 5" Canopy with 15/32" and 1/2" diameter holes
	*211C82	ZAC120	120" cable gripper w/nut - INCL 5" MATTE WHITE CANOPY & BRACKET
	*250E2S	ZAC120 MB	120" cable gripper w/nut - INCL 5" MATTE BLACK CANOPY & BRACKET
	*217YRX	ZAC240	240" cable gripper w/nut - INCL 5" MATTE WHITE CANOPY & BRACKET
	*2512MC	ZAC240 MB	240" cable gripper w/nut - INCL 5" MATTE BLACK CANOPY & BRACKET
	*233RV9	ZACFPD120	5-conductor power feed & 120" cable gripper w/nut - INCL 5" MATTE WHITE CANOPY & BRACKET
	*250E7S	ZACFPD120 MB	5-conductor power feed & 120" cable gripper w/nut - INCL 5" MATTE BLACK CANOPY & BRACKET
	*233RVA	ZACFPD240	5-conductor power feed & 240" cable gripper w/nut - INCL 5" WHITE CANOPY & BRACKET
	*2512MJ	ZACFPD240 MB	5-conductor power feed & 240" cable gripper w/nut - INCL 5" MATTE BLACK CANOPY & BRACKET
DEM- DECORATIVE END MODULE	*266EU4	LLCR WH DEM	Decorative end module, Matte White
	*266EUK	LLCR MB DEM	Decorative end module, Matte Black
	*266EUG	LLCR DNA DEM	Decorative end module, Natural Aluminum
DEC- DECORATIVE END CAP	*286VVV	LLCR WH DEC	Decorative end cap, Matte White
	*286VVX	LLCR DNA DEC	Decorative end cap, Natural Aluminum
	*286VYY	LLCR MB DEC	Decorative end cap, Matte Black
MISCELLANEOUS	*27253J	RK3LLCR	Joiner, Galvanized Steel (comes std w/fixture)
	*212NF3	U0776	Clip used to convert aircraft mounting from JBOX to T-Grid

DIMENSIONS:

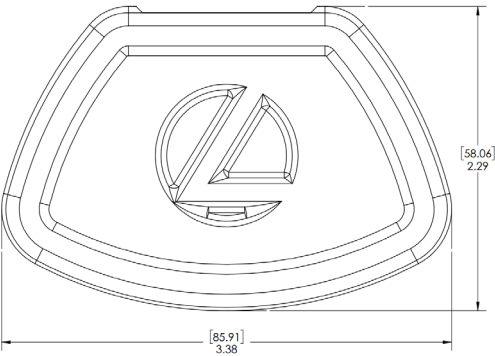

PERFORMANCE DATA

Nomenclature	Lumens	Wattage	LPW
LL4 3000LM 80CRI 40K MVOLT	3000	26	117
LL4 4000LM 80CRI 40K MVOLT	4045	33	123
LL4 5000LM 80CRI 40K MVOLT	4955	41	120
LL8 6000LM 80CRI 40K MVOLT	6111	50	121
LL8 8000LM 80CRI 40K MVOLT	8327	66	127
LL8 10000LM 80CRI 40K MVOLT	9786	79	124
LL16 12000LM 80CRI 40K MVOLT	12223	101	121
LL16 16000LM 80CRI 40K MVOLT	16655	131	127
LL16 20000LM 80CRI 40K MVOLT	19572	158	124
For 30K - Factor in 5% lumen reduction For 35K - Factor in 3% lumen reduction For 50K - Factor in 2% lumen increase For 347V - Factor in 12% wattage increase Refer to LL4 data upload			








Projected LED Life	L90	L80	L70
Hours	44K	92K	150K
Values are projections based on TM-21 and at 25C Ambient.			

PALLET DIMENSIONS

Length/ configuration	Fixtures per pallet	Pallet Dims (L X W)
4ft	84	50X51
8ft CPD	42	51X51
8ft EPD	56	50X102
16ft CPD, EPD	56	50X102


FIXTURE WEIGHTS

Length	Weight
4ft	6lbs
8ft	8lbs
16ft	12lbs

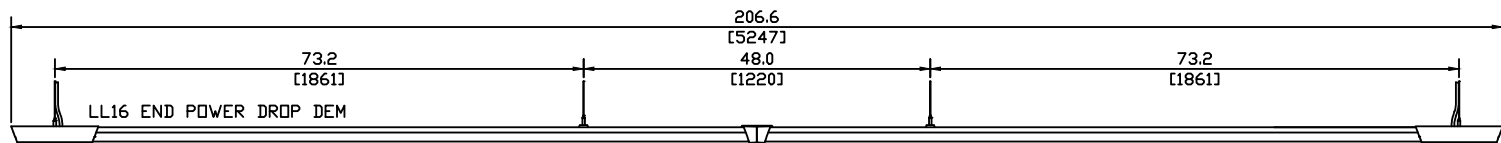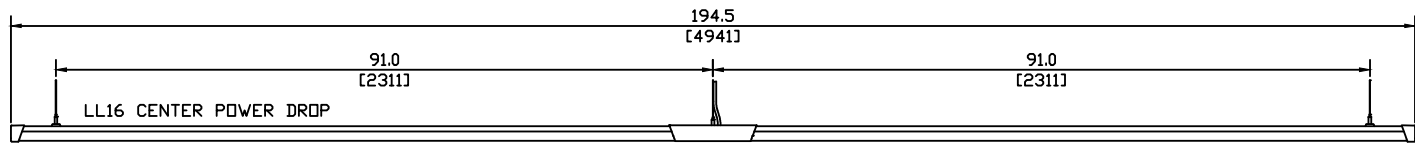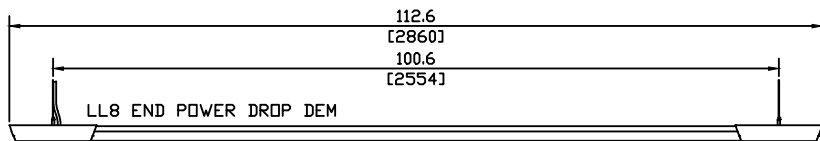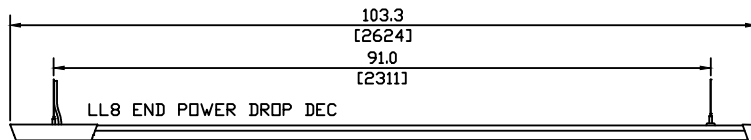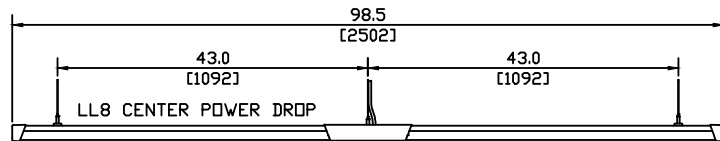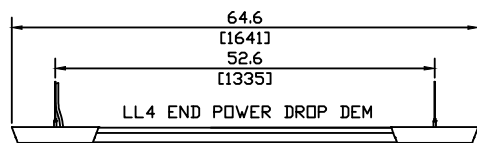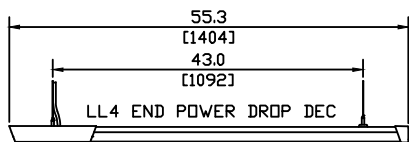


CONFIGURATIONS:

ZT / SLD / EZTR / EZCR

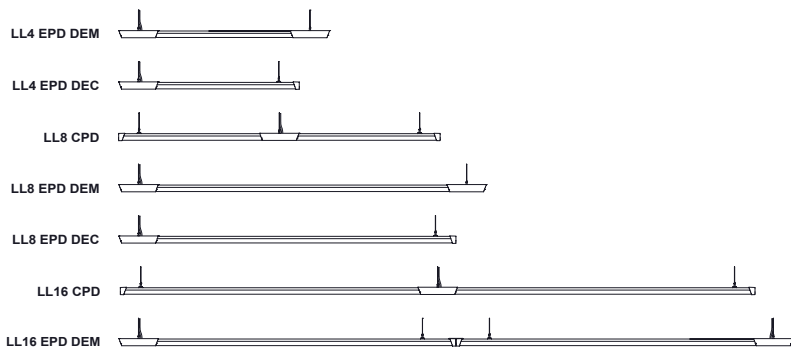

EZTB / EZCB

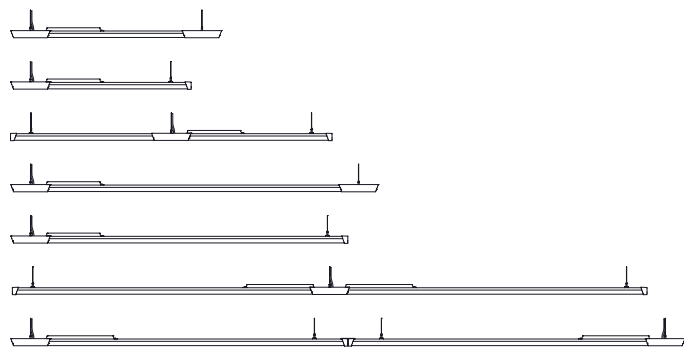

Intelligent Luminaire Technology Guide

Choose nomenclature from these columns			
Control Input		Sensor	
SSE	+	APIR	=
SSE	+	APDT	=
SSE	+	VPIR	=
SSE	+	VAPIR	=
SSAIR	+	(blank)	=
SSAIR	+	VAPIR	=
NLIGHT	+	(blank)	=
NLIGHT	+	PIR	=
NLIGHT	+	PDT	=
NLIGHT	+	APIR	=
NLIGHT	+	APDT	=
NLIGHT	+	VPIR	=
NLIGHTER	+	(blank)	=
NLIGHTER	+	PIR	=
NLIGHTER	+	PDT	=
NLIGHTER	+	APIR	=
NLIGHTER	+	APDT	=
NLIGHTER	+	VPIR	=
NLIGHTLM	+	(blank)	=
NLIGHTLM	+	PIR	=
NLIGHTLM	+	PDT	=
NLIGHTLM	+	APIR	=
NLIGHTLM	+	APDT	=
NLIGHTLM	+	VPIR	=
NLIGHTLMER	+	(blank)	=
NLIGHTLMER	+	PIR	=
NLIGHTLMER	+	PDT	=
NLIGHTLMER	+	APIR	=
NLIGHTLMER	+	APDT	=
NLIGHTLMER	+	VPIR	=
NLTAIR2	+	(blank)	=
NLTAIREM2	+	(blank)	=
NLTAIR2	+	APIR	=
NLTAIR2	+	APDT	=
NLTAIR2	+	APIREM	=
NLTAIR2	+	APDTEM	=

Sensor
MSD 7 ADCX
MSD PDT 7 ADCX
VERTEX EZ OCC VLP
VERTEX EZ ADC VLP
BTRM SSA BTA
BTRM SSA BTA + VERTEX EZ ADC VLP
nIO EZ PH
nIO EZ PH + nES 7
nIO EZ PH + nES PDT 7
nIO EZ PH + nES 7 ADCX
nIO EZ PH + nES PDT 7 ADCX
nIO EZ PH + VERTEX EZ OCC VLP
nIO EZ PH ER
nIO EZ PH ER + nES 7
nIO EZ PH ER + nES PDT 7
nIO EZ PH ER + nES 7 ADCX
nIO EZ PH ER + nES PDT 7 ADCX
nIO EZ PH ER + VERTEX EZ OCC VLP
nIO EZ PH N80
nIO EZ PH N80 + nES 7
nIO EZ PH N80 + nES PDT 7
nIO EZ PH N80 + nES 7 ADCX
nIO EZ PH N80 + nES PDT 7 ADCX
nIO EZ PH N80+ VERTEX EZ OCC VLP
nIO EZ PH ER N80
nIO EZ PH ER N80 + nES 7
nIO EZ PH ER N80 + nES PDT 7
nIO EZ PH ER N80 + nES 7 ADCX
nIO EZ PH ER N80 + nES PDT 7 ADCX
nIO EZ PH ER N80 + VERTEX EZ OCC VLP
RIO EZ PH 90D G2
RIO EZ PH ER 90D G2
RES7 G2
RES7 PDT 180D G2
RES7 EM 180D G2
RES7 PDT EM 180D G2

Notes
Individual fixture control only. PIR integral occupancy sensor with automatic dimming control photocell.
Individual fixture control only. PDT integral occupancy sensor with automatic dimming control photocell.
Vertex passive Infrared OCC sensor with on/off photocell
Vertex passive Infrared Occ sensor with auto-dimming photocell
Wireless room control with SensorSwitch AIR
Wireless room control with SensorSwitch AIR
nLight enabled only. No onboard sensor.
nLight enabled with PIR integral occupancy sensor.
nLight enabled with dual technology occupancy control sensor.
nLight enabled with PIR integral occupancy sensor with automatic dimming photocell.
nLight enabled with dual technology occupancy controls sensor with automatic dimming photocell.
nLight enabled with Vertex passive Infrared OCC sensor with on/off photocell
Emergency nLight enabled only. No onboard sensor.
Emergency nLight enabled with PIR integral occupancy sensor.
Emergency nLight enabled with dual technology occupancy control sensor.
Emergency nLight enabled with PIR integral occupancy sensor with automatic dimming photocell.
Emergency nLight enabled with dual technology occupancy controls sensor with automatic dimming photocell.
Emergency nLight enabled with Vertex passive Infrared OCC sensor with on/off photocell
nLight enabled only with 80% constant lumen management. No onboard sensor.
nLight enabled with 80% constant lumen management with PIR integral occupancy sensor.
nLight enabled with 80% constant lumen management with dual technology occupancy control sensor.
nLight enabled with 80% constant lumen management with PIR integral occupancy sensor with automatic dimming photocell.
nLight enabled with 80% constant lumen managementwith dual technology occupancy controls sensor with automatic dimming photocell.
nLight enabled with 80% constant lumen management with Vertex passive Infrared OCC sensor with on/off photocell
Emergency nLight enabled only with 80% constant lumen management. No onboard sensor.
Emergency nLight enabled with 80% constant lumen managment with PIR integral occupancy sensor.
Emergency nLight enabled with 80% constant lumen management with dual technology occupancy control sensor.
Emergency nLight enabled with 80% constant lumen management with PIR integral occupancy sensor with automatic dimming photocell.
Emergency nLight enabled with 80% constant lumen management with dual technology occupancy controls sensor with automatic dimming photocell.
Emergency nLight enabled with 80% constant lumen management with Vertex passive Infrared OCC sensor with on/off photocell
nLight AIR Generation 2 enabled.
nLight AIR Generation 2 enabled
nLight AIR Generation 2 enabled.
nLight AIR Generation 2 enabled.
nLight AIR Generation 2 enabled.
nLight AIR Generation 2 enabled.

Previous Nomenclature
MSD7ADCX
MSDPDT7ADCX
VTX15FOCC
VTX15FADC
SSAIR
SSAIR APIR
NLIGHT
NLIGHT NES7
NLIGHT NESPDT7
NLIGHT NES7ADCX
NLIGHT NESPDT7ADCX
NLIGHT NVTX16FOCC
NLIGHT EMG
NLIGHT EMG NESPD7
NLIGHT EMG NES7ADC
NLIGHT EMG NES7ADCX
NLIGHT EMG NESPD7ADCX
NLIGHT NVTX15FOCC
NLIGHT CL80
NLIGHT CL80 NES7
NLIGHT CL80 NESPD7
NLIGHT CL80 NES7ADCX
NLIGHT CL80 NESPD7ADCX
NLIGHT CL80 NVTX16FOCC
NLIGHT EMG CL80
NLIGHT EMG CL80 NES7
NLIGHT EMG CL80 NESPD7
NLIGHT EMG CL80 NES7ADCX
NLIGHT EMG CL80 NESPD7ADCX
NLIGHT EMG CL80 NVTX16FOCC
NLIGHT AIR2 RIO
NLTAIR2 RIOEM
NLTAIR2 RES7
NLTAIR2 RES7PDT
NLTAIR2 RES7EM
NLTAIR2 RES7PDTEM




Performance You Can Count On


SensorSwitch™ offers standalone wired and wireless lighting controls solutions designed for room-based applications. Our products offer reliable performance and ease of installation.

Sensorswitch.com

Wired Embedded Controls

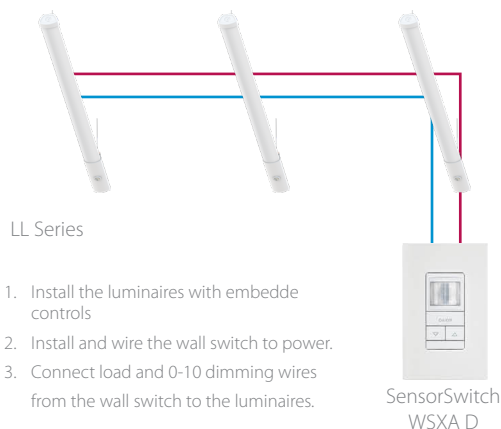

Wireless Embedded Controls

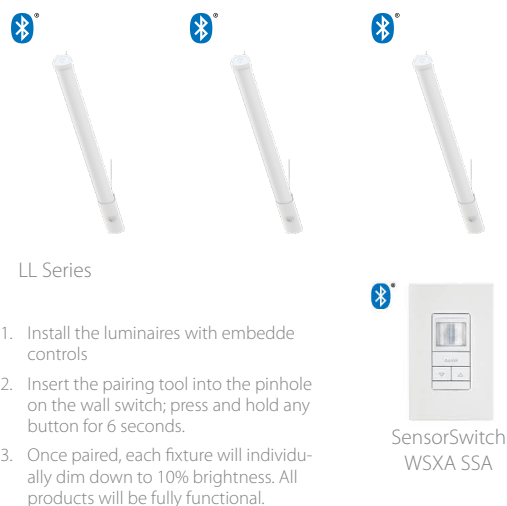




Single Lighting Controls Platform for Indoor & Outdoor Spaces

nLIGHT® is your networked lighting controls platform, for indoor and outdoor applications, providing wired or wireless options. Scaling from room to campus-wide applications, it is the one platform that grows with your business today and tomorrow; to seamlessly address energy cost optimization, building code compliance, improved occupant comfort, and much more. nLIGHT also interfaces with DALI®, BACnet®, DMX and additional third-party devices.

nLIGHTcontrols.com

Wired Embedded Controls

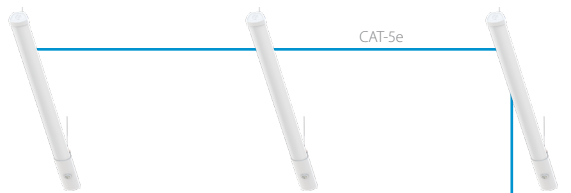

1. Install the luminaires with embedded controls
2. Install the nLight Wired wall switch.
3. Connect the luminaires using standard CAT-5e cables and the controls devices will automatically discover each other and work (plug and play).

nLight nPODMA DX

Wireless Embedded Controls



1. Install the luminaires with embedded controls
2. Install the nLight AIR battery-powered wall switch
3. Use CLAIRITY + mobile app to pair the fixture with the wall switch and is desired, customize the sensor settings

nLight nPODBA 2P DX

Mobile Device