

Hisense

400
SQ FT

PORTABLE AIR CONDITIONER
7,500 BTU (12,000 BTU, ASHRAE 12B equivalent)

AP1219CR1W



- Low Noise Cooling System
- Powerful Cross-flow Fan Design
- Cooling, Fan, and Dehumidifier Functions
- Remote Control is included
- 2-year Warranty



3 Modes - Cool, Dehumidify, and Fan



Quiet Operation



Drain-free Operation



Snap-assembly Window Kit

Cool Comfort - Quiet, Convenient, and Easy to Install

The Hisense AP1219CR1W Portable Air Conditioner provides the utmost in performance more conveniently than ever. Airflow is strong, cool and quiet due to the new cross-flow fan design. Additionally, the louvers automatically open to a preset position after the unit is powered on. To adjust the automatic louver, press SWING once. Press SWING again to hold the louver at a desired direction. Preserve the external appearance of your home with the included, easy to install snap-assembly window kit for, for windows 18" to 50" wide. This Hisense portable air conditioner cools, dehumidifies, and can function in fan mode.

Hisense

400
SQ FT

PORTABLE AIR CONDITIONER
7,500 BTU (12,000 BTU, ASHRAE 128 equivalent)

AP1219CR1W

TECHNICAL SPECIFICATIONS

Performance

Hisense-Model	AP1219CR1W
Maximum Cooling space	400 sq. ft.
Heating Capacity	N/A
Cooling Capacity (BTU)	7,500
Refrigerant	R-410A
Noise Level in dB(A)	47 ~ 50 dB(A)

Electrical

Voltage / Freq / Amps	115V / 60Hz, 10.3A
-----------------------	--------------------

Control Features

Unit Control Type	Electronic
Fan Control	Button
Thermostat Control	61 ~ 86 °F
Display Type	LED
Sleep Mode	Yes (on remote)
Dry Mode	Yes
Smart Mode	N/A
Cooling Speeds	3 Speed
Temp Display Units	°C / °F
Clock	N/A
Timer	24 Hr On / Off
Auto Restart	Yes

General Features

Removable Filter	Yes
Washable PP Filter	Yes
Motorized Air Swing	Yes (on remote)
Vent System	Single Hose, 5.9"D x 59"L
Dehumidification	2.9 Pint / hr (at 26.7/19.4°C)
Airflow (CFM)	160 ~ 205

Accessories

Remote Control	Yes
AAA Batteries	Yes
Air Hose	Yes
Window Kit	Yes

Approvals

Safety	ETL
--------	-----

Shipping


Unit Dimension WxDxH (mm)	442 x 318 x 729
---------------------------	-----------------

Carton Dimension WxDxH (mm)	498 x 386 x 885
Net Weight / Gross Weight (Kg)	32 / 35
Unit Dimension WxDxH (inch)	17.4 x 12.5 x 28.1
Carton Dimension WxDxH (inch)	19.6 x 15.3 x 34.9
Net Weight / Gross Weight (lbs)	70.5 / 77.7
Loading(40HQ)	424
Loading (53')	504 (Floor Loading)
Product	
Parts & Labor	2 years
UPC	819130023618



Control Panel

Window Size

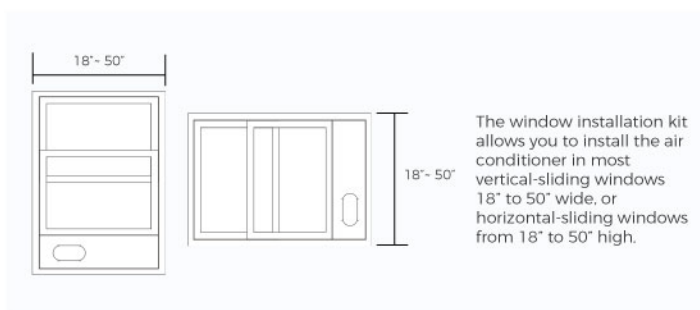

All product, product specifications, and data are subject to change without notice to improve reliability, function, design or otherwise.

©2019 Hisense USA. All rights reserved

Hisense USA Corporation
7310 McGinnis Ferry Road, Suwanee, GA, 30024
1-877-465-3566
www.hisense-usa.com

