


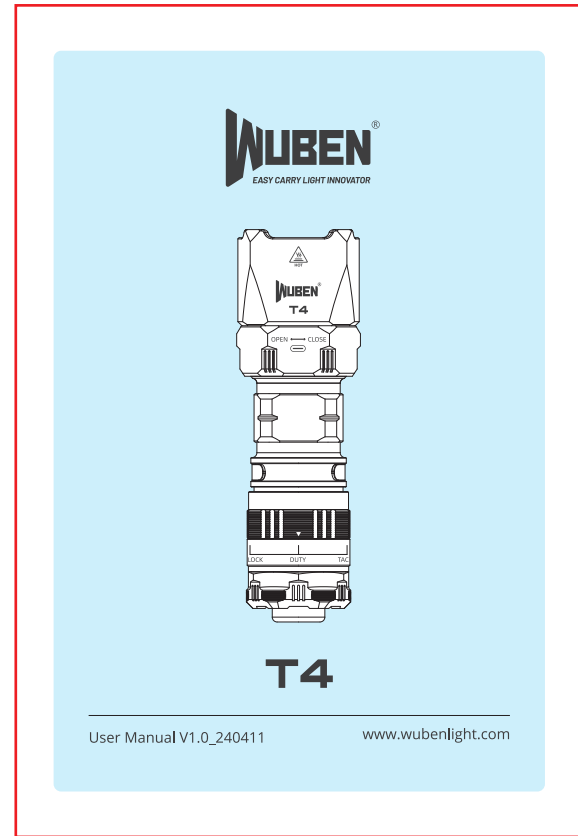
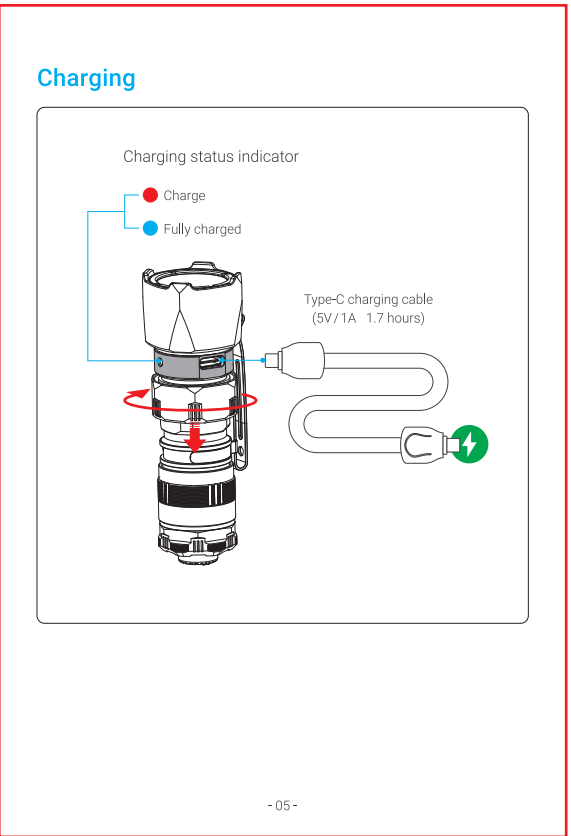
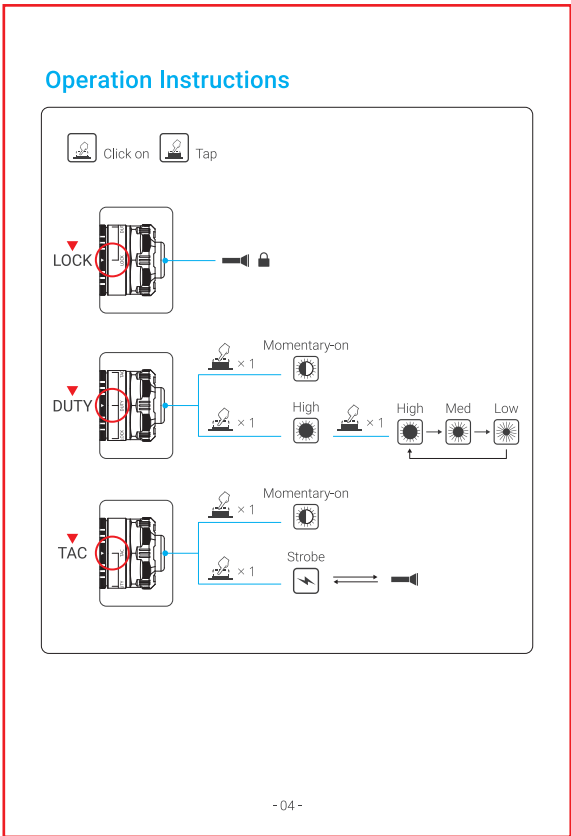
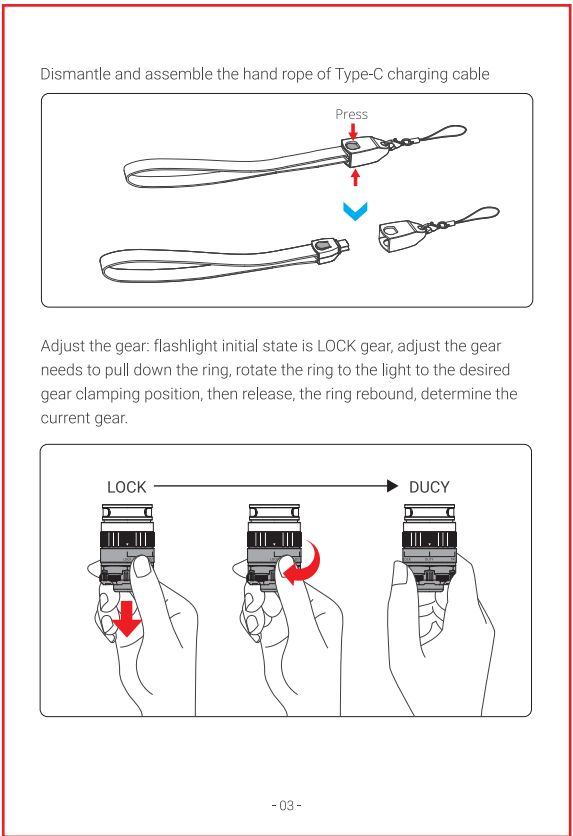


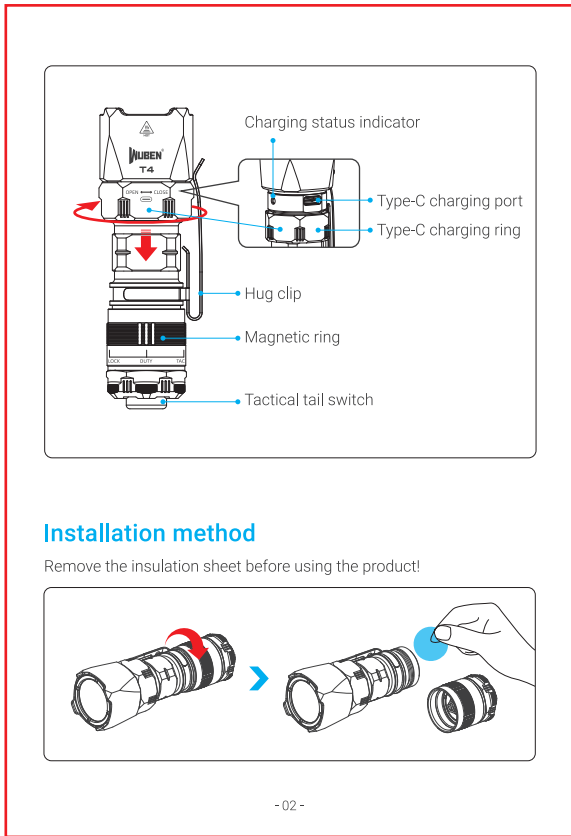

CONTENTS

Product Introduction	01
(EN) English	07
(CN) 简体中文	12
(DE) Deutsch	16
(ES) Español	21
(JP) 日本語	26

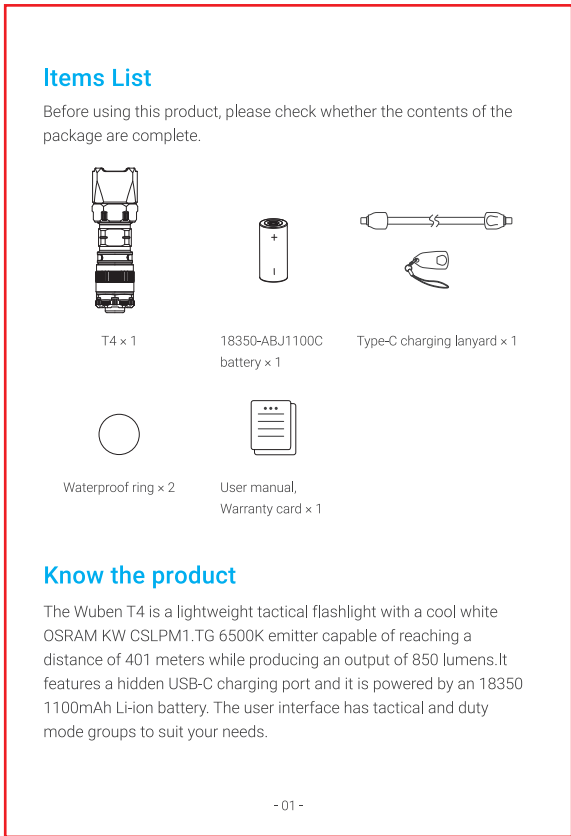

Parameters			
FL1 Standard	Tactical Mode		
	Momentary-on		Stroke
	150 turns		150 turns
	/		/
FL1 Standard	General Mode		
	High	Med	Low
	850V, 120 turns 1mg + 1 sec	200 turns 1 sec hours	5 turns 1 sec hours
	GRAM KIRI CSLP1.1 TG 6500C × 1		
	401 m		
	40200 Candies		
	1.5 m		
	H68 (2 meters underwater for 1 hour)		
	7g 1g 2.79oz (without battery) 104 1g 2.65oz (with battery)		
	97 mm (33 mm ~ 30 mm) 3.82 in × 3.01 × 1.18 in		
 The data is based on ANDERHEIM FL1 standards, using a 16000mAh battery from Qualcomm laboratory. The data may be different due to the environment and batteries.			
- 06 -			

