


Installation meethods and precautions

Receiver and transmitter key schematic diagram

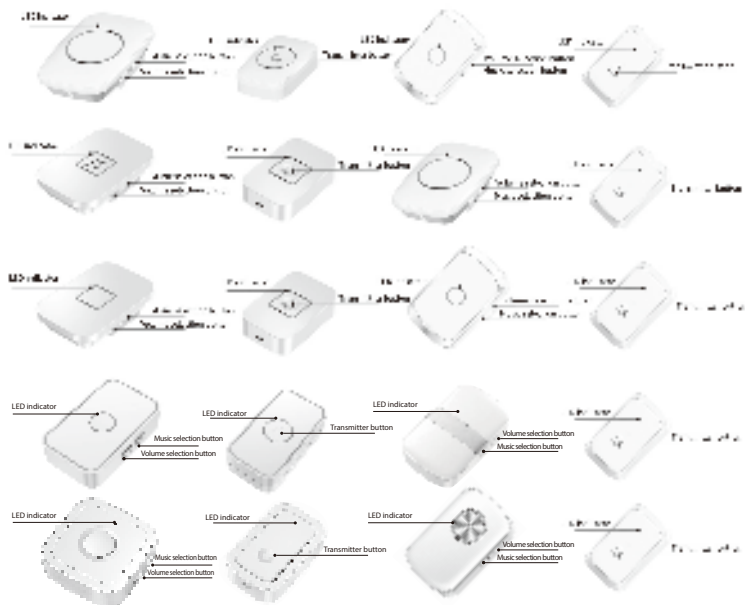


Transmitter key layout

Transmitter key layout



Receiver key layout

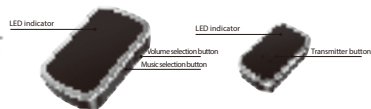

Model: A10/A20/A86/A60/A88/A50/A78/A96/A58/A19/A28/A29

Installation methods and precautions

A series wireless doorbell:

A series wireless doorbell is A series doorbell, different from the traditional wireless doorbell. The transmitter and receiver can be freely paired, simple circuit and easy to use, no electromagnetic interference.

Product features:

- ◆ Fast on-site design ◆ Easy installation ◆ Multiple music
- ◆ 5 levels of volume (including mute) ◆ The receiving distance is long
- ◆ Up to 300 meters in a straight line (laboratory test data)
- ◆ All the transmitter and receiver can be freely matched.

Music Settings:

After selecting music, long press the volume button for 4 seconds, and the receiver lights up and enters the learning state. When the transmitter is pressed, the receiver flashes light and emits a ring tone to lock the ring tone successfully.

Free matching mode of transmitter and receiver:

Long press the volume button of the receiver for 4 seconds, the receiver lights up and enters the learning state. After the transmitter is pressed, the receiver flashes light and rings to indicate that a match has been made.

NOTE:

1. Non-professional personnel are forbidden to open the device which may result in destroy and cause electronic components.
2. High-voltage is required. The device does not open it when it is working. Or it may result in electrical shock.
3. Use the device in the right way can make it long life.
4. Functional range may be adversely affected by one or more of the following factors: weather, radio frequency interference, low transmitter battery and obstructions between the transmitter and receiver.
5. Old batteries can also corrode the contact pins and damage the buttons on device 1. If you find out the functional range decrease shorter, please change fresh battery in time.
6. Do not install on metal objects (such as iron doors, stainless steel doors, etc.)

Transmitter USE a 23A12V alkaline battery
Receiver voltage: 100-240V
Size:
Transmitter 75x51x20mm,
Receiver 95x65x24mm.



Please refer to the relevant laws and regulations if there are any outstanding issues or disputes. The company reserves the right to amend and ultimately interpret this statement