



FAQ

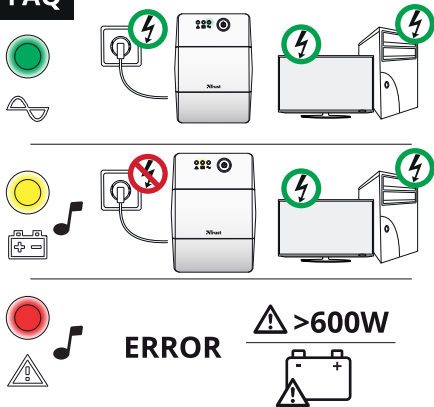


WWW.TRUST.COM/23843/FAQ

Trust International BV - Laan van Barcelona 600 - 3317DD, Dordrecht, NL
©2020 Trust All rights reserved.



Download Software



Trust

1000VA UPS

WITH 4 POWER OUTLETS

emergency back-up battery

PAXXON



User Guide | Bedienungsanleitung | Mode d'emploi | Gebruikershandleiding | Manuale utente | Manual del usuario | Guia do utilizador | Brukerveiledning | Bruksanvisning | Käyttöopas
Brugsvejledning | Instrukcja obsługi | Návod k použití | Návod na používanie | Használati útmutató | Manual de utilizare | Ръководство за потребителя | Εγχειρίδιο χρήσης | Kullanıcı kılavuzu
Руководство пользователя | Uporabniški priročnik | Korisnički priručnik | Guia do usuário | Посібник користувача

The diagram illustrates the connection of the Trust T10000 power supply. It shows three steps: 1. Plugging the power cord into a wall outlet. 2. Plugging the power cord into the power supply. 3. Pressing the power button on the power supply. The power supply has a digital display showing '9H' and a battery icon.

*not included

Diagram 2 illustrates the connection of the power supply unit (PSU) to the system components. The PSU is shown with a warning label indicating a maximum power output of **<600W**. The connections are as follows:

- The **24-pin ATX power connector** is connected to the motherboard's ATX power input.
- The **4-pin D-Sub connector** is connected to the motherboard's D-Sub power input.
- The **8-pin EPS power connector** is connected to the motherboard's EPS power input.
- The **4-pin SATA power connectors** are connected to the power inputs of the four SATA hard drives.
- The **4-pin Molex power connector** is connected to the power input of the optical drive.